



# LED TEMPORARY STRINGER WORK LIGHT

► **DESIGN & OPTIONS** - The LED TEMPORARY STRINGER WORK LIGHT with a 360° beam angle will fully illuminate your work area. With the 10ft long, 3 prong grounded power cord with 6kV surge protection, it can be plugged into any standard outlet. The LEDs are protected by a durable steel cage that will withstand any potential drop. It features a hook for secure hanging, making it perfect for temporary work sites and job site lighting.


► **INSTALLATION** - With everything you need included in one set, installation has never been easier. You can install one fixture or several fixtures together. Refer to install instructions for detailed steps.

► **APPLICATION** - This versatile light is suitable for both indoor and outdoor areas. It is the perfect solution for temporary workplaces such as garages, factories, warehouses, construction sites, mines, and many other commercial and residential applications. It is also Wet location rated and can operate in temperatures ranging from -4+113°F (-20+45°C), allowing it to be utilized in a wide variety of applications and climates.

► **ENERGY SAVINGS & EFFICIENCY** - This fixture provides a lumen output that is equal to or higher than traditional fluorescent fixtures and can cut your electric bill by up to 80% instantly. With a lifespan of 36,000 hours, these fixtures are made to last decades under normal operation! This fixture will save you a significant amount of money in its lifetime.

► **CERTIFICATION & WARRANTY** - Buy with confidence: ASD provides a 5-year warranty along with ETL certification to guarantee top quality products and safety!

Catalog number	
Notes	
Type	

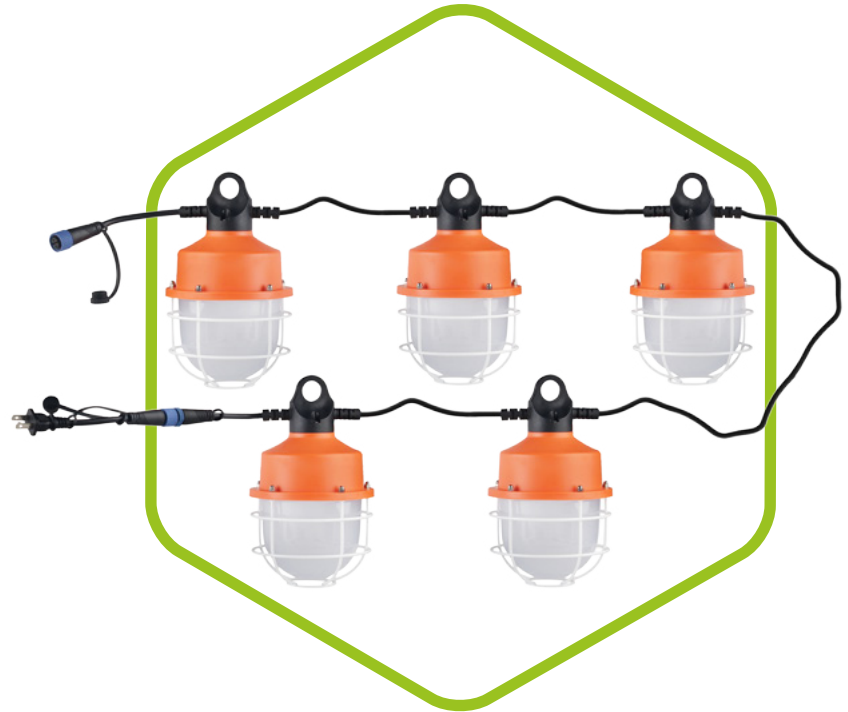

## PRODUCT LEGEND:


Family	Modification	Pcs	Dimmable	Watts	CCT
ASD-LWL	3	X	X	XX	XX
LED Temporary Stringer Work Light		5 - Number of lights	N = Non-dimmable	20 = 20 W	50 = 5,000 K

## LED WORK LIGHT:

Model	Watts	Dimmable	CCT	Lumens	Dimensions (LxWxH)
ASD-LWL3-5N2050	5 x 20 W	No	5,000 K	7,200 lm	4 5/8" x 4 5/8" x 7 5/8"

## ORDERING INFORMATION:

Model	Watts	CCT	UPC	GTIN-14	Pcs in one Carton	Carton Size	Carton Weight
ASD-LWL3-5N2050	5x20	5,000 K	819201025169	10819201025166	4	20.5" x 10.1" x 15.2"	41.4 lbs

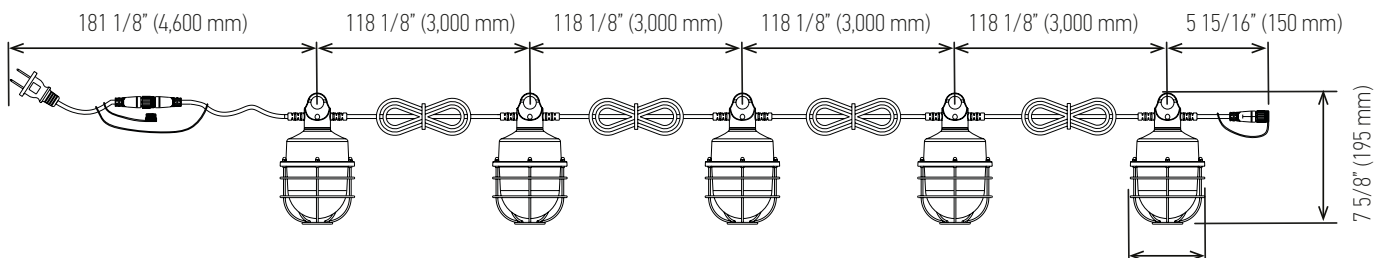

Model	Linkable Quantities
ASD-LWL3-5N2050	Max 12pcs (strings) Max 1,200W

ø4 5/8" (ø116 mm)

For most up-to-date spec sheets please refer to [asd-lighting.com](http://asd-lighting.com)

ASD LIGHTING CORP

E-mail: [orders@asd-lighting.com](mailto:orders@asd-lighting.com) | Web site: [www.asd-lighting.com](http://www.asd-lighting.com)





# LED TEMPORARY STRINGER WORK LIGHT

## PRODUCT SPECIFICATIONS:

Construction & Materials		Electrical System	
Housing	Die-Cast Aluminum + PC	Input Voltage	120 V
Finish	Silver + Orange	Max input current	1.1 A
Cover	Clear	Inrush current (Action time)	35 A (0.65 S)
String	One string 5 lamps	AC input range	min 120 V max 120 V
Weight	8.9 lbs (4.1 kg)	Off State Power	0 W
Environmental System		Power Consumption	100 W
Work Environment	Suitable for Wet Locations, IP65	Power Factor	> 0.9
Operating Temperature	-4°F to 113°F (-20°C to 45°C)	Output voltage	50-70 V
L-70 Life	R > 36,000 hrs; C > 250,000 hrs	Max output current	300 mA
Optical System		LED Driver Class	Class 2
Luminous Flux	12,000 lm		
Color Temperature	5,000 K		
CRI	> 80		
Warranty & Certifications			
5-year limited warranty			
cETLus certified 5001854			

## PACKAGE CONTENTS:

Description	Q-ty
LED Temporary Stringer Work Light	1
Box	1
Cut sheet	3

## INSTALLATION GUIDE

### ⚠ WARNING

**RISK OF PERSONAL INJURY** – READ and follow all WARNINGS and installation instructions.

Keep or give to the owner for future reference.

**Risk of cuts:** Wear gloves to prevent cuts or abrasions when removing from carton, handling, installing, and maintaining this product.

**Risk of electric shock:** This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

**Risk of Fire:** Minimum 194°F supply conductors. Consult a qualified electrician to ensure correct branch circuit conductor.

ASD® assumes no responsibility for claims arising out of improper or careless installation or handling of this product.

### IMPORTANT SAFETY INFORMATION:

Please read all the instructions below before installation.

- ▶ Make sure that the supply voltage corresponds to the rated product voltage.
- ▶ The product must be installed by a qualified electrician in accordance with the National Electrical Code and corresponding local codes.
- ▶ If the product is damaged, do not use it.

### INSTALLATION STEPS:


1. Hook the ring and fix the hook to the wall or object.

2. Connect the plug and socket.

**To connect few fixtures together:**

1. Open the protective cover on the waterproof connector, and loosen the tightening nut of the fixture.

2. Connect the fixtures together.

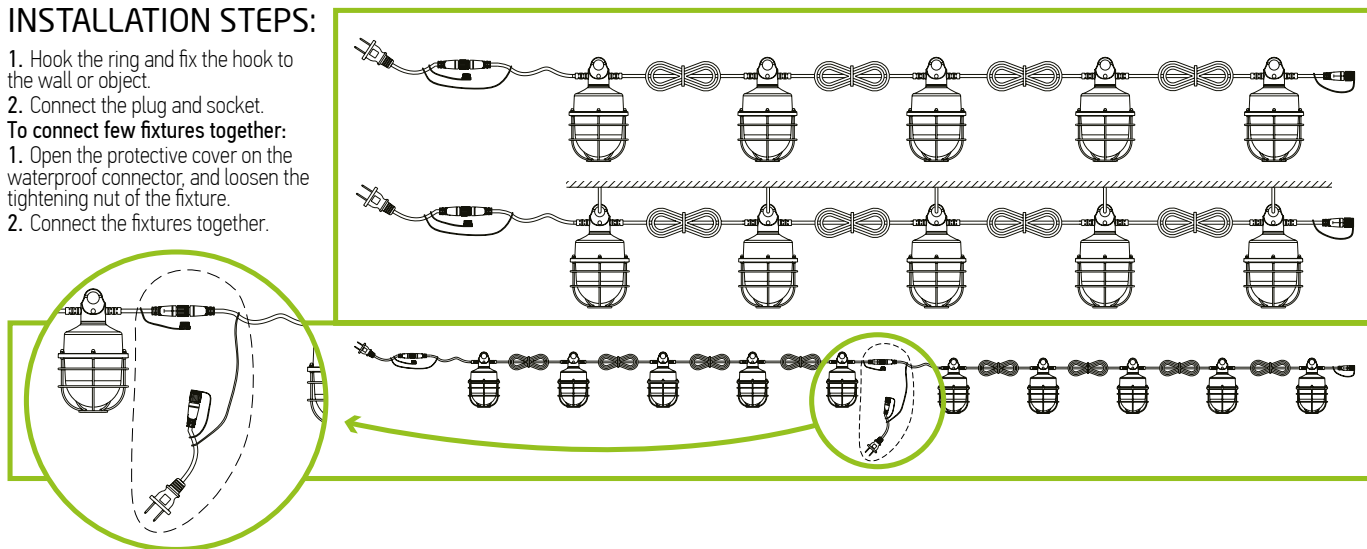

For most up-to-date spec sheets please refer to [asd-lighting.com](http://asd-lighting.com)

ASD LIGHTING CORP

E-mail: [orders@asd-lighting.com](mailto:orders@asd-lighting.com) | Web site: [www.asd-lighting.com](http://www.asd-lighting.com)

