



LED OVAL DOUBLE RING FLUSHMOUNT

► **DESIGN & OPTIONS** - LED OVAL DOUBLE RING FLUSHMOUNT has a modern design, a stylish look with efficient lighting. It is designed to operate on 120-277V circuits. It provides smooth dimming capabilities ranging from 10% to 100% with modern LED dimmers. This fixture also includes a color adjustable option, letting you choose either 3,000K, 4,000K or 5,000K with a simple switch. The 120° beam angle grants you smooth and even lighting. It comes in a 32" size with either a BRONZE or BRUSHED NICKEL finish.

► **INSTALLATION** - Installation is quick and easy: just drive the screws into the outlet box, connect the wires and fix the lamp body on screws. Wire nuts, screws and all installation accessories are provided. Refer to install instructions for detailed steps.

► **APPLICATION** - The LED OVAL DOUBLE RING FLUSHMOUNT provides bright, yet smooth lighting for your family room, bedroom, hallway, corridor, or any other common area in your living space. It can be used as an additional light to an already existing ceiling light as well. This fixture is also Damp Locations rated.

► **ENERGY SAVINGS & EFFICIENCY** - With a lifespan of 50,000 hours, these fixtures are made to last decades under normal operation! This fixture can cut your electric bill by up to 80% instantly and will save you a significant amount of money in its lifetime.

► **CERTIFICATION & WARRANTY** - Buy with confidence: ASD provides a 5-year limited warranty along with ETL certification to guarantee top quality products and safety!

Energy Star classification allow participation in rebates; please check the rebate programs available in your state.

Catalog number	
Notes	
Type	



Model	Size	Watts	Voltage	Dimmable	Lumens	CCT	Finish	Dimensions (LxWxH)
ASD-LFMOV-MV-32D45CC-NK	32 inch	45W	120-277 V	TRIAC	3,360/3,750/3,540 lm	3CCT (3,000/4,000/5,000 K)	Brushed nickel	32-1/2" x 18-1/8" x 4-3/4"
ASD-LFMOV-MV-32D45CC-BZ	32 inch	45W	120-277 V	TRIAC	3,360/3,750/3,540 lm	3CCT (3,000/4,000/5,000 K)	Oil rubbed bronze	32-1/2" x 18-1/8" x 4-3/4"

ORDERING INFORMATION

Model	UPC	Pcs. per carton	Carton size	Carton weight	GTIN 14
ASD-LFMOV-MV-32D45CC-NK	810050732055	2	32.5" x 11.8" x 21.5"	23.2 lb	20810050732059
ASD-LFMOV-MV-32D45CC-BZ	810050732567	2	32.5" x 11.8" x 21.5"	23.2 lb	10810050732564

For most up-to-date spec sheets please refer to asd-lighting.com

ASD LIGHTING CORP

E-mail: orders@asd-lighting.com | Web site: www.asd-lighting.com






LED OVAL DOUBLE RING FLUSHMOUNT

PRODUCT SPECIFICATIONS:

Construction & Materials		Electrical system	
Housing	Steel	Input voltage	120-277 V
Lens	Acrylic	Max input current	0.7 A
Finish	Brushed nickel, Oil rubbed bronze	Inrush current (Action time)	0.36 A (0.1 S)
Weight	7.8 lb (3.5 kg)	Off state power	0W
Environmental system		Power consumption	45W
Work environment	Suitable for Damp Locations	Power factor	> 0.9
Operating temperature	-4°F to 131°F (-20°C to 55°C)	Max output current	1 A
L-70 life	> 50,000 hrs	Surge protection DM/CM	1.5 kV / 1.5 kV
Optical system			
Luminous flux	3,360/3,750/3,540 lm		
Color temperature	3CCT (3,000/4,000/5,000 K)		
CRI	> 80		
Dimming range			
10-100%			
Dimming compatible controls			
Brand	Lutron MACL-153MLH DVCL-153PR STCL-153PH	Leviton DSL06 RNLO6	
Models	TGCL-153P CTCL-153P	P-PKG1W PD-6WCL	
Regular and voluntary certifications			
5-year limited warranty	cETLus certified 4001256	Energy Star listed	

PACKAGE CONTENTS:

Description	Q-ty
LED Oval Double Ring Flushmount	1
Mounting plate (A)	1
Wire nut (B)	3
Anchor (C)	4
Screw (D)	4
Self-tapping screw (E)	4
Box	1



INSTALLATION GUIDE

IMPORTANT SAFETY INFORMATION:

Please read all the instructions below before installation.

- ▶ Make sure that the supply voltage corresponds to the rated product voltage.
- ▶ The product must be installed by a qualified electrician in accordance with the National Electrical Code and corresponding local codes.
- ▶ If the product is damaged, do not use it.

⚠ WARNING

RISK OF PERSONAL INJURY – READ and follow all WARNINGS and installation instructions. Keep or give to the owner for future reference.


Risk of cuts: Wear gloves to prevent cuts or abrasions when removing from carton, handling, installing, and maintaining this product.

Risk of electric shock: This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Risk of Fire: Minimum 194°F supply conductors. Consult a qualified electrician to ensure correct branch circuit conductor.


ASD® assumes no responsibility for claims arising out of improper or careless installation or handling of this product.

ELECTRICAL SCHEMATIC DIAGRAM:

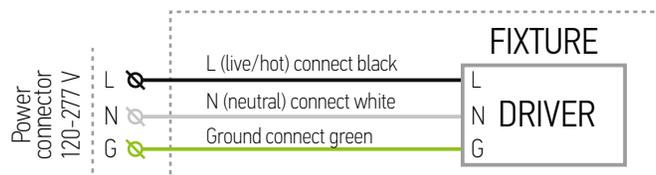

INSTALLATION STEPS:

1. Unscrew cap nuts counter-clockwise and remove the metal ring and the lens.
2. Attach the mounting plate to the outlet box using two screws. For a more secure installation, please use anchors and self-tapping screws: attach the fixture to the mounting plate and mark the location of the holes for the wall anchors in the narrow ends of the keyholes. Remove the fixture and drill four appropriate sized holes for anchors, insert anchors into the holes, twist the four self-tapping screws into the anchors.
3. Connect the wires: Black to Black, White to White, Ground to Ground. Attach the back plate to the ceiling by feeding self-tapping screws through the keyhole slots and then tightening the screws in the narrow end of the keyhole slots. Secure the fixture to the mounting plate using two screws.
4. Choose either 3,000K, 4,000K, or 5,000K with a simple switch. Secure the lens and metal ring to the fixture pan using cap nuts.

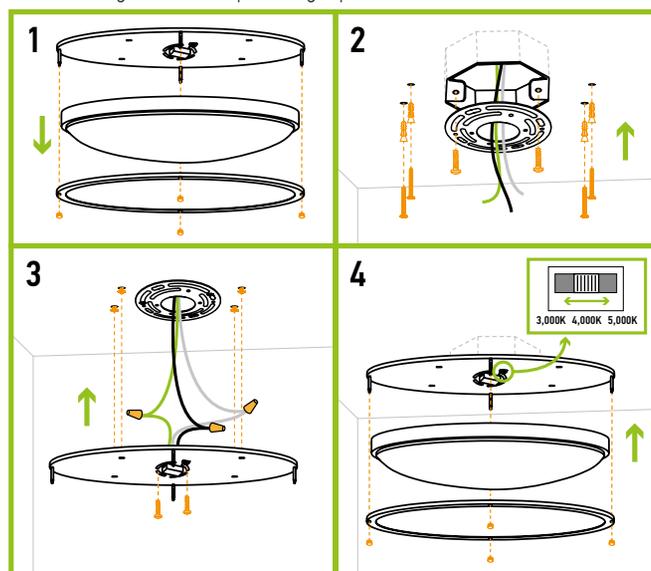

For most up-to-date spec sheets please refer to asd-lighting.com