



SQUARE OUTDOOR WALL CYLINDER

► **DESIGN** - SQUARE OUTDOOR WALL CYLINDER has a modern design with effective up/down illumination. This E26 base fixture is made from die-cast aluminum and a tempered glass cover. The high quality reflector creates a 50° beam angle.

► **BULBS** - The fixture includes a standard E26 medium base which is compatible with a variety of incandescent, CFL or LED bulbs less than 60W.

► **PHOTOCELL** - The built-in Dusk to Dawn Photocell will automatically turn the fixture on/off depending on the time of day.

► Durable waterproof housing resistant to rust and impact can be used outdoors in all weather conditions.

► **APPLICATION** - The fixture is rated for Wet Locations, making it perfect for indoor and outdoor projects such as decks, front doors, porches, patios, corridors, walkways, or any other common areas.

► **ADVANTAGES** - ASD provides a 5-year limited warranty along with ETL certification to guarantee top quality products and safety!

Catalog number	
Notes	
Type	



Model	Number of lights	Bulb type	Finish	Dimensions (LxWxH)	Option
ASD-OCLS-11-2660-BZ	1 light	E26 60W max	Oil rubbed bronze	4-3/8" x 5-13/16" x 7-7/8"	-
ASD-OCLS-11-2660-BK	1 light	E26 60W max	Black	4-3/8" x 5-13/16" x 7-7/8"	-
ASD-OCLS-11-2660-BK-2PACK	1 light	E26 60W max	Black	4-3/8" x 5-13/16" x 7-7/8"	-
ASD-OCLS-21-2660-BZ	2 light	E26 60W max	Oil rubbed bronze	4-3/8" x 5-13/16" x 11-13/16"	-
ASD-OCLS-21-2660-BK	2 light	E26 60W max	Black	4-3/8" x 5-13/16" x 11-13/16"	-
OCLS-PC WITH PHOTOCELL					
ASD-OCLS-11-2660-PC-BK	1 light	E26 60W max	Black	4-3/8" x 5-13/16" x 7-7/8"	Photocell
ASD-OCLS-11-2660-PC-BK-2PACK	1 light	E26 60W max	Black	4-3/8" x 5-13/16" x 7-7/8"	Photocell
ASD-OCLS-21-2660-PC-BK	2 light	E26 40W max	Black	4-3/8" x 5-13/16" x 11-13/16"	Photocell

ORDERING INFORMATION

Model	UPC	Pcs. per carton	Carton size	Carton weight	GTIN 14
ASD-OCLS-11-2660-BZ	810050736862	6	16.7" x 15.4" x 9.8"	15.5 lbs	30810050736863
ASD-OCLS-11-2660-BK	810050736855	6	16.7" x 15.4" x 9.8"	15.5 lbs	30810050736856
ASD-OCLS-11-2660-BK-2PACK	810128112499	3	22.1" x 11" x 9.8"	14.3 lbs	10810128112496
ASD-OCLS-21-2660-BZ	810050736886	6	16.7" x 15.4" x 12.2"	17.6 lbs	30810050736887
ASD-OCLS-21-2660-BK	810050736879	6	16.7" x 15.4" x 12.2"	17.6 lbs	30810050736870
OCLS-PC WITH PHOTOCELL					
ASD-OCLS-11-2660-PC-BK	810050736893	6	16.7" x 15.4" x 9.8"	15.5 lbs	30810050736894
ASD-OCLS-11-2660-PC-BK-2PACK	810128112505	3	22.1" x 11" x 9.8"	14.3 lbs	10810128112502
ASD-OCLS-21-2660-PC-BK	810050736909	6	16.7" x 15.4" x 12.2"	17.6 lbs	30810050736900

For most up-to-date spec sheets please refer to asd-lighting.com

ASD LIGHTING CORP

E-mail: orders@asd-lighting.com | Web site: www.asd-lighting.com






SQUARE OUTDOOR WALL CYLINDER

PRODUCT SPECIFICATIONS:

Construction & Materials		
Housing	Aluminum	
Lens	Glass	
Finish color	Oil rubbed bronze, Black	
Weight	ASD-OCLS-1I-2660-BZ	2 lbs (0.9 kg)
	ASD-OCLS-1I-2660-BK	
	ASD-OCLS-1I-2660-BK-2PACK	3.8 lbs (1.7 kg)
	ASD-OCLS-2I-2660-BZ	2.7 lbs (1.2 kg)
	ASD-OCLS-2I-2660-BK	
	ASD-OCLS-1I-2660-PC-BK	2 lbs (0.9 kg)
	ASD-OCLS-1I-2660-PC-BK-2PACK	3.8 lbs (1.7 kg)
	ASD-OCLS-2I-2660-PC-BK	2.7 lbs (1.2 kg)
Environmental system		
Work environment	Suitable for Wet Locations	
Operating temperature	-40°F to 113°F (-40°C to 45°C)	
	for PC models: -4°F to 113°F (-20°C to 45°C)	
Electrical system		
Input voltage	120 V	
Light source type	Incandescent/LED/CFL bulb	
Bulb base type	E26 medium	
Maximum bulb wattage	60W	
	for ASD-OCLS-2I-2660-PC-BK model: 40W	
Maximum wattage	ASD-OCLS-1I-2660-BZ	60W
	ASD-OCLS-1I-2660-BK	
	ASD-OCLS-1I-2660-BK-2PACK	
	ASD-OCLS-2I-2660-BZ	120W
	ASD-OCLS-2I-2660-BK	
	ASD-OCLS-1I-2660-PC-BK	60W
ASD-OCLS-1I-2660-PC-BK-2PACK	80W	
ASD-OCLS-2I-2660-PC-BK	80W	
Surge protection DM/CM	1.25 kV / 1.25 kV	
Regular and voluntary certifications		
5-year limited warranty		
cETLus certified 4001256		

PACKAGE CONTENTS:

Description	Q-ty
Square Outdoor Wall Cylinder	1
Mounting plate (A)	1
Mounting screw (B)	2
Outlet box screw (C)	2
Wire nut (D)	3
Glass cover screw (E)	4
Decorative nut (F)	2
Waterproof gasket (G)	2
Photocell cap (H) only for PC models	1
Box	1



BUILT-IN PHOTOCCELL INFORMATION

The dusk-to-dawn sensor automatically turns the fixture off during daylight hours.

Specifications	Model: MD,EP-120R
Input power	120 Vac, 60 Hz
Light level to turn ON	30 ~ 150 lux (2.8 - 14 fc)
Light level to turn OFF	200 ~ 800 lux (18.6-74.4 fc)
Operating temperature	-4°F to 122°F (-20°C to 50°C)

INSTALLATION GUIDE

IMPORTANT SAFETY INFORMATION:

Please read all the instructions below before installation.

- ▶ Make sure that the supply voltage corresponds to the rated product voltage.
- ▶ The product must be installed by a qualified electrician in accordance with the National Electrical Code and corresponding local codes.
- ▶ If the product is damaged, do not use it.

⚠ WARNING

RISK OF PERSONAL INJURY – READ and follow all WARNINGS and installation instructions. Keep or give to the owner for future reference.

Risk of cuts: Wear gloves to prevent cuts or abrasions when removing from carton, handling, installing, and maintaining this product.


Risk of electric shock: This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Risk of Fire: Minimum 194°F supply conductors. Consult a qualified electrician to ensure correct branch circuit conductor.

ASD® assumes no responsibility for claims arising out of improper or careless installation or handling of this product.

INSTALLATION STEPS:

1. Unscrew the four screws from the glass cover, remove the glass cover and install the bulbs (A19/60W max). Screw the glass cover back to the fixture. In models with photocell option remove the photocell cap to make the dusk-to-dawn sensor operate.
2. Screw the two mounting screws onto the mounting plate. Attach the mounting plate to the outlet box using the screws. Make sure the threads of the mounting screws are facing outside when the mounting plate is attached to the outlet box.
3. Connect the wires: Black to Black, White to White, Ground to Ground. Secure the connection with wire nuts. Place the fixture base on the wall by aligning the protruding mounting screws through the holes on the wall plate. Put the waterproof gasket on each mounting screw. Tighten the fixture to the wall using two decorative nuts. For outdoor locations please use silicone (not included) shown in the picture below.

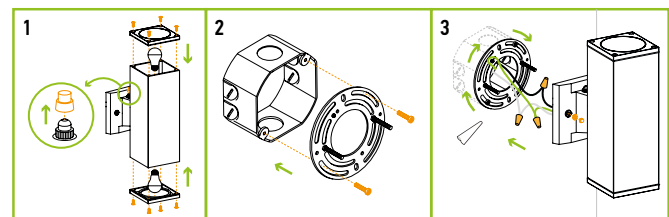

* The fixture must be mounted vertically with the photocell sensor facing up.

For most up-to-date spec sheets please refer to asd-lighting.com