
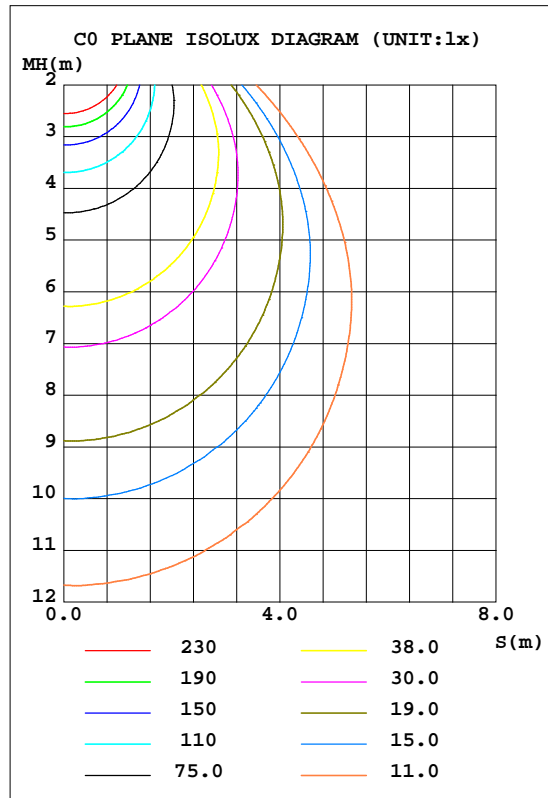


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.05V I:0.3380A P:40.200W PF:0.9910 Freq:60.00Hz Lamp Flux:3224.36x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 80.21 lm/W			
AMODEDL7-8DA40AC(40W 2700K)		I _{max} (cd)	1502	S/MH(C0/180)	1.15
NOMINAL POWER(W)	40	LOR(%)	100.0	S/MH(C90/270)	1.18
RATED VOLTAGE(V)	120-277	TOTAL FLUX(lm)	3224.4	h UP, DN(C0-180)	0.2,50.0
NOMINAL FLUX(lm)	3224.36	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.2,49.5
LAMPS INSIDE	1	h up(%)	0.4	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	h down(%)	99.6	CIBSE SHR MAX	1.30

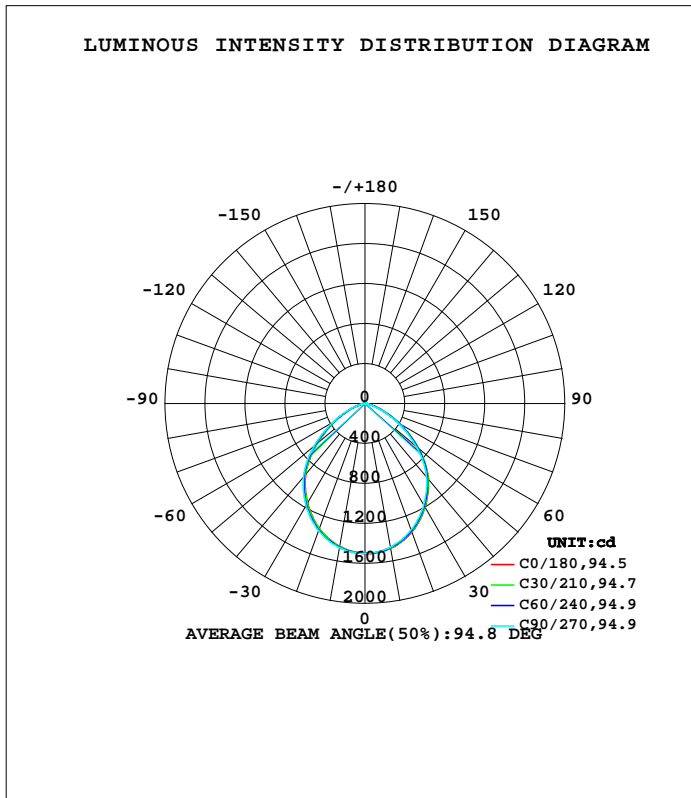

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-12-05

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.1264]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	1474	1467	1459	1452	1455	1457	1464	1471	0- 10	141.3	141.3	4.38,4.38
20	1370	1361	1347	1332	1334	1342	1356	1367	10- 20	398.7	540.0	16.7,16.7
30	1201	1191	1175	1151	1150	1163	1181	1197	20- 30	584.5	1124	34.9,34.9
40	985.7	977.1	960.5	927.7	925.9	940.4	959.4	979.6	30- 40	668.8	1793	55.6,55.6
50	703.2	695.5	674.6	635.4	626.4	641.3	667.0	694.7	40- 50	630.0	2423	75.2,75.2
60	394.7	390.1	370.1	337.2	331.8	342.1	358.9	384.0	50- 60	456.4	2880	89.3,89.3
70	157.1	152.1	138.6	124.1	123.1	128.0	136.6	150.0	60- 70	239.2	3119	96.7,96.7
80	35.11	33.84	30.17	28.79	28.74	28.75	30.39	33.26	70- 80	77.39	3196	99.1,99.1
90	0.7491	0.6052	0.1354	0.0982	0.1558	0.1800	0.1622	0.1780	80- 90	14.04	3210	99.6,99.6
100	0.4253	0.4761	0.4939	0.4427	0.5888	0.5742	0.4729	0.4834	90-100	0.3131	3211	99.6,99.6
110	1.047	1.165	1.123	1.085	1.265	1.253	1.175	1.156	100-110	0.8469	3211	99.6,99.6
120	1.919	2.006	1.941	1.903	2.083	2.101	2.041	2.001	110-120	1.558	3213	99.6,99.6
130	2.879	2.878	2.678	2.823	2.922	2.972	2.940	2.833	120-130	2.174	3215	99.7,99.7
140	3.738	3.719	3.448	3.617	3.611	3.641	3.643	3.607	130-140	2.523	3218	99.8,99.8
150	4.441	4.320	4.138	4.384	4.111	4.324	4.333	4.293	140-150	2.485	3220	99.9,99.9
160	5.246	5.050	4.489	5.162	4.639	5.080	5.002	4.898	150-160	2.143	3222	99.9,99.9
170	5.955	5.847	5.125	5.767	5.335	5.621	5.604	5.527	160-170	1.496	3224	100,100
180	6.511	6.249	5.570	5.943	5.686	6.127	5.881	5.831	170-180	0.5555	3224	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-12-05

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.700m [K=1.1264]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.05V I:0.3380A P:40.200W PF:0.9910 Freq:60.00Hz Lamp Flux:3224.36x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

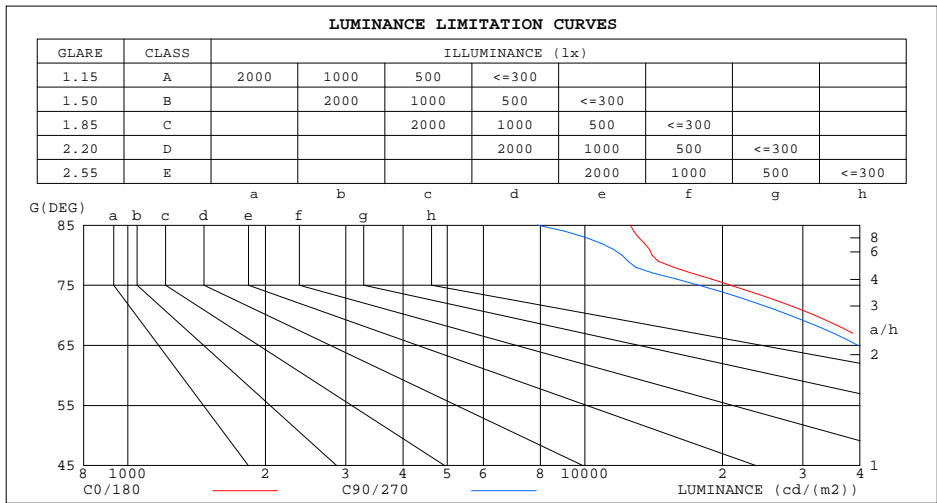


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-12-05

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.1264]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.05V I:0.3380A P:40.200W PF:0.9910 Freq:60.00Hz Lamp Flux:3224.36x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

r _{cc}	80%			70%			50%			30%			10%			0
r _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.07	1.03	.00	1.04	1.01	.98	1.00	.98	.95	.96	.94	.92	.93	.91	.89	.87
2.0	.95	.89	.84	.93	.88	.83	.90	.85	.81	.86	.83	.79	.83	.80	.78	.76
3.0	.85	.78	.72	.83	.77	.71	.80	.75	.70	.78	.73	.69	.75	.71	.68	.66
4.0	.76	.68	.62	.75	.67	.62	.72	.66	.61	.70	.65	.60	.68	.63	.59	.57
5.0	.69	.61	.55	.68	.60	.54	.65	.59	.54	.64	.58	.53	.62	.57	.52	.50
6.0	.62	.54	.48	.61	.54	.48	.60	.53	.48	.58	.52	.47	.56	.51	.47	.45
7.0	.57	.49	.43	.56	.48	.43	.54	.48	.43	.53	.47	.42	.52	.46	.42	.40
8.0	.52	.44	.39	.51	.44	.39	.50	.43	.38	.49	.43	.38	.48	.42	.38	.36
9.0	.48	.40	.35	.47	.40	.35	.46	.40	.35	.45	.39	.35	.44	.39	.34	.33
10.0	.44	.37	.32	.44	.37	.32	.43	.36	.32	.42	.36	.32	.41	.35	.31	.30

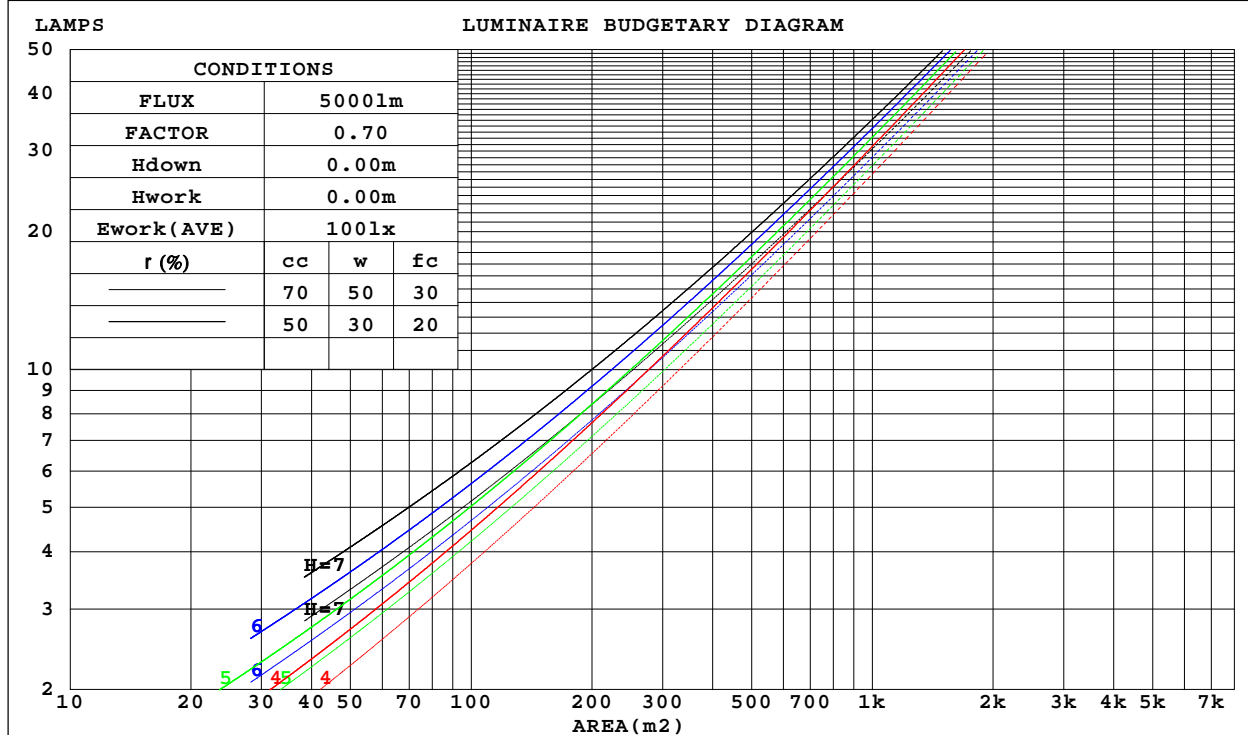

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-12-05

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.1264]
 Remarks:

WEC AND CCEC

Test:U:120.05V I:0.3380A P:40.200W PF:0.9910 Freq:60.00Hz Lamp Flux:3224.36x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.254	.144	.046	.247	.141	.045	.234	.134	.043	.222	.128	.041	.210	.122	.039	
2.0	.247	.135	.042	.241	.133	.041	.229	.128	.040	.219	.123	.038	.209	.118	.037	
3.0	.234	.125	.037	.229	.123	.037	.219	.119	.036	.209	.115	.035	.201	.111	.034	
4.0	.221	.115	.034	.216	.113	.033	.207	.110	.033	.199	.107	.032	.191	.104	.032	
5.0	.207	.106	.031	.203	.104	.030	.195	.102	.030	.188	.099	.029	.181	.097	.029	
6.0	.195	.098	.028	.191	.096	.028	.184	.094	.027	.177	.092	.027	.171	.090	.027	
7.0	.183	.090	.026	.180	.089	.026	.173	.088	.025	.167	.086	.025	.162	.084	.025	
8.0	.172	.084	.024	.169	.083	.024	.164	.082	.023	.158	.080	.023	.153	.079	.023	
9.0	.163	.079	.022	.160	.078	.022	.155	.077	.022	.150	.075	.022	.145	.074	.021	
10.0	.154	.074	.020	.151	.073	.020	.147	.072	.020	.142	.071	.020	.138	.070	.020	

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.194	.194	.194	.166	.166	.166	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.180	.160	.142	.154	.137	.122	.105	.094	.085	.061	.055	.049	.019	.018	.016	
2.0	.170	.136	.107	.145	.117	.092	.100	.081	.064	.057	.047	.038	.018	.015	.012	
3.0	.161	.117	.083	.138	.101	.072	.095	.070	.050	.055	.041	.030	.018	.013	.010	
4.0	.153	.104	.066	.131	.090	.057	.090	.062	.040	.052	.037	.024	.017	.012	.008	
5.0	.146	.093	.054	.125	.081	.047	.086	.056	.033	.050	.033	.020	.016	.011	.006	
6.0	.139	.085	.045	.120	.073	.039	.083	.051	.028	.048	.030	.017	.015	.010	.005	
7.0	.133	.078	.039	.114	.067	.034	.079	.047	.024	.046	.028	.014	.015	.009	.005	
8.0	.127	.072	.034	.109	.062	.030	.076	.044	.021	.044	.026	.012	.014	.008	.004	
9.0	.121	.067	.030	.105	.058	.026	.072	.041	.019	.042	.024	.011	.014	.008	.004	
10.0	.116	.063	.027	.100	.054	.024	.069	.038	.017	.040	.023	.010	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-12-05

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.1264]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.05V I:0.3380A P:40.200W PF:0.9910 Freq:60.00Hz Lamp Flux:3224.36x1 lm										
NAME:					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: ASD LIGHTNG CORP					SUR.: 0.12*0.12			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	26.2	27.6	26.5	28.0	28.3	25.4	26.9	25.8	27.2	27.5
3H	27.0	28.3	27.4	28.6	29.0	26.2	27.5	26.5	27.8	28.2
4H	27.1	28.3	27.5	28.7	29.1	26.3	27.5	26.7	27.9	28.2
6H	27.2	28.3	27.6	28.7	29.1	26.3	27.4	26.7	27.8	28.2
8H	27.1	28.2	27.6	28.6	29.0	26.3	27.3	26.7	27.7	28.2
12H	27.1	28.2	27.6	28.6	29.0	26.3	27.3	26.7	27.7	28.1
4H 2H	26.5	27.7	26.9	28.0	28.4	25.7	26.9	26.1	27.2	27.6
3H	27.4	28.4	27.8	28.8	29.2	26.5	27.5	26.9	27.9	28.3
4H	27.6	28.5	28.0	28.9	29.4	26.6	27.5	27.1	28.0	28.4
6H	27.7	28.4	28.1	28.9	29.4	26.7	27.5	27.2	27.9	28.4
8H	27.7	28.4	28.1	28.9	29.3	26.7	27.4	27.2	27.9	28.4
12H	27.7	28.3	28.2	28.8	29.3	26.7	27.3	27.2	27.8	28.3
8H 4H	27.6	28.3	28.1	28.8	29.3	26.6	27.4	27.1	27.8	28.3
6H	27.7	28.3	28.2	28.8	29.3	26.7	27.3	27.2	27.8	28.3
8H	27.7	28.3	28.2	28.8	29.3	26.7	27.3	27.2	27.8	28.3
12H	27.8	28.2	28.3	28.7	29.3	26.7	27.2	27.2	27.7	28.3
12H 4H	27.6	28.2	28.1	28.7	29.2	26.6	27.3	27.1	27.7	28.2
6H	27.7	28.2	28.2	28.7	29.2	26.7	27.2	27.2	27.7	28.2
8H	27.7	28.2	28.2	28.7	29.3	26.7	27.2	27.2	27.7	28.3
CIE190: 2010										

CIE190: 2010
Area: 0.0144 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-12-05

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.700m [K=1.1264]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.05V I:0.3380A P:40.200W PF:0.9910 Freq:60.00Hz Lamp Flux:3224.36x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	63	53	47	63	53	46	62	52	46	40
0.80	74	64	57	73	63	57	71	62	56	50
1.00	82	73	66	81	72	66	79	73	65	59
1.25	89	80	74	88	79	74	85	78	73	66
1.50	94	85	79	92	84	79	89	83	78	71
2.00	100	93	87	98	91	86	95	89	85	78
2.50	103	96	91	101	95	90	97	92	88	81
3.00	106	100	95	103	98	94	100	95	92	84
4.00	109	104	100	106	102	99	102	99	96	88
5.00	111	107	103	108	105	102	104	101	99	90
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-12-05

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity: 65.0%
Test Distance: 8.700m [K=1.1264]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.05V I:0.3380A P:40.200W PF:0.9910 Freq:60.00Hz Lamp Flux:3224.36x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

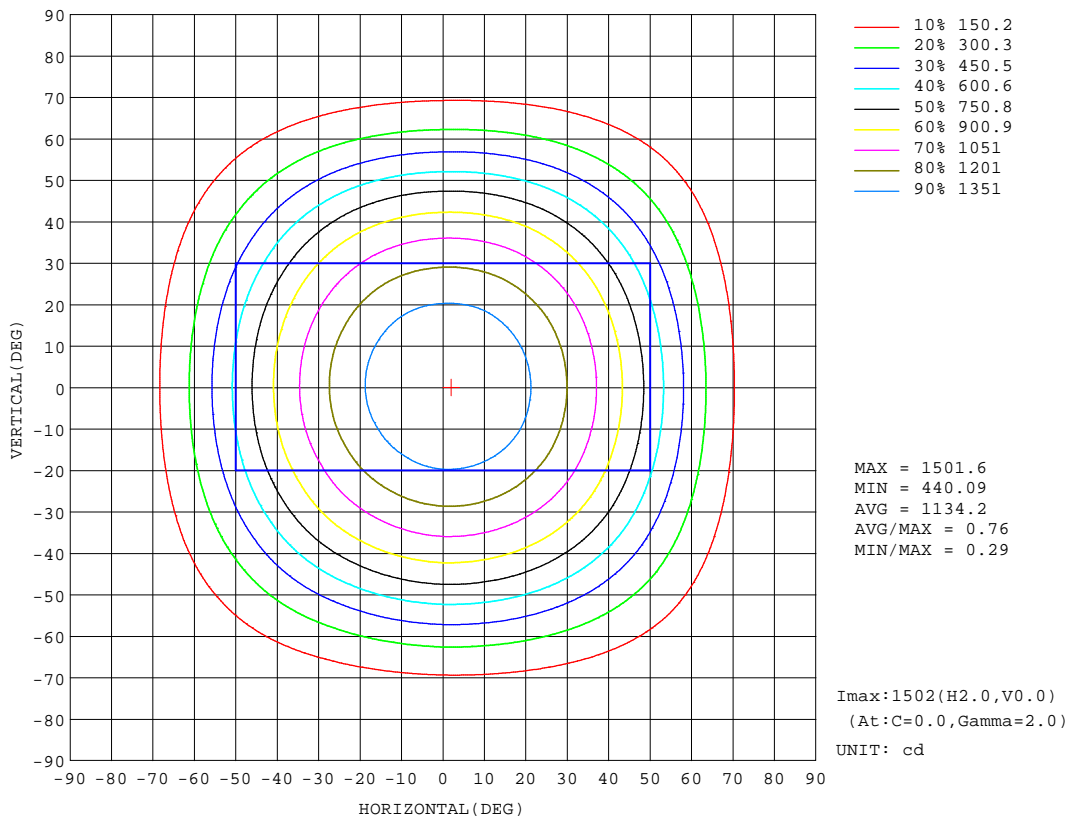


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-12-05

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.1264]
 Remarks:

AAI Figure

Test:U:120.05V I:0.3380A P:40.200W PF:0.9910 Freq:60.00Hz Lamp Flux:3224.36x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

Flux out:2308 lm

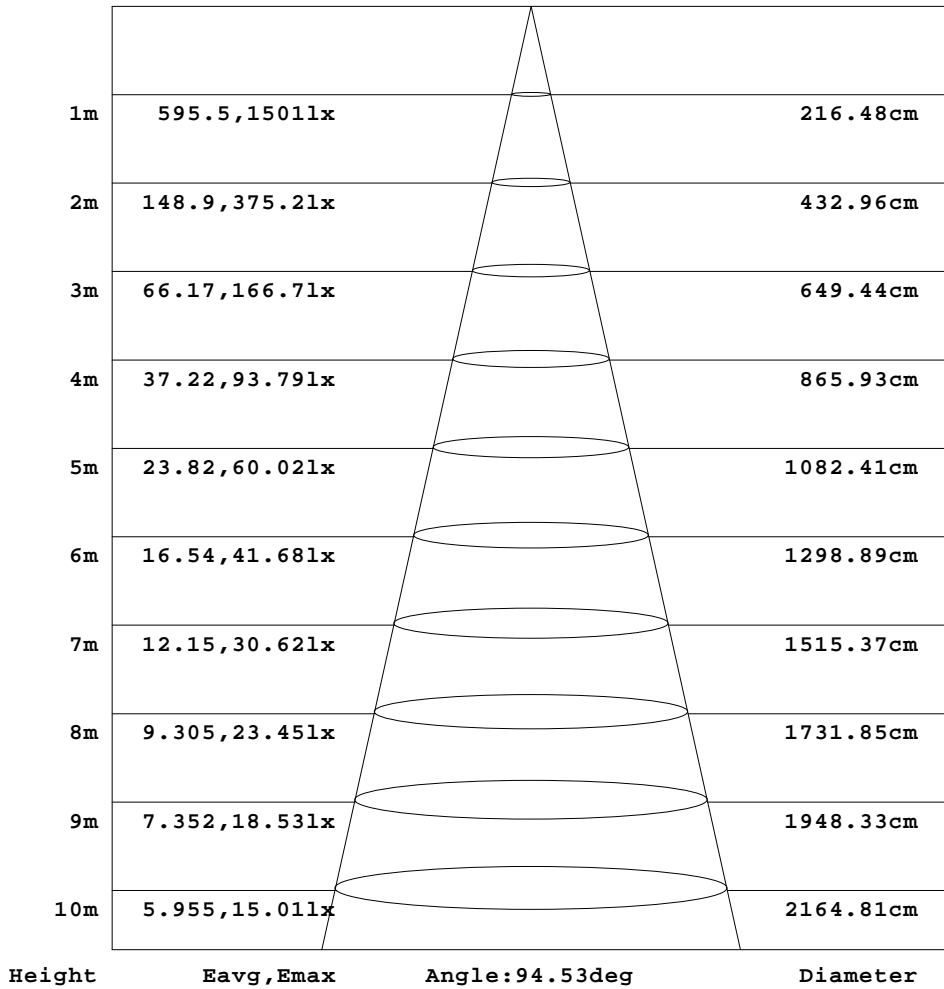


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-12-05

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.1264]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.05V I:0.3380A P:40.200W PF:0.9910 Freq:60.00Hz Lamp Flux:3224.36x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

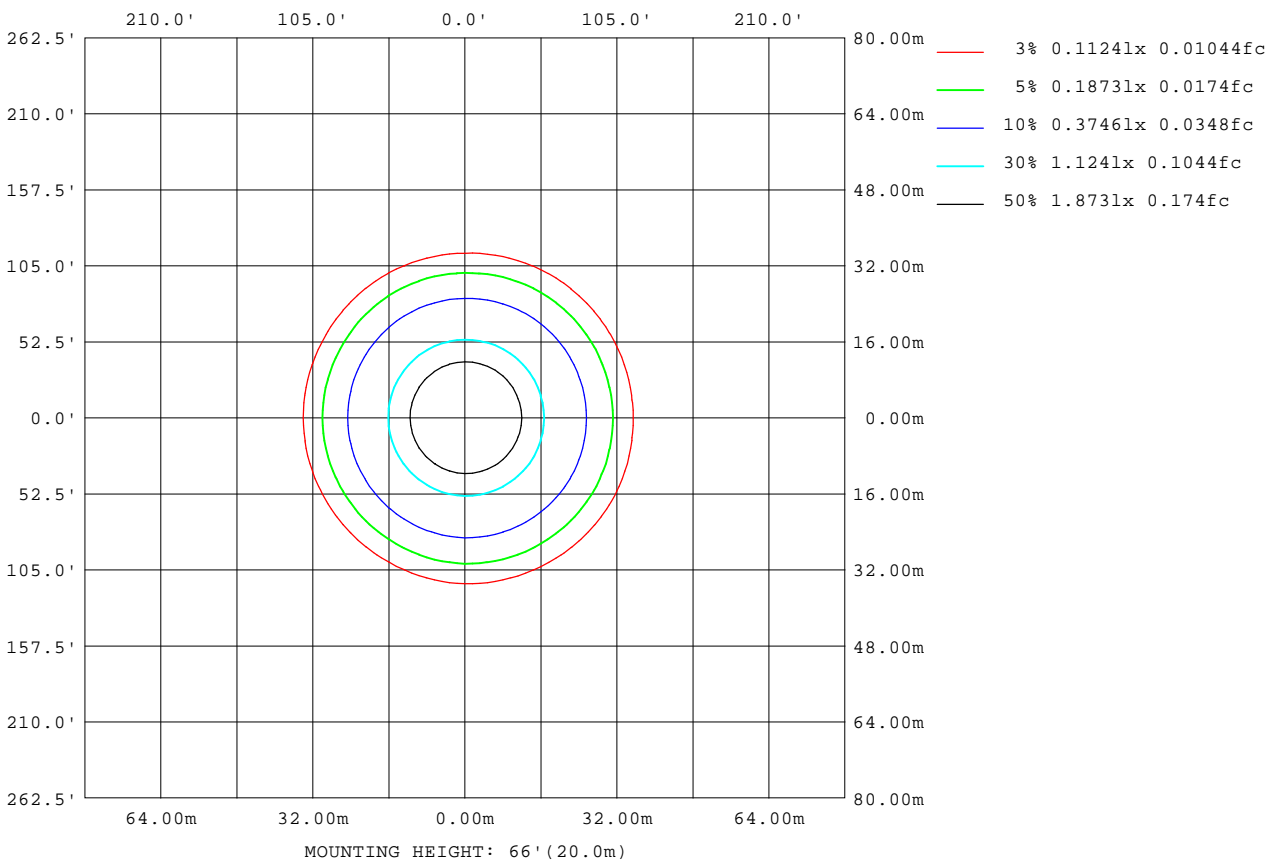

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-12-05

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=1.1264]
 Remarks:

LED Avg.L Report

Test:U:120.05V I:0.3380A P:40.200W PF:0.9910 Freq:60.00Hz Lamp Flux:3224.36x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	39273
L_0~180(75)av	18456
L_0~180(85)av	10814
L_90~270(65)av	39013
L_90~270(75)av	17949
L_90~270(85)av	8134
L_45(65)av	39080
L_45(75)av	18244
L_45(85)av	9249

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-12-05

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.700m [K=1.1264]
Remarks:

Planar Illuminance Curve

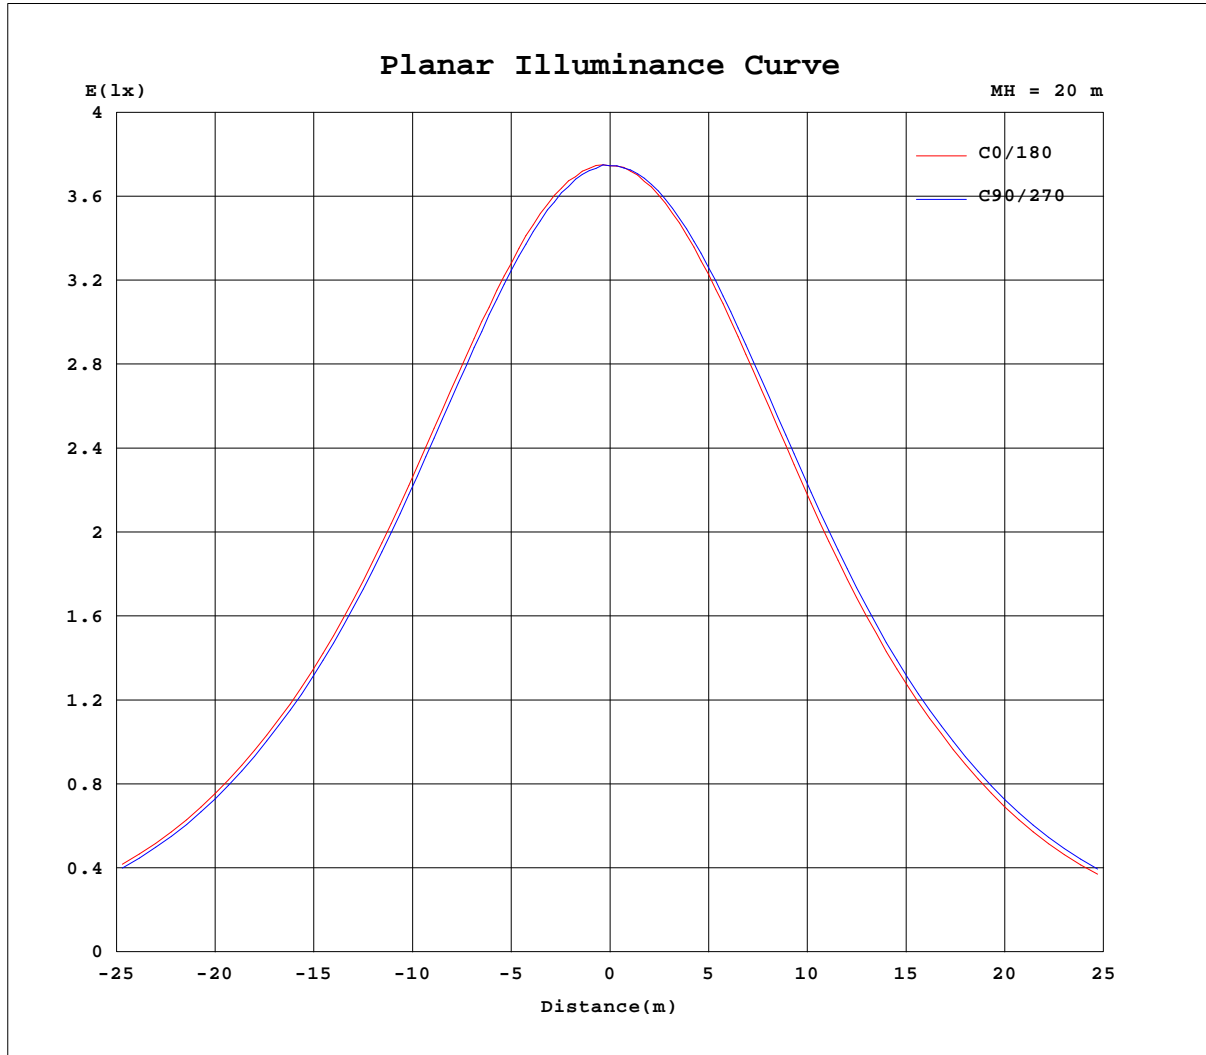

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-12-05

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=1.1264]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.05V I:0.3380A P:40.200W PF:0.9910 Freq:60.00Hz Lamp Flux:3224.36x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	1499	1499	1499	1499	1499	1499	1499	1499	1499	1499	1499	1499						
5	1495	1493	1492	1490	1484	1485	1486	1485	1490	1492	1489	1495						
10	1474	1470	1465	1459	1453	1452	1455	1454	1460	1464	1469	1472						
15	1430	1426	1421	1413	1401	1399	1402	1404	1414	1420	1427	1430						
20	1370	1366	1357	1347	1335	1329	1334	1336	1349	1356	1365	1370						
25	1293	1288	1279	1269	1251	1244	1248	1253	1267	1276	1288	1292						
30	1201	1196	1186	1175	1155	1146	1150	1154	1171	1181	1194	1201						
35	1097	1095	1084	1072	1050	1038	1042	1047	1064	1073	1089	1097						
40	986	983	972	961	935	921	926	931	949	959	975	984						
45	855	852	839	826	797	781	782	788	808	822	843	852						
50	703	703	689	675	643	628	626	631	652	667	689	701						
55	545	546	533	517	488	472	473	475	495	506	530	541						
60	395	398	383	370	343	332	332	334	350	359	379	389						
65	263	265	252	241	221	214	215	216	227	234	250	257						
70	157	157	147	139	126	122	123	124	132	137	147	153						
75	77.7	77.4	71.3	66.2	60.8	59.4	59.9	60.5	64.7	67.6	73.6	76.2						
80	35.1	35.2	32.5	30.2	28.6	28.9	28.7	27.5	30.0	30.4	33.1	33.4						
85	15.8	15.7	11.7	9.88	9.27	10.9	11.3	8.85	11.0	10.5	13.1	12.6						
90	0.75	0.23	0.98	0.14	0.09	0.11	0.16	0.18	0.18	0.16	0.12	0.23						
95	0.22	0.30	0.18	0.28	0.17	0.25	0.33	0.26	0.35	0.24	0.26	0.18						
100	0.43	0.51	0.44	0.49	0.40	0.49	0.59	0.54	0.61	0.47	0.53	0.43						
105	0.70	0.83	0.75	0.77	0.67	0.81	0.89	0.84	0.91	0.78	0.83	0.73						
110	1.05	1.22	1.11	1.12	1.03	1.14	1.27	1.23	1.28	1.18	1.20	1.12						
115	1.47	1.65	1.52	1.51	1.44	1.57	1.65	1.64	1.68	1.61	1.60	1.56						
120	1.92	2.05	1.97	1.94	1.84	1.97	2.08	2.09	2.12	2.04	1.97	2.03						
125	2.37	2.45	2.41	2.33	2.27	2.38	2.46	2.52	2.57	2.49	2.37	2.47						
130	2.88	2.88	2.87	2.68	2.73	2.92	2.92	2.96	2.98	2.94	2.79	2.88						
135	3.37	3.29	3.34	3.04	3.11	3.34	3.33	3.36	3.31	3.30	3.25	3.27						
140	3.74	3.69	3.74	3.45	3.43	3.81	3.61	3.73	3.56	3.64	3.61	3.60						
145	4.12	3.98	4.10	3.78	3.74	4.28	3.85	4.02	3.93	3.99	3.91	3.90						
150	4.44	4.26	4.38	4.14	4.11	4.66	4.11	4.38	4.27	4.33	4.30	4.29						
155	4.80	4.65	4.78	4.32	4.44	5.16	4.32	4.81	4.62	4.66	4.73	4.62						
160	5.25	5.08	5.02	4.49	4.76	5.56	4.64	5.18	4.98	5.00	4.95	4.84						
165	5.58	5.47	5.58	4.89	5.06	5.78	4.98	5.49	5.20	5.38	5.22	5.23						
170	5.96	5.64	6.05	5.12	5.34	6.20	5.33	5.80	5.44	5.60	5.58	5.47						
175	6.27	5.93	6.48	5.41	5.62	6.41	5.62	6.11	5.88	5.77	5.83	5.74						
180	6.51	6.14	6.36	5.57	5.83	6.06	5.69	6.23	6.02	5.88	5.95	5.71						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-12-05

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.1264]
 Remarks: