
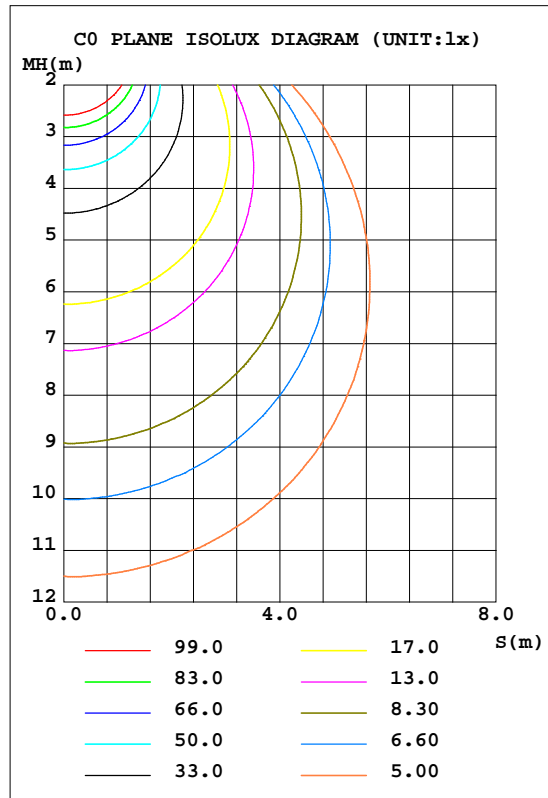


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.19V I:0.2066A P:24.475W PF:0.9858 Freq:59.98Hz Lamp Flux:1932.55x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.23*0.23	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 78.96 lm/W			
MODELASD-JBS-4D12AC(3000K)		I <sub>max</sub> (cd)	662.4	S/MH(C0/180)	1.25
NOMINAL POWER(W)	12	LOR(%)	100.0	S/MH(C90/270)	1.25
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	1932.5	h UP, DN(C0-180)	0.2,50.7
NOMINAL FLUX(lm)	1932.55	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.2,48.9
LAMPS INSIDE	1	h up(%)	0.4	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	h down(%)	99.6	CIBSE SHR MAX	1.35

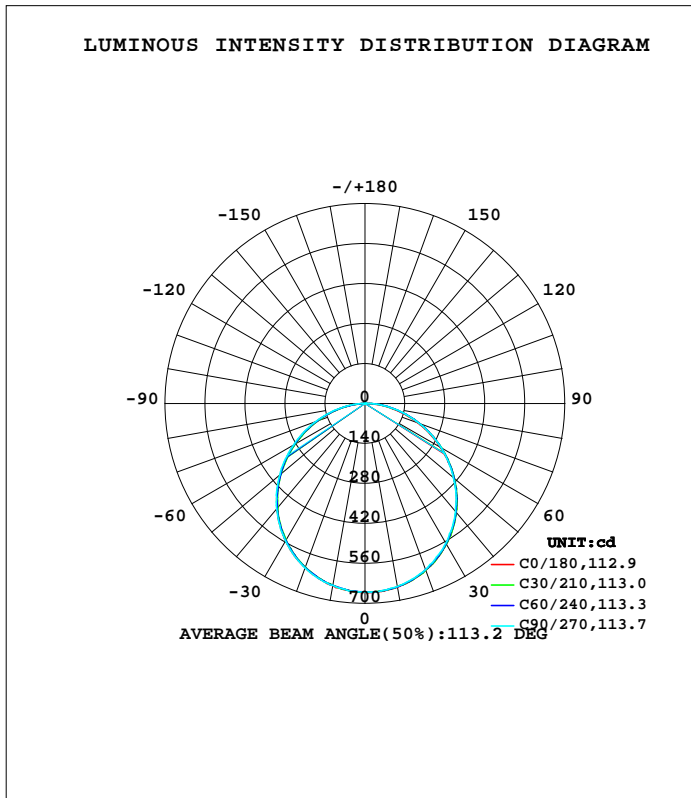

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-11

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=1.0000]  
 Remarks:

## ZONAL FLUX DIAGRAM

## ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	652.9	652.4	651.3	649.8	648.1	646.7	646.8	651.5	0- 10	62.57	62.57	3.24,3.24
20	621.7	620.7	619.0	615.1	612.3	610.8	612.8	618.4	10- 20	179.5	242.1	12.5,12.5
30	569.4	568.6	565.8	559.0	555.9	553.4	556.9	564.0	20- 30	272.6	514.7	26.6,26.6
40	496.4	497.1	493.5	485.2	480.1	477.0	481.1	489.5	30- 40	329.5	844.1	43.7,43.7
50	407.3	408.5	404.8	395.0	387.7	384.8	389.7	399.6	40- 50	342.3	1186	61.4,61.4
60	304.7	308.7	306.6	293.8	284.1	282.3	288.0	297.9	50- 60	310.5	1497	77.5,77.5
70	195.5	202.1	200.9	187.1	176.1	174.9	181.5	190.7	60- 70	239.8	1737	89.9,89.9
80	90.28	98.30	97.98	85.20	74.11	73.64	79.40	85.46	70- 80	143.9	1881	97.3,97.3
90	4.642	8.447	7.068	0.8403	0.2449	0.2602	0.5843	0.4721	80- 90	43.63	1924	99.6,99.6
100	0.3742	0.4810	0.5519	0.5497	0.5779	0.5825	0.5616	0.4898	90-100	0.5426	1925	99.6,99.6
110	0.8060	0.8997	0.9369	0.9456	0.9577	0.9259	0.9882	0.8468	100-110	0.7543	1926	99.6,99.6
120	1.253	1.261	1.317	1.337	1.296	1.290	1.379	1.214	110-120	1.092	1927	99.7,99.7
130	1.597	1.589	1.645	1.678	1.592	1.615	1.670	1.542	120-130	1.307	1928	99.8,99.8
140	1.836	1.828	1.879	1.920	1.946	1.893	1.894	1.816	130-140	1.345	1929	99.8,99.8
150	2.076	1.982	2.118	2.142	2.227	2.109	2.081	2.071	140-150	1.244	1931	99.9,99.9
160	2.310	2.195	2.368	2.360	2.487	2.294	2.232	2.353	150-160	1.016	1932	100,100
170	2.700	2.395	2.633	2.587	2.757	2.473	2.440	2.592	160-170	0.6890	1932	100,100
180	2.607	2.588	2.675	2.592	2.633	2.712	2.597	2.608	170-180	0.2483	1933	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-6-11

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
Humidity:65.0%  
Test Distance:8.600m [K=1.0000]  
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.19V I:0.2066A P:24.475W PF:0.9858 Freq:59.98Hz Lamp Flux:1932.55x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.23*0.23	Shielding Angle:

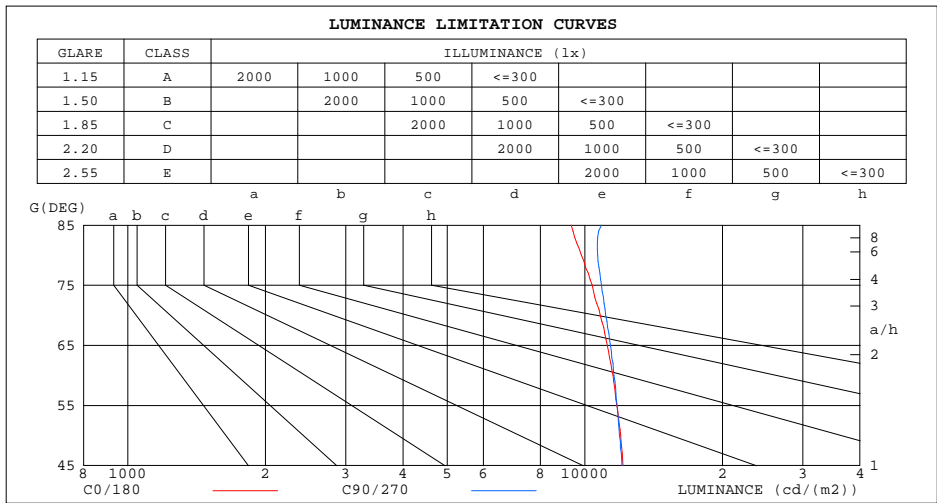

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	9334	10874
80	9832	10669
75	10379	10885
70	10807	11108
65	11206	11376
60	11526	11593
55	11750	11770
50	11983	11909
45	12128	12054


C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-11

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=1.0000]  
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.19V I:0.2066A P:24.475W PF:0.9858 Freq:59.98Hz Lamp Flux:1932.55x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.23*0.23	Shielding Angle:

r <sub>cc</sub>	80%			70%			50%			30%			10%			0
r <sub>w</sub>	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r <sub>fc</sub>	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio      Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.03	.99	.95	1.01	.97	.93	.97	.93	.90	.93	.90	.88	.89	.87	.85	.83
2.0	.90	.83	.77	.88	.82	.76	.84	.79	.74	.81	.76	.72	.78	.74	.71	.69
3.0	.79	.70	.64	.77	.69	.63	.74	.67	.62	.71	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.54	.68	.60	.54	.66	.58	.53	.63	.57	.52	.61	.56	.51	.49
5.0	.62	.53	.46	.61	.52	.46	.59	.51	.46	.57	.50	.45	.55	.49	.44	.42
6.0	.56	.47	.40	.55	.46	.40	.53	.45	.40	.51	.45	.39	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.41	.35	.48	.41	.35	.47	.40	.35	.45	.39	.35	.33
8.0	.46	.38	.32	.46	.37	.32	.44	.37	.31	.43	.36	.31	.42	.36	.31	.29
9.0	.42	.34	.29	.42	.34	.28	.41	.33	.28	.39	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.30	.26	.37	.30	.25	.36	.30	.25	.24

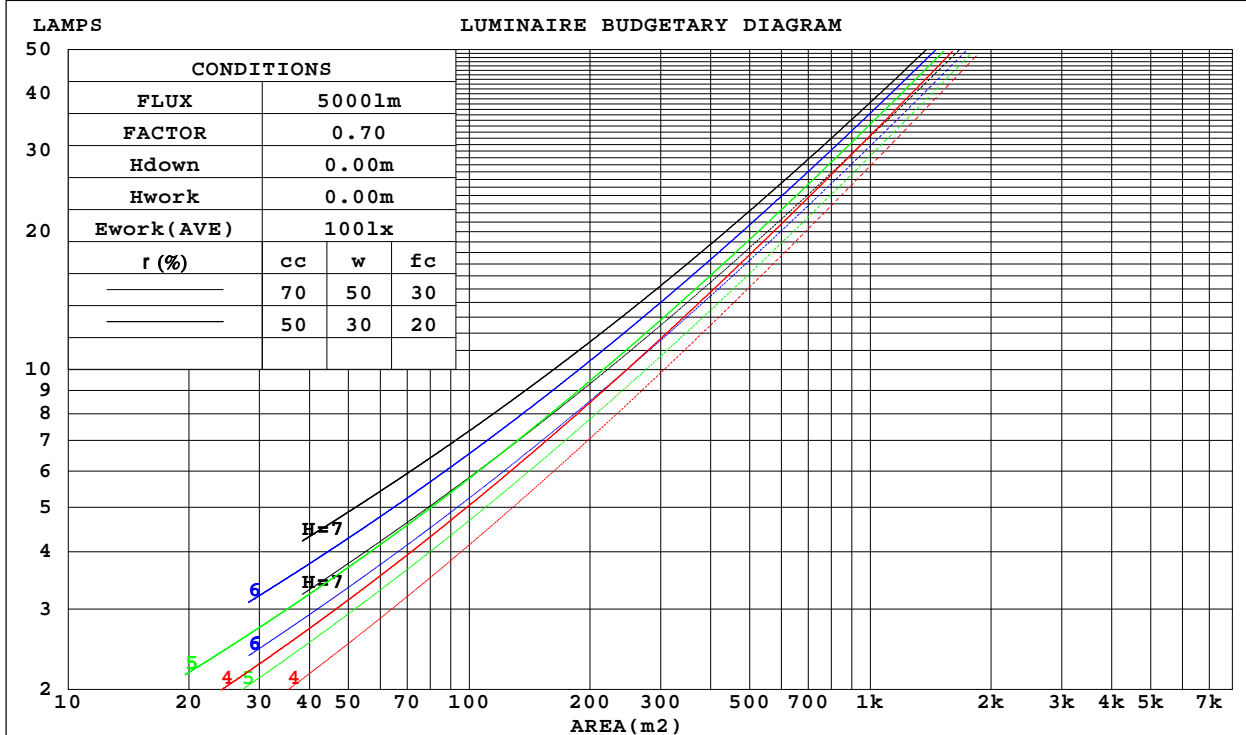

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-11

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=1.0000]  
 Remarks:

WEC AND CCEC

Test:U:120.19V I:0.2066A P:24.475W PF:0.9858 Freq:59.98Hz Lamp Flux:1932.55x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.23*0.23	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.316	.180	.057	.309	.176	.056	.296	.170	.054	.283	.163	.052	.272	.158	.051	
2.0	.296	.162	.050	.290	.160	.049	.278	.154	.048	.267	.150	.047	.256	.145	.046	
3.0	.273	.145	.044	.267	.143	.043	.257	.139	.042	.247	.135	.042	.238	.132	.041	
4.0	.251	.131	.038	.246	.129	.038	.237	.126	.038	.228	.123	.037	.220	.120	.036	
5.0	.232	.118	.034	.228	.117	.034	.219	.114	.034	.211	.112	.033	.204	.109	.033	
6.0	.215	.108	.031	.211	.107	.031	.204	.104	.030	.197	.102	.030	.190	.100	.030	
7.0	.200	.099	.028	.196	.098	.028	.190	.096	.028	.183	.094	.027	.178	.092	.027	
8.0	.187	.091	.026	.183	.090	.026	.177	.089	.025	.172	.087	.025	.167	.086	.025	
9.0	.175	.085	.024	.172	.084	.024	.167	.082	.023	.161	.081	.023	.157	.080	.023	
10.0	.164	.079	.022	.162	.078	.022	.157	.077	.022	.152	.076	.021	.148	.074	.021	

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.194	.194	.194	.166	.166	.166	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.184	.159	.137	.157	.137	.118	.108	.094	.082	.062	.054	.047	.020	.018	.015	
2.0	.176	.135	.101	.151	.116	.087	.103	.081	.061	.060	.047	.036	.019	.015	.012	
3.0	.168	.118	.077	.144	.101	.067	.099	.070	.047	.057	.041	.028	.018	.013	.009	
4.0	.161	.104	.061	.138	.090	.053	.095	.063	.038	.055	.037	.022	.018	.012	.007	
5.0	.153	.094	.050	.132	.081	.044	.091	.057	.031	.053	.033	.018	.017	.011	.006	
6.0	.146	.086	.042	.126	.074	.037	.087	.052	.026	.050	.031	.015	.016	.010	.005	
7.0	.139	.079	.036	.120	.068	.032	.083	.048	.022	.048	.028	.013	.016	.009	.004	
8.0	.133	.073	.032	.114	.063	.028	.079	.044	.020	.046	.026	.012	.015	.009	.004	
9.0	.127	.068	.028	.109	.059	.025	.076	.041	.018	.044	.025	.011	.014	.008	.003	
10.0	.121	.064	.026	.104	.055	.022	.072	.039	.016	.042	.023	.010	.014	.008	.003	

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-11

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=1.0000]  
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.19V I:0.2066A P:24.475W PF:0.9858 Freq:59.98Hz Lamp Flux:1932.55x1 lm										
NAME:			TYPE:			WEIGHT:				
SPEC.:			DIM.:			SERIAL No.:				
MFR.: ASD LIGHTNG CORP			SUR.: 0.23*0.23			Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	20.9	22.5	21.2	22.8	23.1	20.7	22.3	21.1	22.7	23.0
3H	22.8	24.3	23.2	24.6	25.0	22.7	24.2	23.0	24.5	24.9
4H	23.5	24.9	23.9	25.3	25.7	23.5	24.9	23.9	25.2	25.6
6H	24.1	25.4	24.5	25.8	26.2	24.1	25.4	24.5	25.8	26.2
8H	24.3	25.6	24.8	26.0	26.4	24.4	25.6	24.8	26.0	26.4
12H	24.5	25.7	24.9	26.1	26.5	24.6	25.7	25.0	26.1	26.6
4H 2H	21.5	22.9	21.9	23.3	23.7	21.3	22.7	21.7	23.1	23.5
3H	23.7	24.9	24.1	25.3	25.7	23.5	24.7	23.9	25.1	25.5
4H	24.6	25.7	25.0	26.1	26.5	24.4	25.5	24.9	25.9	26.4
6H	25.3	26.3	25.8	26.7	27.2	25.2	26.2	25.7	26.6	27.1
8H	25.6	26.5	26.1	26.9	27.4	25.5	26.4	26.0	26.9	27.3
12H	25.8	26.6	26.3	27.1	27.6	25.8	26.6	26.3	27.1	27.6
8H 4H	25.0	25.9	25.4	26.3	26.8	24.7	25.6	25.2	26.1	26.5
6H	25.9	26.6	26.4	27.1	27.6	25.7	26.4	26.2	26.9	27.4
8H	26.2	26.9	26.8	27.4	27.9	26.1	26.7	26.6	27.3	27.7
12H	26.6	27.1	27.1	27.6	28.2	26.4	27.0	27.0	27.5	28.1
12H 4H	25.0	25.8	25.5	26.3	26.8	24.8	25.6	25.3	26.1	26.5
6H	26.0	26.6	26.5	27.1	27.7	25.8	26.4	26.3	26.9	27.4
8H	26.4	27.0	26.9	27.5	28.1	26.2	26.8	26.7	27.3	27.8
CIE190: 2010										

CIE190: 2010  
Area: 0.0529 m2

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-6-11

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
Humidity:65.0%  
Test Distance:8.600m [K=1.0000]  
Remarks:

## UTILIZATION FACTORS TABLE

Test:U:120.19V I:0.2066A P:24.475W PF:0.9858 Freq:59.98Hz Lamp Flux:1932.55x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.23*0.23	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	45	38	56	45	38	55	45	38	32
0.80	67	55	48	66	55	48	64	54	47	40
1.00	75	64	57	74	64	56	72	65	56	49
1.25	82	72	65	81	71	64	78	70	63	56
1.50	87	77	70	86	77	70	83	75	69	61
2.00	94	86	79	93	84	78	89	82	77	69
2.50	98	90	84	96	89	83	92	86	81	73
3.00	102	95	89	100	93	88	95	90	86	77
4.00	106	100	95	103	98	94	99	95	91	82
5.00	108	103	99	106	101	98	101	98	94	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 2022-6-11

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
Humidity: 65.0%  
Test Distance: 8.600m [K=1.0000]  
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.19V I:0.2066A P:24.475W PF:0.9858 Freq:59.98Hz Lamp Flux:1932.55x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.23*0.23	Shielding Angle:

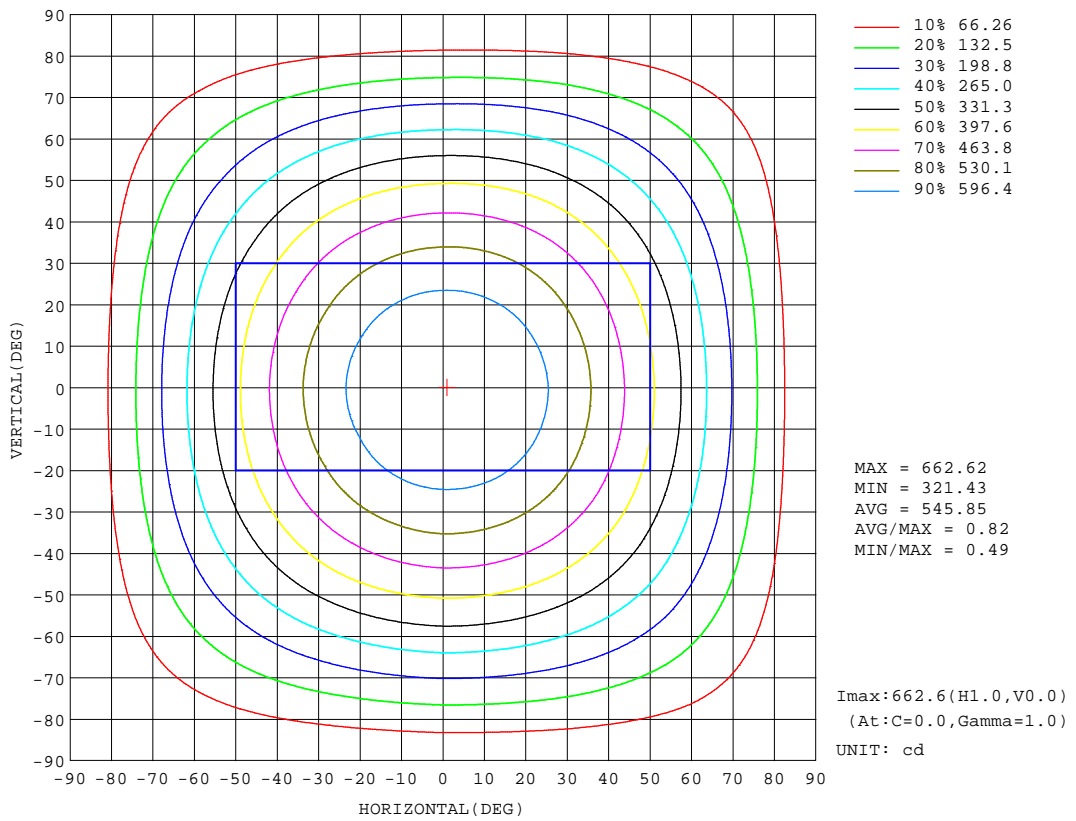

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-11


g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=1.0000]  
 Remarks:



AAI Figure

Test:U:120.19V I:0.2066A P:24.475W PF:0.9858 Freq:59.98Hz Lamp Flux:1932.55x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.23*0.23	Shielding Angle:

Flux out:1410 lm

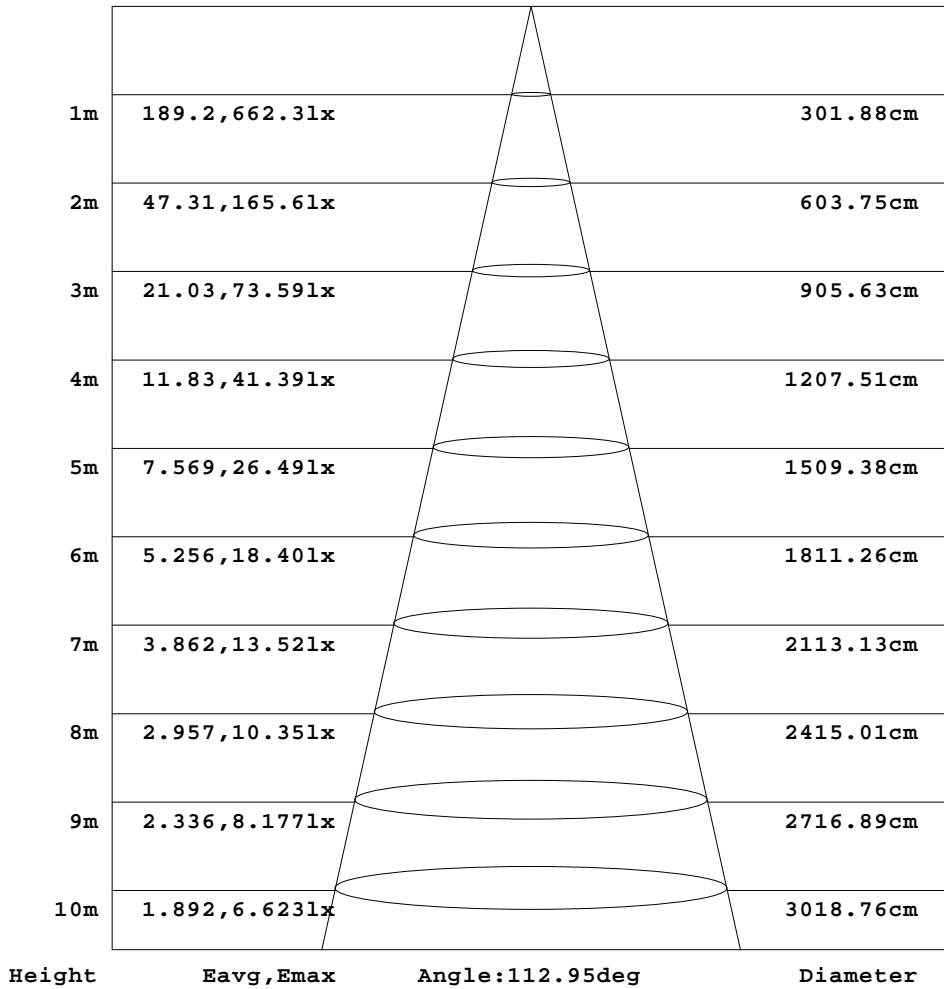


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-11

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=1.0000]  
 Remarks:

ISOLUX DIAGRAM

Test:U:120.19V I:0.2066A P:24.475W PF:0.9858 Freq:59.98Hz Lamp Flux:1932.55x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.23*0.23	Shielding Angle:

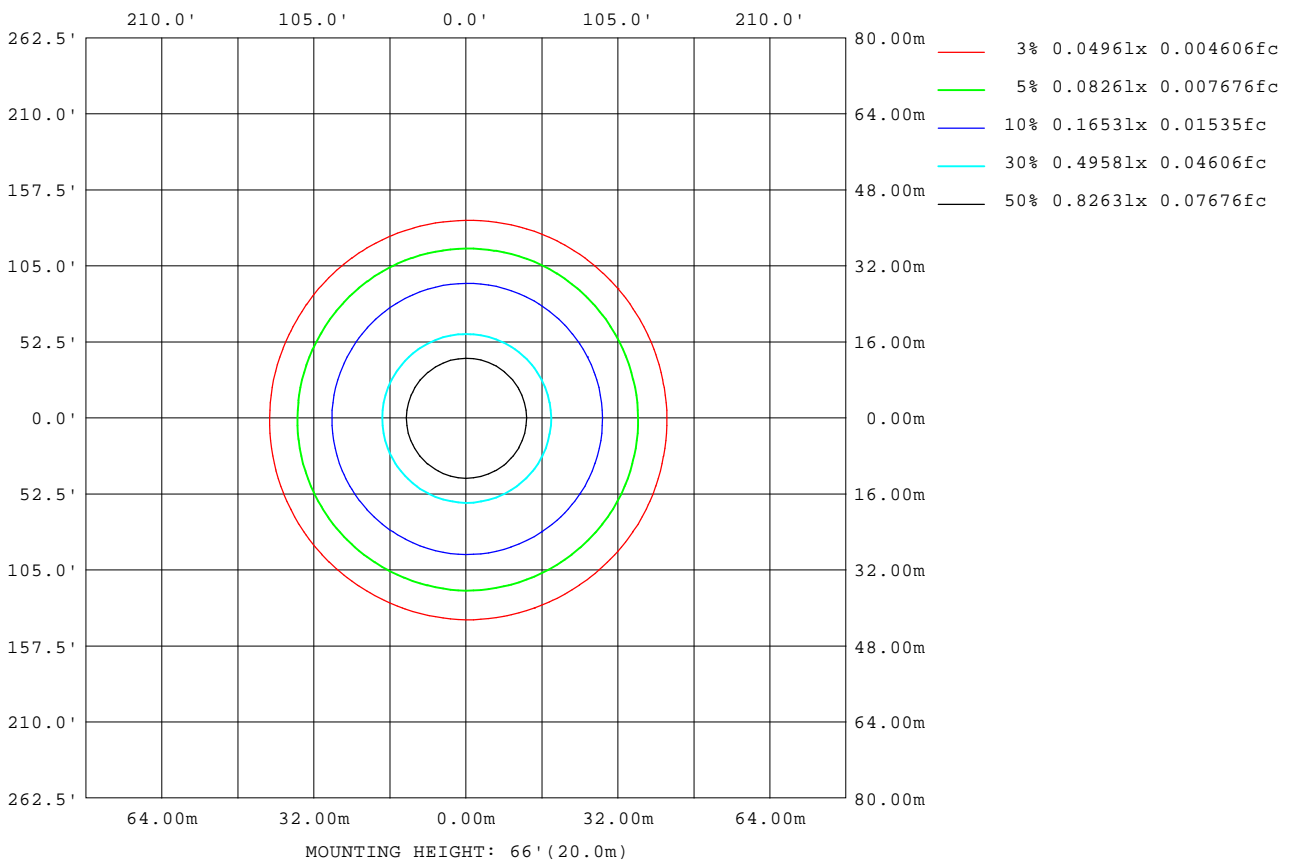

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2022-6-11

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity: 65.0%  
 Test Distance: 8.600m [K=1.0000]  
 Remarks:

## LED Avg.L Report

Test:U:120.19V I:0.2066A P:24.475W PF:0.9858 Freq:59.98Hz Lamp Flux:1932.55x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.23*0.23	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	10748
L_0~180(75)av	9695
L_0~180(85)av	7798
L_90~270(65)av	10944
L_90~270(75)av	10189
L_90~270(85)av	8963
L_45(65)av	10837
L_45(75)av	9946
L_45(85)av	8344

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-6-11

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
Humidity:65.0%  
Test Distance:8.600m [K=1.0000]  
Remarks:

Planar Illuminance Curve

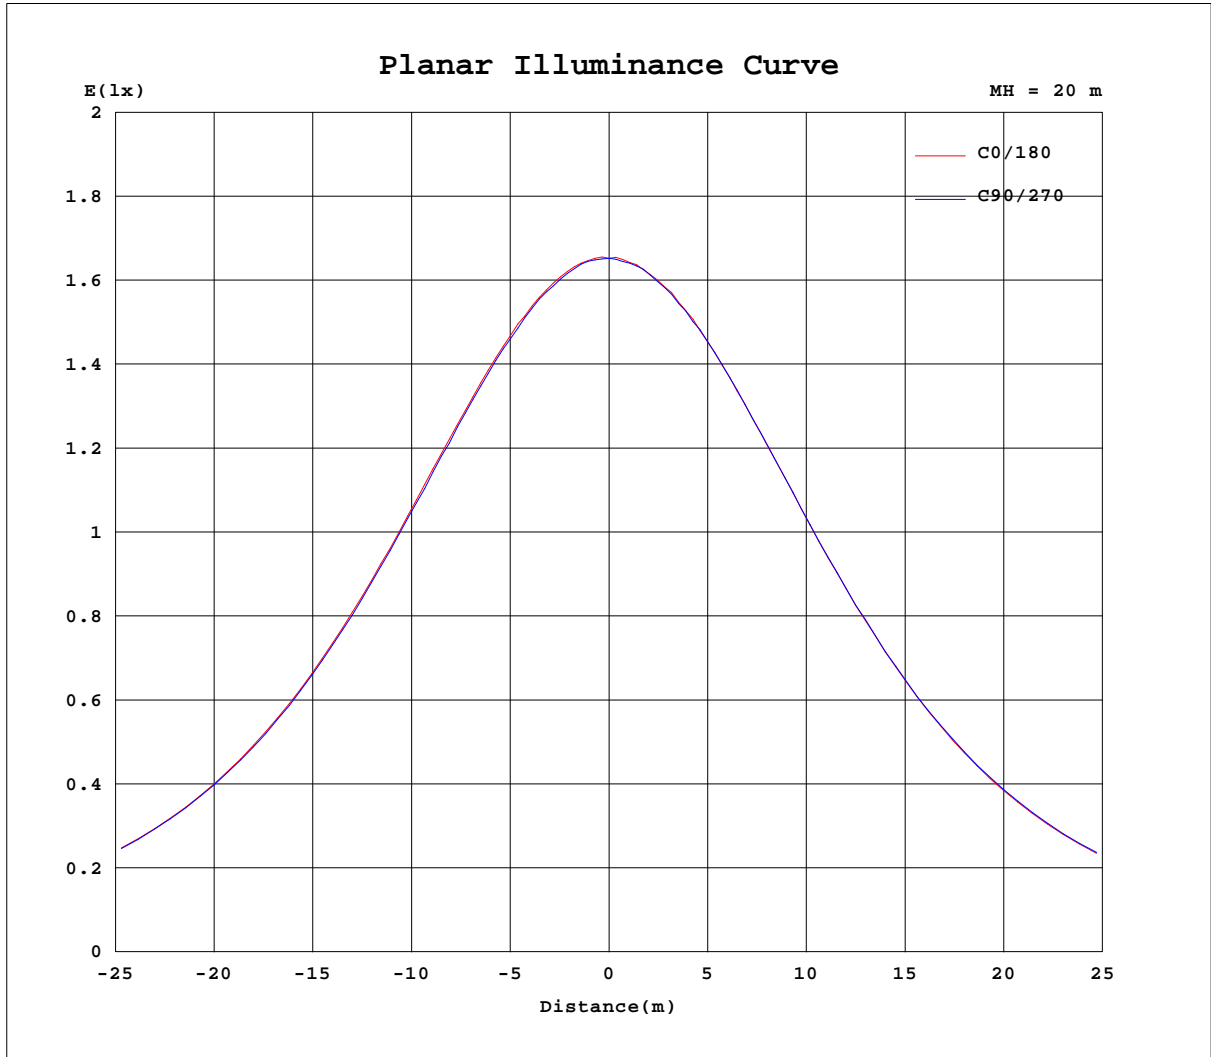

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2022-6-11

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity: 65.0%  
 Test Distance: 8.600m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.19V I:0.2066A P:24.475W PF:0.9858 Freq:59.98Hz Lamp Flux:1932.55x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.23*0.23	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	661	661	661	661	661	661	661	661	661	661	661	661						
5	660	660	659	659	657	658	657	657	657	658	658	659						
10	653	652	653	651	650	649	648	647	647	647	650	653						
15	640	641	639	638	636	634	634	631	633	633	636	639						
20	622	622	619	619	616	615	612	610	612	613	617	620						
25	599	598	597	593	591	588	587	584	585	588	591	595						
30	569	569	568	566	560	558	556	553	554	557	562	566						
35	536	536	534	532	526	522	520	517	517	521	527	531						
40	496	498	496	494	487	483	480	475	478	481	488	491						
45	453	456	454	451	444	438	435	431	434	437	444	449						
50	407	409	408	405	399	391	388	384	386	390	398	401						
55	356	360	358	357	348	342	336	332	336	341	347	352						
60	305	310	308	307	298	290	284	280	285	288	297	299						
65	250	256	255	254	244	237	230	226	232	235	243	246						
70	195	202	202	201	191	183	176	172	178	181	189	192						
75	142	149	150	149	140	131	123	121	126	130	136	138						
80	90.3	97.4	99.3	98.0	89.4	81.0	74.1	71.7	75.6	79.4	85.0	85.9						
85	43.0	49.7	51.1	50.1	42.4	35.4	28.9	26.1	29.1	32.5	35.7	38.3						
90	4.64	8.49	8.40	7.07	1.40	0.28	0.24	0.25	0.27	0.58	0.26	0.69						
95	0.19	0.27	0.34	0.37	0.33	0.42	0.43	0.37	0.41	0.37	0.40	0.30						
100	0.37	0.46	0.50	0.55	0.51	0.59	0.58	0.58	0.58	0.56	0.55	0.43						
105	0.61	0.69	0.68	0.74	0.71	0.77	0.76	0.76	0.73	0.78	0.72	0.59						
110	0.81	0.93	0.87	0.94	0.93	0.96	0.96	0.95	0.91	0.99	0.91	0.78						
115	1.04	1.10	1.08	1.15	1.16	1.13	1.12	1.15	1.08	1.18	1.09	1.01						
120	1.25	1.26	1.26	1.32	1.36	1.31	1.30	1.34	1.24	1.38	1.25	1.18						
125	1.43	1.42	1.43	1.50	1.54	1.51	1.46	1.52	1.44	1.51	1.42	1.40						
130	1.60	1.57	1.61	1.64	1.71	1.65	1.59	1.64	1.59	1.67	1.58	1.51						
135	1.71	1.71	1.72	1.76	1.82	1.74	1.73	1.77	1.76	1.78	1.70	1.68						
140	1.84	1.84	1.82	1.88	1.98	1.86	1.95	1.91	1.88	1.89	1.83	1.80						
145	1.97	1.94	1.87	1.98	2.07	1.97	2.10	2.03	1.99	1.99	1.97	1.94						
150	2.08	2.03	1.93	2.12	2.22	2.06	2.23	2.15	2.07	2.08	2.06	2.08						
155	2.18	2.15	2.04	2.23	2.28	2.18	2.36	2.25	2.18	2.14	2.21	2.19						
160	2.31	2.23	2.16	2.37	2.43	2.29	2.49	2.31	2.28	2.23	2.35	2.36						
165	2.47	2.26	2.30	2.50	2.65	2.37	2.64	2.41	2.38	2.37	2.48	2.54						
170	2.70	2.34	2.45	2.63	2.67	2.50	2.76	2.48	2.47	2.44	2.61	2.57						
175	2.77	2.57	2.57	2.68	2.61	2.65	2.72	2.54	2.54	2.59	2.65	2.60						
180	2.61	2.63	2.55	2.67	2.52	2.66	2.63	2.55	2.88	2.60	2.64	2.58						

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-11

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=1.0000]  
 Remarks: