
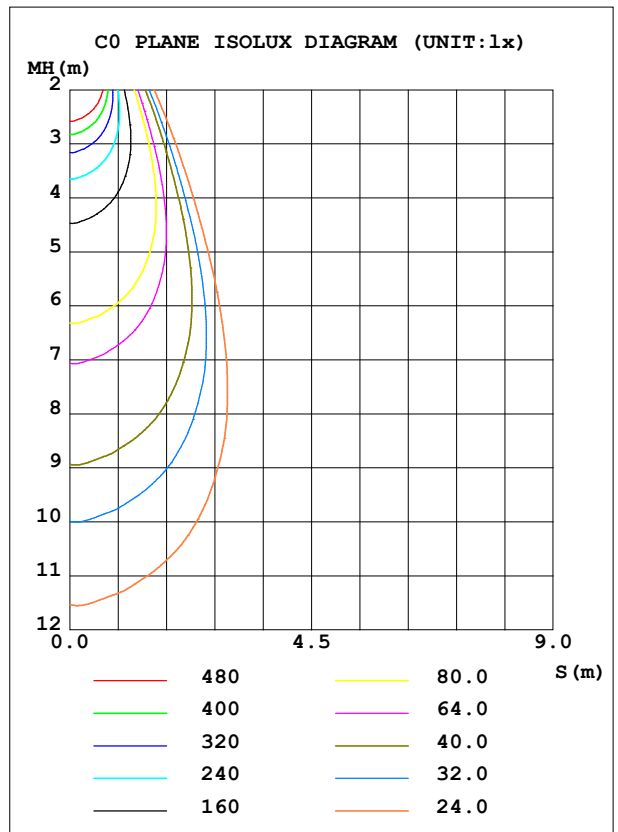


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.72V I:0.1853A P:21.772W PF:0.9813 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1800.86x1 lm		
NAME: ASD-CD-TS-6D24AC-WH	TYPE:	WEIGHT:
SPEC.: 3000K 90	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 82.72 lm/W
MODEL		I _{max} (cd)	3201	S/MH (C0/180)		0.65
NOMINAL POWER (W)	24	LOR (%)	100.0	S/MH (C90/270)		0.65
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	1800.9	η UP, DN (C0-180)		0.0, 53.1
NOMINAL FLUX (lm)	1800.86	CIE CLASS	DIRECT	η UP, DN (C180-360)		0.0, 46.9
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM		0.50
TEST VOLTAGE (V)	120	η down (%)	100.0	CIBSE SHR MAX		0.70

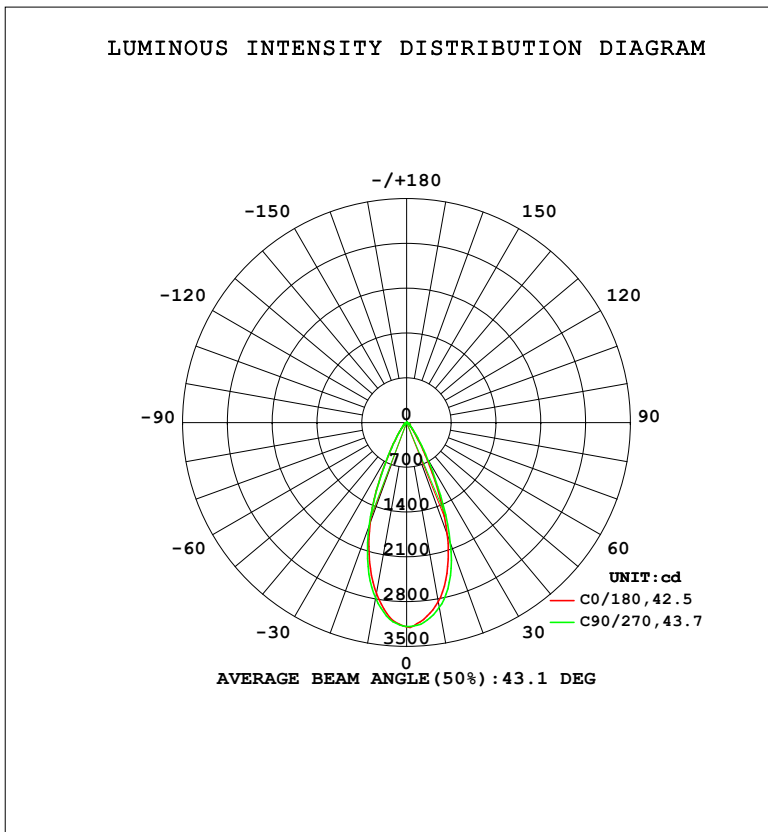

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2023-04-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	2844	2951	2936	2863	2716	2703	2792	2800	0- 10	286.4	286.4	15.9,15.9
20	1868	2047	1999	1873	1677	1606	1715	1757	10- 20	658.0	944.4	52.4,52.4
30	584.9	670.0	659.0	609.8	529.0	483.2	522.0	530.8	20- 30	515.0	1459	81,81
40	160.3	182.3	182.9	167.5	144.7	132.0	145.4	141.1	30- 40	191.9	1651	91.7,91.7
50	67.31	71.97	72.87	67.76	63.60	59.95	63.68	61.41	40- 50	77.67	1729	96,96
60	38.31	35.04	40.25	33.82	37.46	31.77	37.49	31.74	50- 60	43.97	1773	98.5,98.5
70	11.55	7.374	14.96	7.495	14.56	7.651	14.64	7.521	60- 70	22.22	1795	99.7,99.7
80	2.085	2.070	2.164	2.138	2.273	2.256	2.283	2.134	70- 80	4.589	1800	99.9,99.9
90	0.0919	0.0755	0.0858	0.0830	0.0811	0.0618	0.0759	0.0528	80- 90	1.065	1801	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2023-04-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.72V I:0.1853A P:21.772W PF:0.9813 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1800.86x1 lm		
NAME: ASD-CD-TS-6D24AC-WH	TYPE:	WEIGHT:
SPEC.: 3000K 90	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

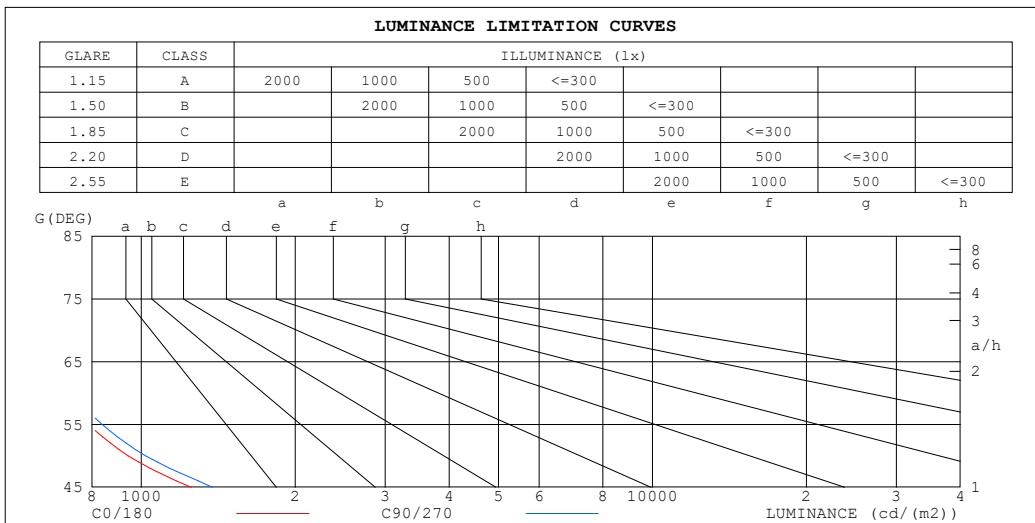

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	81	103
80	108	112
75	117	134
70	304	394
65	570	608
60	690	725
55	787	838
50	942	1020
45	1252	1376


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators:
 Test Date: 2023-04-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.72V I:0.1853A P:21.772W PF:0.9813 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1800.86x1 lm		
NAME: ASD-CD-TS-6D24AC-WH	TYPE:	WEIGHT:
SPEC.: 3000K 90	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.05	1.03	1.02	1.01	.99	.99	.98	.97	.96	.94
2.0	1.04	1.00	.97	1.02	.99	.96	.99	.96	.94	.96	.94	.92	.93	.92	.90	.88
3.0	.98	.93	.89	.96	.92	.89	.94	.90	.87	.91	.88	.86	.89	.87	.84	.83
4.0	.92	.87	.83	.91	.86	.82	.89	.85	.81	.87	.83	.80	.85	.82	.80	.78
5.0	.87	.81	.77	.86	.81	.77	.84	.80	.76	.83	.79	.76	.81	.78	.75	.74
6.0	.82	.77	.73	.81	.76	.73	.80	.75	.72	.79	.75	.72	.77	.74	.71	.70
7.0	.78	.73	.69	.77	.72	.69	.76	.72	.68	.75	.71	.68	.74	.70	.67	.66
8.0	.74	.69	.65	.74	.69	.65	.73	.68	.65	.72	.68	.64	.71	.67	.64	.63
9.0	.71	.65	.62	.70	.65	.62	.70	.65	.62	.69	.64	.61	.68	.64	.61	.60
10.0	.68	.62	.59	.67	.62	.59	.67	.62	.59	.66	.62	.59	.65	.61	.58	.57

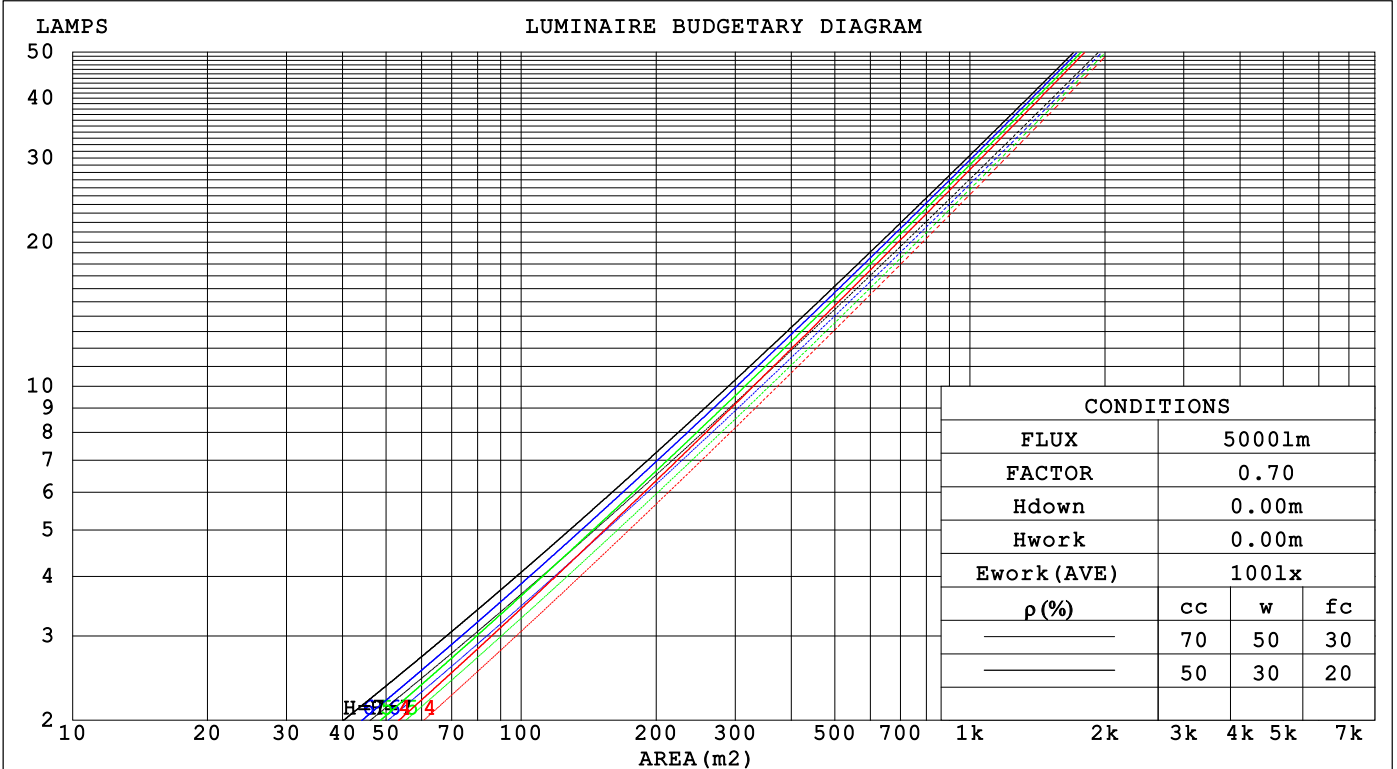

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2023-04-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.72V I:0.1853A P:21.772W PF:0.9813 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1800.86x1 lm		
NAME: ASD-CD-TS-6D24AC-WH	TYPE:	WEIGHT:
SPEC.: 3000K 90	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.170	.097	.031	.163	.093	.030	.151	.087	.028	.139	.080	.026	.129	.075	.024	
2.0	.162	.089	.027	.156	.086	.026	.146	.081	.025	.136	.076	.024	.127	.072	.023	
3.0	.153	.081	.024	.148	.079	.024	.139	.075	.023	.131	.072	.022	.123	.068	.021	
4.0	.145	.075	.022	.141	.074	.022	.133	.071	.021	.126	.068	.020	.119	.065	.020	
5.0	.137	.070	.020	.134	.069	.020	.127	.066	.020	.121	.064	.019	.115	.062	.019	
6.0	.131	.065	.019	.128	.064	.019	.122	.062	.018	.116	.060	.018	.111	.059	.017	
7.0	.124	.062	.017	.122	.061	.017	.117	.059	.017	.112	.057	.017	.107	.056	.016	
8.0	.119	.058	.016	.116	.057	.016	.112	.056	.016	.108	.054	.016	.104	.053	.015	
9.0	.114	.055	.015	.111	.054	.015	.107	.053	.015	.104	.052	.015	.100	.051	.015	
10.0	.109	.052	.014	.107	.052	.014	.103	.051	.014	.100	.050	.014	.097	.049	.014	

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.171	.157	.145	.146	.135	.125	.100	.093	.087	.057	.054	.050	.018	.017	.016	
2.0	.155	.133	.114	.133	.114	.098	.091	.079	.069	.052	.046	.040	.017	.015	.013	
3.0	.142	.114	.091	.122	.098	.079	.084	.068	.055	.048	.040	.033	.016	.013	.011	
4.0	.131	.099	.074	.113	.085	.064	.077	.059	.045	.045	.035	.027	.014	.011	.009	
5.0	.122	.087	.061	.105	.075	.053	.072	.053	.037	.042	.031	.022	.013	.010	.007	
6.0	.114	.077	.051	.098	.067	.044	.068	.047	.031	.039	.028	.019	.013	.009	.006	
7.0	.107	.070	.043	.092	.060	.038	.064	.042	.027	.037	.025	.016	.012	.008	.005	
8.0	.101	.063	.037	.087	.055	.032	.060	.039	.023	.035	.023	.014	.011	.007	.005	
9.0	.096	.058	.032	.083	.050	.028	.057	.035	.020	.033	.021	.012	.011	.007	.004	
10.0	.091	.054	.028	.079	.046	.025	.055	.033	.018	.032	.019	.010	.010	.006	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2023-04-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.72V I:0.1853A P:21.772W PF:0.9813 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1800.86x1 lm										
NAME: ASD-CD-TS-6D24AC-WH					TYPE:			WEIGHT:		
SPEC.: 3000K 90					DIM.:			SERIAL No.:		
MFR.: ASD LIGHTING CORP					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	6.1	6.9	6.3	7.1	7.3	6.5	7.4	6.7	7.5	7.7
3H	6.2	7.0	6.4	7.2	7.4	6.6	7.5	6.9	7.7	7.8
4H	6.1	6.9	6.4	7.1	7.3	6.6	7.4	6.9	7.6	7.8
6H	6.1	6.8	6.4	7.0	7.3	6.5	7.2	6.8	7.5	7.7
8H	6.0	6.7	6.3	7.0	7.2	6.5	7.2	6.8	7.4	7.7
12H	6.0	6.6	6.3	6.9	7.2	6.4	7.1	6.8	7.4	7.6
4H 2H	6.1	6.8	6.3	7.0	7.3	6.5	7.2	6.7	7.4	7.7
3H	6.2	6.9	6.5	7.1	7.4	6.6	7.3	6.9	7.6	7.8
4H	6.1	6.7	6.5	7.0	7.3	6.6	7.2	6.9	7.5	7.8
6H	6.1	6.6	6.4	6.9	7.3	6.5	7.0	6.9	7.4	7.7
8H	6.0	6.5	6.4	6.9	7.2	6.5	6.9	6.8	7.3	7.7
12H	6.0	6.4	6.4	6.8	7.2	6.4	6.9	6.8	7.2	7.6
8H 4H	6.0	6.5	6.4	6.9	7.2	6.4	6.9	6.8	7.3	7.6
6H	5.9	6.4	6.4	6.8	7.2	6.4	6.8	6.8	7.2	7.6
8H	5.9	6.3	6.4	6.7	7.1	6.3	6.7	6.8	7.1	7.5
12H	5.9	6.2	6.3	6.6	7.1	6.3	6.6	6.8	7.0	7.5
12H 4H	6.0	6.4	6.4	6.8	7.2	6.4	6.8	6.8	7.2	7.6
6H	5.9	6.3	6.3	6.7	7.1	6.3	6.7	6.8	7.1	7.5
8H	5.9	6.2	6.3	6.6	7.1	6.3	6.6	6.7	7.0	7.5
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 1.5 / - 2.3					+ 1.7 / - 2.5				
1.5H	+ 2.5 / - 1.7					+ 2.9 / - 1.7				
2.0H	+ 2.0 / - 1.8					+ 2.2 / - 1.9				

CIE Pub.117, 1801 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 2.0)
 Area: 0.111111 m2

C Range: 0 - 360DEG	γ Range: 0 - 90DEG
C Interval: 22.5DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
Temperature:25.3°C	Humidity:65.0%
Operators:	Test Distance:3.090m [K=1.0000]
Test Date:2023-04-14	Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.72V I:0.1853A P:21.772W PF:0.9813 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1800.86x1 lm		
NAME: ASD-CD-TS-6D24AC-WH	TYPE:	WEIGHT:
SPEC.: 3000K 90	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	86	80	76	86	80	76	85	79	76	72
0.80	94	88	84	93	87	84	92	87	83	80
1.00	98	93	89	98	92	89	96	92	88	84
1.25	103	97	94	102	97	93	100	95	92	88
1.50	105	100	97	104	100	97	102	98	95	91
2.00	108	104	101	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	112	108	105	110	107	104	106	104	102	96
4.00	114	111	109	112	109	107	108	106	104	97
5.00	115	113	111	113	111	109	109	107	106	98
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2023-04-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.72V I:0.1853A P:21.772W PF:0.9813 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1800.86x1 lm		
NAME: ASD-CD-TS-6D24AC-WH	TYPE:	WEIGHT:
SPEC.: 3000K 90	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

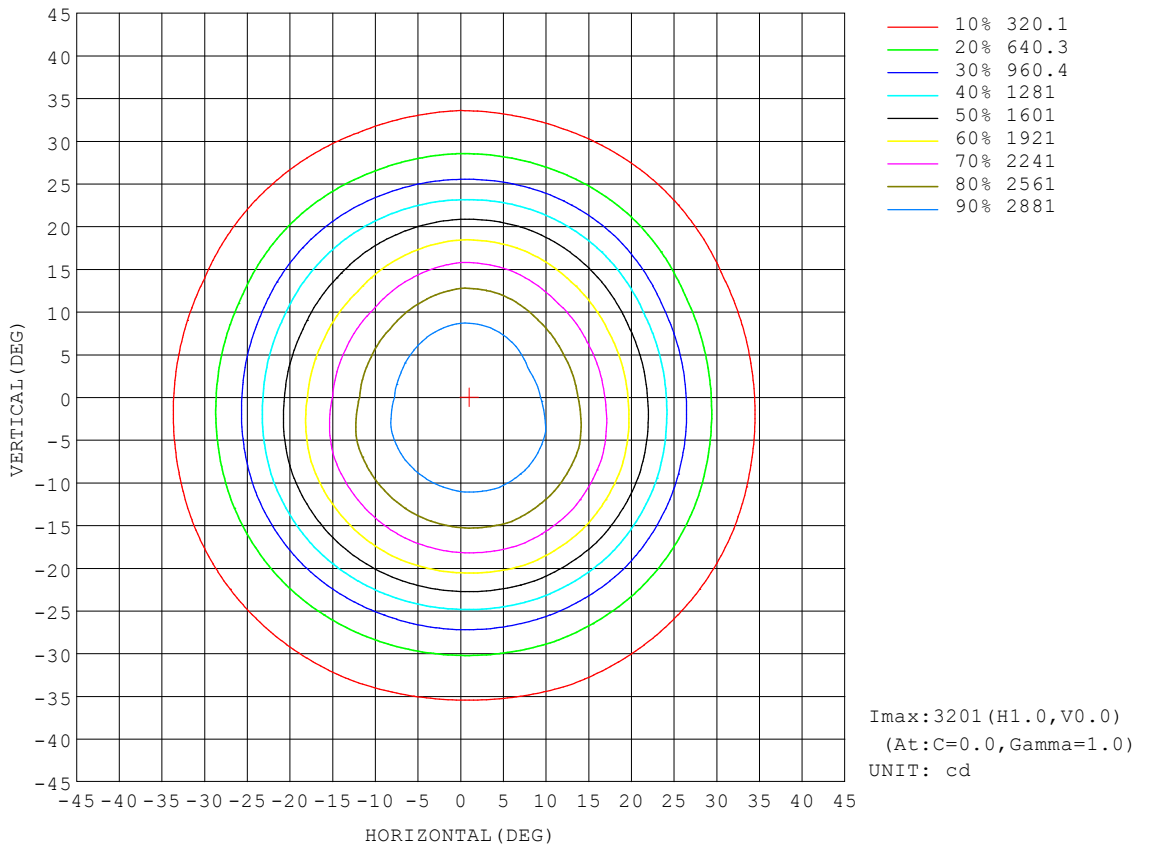


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2023-04-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

AAI Figure

Test:U:119.72V I:0.1853A P:21.772W PF:0.9813 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1800.86x1 lm		
NAME: ASD-CD-TS-6D24AC-WH	TYPE:	WEIGHT:
SPEC.: 3000K 90	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

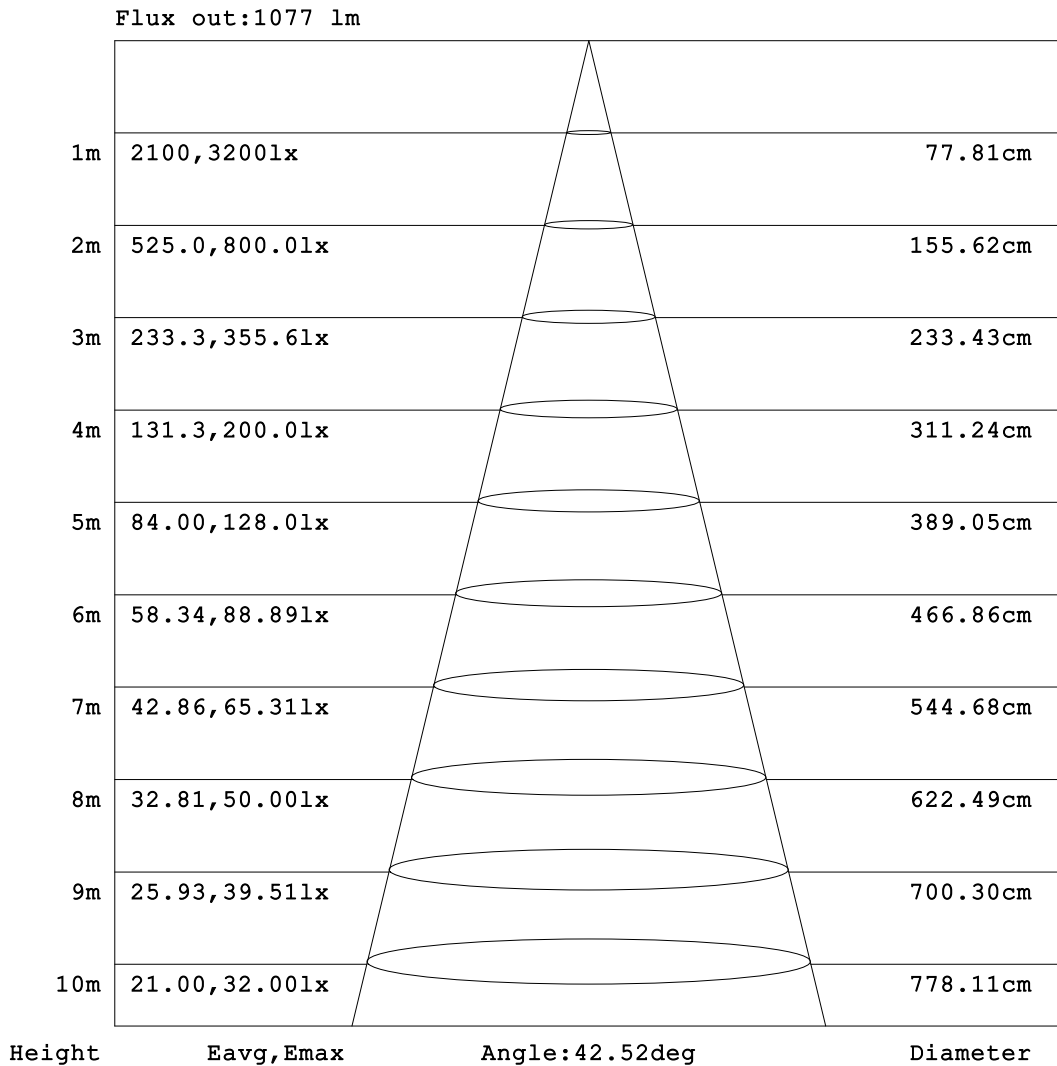


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators:
 Test Date: 2023-04-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.72V I:0.1853A P:21.772W PF:0.9813 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1800.86x1 lm		
NAME: ASD-CD-TS-6D24AC-WH	TYPE:	WEIGHT:
SPEC.: 3000K 90	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

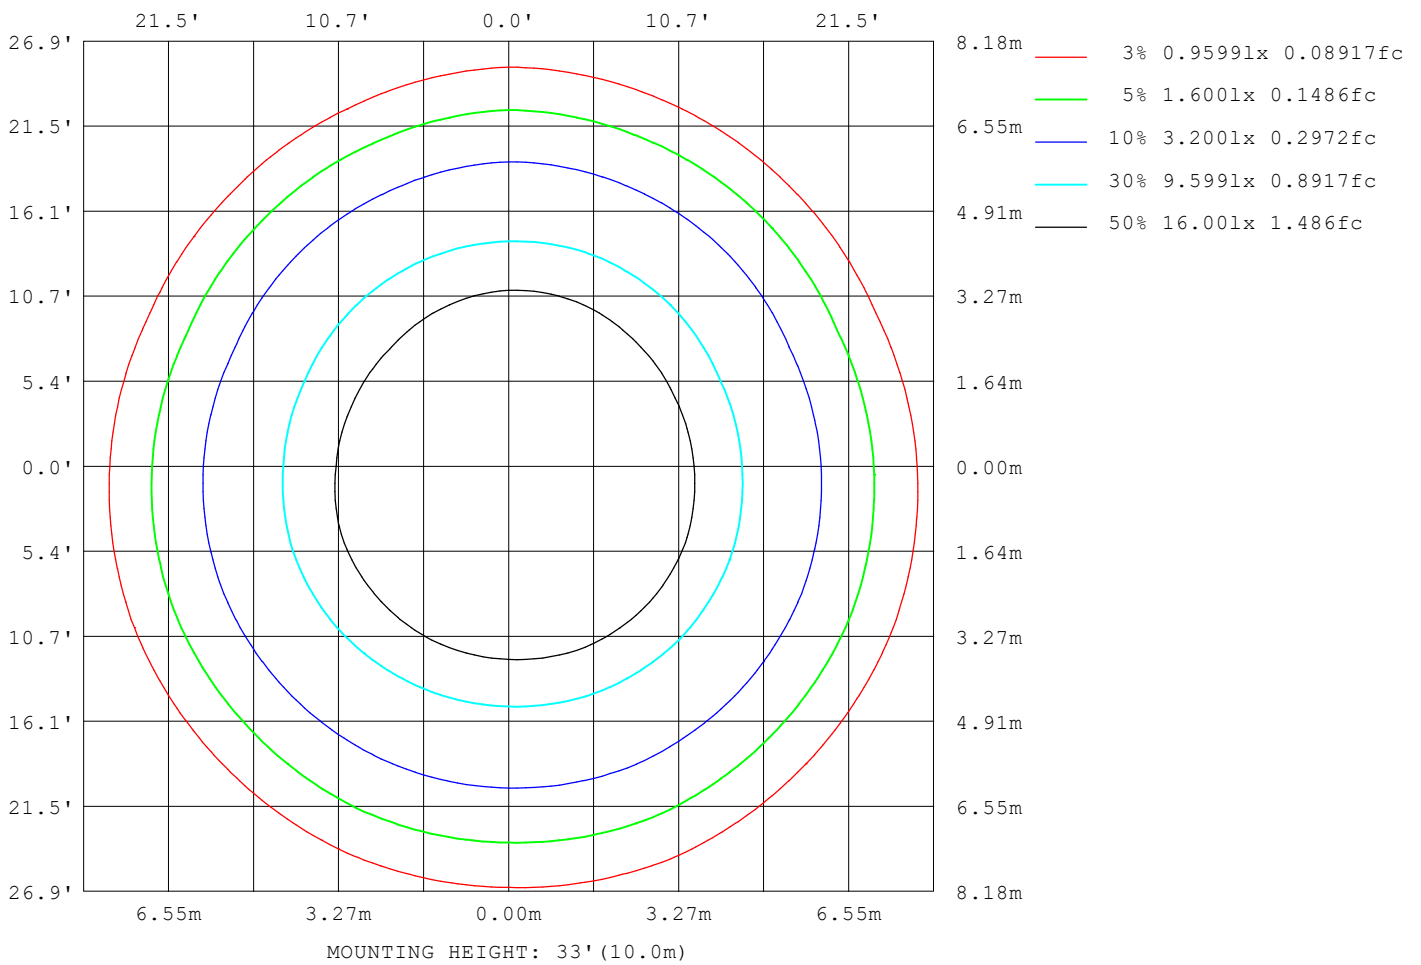

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2023-04-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:119.72V I:0.1853A P:21.772W PF:0.9813 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1800.86x1 lm		
NAME: ASD-CD-TS-6D24AC-WH	TYPE:	WEIGHT:
SPEC.: 3000K 90	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	575
L_0~180 (75) av	126
L_0~180 (85) av	91
L_90~270 (65) av	593
L_90~270 (75) av	139
L_90~270 (85) av	107
L_45 (65) av	398
L_45 (75) av	111
L_45 (85) av	96

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:
 Test Date:2023-04-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

Planar Illuminance Curve

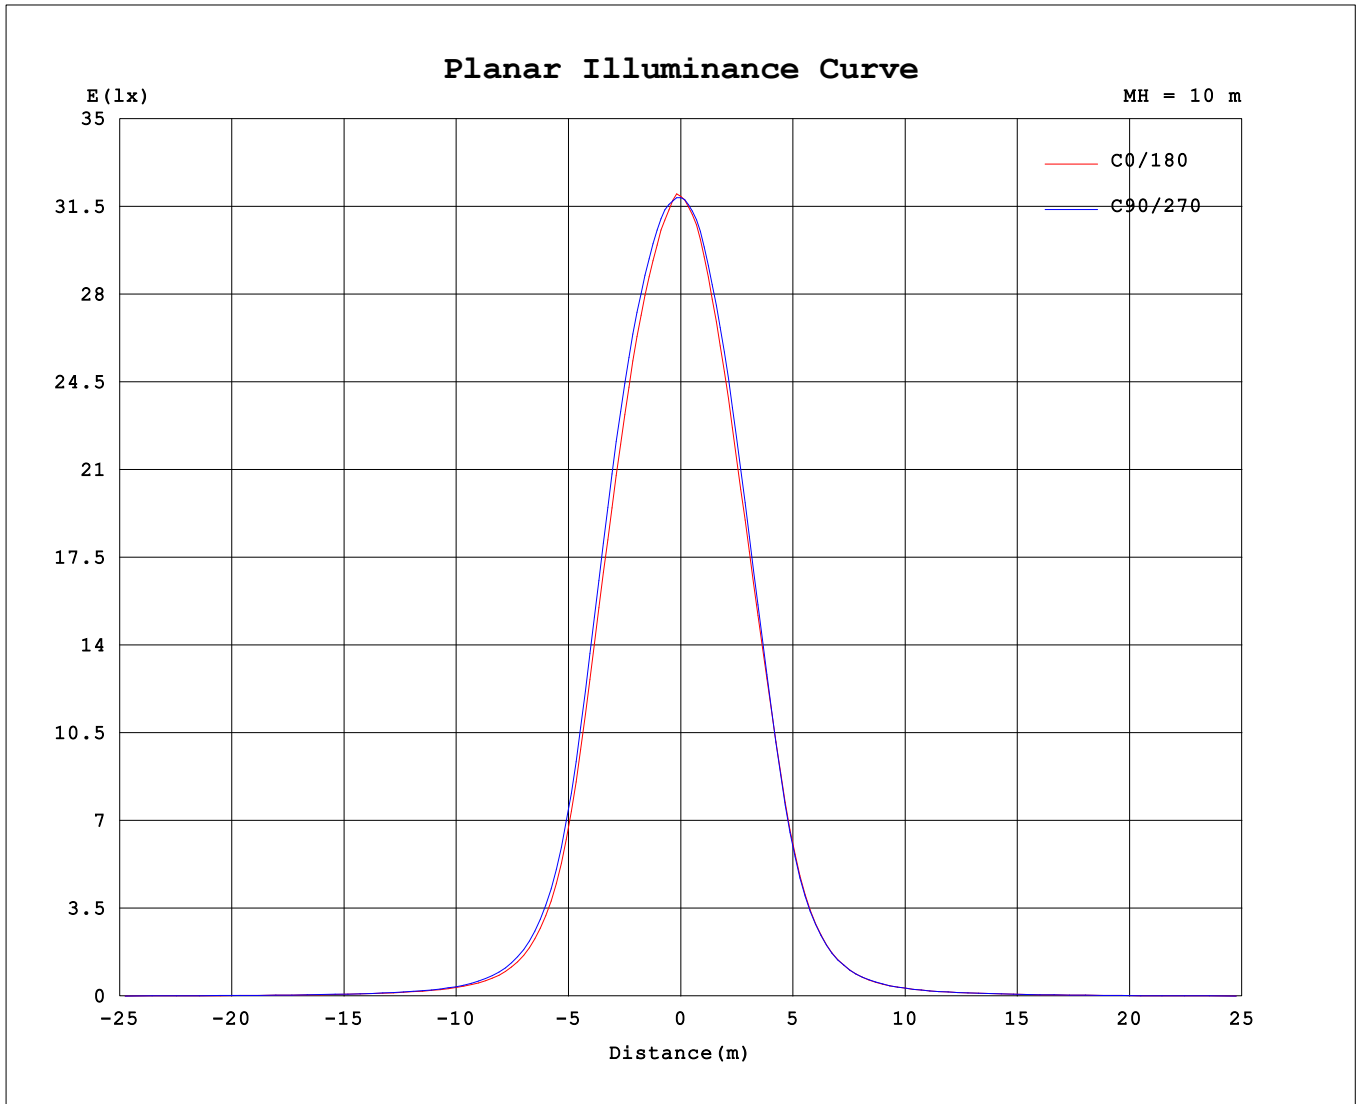

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2023-04-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.72V I:0.1853A P:21.772W PF:0.9813 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1800.86x1 lm		
NAME: ASD-CD-TS-6D24AC-WH	TYPE:	WEIGHT:
SPEC.: 3000K 90	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	3191	3188	3186	3186	3185	3184	3182	3178	3191	3188	3186	3186	3185	3184	3182	3178			
5	3092	3112	3131	3143	3137	3124	3102	3076	3054	3047	3065	3079	3086	3089	3081	3066			
10	2844	2920	2951	2957	2936	2904	2863	2810	2716	2694	2703	2745	2792	2804	2800	2795			
15	2443	2566	2609	2628	2588	2530	2454	2382	2243	2194	2178	2249	2333	2344	2327	2368			
20	1868	1988	2047	2061	1999	1949	1873	1798	1677	1608	1606	1655	1715	1752	1757	1780			
25	1148	1253	1307	1303	1256	1220	1186	1131	1039	984	993	1001	1026	1063	1078	1075			
30	585	641	670	680	659	636	610	578	529	479	483	491	522	522	531	528			
35	296	326	339	353	339	331	308	292	265	237	239	244	264	258	262	262			
40	160	175	182	190	183	179	168	158	145	133	132	136	145	143	141	143			
45	98.3	105	108	112	108	107	102	96.9	90.5	85.3	84.6	86.8	90.5	90.0	88.3	89.9			
50	67.3	69.6	72.0	73.3	72.9	71.0	67.8	65.6	63.6	60.4	59.9	61.1	63.7	62.6	61.4	62.4			
55	50.2	50.5	51.1	52.5	53.4	51.2	48.7	48.3	48.5	45.6	44.5	46.0	48.4	46.8	45.2	46.5			
60	38.3	36.8	35.0	38.1	40.3	37.3	33.8	35.7	37.5	33.7	31.8	34.1	37.5	34.5	31.7	34.1			
65	26.8	22.6	18.8	23.3	28.6	23.2	19.0	22.7	27.2	21.8	18.7	22.0	27.1	21.9	18.2	21.3			
70	11.5	8.99	7.37	9.21	15.0	9.24	7.49	9.52	14.6	9.21	7.65	9.31	14.6	9.24	7.52	8.60			
75	3.36	3.25	3.13	3.29	3.84	3.31	3.19	3.42	3.91	3.40	3.27	3.44	4.14	3.37	3.14	3.18			
80	2.08	2.10	2.07	2.21	2.16	2.24	2.14	2.27	2.27	2.28	2.26	2.35	2.28	2.30	2.13	2.06			
85	0.78	0.81	0.87	0.97	0.99	1.00	0.94	0.96	0.97	0.94	1.00	1.07	1.08	1.03	0.90	0.76			
90	0.09	0.07	0.08	0.07	0.09	0.09	0.08	0.06	0.08	0.06	0.06	0.06	0.08	0.06	0.05	0.06			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2023-04-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks: