
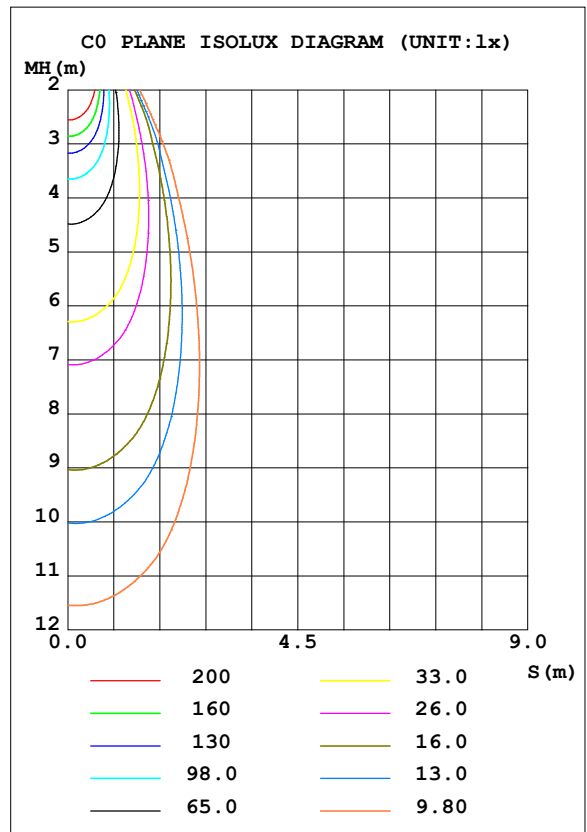


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.06V I:0.0687A P:7.6796W PF:0.9529 Freq:59.98Hz Lamp Flux:616.489x1 lm		
NAME: ASD-CD-TR-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 80.28 lm/W			
MODEL		Imax (cd)	1309	S/MH (C0/180)	0.60
NOMINAL POWER (W)	8	LOR (%)	100.0	S/MH (C90/270)	0.61
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	616.49	<input type="checkbox"/> UP, DN (C0-180)	0.0, 49.7
NOMINAL FLUX (lm)	616.489	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 50.3
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	0.65

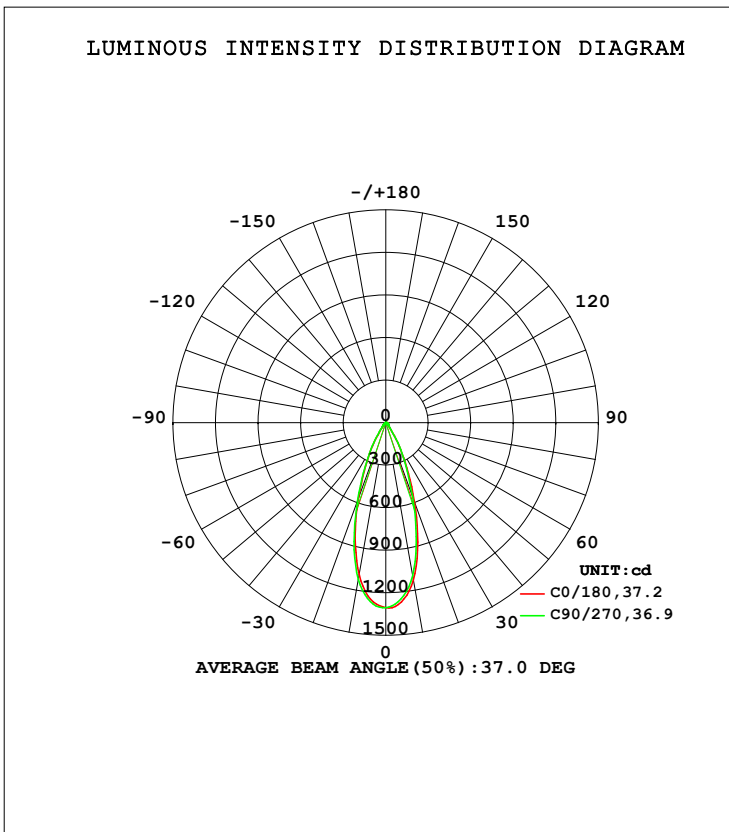

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-10-19

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	□ zone	□ total	%lum,lamp
10	1127	1118	1095	1092	1087	1105	1121	1130	0- 10	115.5	115.5	18.7,18.7
20	592.0	584.0	555.5	560.2	563.6	604.5	583.2	603.4	10- 20	233.6	349.1	56.6,56.6
30	191.9	202.9	196.7	196.9	189.0	207.3	195.2	199.9	20- 30	163.3	512.4	83.1,83.1
40	38.02	41.87	42.26	40.07	38.47	42.72	41.67	40.17	30- 40	56.26	568.7	92.2,92.2
50	21.79	21.67	21.38	21.18	21.09	21.10	21.35	21.78	40- 50	22.38	591.0	95.9,95.9
60	11.53	11.49	11.08	11.02	10.92	10.89	10.40	11.34	50- 60	14.04	605.1	98.2,98.2
70	6.230	5.546	4.505	5.087	5.543	4.945	4.270	5.295	60- 70	7.901	613.0	99.4,99.4
80	2.413	1.148	0.5028	0.9516	1.966	0.9499	0.4634	1.015	70- 80	3.190	616.2	99.9,99.9
90	0.0127	0.0093	0.0080	0.0057	0.0164	0.0130	0.0123	0.0130	80- 90	0.3116	616.5	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-10-19

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.06V I:0.0687A P:7.6796W PF:0.9529 Freq:59.98Hz Lamp Flux:616.489x1 lm		
NAME: ASD-CD-TR-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

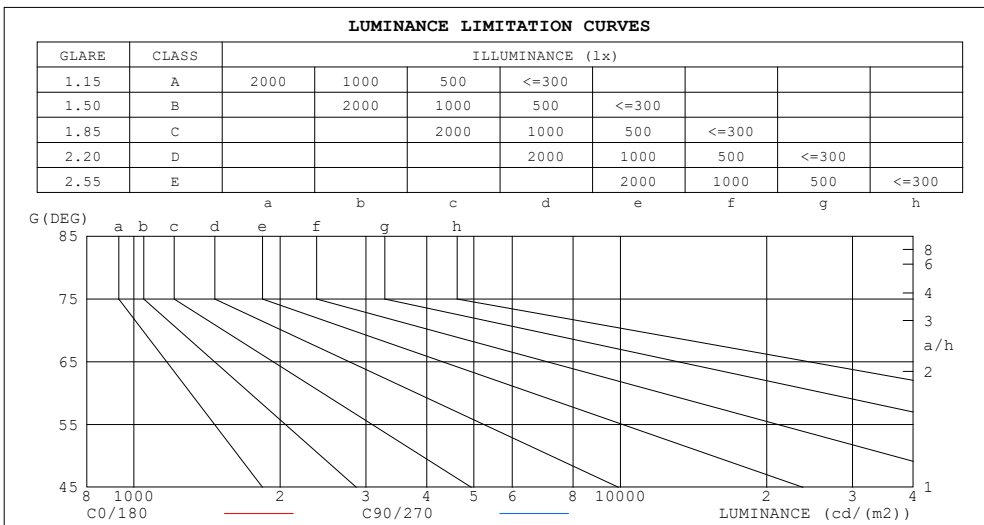

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	44	5
80	125	26
75	144	77
70	164	119
65	186	160
60	208	199
55	248	242
50	305	300
45	359	361


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-10-19

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.06V I:0.0687A P:7.6796W PF:0.9529 Freq:59.98Hz Lamp Flux:616.489x1 lm		
NAME: ASD-CD-TR-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.05	1.03	1.02	1.01	1.00	.99	.98	.97	.96	.94
2.0	1.04	1.01	.97	1.03	.99	.96	.99	.97	.94	.97	.94	.92	.94	.92	.90	.89
3.0	.98	.94	.90	.97	.93	.89	.94	.91	.88	.92	.89	.87	.90	.87	.85	.84
4.0	.93	.88	.84	.92	.87	.83	.90	.86	.82	.88	.84	.82	.86	.83	.81	.79
5.0	.88	.83	.79	.87	.82	.78	.85	.81	.78	.84	.80	.77	.82	.79	.76	.75
6.0	.84	.78	.74	.83	.78	.74	.81	.77	.74	.80	.76	.73	.79	.75	.73	.71
7.0	.80	.74	.70	.79	.74	.70	.78	.73	.70	.77	.73	.70	.76	.72	.69	.68
8.0	.76	.71	.67	.75	.70	.67	.74	.70	.67	.73	.69	.66	.73	.69	.66	.65
9.0	.73	.67	.64	.72	.67	.64	.71	.67	.64	.70	.66	.63	.70	.66	.63	.62
10.0	.70	.65	.61	.69	.64	.61	.68	.64	.61	.68	.64	.61	.67	.63	.61	.59

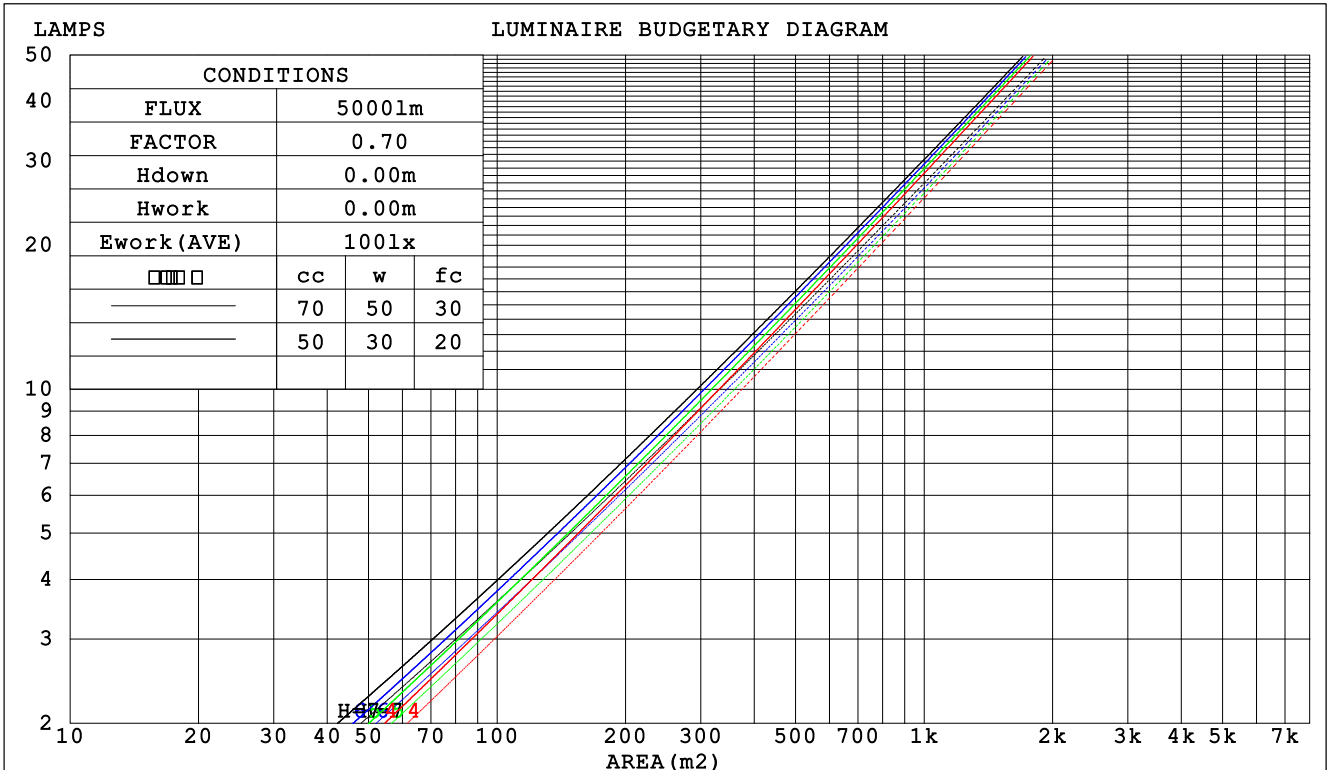

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-10-19

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:120.06V I:0.0687A P:7.6796W PF:0.9529 Freq:59.98Hz Lamp Flux:616.489x1 lm		
NAME: ASD-CD-TR-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients (WEC)			
0.0						
1.0	.167 .095 .030	.160 .092 .029	.148 .085 .027	.136 .079 .025	.126 .073 .024	
2.0	.158 .087 .027	.153 .084 .026	.142 .079 .025	.132 .074 .023	.124 .070 .022	
3.0	.149 .079 .024	.144 .077 .023	.136 .073 .022	.127 .070 .021	.120 .066 .021	
4.0	.141 .073 .022	.137 .072 .021	.129 .069 .020	.122 .066 .020	.116 .063 .019	
5.0	.133 .068 .020	.130 .067 .019	.123 .064 .019	.117 .062 .018	.111 .060 .018	
6.0	.127 .063 .018	.123 .062 .018	.118 .060 .018	.112 .058 .017	.107 .057 .017	
7.0	.120 .060 .017	.118 .059 .017	.113 .057 .016	.108 .055 .016	.103 .054 .016	
8.0	.115 .056 .016	.112 .055 .016	.108 .054 .015	.104 .053 .015	.100 .051 .015	
9.0	.110 .053 .015	.108 .052 .015	.104 .051 .015	.100 .050 .014	.096 .049 .014	
10.0	.105 .050 .014	.103 .050 .014	.100 .049 .014	.096 .048 .014	.093 .047 .013	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients (CCEC)			
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.170 .157 .146	.146 .135 .125	.100 .093 .087	.057 .054 .050	.018 .017 .016	
2.0	.154 .133 .114	.132 .114 .099	.091 .079 .069	.052 .046 .040	.017 .015 .013	
3.0	.141 .113 .091	.121 .098 .079	.083 .068 .056	.048 .040 .033	.015 .013 .011	
4.0	.130 .099 .074	.112 .085 .065	.077 .059 .046	.044 .035 .027	.014 .011 .009	
5.0	.121 .087 .062	.104 .075 .054	.071 .052 .038	.041 .031 .022	.013 .010 .007	
6.0	.113 .077 .052	.097 .067 .045	.067 .047 .032	.039 .028 .019	.013 .009 .006	
7.0	.106 .069 .044	.091 .060 .038	.063 .042 .027	.037 .025 .016	.012 .008 .005	
8.0	.100 .063 .038	.086 .055 .033	.059 .038 .023	.035 .023 .014	.011 .007 .005	
9.0	.094 .058 .033	.081 .050 .029	.056 .035 .020	.033 .021 .012	.011 .007 .004	
10.0	.090 .053 .029	.077 .046 .025	.054 .032 .018	.031 .019 .011	.010 .006 .004	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-10-19

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.06V I:0.0687A P:7.6796W PF:0.9529 Freq:59.98Hz Lamp Flux:616.489x1 lm										
NAME: ASD-CD-TR-2D8AC-WH					TYPE:			WEIGHT:		
SPEC.:3500K 90					DIM.:			SERIAL No.:		
MFR.: ASD Lighting Corp					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	4.8	5.7	5.0	5.8	6.0	4.8	5.6	5.0	5.8	5.9
3H	5.4	6.1	5.6	6.3	6.5	5.1	5.9	5.4	6.1	6.3
4H	5.6	6.3	5.8	6.5	6.8	5.1	5.9	5.4	6.1	6.3
6H	5.7	6.4	6.0	6.7	6.9	5.1	5.8	5.4	6.0	6.3
8H	5.7	6.4	6.0	6.6	6.9	5.0	5.7	5.3	6.0	6.2
12H	5.7	6.3	6.0	6.6	6.9	5.0	5.6	5.3	5.9	6.2
4H 2H	5.0	5.7	5.2	5.9	6.1	4.9	5.7	5.2	5.9	6.1
3H	5.7	6.3	6.0	6.6	6.8	5.4	6.0	5.7	6.3	6.6
4H	6.0	6.6	6.3	6.8	7.2	5.4	6.0	5.8	6.3	6.6
6H	6.2	6.7	6.6	7.0	7.4	5.4	5.9	5.8	6.3	6.6
8H	6.2	6.7	6.6	7.0	7.4	5.4	5.8	5.7	6.2	6.6
12H	6.1	6.6	6.5	6.9	7.3	5.3	5.7	5.7	6.1	6.5
8H 4H	5.9	6.4	6.3	6.8	7.1	5.4	5.9	5.8	6.3	6.6
6H	6.2	6.6	6.6	7.0	7.4	5.4	5.8	5.8	6.2	6.6
8H	6.2	6.6	6.7	7.0	7.4	5.4	5.7	5.8	6.1	6.6
12H	6.2	6.5	6.7	6.9	7.4	5.3	5.6	5.8	6.0	6.5
12H 4H	5.9	6.3	6.3	6.7	7.1	5.4	5.9	5.8	6.2	6.6
6H	6.2	6.5	6.6	6.9	7.4	5.4	5.7	5.8	6.1	6.6
8H	6.2	6.5	6.6	6.9	7.4	5.3	5.6	5.8	6.1	6.5
Variations with the observer position at spacings:										
S = 1.0H	+ 0.7 / - 0.9					+ 1.0 / - 1.3				
1.5H	+ 0.8 / - 0.5					+ 1.5 / - 0.8				
2.0H	+ 1.0 / - 0.9					+ 1.3 / - 1.1				

CIE Pub.117, 616.5 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -1.7)
 Area: 0.111111 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-10-19

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.06V I:0.0687A P:7.6796W PF:0.9529 Freq:59.98Hz Lamp Flux:616.489x1 lm		
NAME: ASD-CD-TR-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	87	80	76	86	80	76	85	80	76	73
0.80	94	88	84	93	88	84	92	87	84	80
1.00	99	93	89	98	92	89	96	92	88	84
1.25	103	97	94	102	97	93	100	96	93	88
1.50	105	101	97	104	100	97	102	98	96	91
2.00	108	104	101	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	112	108	105	110	107	104	106	104	102	96
4.00	114	111	109	112	109	107	108	106	104	97
5.00	115	113	111	113	111	109	109	107	106	98
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-10-19

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.06V I:0.0687A P:7.6796W PF:0.9529 Freq:59.98Hz Lamp Flux:616.489x1 lm		
NAME: ASD-CD-TR-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

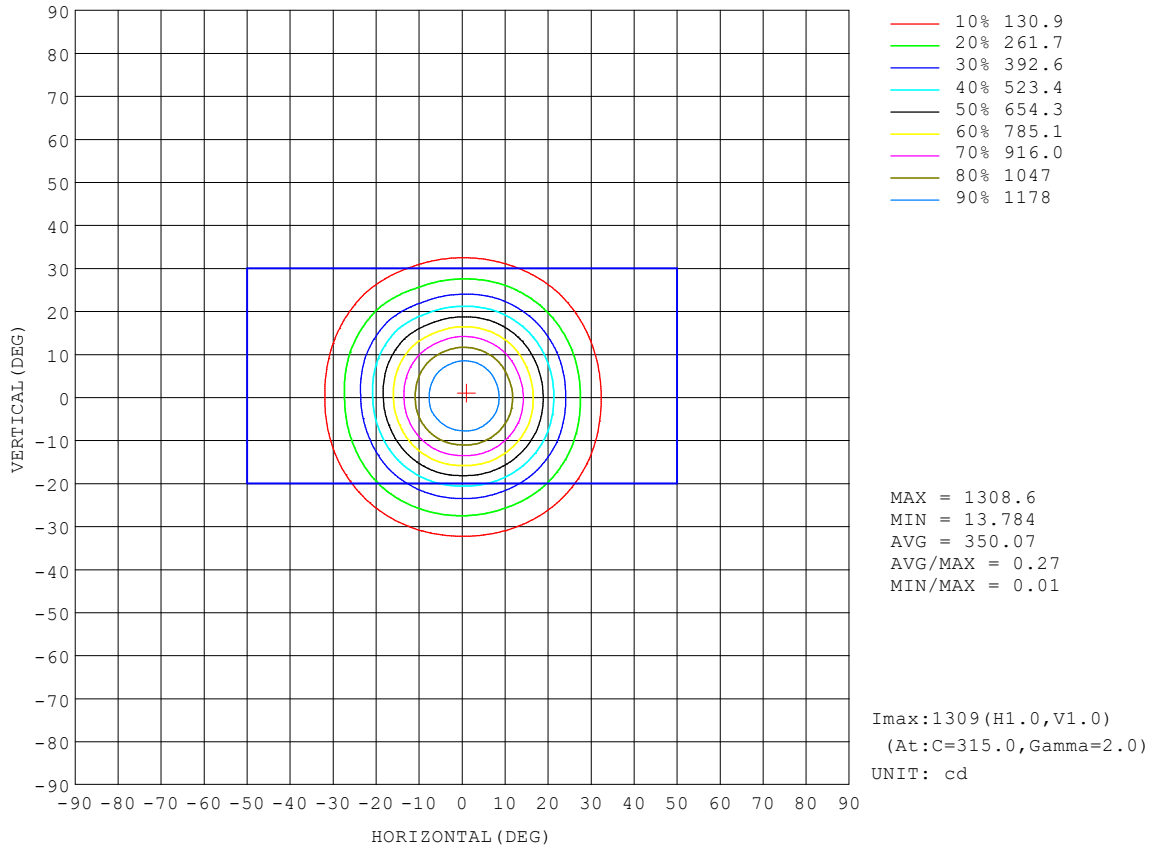


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-10-19

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

AAI Figure

Test:U:120.06V I:0.0687A P:7.6796W PF:0.9529 Freq:59.98Hz Lamp Flux:616.489x1 lm		
NAME: ASD-CD-TR-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

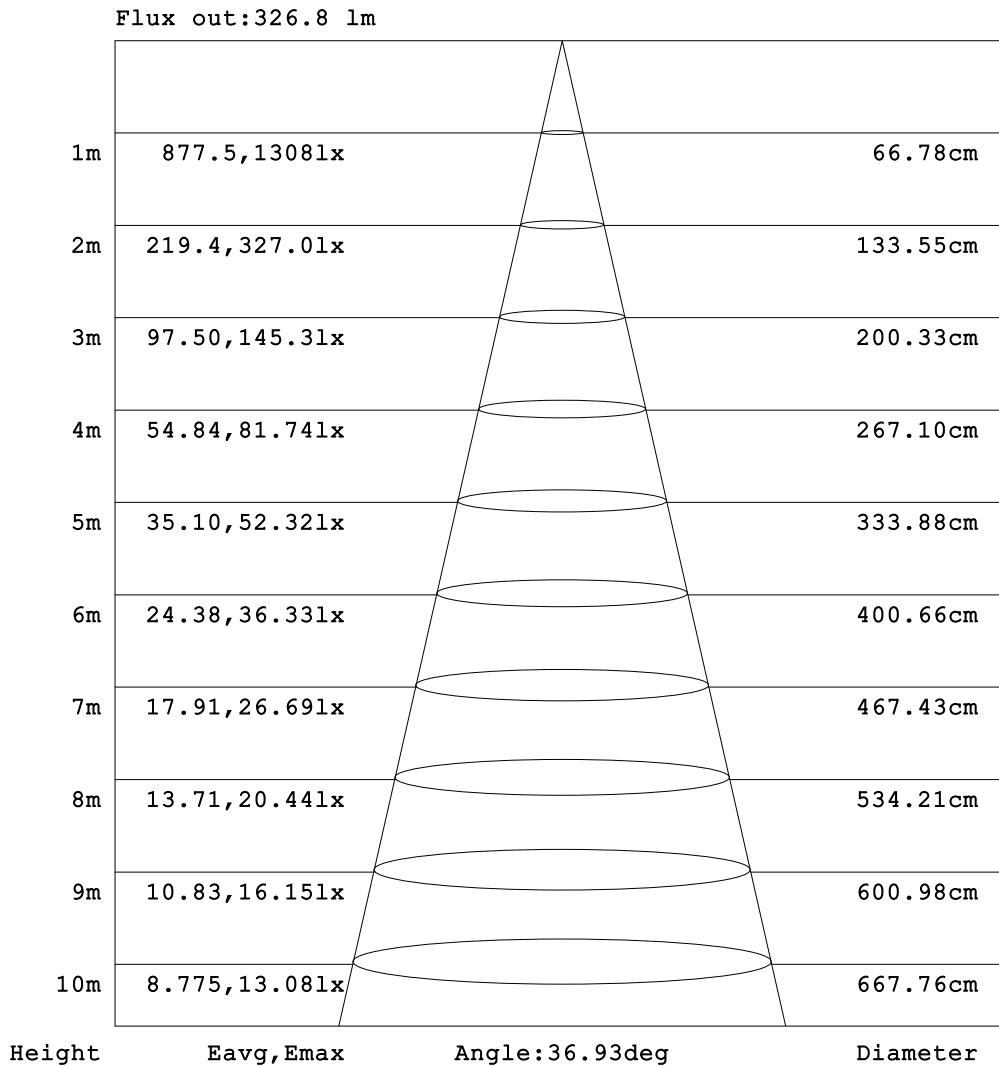


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-10-19

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.06V I:0.0687A P:7.6796W PF:0.9529 Freq:59.98Hz Lamp Flux:616.489x1 lm		
NAME: ASD-CD-TR-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

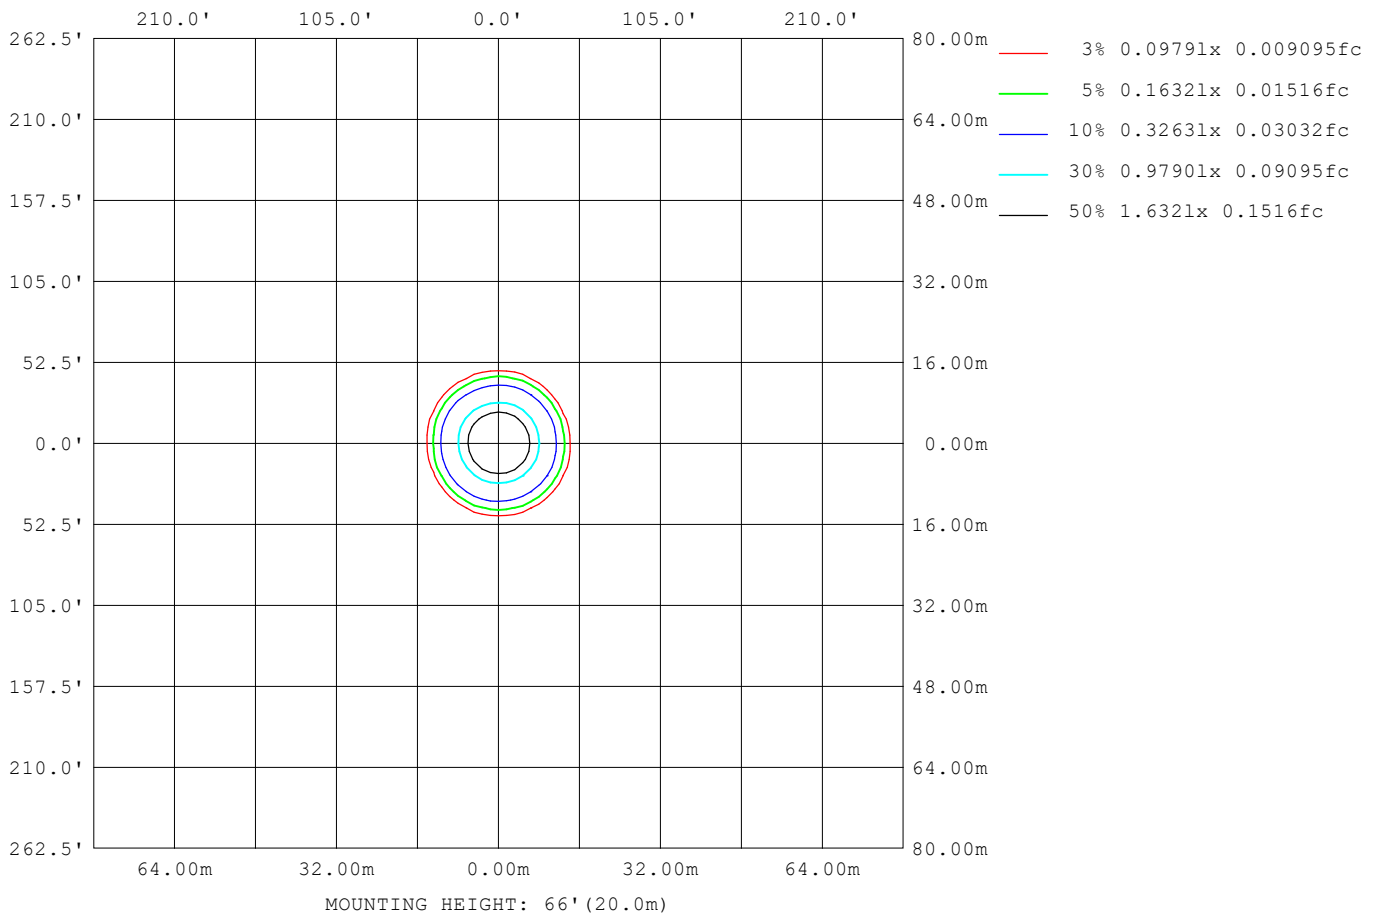

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-10-19

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:120.06V I:0.0687A P:7.6796W PF:0.9529 Freq:59.98Hz Lamp Flux:616.489x1 lm		
NAME: ASD-CD-TR-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	178
L_0~180 (75) av	134
L_0~180 (85) av	39
L_90~270 (65) av	155
L_90~270 (75) av	75
L_90~270 (85) av	5
L_45 (65) av	171
L_45 (75) av	100
L_45 (85) av	4

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-10-19

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

Planar Illuminance Curve

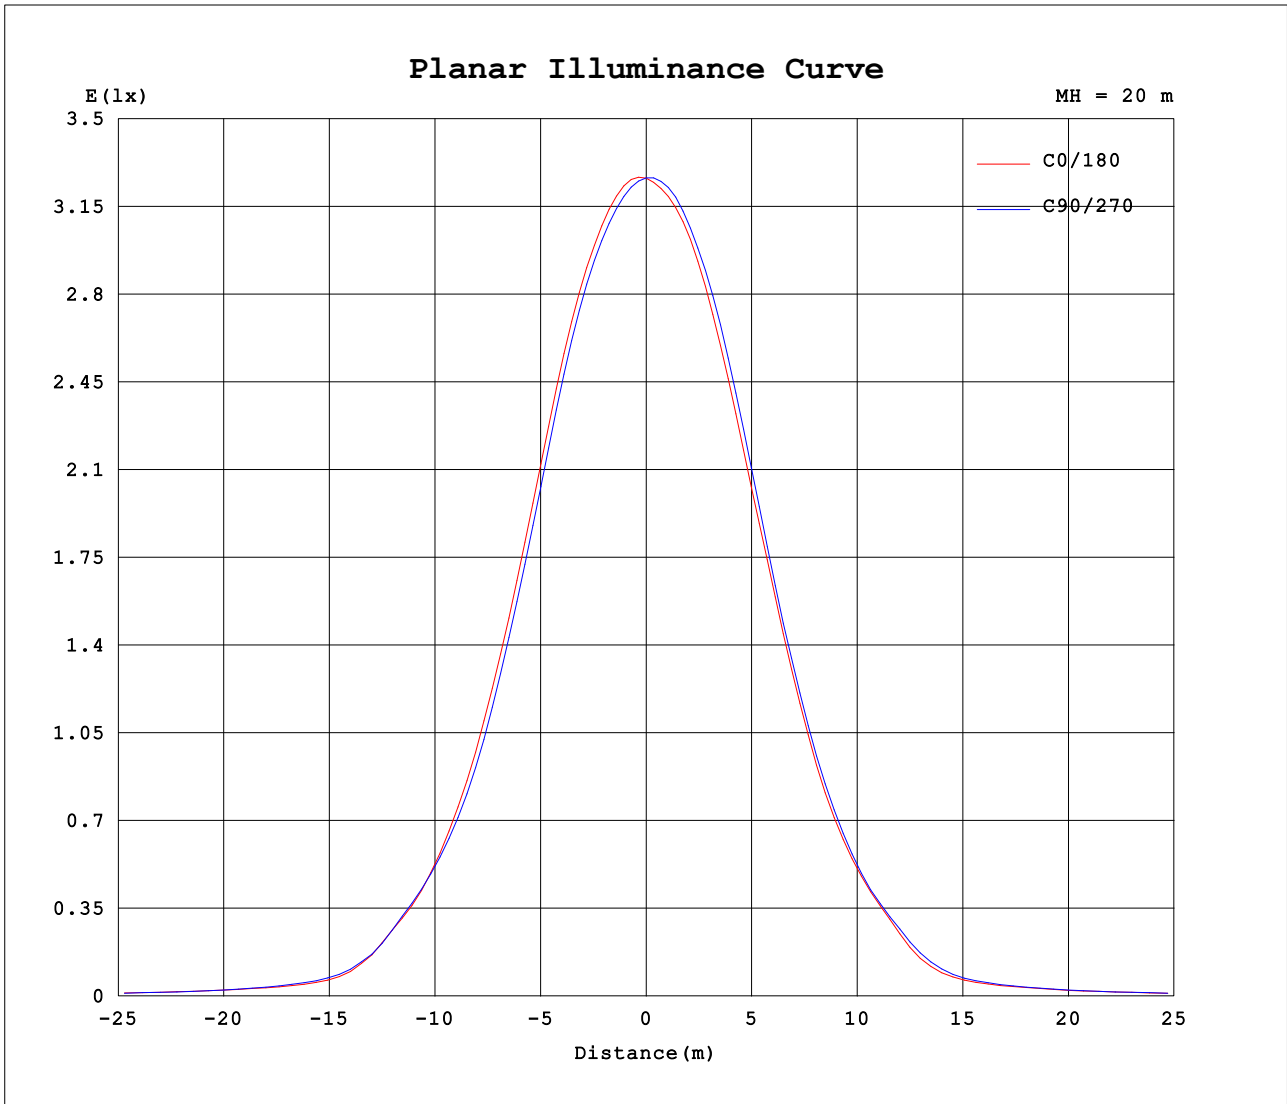

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-10-19

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.06V I:0.0687A P:7.6796W PF:0.9529 Freq:59.98Hz Lamp Flux:616.489x1 lm		
NAME: ASD-CD-TR-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1305	1305	1305	1305	1305	1305	1305	1305	1305	1305	1305	1305	1305	1305	1305	1305			
5	1270	1268	1259	1253	1247	1248	1249	1253	1250	1249	1254	1260	1267	1272	1278	1273			
10	1127	1128	1118	1109	1095	1094	1092	1093	1087	1096	1105	1110	1121	1129	1130	1126			
15	873	880	866	853	833	837	836	833	837	854	863	853	867	876	879	869			
20	592	596	584	571	555	561	560	555	564	593	604	579	583	599	603	596			
25	354	363	357	342	339	340	346	336	336	363	370	342	350	363	364	361			
30	192	202	203	197	197	197	197	193	189	203	207	191	195	200	200	197			
35	71.7	79.6	83.0	80.2	78.6	78.6	75.1	70.0	68.6	78.7	82.5	77.8	79.7	79.7	76.3	71.0			
40	38.0	40.8	41.9	42.8	42.3	41.2	40.1	38.5	38.5	41.9	42.7	41.5	41.7	40.7	40.2	37.8			
45	28.2	28.6	28.8	29.3	28.4	27.8	27.5	27.4	27.2	27.5	28.2	28.3	28.5	28.3	28.4	28.2			
50	21.8	21.8	21.7	21.6	21.4	21.4	21.2	21.2	21.1	21.0	21.1	21.1	21.3	21.5	21.8	21.8			
55	15.8	15.9	15.6	15.7	15.4	15.3	15.1	15.1	15.0	14.9	15.1	15.0	15.2	15.2	15.8	15.8			
60	11.5	11.6	11.5	11.4	11.1	11.1	11.0	11.0	10.9	10.9	10.9	10.5	10.4	10.7	11.3	11.5			
65	8.72	8.69	8.43	7.90	7.50	7.60	7.92	8.06	7.99	8.02	7.68	7.16	7.03	7.36	8.13	8.67			
70	6.23	6.19	5.55	4.88	4.50	4.64	5.09	5.56	5.54	5.49	4.94	4.41	4.27	4.54	5.29	6.09			
75	4.14	3.93	3.11	2.50	2.20	2.33	2.78	3.40	3.56	3.33	2.71	2.23	2.09	2.28	2.92	3.77			
80	2.41	1.96	1.15	0.67	0.50	0.59	0.95	1.59	1.97	1.54	0.95	0.56	0.46	0.56	1.01	1.80			
85	0.43	0.42	0.05	0.05	0.05	0.04	0.05	0.29	0.32	0.28	0.04	0.04	0.04	0.04	0.03	0.37			
90	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.02			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-10-19
□ Range: 0 - 90DEG
□ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:3.080m [K=1.0000]
Remarks: