
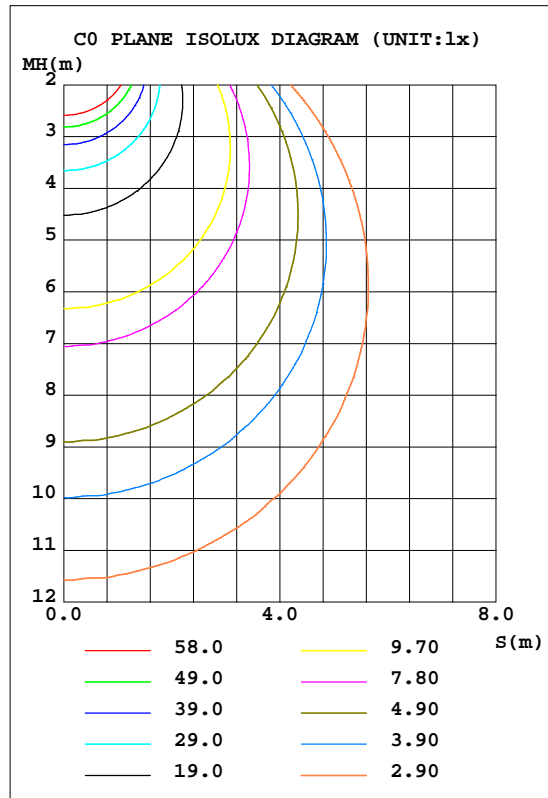


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.22V I:0.1198A P:14.210W PF:0.9862 Freq:59.98Hz Lamp Flux:1137.36x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: ϕ 0.14	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODELASD-JBR-6D15AC(3000K)		Imax(cd)	388.7	S/MH(C0/180)	1.27
NOMINAL POWER(W)	15	LOR(%)	100.0	S/MH(C90/270)	1.26
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	1137.4	h UP,DN(C0-180)	0.4,49.7
NOMINAL FLUX(lm)	1137.36	CIE CLASS	DIRECT	h UP,DN(C180-360)	0.4,49.5
LAMPS INSIDE	1	h up(%)	0.8	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	h down(%)	99.2	CIBSE SHR MAX	1.35

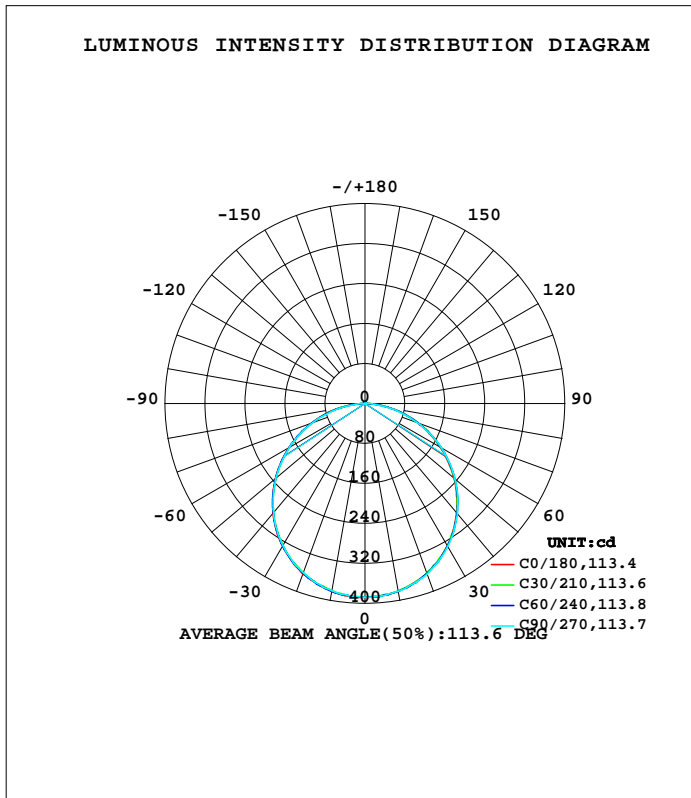

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-8

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.2093]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	381.7	381.3	381.6	382.4	381.9	380.8	380.7	381.5	0- 10	36.71	36.71	3.23,3.23
20	361.2	361.7	363.2	362.7	363.0	361.2	360.8	362.0	10- 20	105.4	142.1	12.5,12.5
30	329.2	329.8	330.4	331.0	329.8	328.8	328.6	329.9	20- 30	160.1	302.1	26.6,26.6
40	285.4	286.7	287.8	287.1	286.4	285.1	284.4	285.9	30- 40	193.5	495.6	43.6,43.6
50	232.7	234.4	235.2	234.4	234.0	233.0	233.3	233.0	40- 50	201.3	696.9	61.3,61.3
60	173.6	175.6	176.4	174.6	175.1	174.3	173.8	173.7	50- 60	182.9	879.8	77.4,77.4
70	111.7	112.8	110.7	111.8	112.9	112.7	110.5	111.0	60- 70	141.9	1022	89.8,89.8
80	51.77	49.91	45.58	48.90	52.90	49.50	45.56	47.87	70- 80	84.61	1106	97.3,97.3
90	1.524	1.141	0.9443	1.098	1.088	1.304	1.074	1.110	80- 90	21.84	1128	99.2,99.2
100	1.241	1.305	1.134	1.149	1.209	1.397	1.235	1.242	90-100	1.336	1130	99.3,99.3
110	1.293	1.334	1.210	1.153	1.339	1.436	1.290	1.234	100-110	1.342	1131	99.4,99.4
120	1.501	1.418	1.317	1.235	1.491	1.536	1.385	1.315	110-120	1.324	1132	99.5,99.5
130	1.605	1.491	1.409	1.320	1.659	1.739	1.560	1.487	120-130	1.309	1134	99.7,99.7
140	1.719	1.574	1.492	1.420	1.749	1.866	1.652	1.540	130-140	1.218	1135	99.8,99.8
150	1.810	1.699	1.645	1.570	1.810	2.015	1.766	1.668	140-150	1.050	1136	99.9,99.9
160	1.932	1.832	1.782	1.674	1.917	2.091	1.774	1.788	150-160	0.8296	1137	99.9,99.9
170	2.077	2.014	2.055	1.799	2.054	2.158	1.807	1.929	160-170	0.5424	1137	100,100
180	2.191	2.129	2.078	1.906	2.084	2.228	1.652	2.203	170-180	0.1922	1137	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-8

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.2093]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.22V I:0.1198A P:14.210W PF:0.9862 Freq:59.98Hz Lamp Flux:1137.36x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: ϕ 0.14	Shielding Angle:

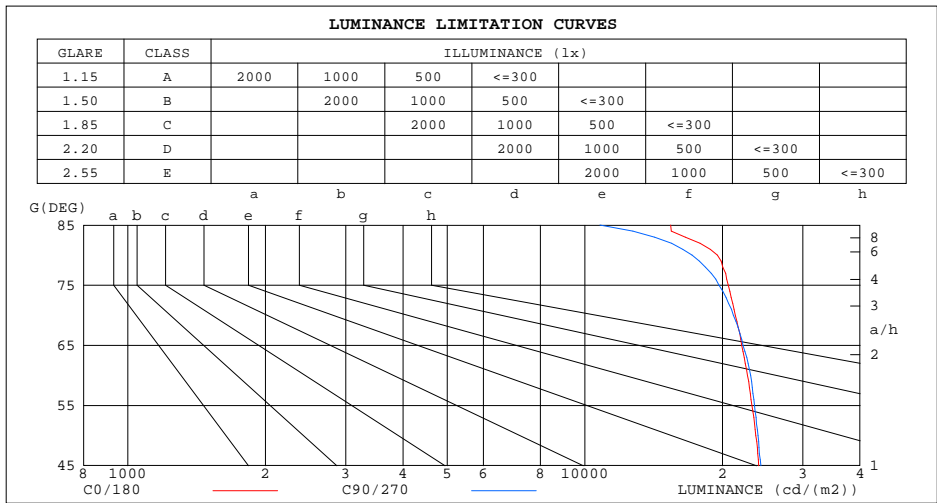

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	15405	10785
80	19502	17155
75	20607	19670
70	21362	21149
65	22061	22179
60	22709	23059
55	23210	23525
50	23677	23915
45	24020	24281


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-8

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.2093]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.22V I:0.1198A P:14.210W PF:0.9862 Freq:59.98Hz Lamp Flux:1137.36x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: ϕ 0.14	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.04	.99	.95	1.01	.97	.94	.97	.93	.90	.93	.90	.88	.89	.87	.85	.83
2.0	.90	.83	.77	.88	.82	.76	.84	.79	.74	.81	.76	.72	.78	.74	.71	.69
3.0	.79	.71	.64	.77	.70	.63	.74	.67	.62	.71	.66	.61	.69	.64	.60	.57
4.0	.70	.61	.54	.68	.60	.54	.66	.58	.53	.63	.57	.52	.61	.56	.51	.49
5.0	.62	.53	.46	.61	.53	.46	.59	.51	.46	.57	.50	.45	.55	.49	.44	.42
6.0	.56	.47	.40	.55	.46	.40	.53	.45	.40	.51	.45	.39	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.41	.35	.48	.41	.35	.47	.40	.35	.45	.39	.35	.33
8.0	.46	.38	.32	.46	.37	.32	.44	.37	.31	.43	.36	.31	.42	.35	.31	.29
9.0	.42	.34	.29	.42	.34	.28	.41	.33	.28	.39	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.30	.26	.37	.30	.25	.36	.30	.25	.24

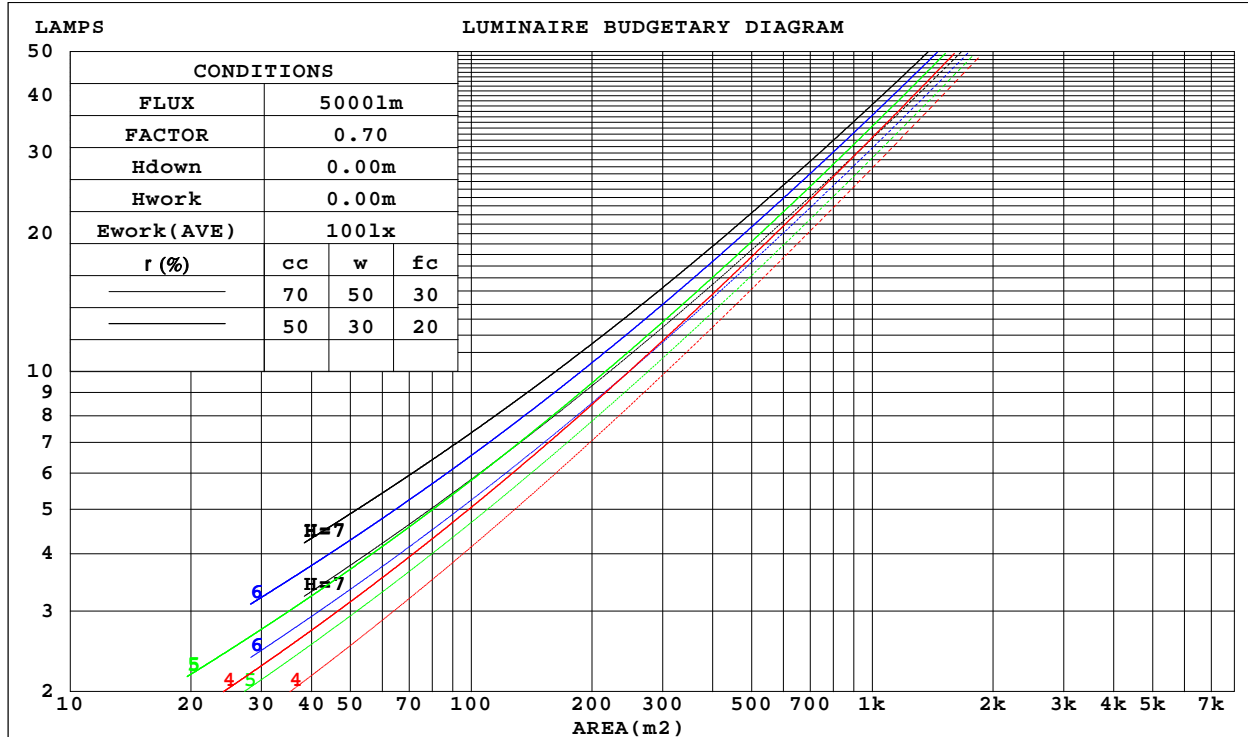

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-8

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.2093]
 Remarks:

WEC AND CCEC

Test:U:120.22V I:0.1198A P:14.210W PF:0.9862 Freq:59.98Hz Lamp Flux:1137.36x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: φ0.14	Shielding Angle:

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.313	.178	.056	.306	.174	.055	.292	.168	.054	.280	.161	.052	.268	.155	.050	
2.0	.294	.161	.049	.288	.159	.049	.276	.153	.048	.265	.148	.046	.254	.144	.045	
3.0	.272	.145	.043	.266	.143	.043	.256	.138	.042	.246	.135	.041	.236	.131	.040	
4.0	.251	.130	.038	.246	.129	.038	.236	.125	.037	.227	.122	.037	.219	.119	.036	
5.0	.232	.118	.034	.227	.117	.034	.219	.114	.034	.211	.111	.033	.203	.109	.033	
6.0	.215	.108	.031	.211	.106	.031	.203	.104	.030	.196	.102	.030	.189	.100	.030	
7.0	.200	.099	.028	.196	.098	.028	.189	.096	.028	.183	.094	.027	.177	.092	.027	
8.0	.186	.091	.026	.183	.090	.025	.177	.088	.025	.171	.087	.025	.166	.085	.025	
9.0	.175	.084	.024	.172	.084	.023	.166	.082	.023	.161	.081	.023	.156	.079	.023	
10.0	.164	.079	.022	.161	.078	.022	.156	.077	.022	.152	.075	.021	.147	.074	.021	

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.197	.197	.197	.168	.168	.168	.115	.115	.115	.066	.066	.066	.021	.021	.021	
1.0	.187	.162	.140	.160	.139	.121	.109	.096	.083	.063	.055	.049	.020	.018	.016	
2.0	.179	.138	.104	.153	.119	.090	.105	.082	.063	.061	.048	.037	.019	.015	.012	
3.0	.171	.121	.080	.147	.104	.070	.101	.072	.049	.058	.042	.029	.019	.014	.009	
4.0	.164	.107	.064	.140	.093	.056	.096	.065	.039	.056	.038	.023	.018	.012	.008	
5.0	.156	.097	.053	.134	.084	.046	.092	.059	.033	.053	.034	.019	.017	.011	.006	
6.0	.149	.089	.045	.128	.077	.039	.088	.054	.028	.051	.032	.017	.017	.010	.005	
7.0	.142	.082	.039	.122	.071	.034	.084	.050	.024	.049	.029	.014	.016	.010	.005	
8.0	.136	.076	.035	.117	.066	.030	.081	.046	.022	.047	.027	.013	.015	.009	.004	
9.0	.129	.071	.031	.112	.062	.027	.077	.043	.020	.045	.026	.012	.015	.008	.004	
10.0	.124	.067	.029	.107	.058	.025	.074	.041	.018	.043	.024	.011	.014	.008	.004	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-8

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.2093]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.22V I:0.1198A P:14.210W PF:0.9862 Freq:59.98Hz Lamp Flux:1137.36x1 lm										
NAME:					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: ASD LIGHTNG CORP					SUR.: φ0.14			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.1	24.7	23.4	25.0	25.4	23.1	24.7	23.5	25.1	25.4
3H	25.0	26.5	25.4	26.8	27.2	25.0	26.4	25.3	26.8	27.2
4H	25.7	27.1	26.2	27.5	27.9	25.7	27.0	26.1	27.4	27.8
6H	26.3	27.6	26.8	28.0	28.4	26.2	27.4	26.6	27.8	28.2
8H	26.5	27.8	27.0	28.2	28.6	26.3	27.5	26.7	27.9	28.4
12H	26.6	27.8	27.1	28.2	28.7	26.4	27.5	26.8	27.9	28.4
4H 2H	23.7	25.1	24.2	25.5	25.9	23.7	25.1	24.2	25.5	25.9
3H	25.9	27.1	26.3	27.5	27.9	25.8	27.0	26.3	27.4	27.8
4H	26.8	27.8	27.2	28.3	28.7	26.7	27.7	27.1	28.2	28.6
6H	27.5	28.5	28.0	28.9	29.4	27.3	28.2	27.8	28.7	29.1
8H	27.8	28.6	28.2	29.1	29.6	27.5	28.3	27.9	28.8	29.3
12H	27.9	28.7	28.4	29.2	29.7	27.6	28.4	28.1	28.8	29.3
8H 4H	27.1	28.0	27.6	28.5	28.9	27.0	27.9	27.5	28.3	28.8
6H	28.0	28.7	28.5	29.2	29.7	27.8	28.5	28.3	29.0	29.5
8H	28.3	29.0	28.9	29.5	30.0	28.0	28.7	28.5	29.2	29.7
12H	28.6	29.1	29.1	29.7	30.2	28.2	28.7	28.7	29.2	29.8
12H 4H	27.2	27.9	27.7	28.4	28.9	27.1	27.8	27.5	28.3	28.8
6H	28.1	28.7	28.6	29.2	29.8	27.8	28.5	28.4	29.0	29.5
8H	28.5	29.0	29.0	29.5	30.1	28.1	28.7	28.7	29.2	29.8
CIE190: 2010										

CIE190: 2010
Area: 0.0153 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-6-8

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.600m [K=1.2093]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.22V I:0.1198A P:14.210W PF:0.9862 Freq:59.98Hz Lamp Flux:1137.36x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.14$	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	45	38	56	45	38	55	44	38	31
0.80	67	55	48	66	55	48	64	54	47	40
1.00	75	64	57	74	63	56	72	65	56	49
1.25	82	72	65	81	71	64	78	70	63	56
1.50	87	77	70	86	76	70	83	75	69	61
2.00	94	86	79	92	84	78	89	82	77	69
2.50	98	90	84	96	89	83	92	86	81	73
3.00	102	95	89	100	93	88	95	90	86	77
4.00	106	100	95	103	98	94	99	95	91	82
5.00	108	103	99	106	101	98	101	98	94	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-6-8

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity: 65.0%
Test Distance: 8.600m [K=1.2093]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.22V I:0.1198A P:14.210W PF:0.9862 Freq:59.98Hz Lamp Flux:1137.36x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.14$	Shielding Angle:

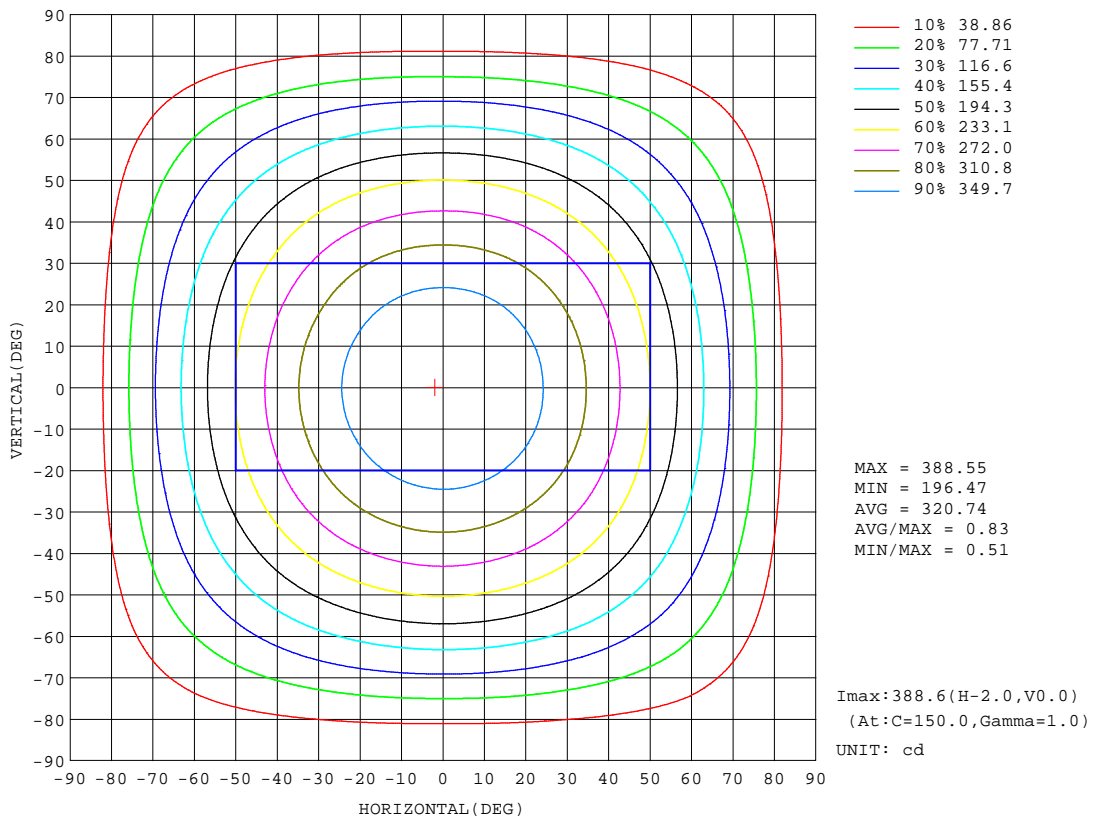


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-8

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=1.2093]
 Remarks:

AAI Figure

Test:U:120.22V I:0.1198A P:14.210W PF:0.9862 Freq:59.98Hz Lamp Flux:1137.36x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: φ0.14	Shielding Angle:

Flux out:828.3 lm

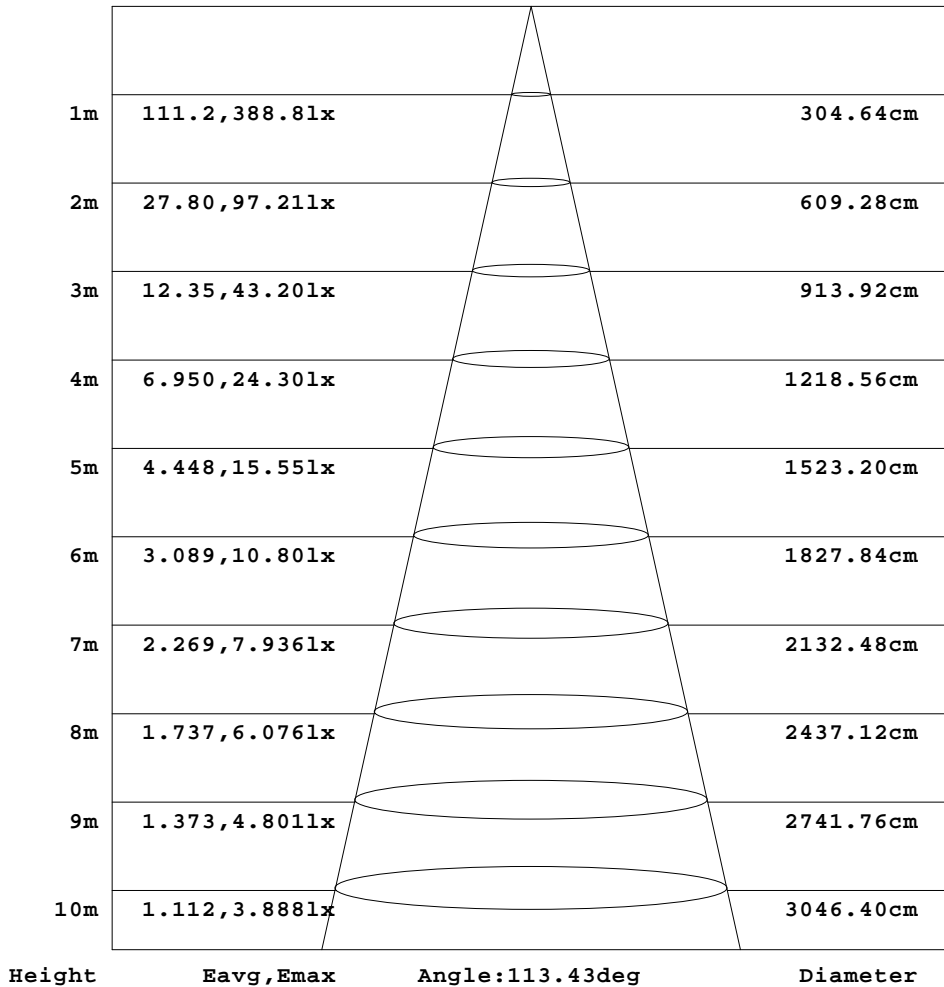


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-8

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.2093]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.22V I:0.1198A P:14.210W PF:0.9862 Freq:59.98Hz Lamp Flux:1137.36x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.14$	Shielding Angle:

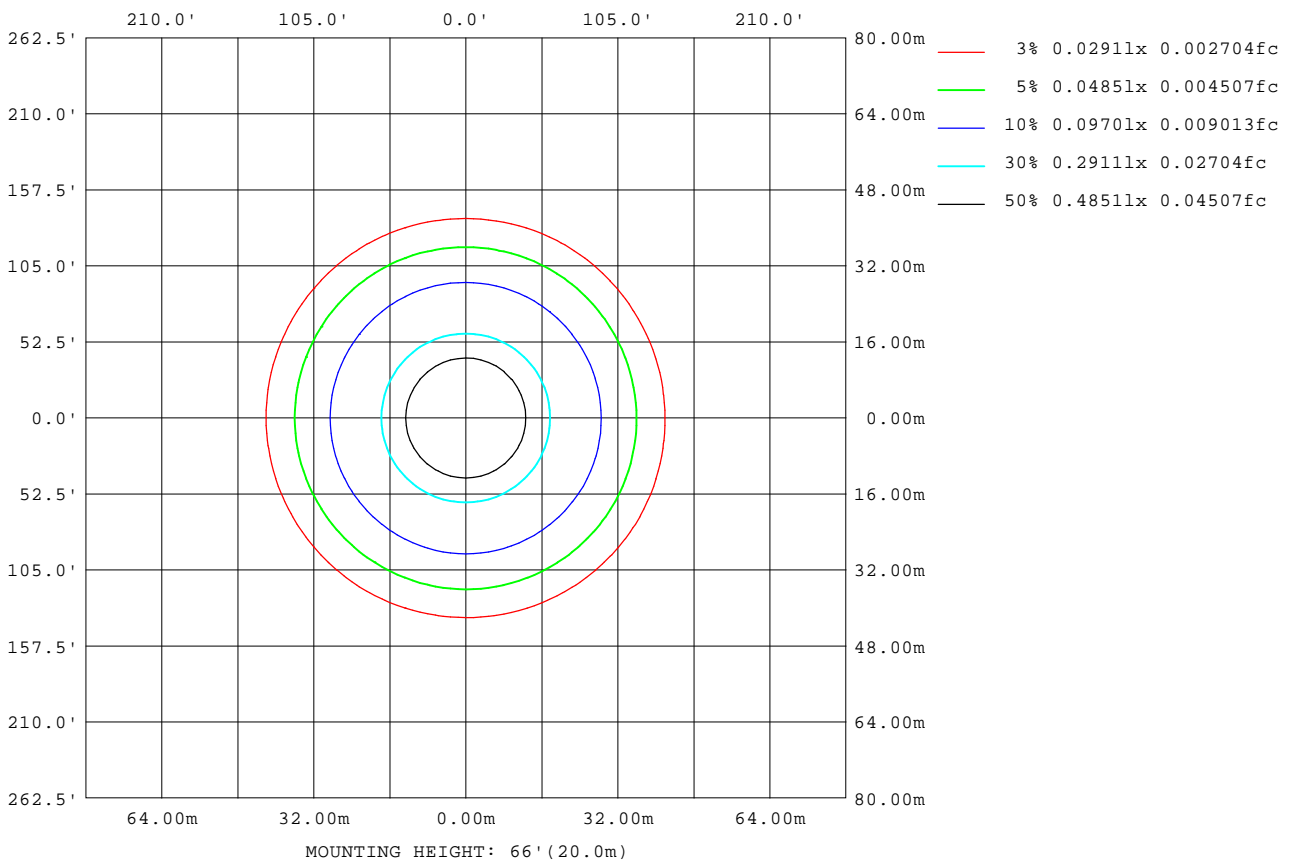

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-8

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=1.2093]
 Remarks:

LED Avg.L Report

Test:U:120.22V I:0.1198A P:14.210W PF:0.9862 Freq:59.98Hz Lamp Flux:1137.36x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.14$	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	22155
L_0~180(75)av	20710
L_0~180(85)av	14962
L_90~270(65)av	22150
L_90~270(75)av	19607
L_90~270(85)av	10705
L_45(65)av	22207
L_45(75)av	20273
L_45(85)av	14038

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-6-8

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.600m [K=1.2093]
Remarks:

Planar Illuminance Curve

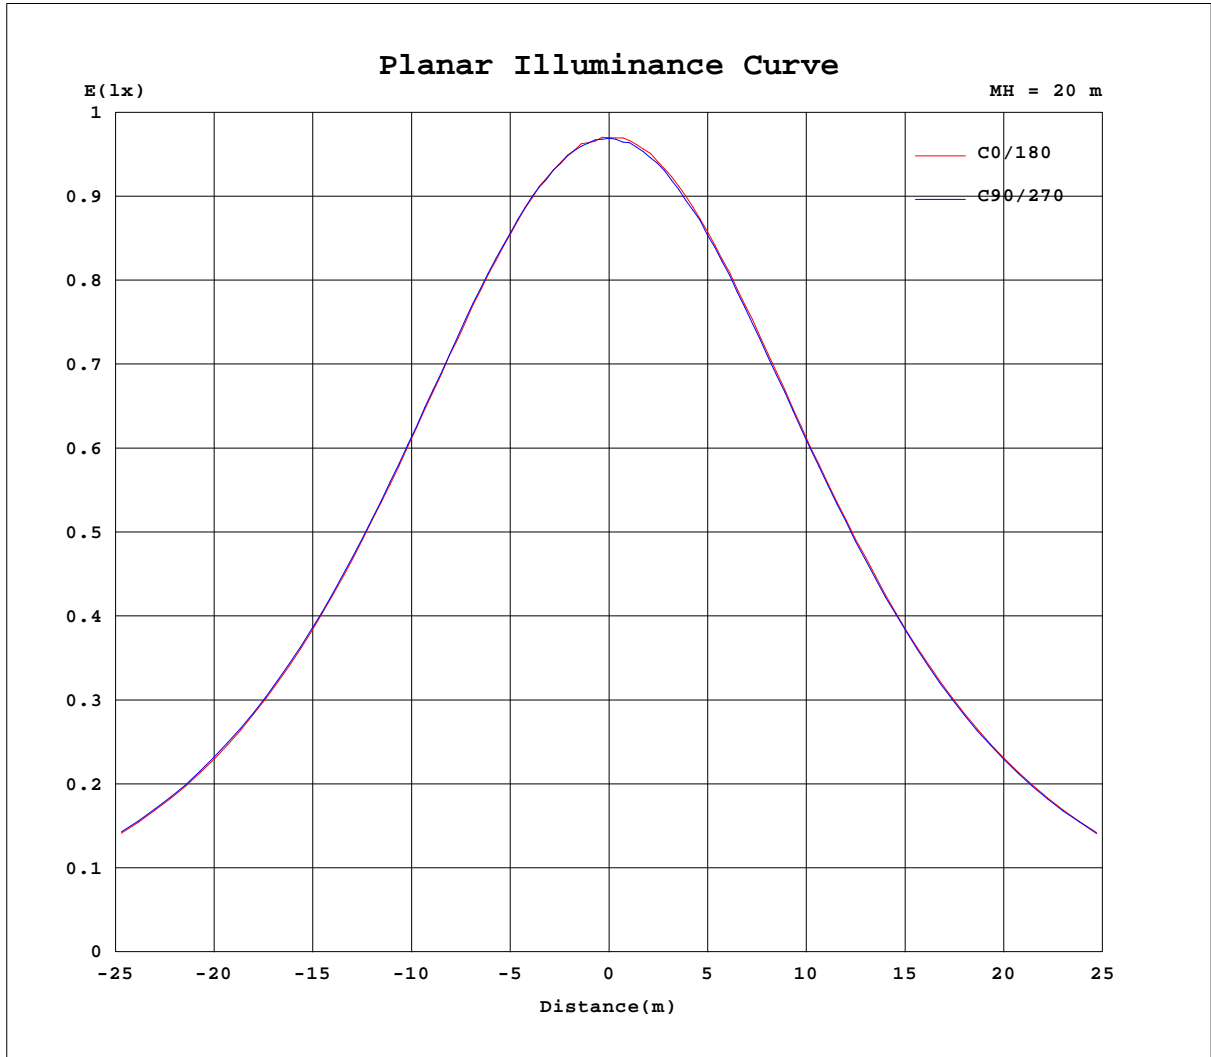

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-8

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=1.2093]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.22V I:0.1198A P:14.210W PF:0.9862 Freq:59.98Hz Lamp Flux:1137.36x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: φ0.14	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	388	388	388	388	388	388	388	388	388	388	388	388						
5	386	385	386	386	386	387	387	386	386	386	386	387						
10	382	380	382	382	382	383	382	380	382	381	381	382						
15	373	373	374	374	374	375	374	373	374	373	373	374						
20	361	361	362	363	362	363	363	360	362	361	362	362						
25	347	346	348	349	348	348	347	346	347	346	348	348						
30	329	329	330	330	331	331	330	328	329	329	330	330						
35	309	309	310	311	310	310	310	308	309	308	309	309						
40	285	287	287	288	287	287	286	285	286	284	285	286						
45	260	261	262	263	262	262	261	259	261	260	261	261						
50	233	234	235	235	234	235	234	232	234	233	233	233						
55	204	205	206	206	205	205	205	204	205	204	204	204						
60	174	175	176	176	175	174	175	174	175	174	174	173						
65	143	145	145	143	144	143	144	143	144	143	143	142						
70	112	114	112	111	112	112	113	113	113	110	111	111						
75	81.5	82.3	79.7	77.9	79.3	80.9	82.5	81.5	80.5	77.4	78.2	79.5						
80	51.8	52.0	47.8	45.6	47.6	50.2	52.9	50.8	48.2	45.6	46.8	49.0						
85	20.5	22.4	16.8	14.4	17.4	21.8	19.4	17.9	17.5	14.2	16.8	17.7						
90	1.52	1.15	1.13	0.94	1.13	1.07	1.09	1.30	1.31	1.07	1.14	1.08						
95	1.14	1.25	1.54	1.23	1.13	1.13	1.18	1.37	1.36	1.10	1.24	1.14						
100	1.24	1.28	1.33	1.13	1.13	1.16	1.21	1.41	1.38	1.23	1.26	1.23						
105	1.26	1.31	1.30	1.14	1.14	1.16	1.26	1.38	1.42	1.41	1.33	1.21						
110	1.29	1.37	1.30	1.21	1.15	1.16	1.34	1.39	1.48	1.29	1.26	1.21						
115	1.42	1.42	1.32	1.26	1.16	1.19	1.45	1.43	1.53	1.30	1.25	1.24						
120	1.50	1.47	1.36	1.32	1.23	1.24	1.49	1.45	1.62	1.39	1.35	1.28						
125	1.54	1.51	1.42	1.37	1.26	1.29	1.57	1.52	1.73	1.48	1.47	1.34						
130	1.60	1.54	1.44	1.41	1.31	1.33	1.66	1.65	1.82	1.56	1.56	1.42						
135	1.67	1.58	1.46	1.45	1.37	1.35	1.74	1.74	1.87	1.61	1.56	1.46						
140	1.72	1.64	1.51	1.49	1.43	1.41	1.75	1.84	1.89	1.65	1.57	1.51						
145	1.75	1.72	1.54	1.56	1.46	1.48	1.77	1.94	1.92	1.70	1.58	1.55						
150	1.81	1.79	1.61	1.64	1.60	1.54	1.81	1.99	2.04	1.77	1.77	1.56						
155	1.85	1.84	1.69	1.69	1.61	1.63	1.86	2.07	1.99	1.75	1.81	1.68						
160	1.93	1.90	1.77	1.78	1.65	1.70	1.92	2.11	2.07	1.77	1.88	1.69						
165	2.03	2.00	1.83	2.00	1.68	1.80	2.00	2.12	2.13	1.82	1.96	1.71						
170	2.08	2.05	1.98	2.06	1.77	1.83	2.05	2.15	2.16	1.81	2.07	1.79						
175	2.11	2.13	2.03	1.99	1.86	1.87	2.08	2.25	2.22	1.76	2.15	1.87						
180	2.19	2.19	2.06	2.08	1.92	1.89	2.08	2.22	2.23	1.65	2.25	2.15						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-8

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.2093]
 Remarks: