
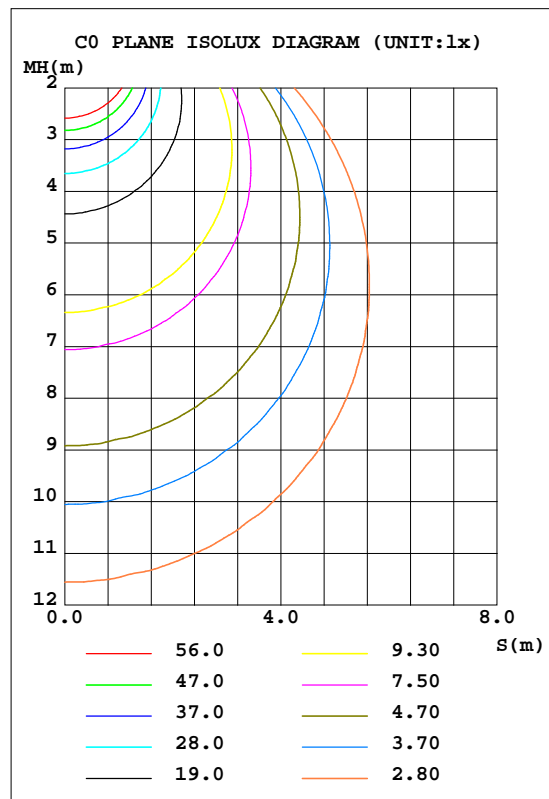


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.99V I:0.1524A P:15.639W PF:0.8170 Freq:60.00Hz Lamp Flux:1149.76x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: $\phi 0.14$	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	ASD-LDS-6N15AC-MawHcd(4000K)	375.1	S/MH(C0/180)	Eff: 73.52 lm/W	
NOMINAL POWER(W)	15	LOR(%)	100.0	S/MH(C90/270)	1.25
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	1149.8	h UP, DN(C0-180)	1.2,49.0
NOMINAL FLUX(lm)	1149.76	CIE CLASS	DIRECT	h UP, DN(C180-360)	1.2,48.7
LAMPS INSIDE	1	h up(%)	2.4	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	h down(%)	97.6	CIBSE SHR MAX	1.35

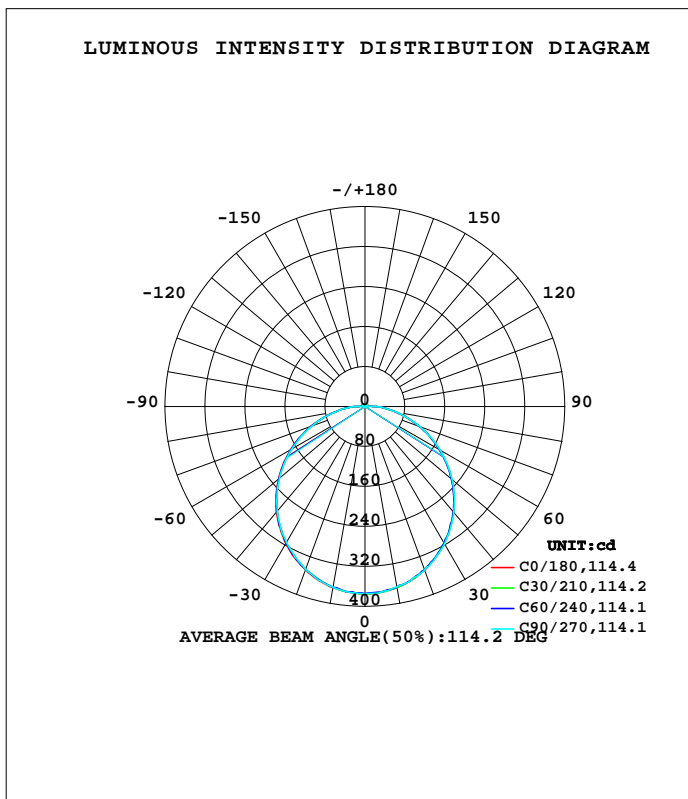

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-06-15

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=0.9540]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	367.9	367.7	367.1	367.9	367.2	367.2	367.4	367.4	0- 10	35.41	35.41	3.08,3.08
20	348.9	348.1	349.0	346.7	348.0	347.0	346.8	347.6	10- 20	101.3	136.7	11.9,11.9
30	316.6	316.5	317.9	315.7	316.6	315.3	314.3	316.7	20- 30	153.5	290.2	25.2,25.2
40	275.4	275.8	276.6	274.3	275.8	273.7	273.0	275.5	30- 40	185.5	475.8	41.4,41.4
50	226.5	226.6	227.6	225.3	226.3	224.6	223.5	225.9	40- 50	193.8	669.6	58.2,58.2
60	172.0	172.1	173.0	170.1	171.1	170.1	168.4	171.3	50- 60	177.8	847.4	73.7,73.7
70	115.2	115.3	115.9	113.6	113.8	113.0	112.3	114.6	60- 70	141.2	988.6	86,86
80	61.17	61.40	62.10	59.80	59.56	59.28	59.09	60.93	70- 80	91.47	1080	93.9,93.9
90	20.15	21.50	21.75	20.44	20.02	18.35	20.03	20.67	80- 90	42.33	1122	97.6,97.6
100	1.255	1.344	0.9987	1.139	3.478	0.9444	0.4556	0.8071	90-100	9.044	1131	98.4,98.4
110	3.190	2.424	1.334	2.144	3.353	2.464	1.628	2.097	100-110	1.514	1133	98.5,98.5
120	6.222	4.862	3.012	4.639	6.727	4.606	3.199	4.152	110-120	3.541	1137	98.8,98.8
130	6.924	5.751	4.902	6.498	7.429	5.551	4.866	6.358	120-130	4.933	1141	99.3,99.3
140	6.060	4.452	4.783	4.937	5.976	3.732	4.510	4.982	130-140	4.296	1146	99.7,99.7
150	2.808	1.361	2.192	1.412	3.289	1.396	2.589	1.534	140-150	2.197	1148	99.8,99.8
160	1.511	2.997	2.318	2.946	2.067	2.337	2.176	2.910	150-160	0.8631	1149	99.9,99.9
170	2.979	1.618	1.532	1.774	3.183	2.110	1.973	1.776	160-170	0.7996	1150	100,100
180	1.599	1.620	1.614	1.588	1.599	1.635	1.595	1.607	170-180	0.1620	1150	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-06-15

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.700m [K=0.9540]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.99V I:0.1524A P:15.639W PF:0.8170 Freq:60.00Hz Lamp Flux:1149.76x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: $\phi 0.14$	Shielding Angle:

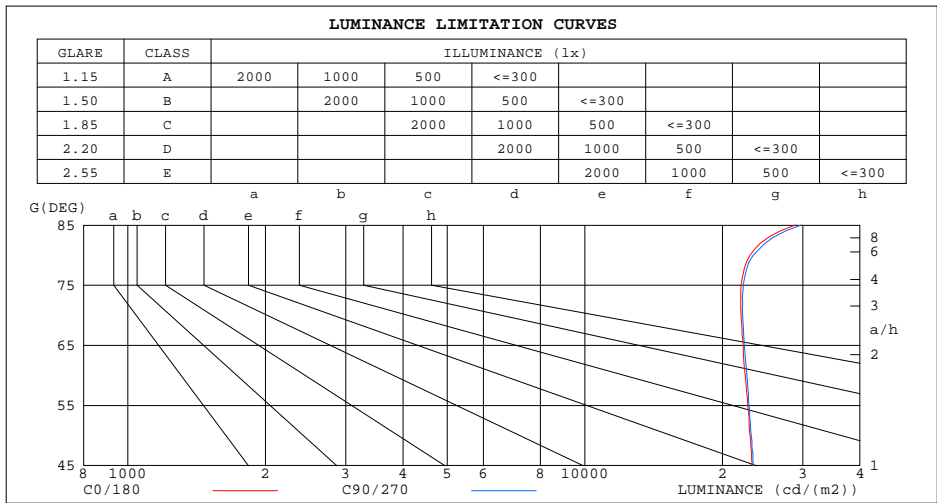

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	28856	29710
80	22971	23374
75	21970	22221
70	21971	22144
65	22209	22331
60	22436	22618
55	22720	22887
50	22983	23141
45	23231	23369


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-06-15

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=0.9540]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.99V I:0.1524A P:15.639W PF:0.8170 Freq:60.00Hz Lamp Flux:1149.76x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: $\phi 0.14$	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.10	1.10	1.10	1.05	1.05	1.05	.00	.00	.00	.98
1.0	1.02	.97	.93	.00	.95	.91	.95	.91	.88	.90	.88	.85	.86	.84	.82	.80
2.0	.88	.81	.75	.86	.80	.74	.82	.77	.72	.79	.74	.70	.75	.71	.68	.66
3.0	.77	.69	.62	.76	.68	.61	.72	.65	.60	.69	.63	.59	.66	.61	.57	.55
4.0	.68	.59	.52	.67	.58	.52	.64	.57	.51	.61	.55	.50	.59	.53	.49	.47
5.0	.61	.52	.45	.60	.51	.45	.57	.50	.44	.55	.48	.43	.53	.47	.42	.40
6.0	.55	.46	.39	.54	.45	.39	.52	.44	.38	.50	.43	.38	.48	.42	.37	.35
7.0	.50	.41	.34	.49	.40	.34	.47	.39	.34	.45	.38	.33	.44	.38	.33	.31
8.0	.45	.37	.31	.44	.36	.31	.43	.35	.30	.41	.35	.30	.40	.34	.30	.28
9.0	.42	.33	.28	.41	.33	.27	.39	.32	.27	.38	.32	.27	.37	.31	.27	.25
10.0	.38	.30	.25	.38	.30	.25	.37	.29	.25	.35	.29	.24	.34	.28	.24	.22

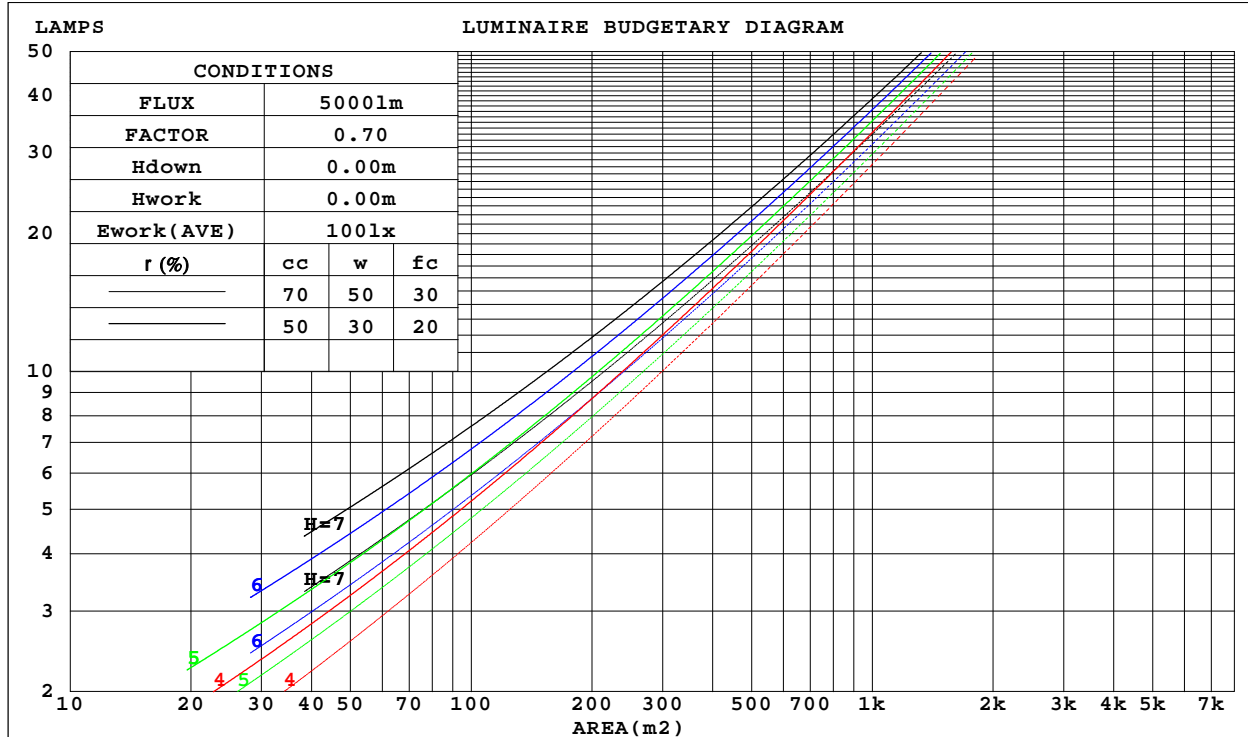

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-06-15

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=0.9540]
 Remarks:

WEC AND CCEC

Test:U:119.99V I:0.1524A P:15.639W PF:0.8170 Freq:60.00Hz Lamp Flux:1149.76x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: φ0.14	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.334	.190	.060	.326	.186	.059	.311	.179	.057	.298	.172	.055	.285	.165	.053	
2.0	.306	.168	.051	.299	.165	.051	.286	.159	.049	.274	.153	.048	.262	.148	.047	
3.0	.279	.149	.044	.273	.146	.044	.261	.142	.043	.251	.137	.042	.241	.133	.041	
4.0	.256	.133	.039	.250	.131	.039	.240	.127	.038	.230	.124	.037	.221	.120	.037	
5.0	.235	.120	.035	.230	.118	.034	.221	.115	.034	.212	.112	.033	.204	.109	.033	
6.0	.217	.109	.031	.213	.107	.031	.204	.105	.030	.197	.102	.030	.189	.100	.030	
7.0	.201	.100	.028	.198	.098	.028	.190	.096	.028	.183	.094	.027	.177	.092	.027	
8.0	.188	.092	.026	.184	.091	.026	.178	.089	.025	.171	.087	.025	.165	.085	.025	
9.0	.176	.085	.024	.172	.084	.024	.166	.082	.023	.161	.081	.023	.155	.079	.023	
10.0	.165	.079	.022	.162	.078	.022	.157	.077	.022	.151	.075	.021	.146	.074	.021	

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.209	.209	.209	.178	.178	.178	.122	.122	.122	.070	.070	.070	.022	.022	.022	
1.0	.200	.174	.151	.171	.150	.130	.117	.103	.090	.067	.060	.052	.022	.019	.017	
2.0	.192	.150	.115	.165	.129	.099	.113	.089	.069	.065	.052	.041	.021	.017	.013	
3.0	.185	.133	.092	.158	.115	.079	.109	.080	.056	.063	.046	.033	.020	.015	.011	
4.0	.177	.120	.076	.152	.103	.066	.104	.072	.046	.060	.042	.027	.019	.014	.009	
5.0	.169	.109	.065	.145	.095	.057	.100	.066	.040	.058	.039	.024	.019	.013	.008	
6.0	.162	.101	.057	.139	.088	.050	.096	.061	.035	.056	.036	.021	.018	.012	.007	
7.0	.155	.094	.052	.133	.082	.045	.092	.057	.032	.054	.034	.019	.017	.011	.006	
8.0	.149	.088	.047	.128	.077	.041	.088	.054	.029	.051	.032	.017	.017	.010	.006	
9.0	.142	.084	.044	.123	.073	.038	.085	.051	.027	.050	.030	.016	.016	.010	.005	
10.0	.137	.079	.041	.118	.069	.036	.082	.048	.025	.048	.029	.015	.015	.009	.005	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-06-15

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=0.9540]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.99V I:0.1524A P:15.639W PF:0.8170 Freq:60.00Hz Lamp Flux:1149.76x1 lm										
NAME:					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: ASD LIGHTING CORP					SUR.: φ0.14			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.8	24.4	23.2	24.8	25.2	22.8	24.4	23.2	24.8	25.1
3H	24.8	26.3	25.2	26.7	27.1	24.8	26.3	25.2	26.7	27.1
4H	25.7	27.1	26.1	27.5	27.9	25.7	27.0	26.1	27.4	27.9
6H	26.4	27.7	26.9	28.1	28.6	26.4	27.7	26.9	28.1	28.6
8H	26.7	28.0	27.2	28.4	28.8	26.7	28.0	27.2	28.4	28.9
12H	27.0	28.2	27.5	28.6	29.1	27.1	28.2	27.5	28.7	29.2
4H 2H	23.5	24.9	23.9	25.3	25.7	23.5	24.8	23.9	25.2	25.7
3H	25.8	26.9	26.2	27.4	27.8	25.7	26.9	26.2	27.3	27.8
4H	26.7	27.8	27.2	28.3	28.8	26.7	27.8	27.2	28.2	28.7
6H	27.6	28.6	28.1	29.1	29.6	27.6	28.6	28.1	29.0	29.5
8H	28.0	28.9	28.5	29.4	29.9	28.0	28.9	28.5	29.4	29.9
12H	28.4	29.2	28.9	29.7	30.3	28.4	29.2	28.9	29.7	30.3
8H 4H	27.1	28.0	27.6	28.5	29.0	27.1	28.0	27.6	28.5	29.0
6H	28.2	29.0	28.7	29.5	30.0	28.2	28.9	28.7	29.4	30.0
8H	28.7	29.4	29.3	30.0	30.5	28.7	29.4	29.2	29.9	30.5
12H	29.3	29.9	29.8	30.4	31.0	29.3	29.9	29.8	30.4	31.0
12H 4H	27.2	28.0	27.7	28.5	29.1	27.2	28.0	27.7	28.5	29.0
6H	28.4	29.0	28.9	29.5	30.1	28.3	29.0	28.8	29.5	30.1
8H	29.0	29.5	29.5	30.1	30.7	28.9	29.5	29.4	30.0	30.6
CIE190: 2010										

CIE190: 2010
Area: 0.0153 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-06-15

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.700m [K=0.9540]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.99V I:0.1524A P:15.639W PF:0.8170 Freq:60.00Hz Lamp Flux:1149.76x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: $\phi 0.14$	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	56	44	37	55	44	37	54	43	36	30
0.80	66	54	46	64	53	46	62	52	45	38
1.00	74	62	55	72	62	54	70	63	54	46
1.25	81	70	62	79	69	62	76	67	61	53
1.50	86	75	68	84	74	67	81	72	66	58
2.00	93	84	77	91	82	76	87	80	74	66
2.50	97	88	82	95	87	81	90	84	79	70
3.00	100	93	87	98	91	86	93	88	83	74
4.00	104	98	93	102	96	92	97	92	89	79
5.00	107	102	97	104	99	95	99	95	92	82
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-06-15

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity: 65.0%
Test Distance: 8.700m [K=0.9540]
Remarks:

ISOCANDELA DIAGRAM

Test:U:119.99V I:0.1524A P:15.639W PF:0.8170 Freq:60.00Hz Lamp Flux:1149.76x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: $\phi 0.14$	Shielding Angle:

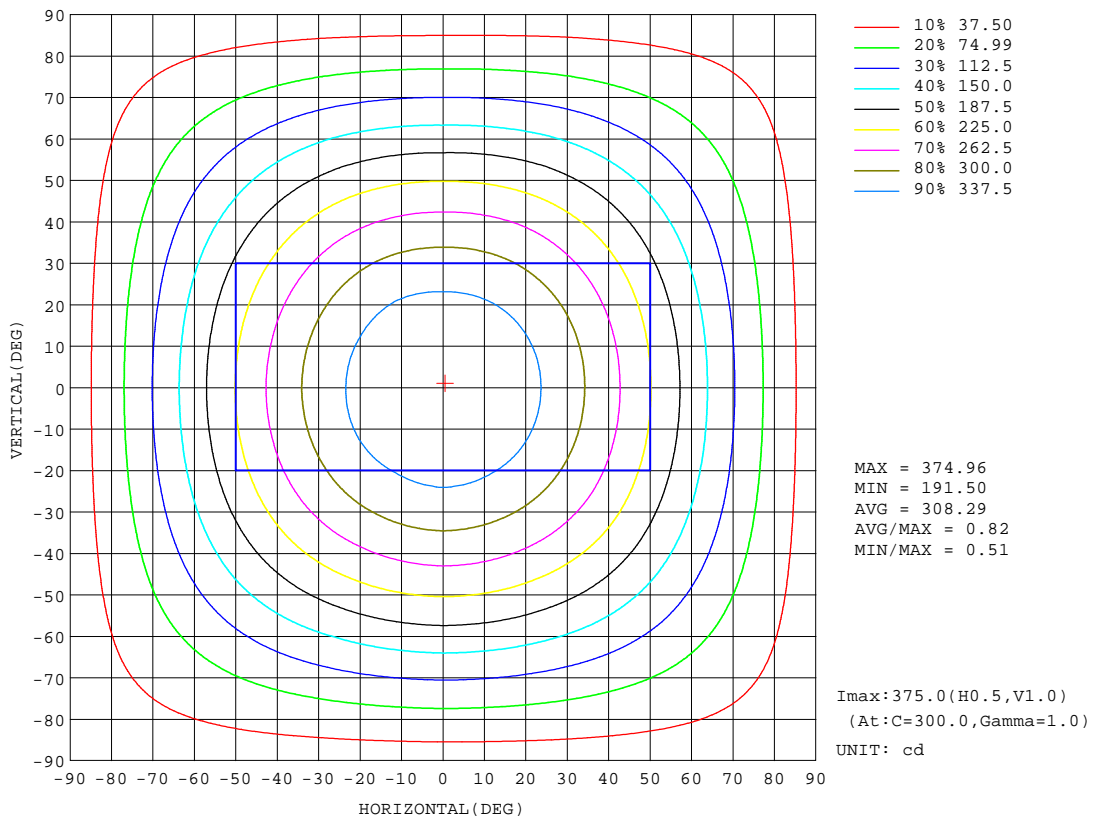


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-06-15

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=0.9540]
 Remarks:

AAI Figure

Test:U:119.99V I:0.1524A P:15.639W PF:0.8170 Freq:60.00Hz Lamp Flux:1149.76x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: ϕ 0.14	Shielding Angle:

Flux out:814.2 lm

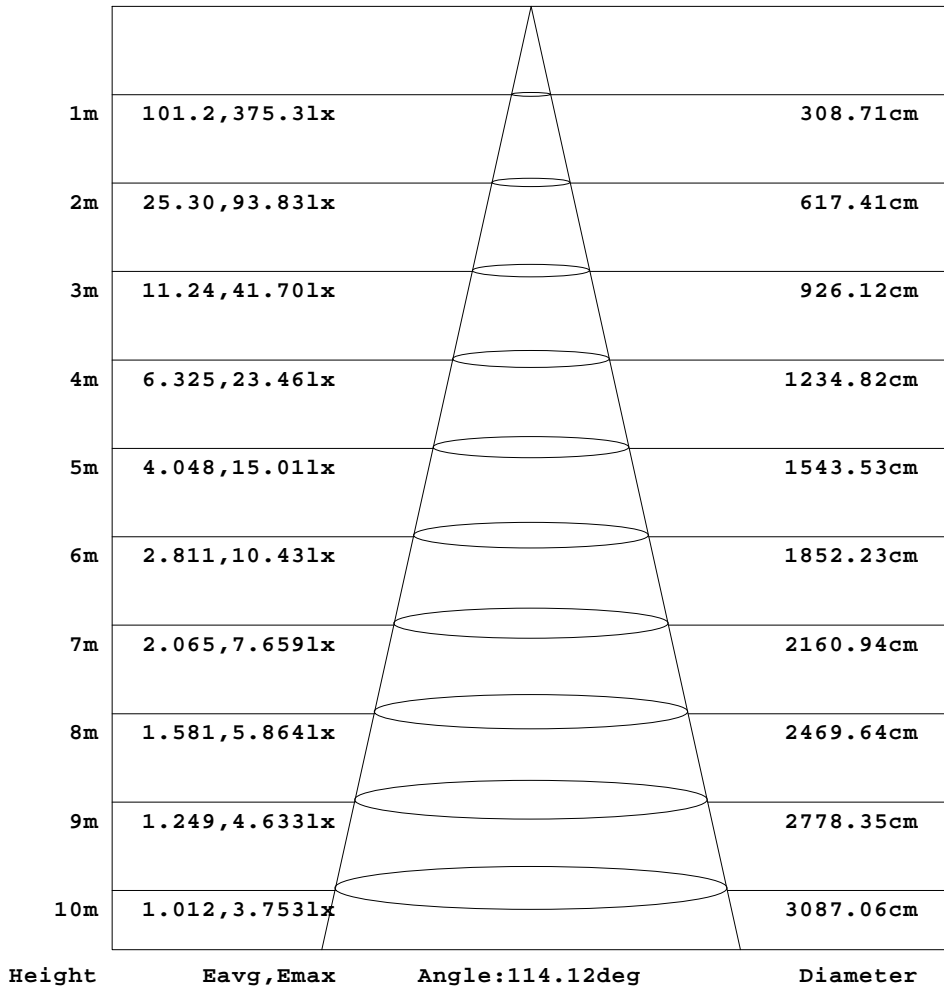


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-06-15

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=0.9540]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.99V I:0.1524A P:15.639W PF:0.8170 Freq:60.00Hz Lamp Flux:1149.76x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: $\phi 0.14$	Shielding Angle:

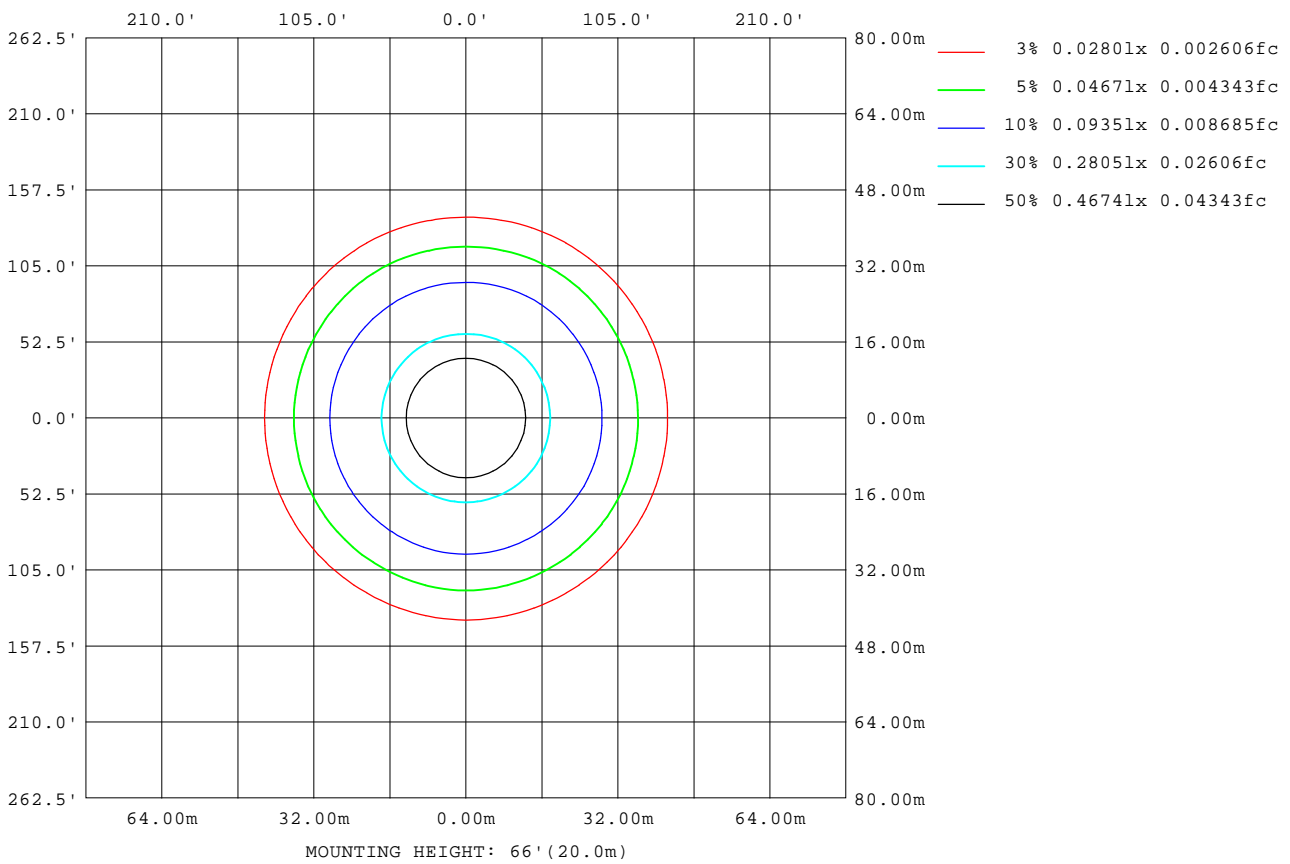

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-06-15

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=0.9540]
 Remarks:

LED Avg.L Report

Test:U:119.99V I:0.1524A P:15.639W PF:0.8170 Freq:60.00Hz Lamp Flux:1149.76x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: $\phi 0.14$	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	22155
L_0~180(75)av	21825
L_0~180(85)av	28374
L_90~270(65)av	22061
L_90~270(75)av	21845
L_90~270(85)av	28773
L_45(65)av	22072
L_45(75)av	21792
L_45(85)av	28600

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-06-15

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.700m [K=0.9540]
Remarks:

Planar Illuminance Curve

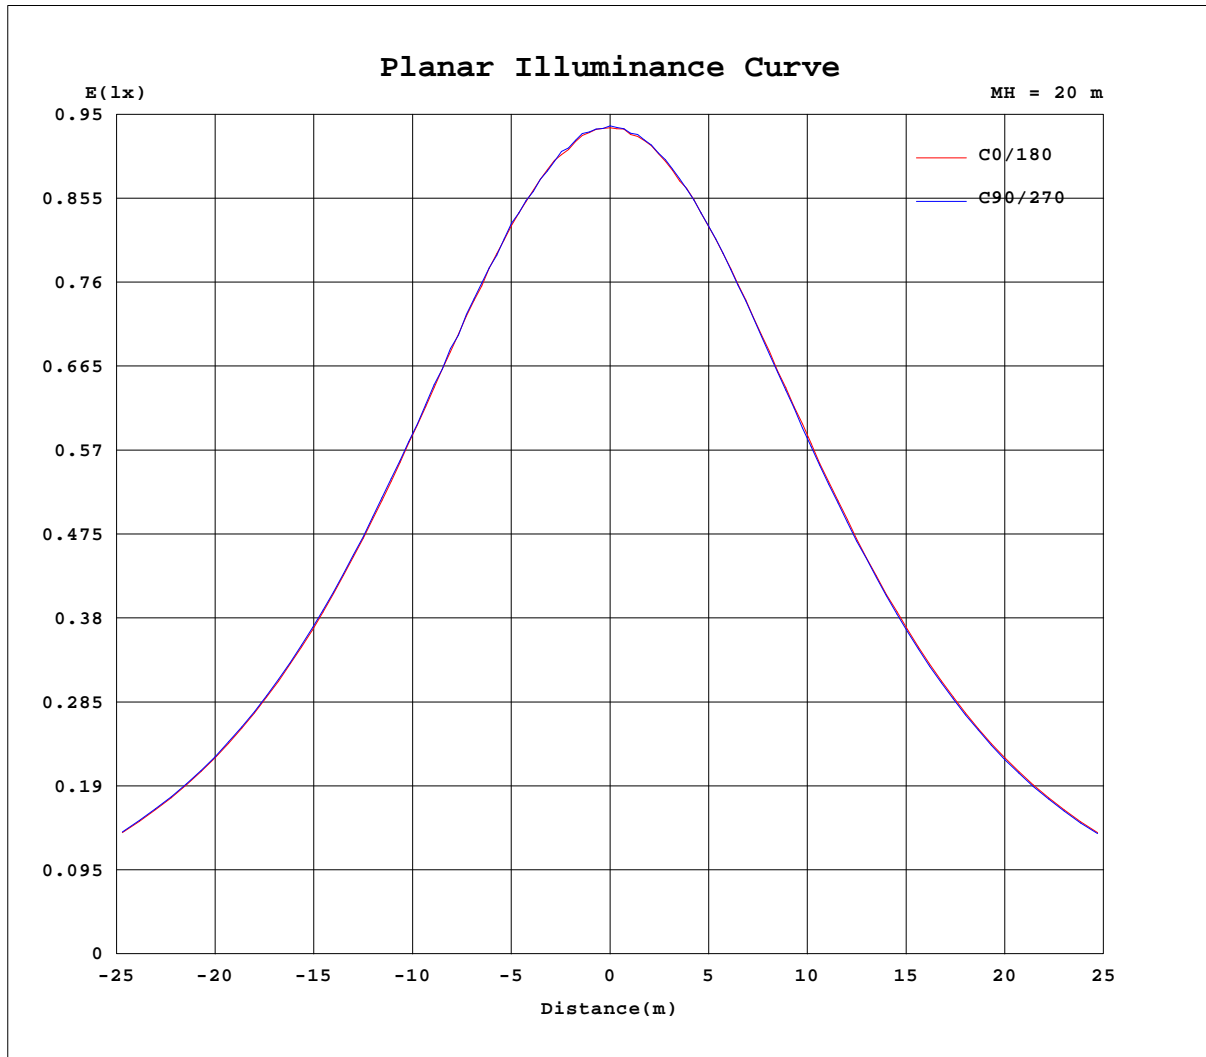

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-06-15

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=0.9540]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.99V I:0.1524A P:15.639W PF:0.8170 Freq:60.00Hz Lamp Flux:1149.76x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: φ0.14	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	375	375	375	375	375	375	375	375	375	375	375	375						
5	373	373	373	373	373	373	373	373	373	372	373	373	373					
10	368	368	367	367	367	368	367	367	367	367	367	367	367					
15	359	360	360	359	358	360	360	358	358	359	359	360						
20	349	348	348	349	346	348	348	347	347	347	347	348						
25	334	333	334	334	333	333	333	331	333	332	333	334						
30	317	316	317	318	316	316	317	315	316	314	316	317						
35	298	297	296	298	296	296	297	295	295	295	297	297						
40	275	276	275	277	274	274	276	274	274	273	275	276						
45	252	253	251	253	251	251	252	250	250	249	252	251						
50	227	227	226	228	225	226	226	224	225	223	226	226						
55	200	200	199	201	198	199	199	198	198	196	199	199						
60	172	172	172	173	169	171	171	170	170	168	171	171						
65	144	144	144	144	142	142	143	142	142	141	143	143						
70	115	115	115	116	114	113	114	113	113	112	114	115						
75	87.2	87.5	87.5	88.0	85.9	85.4	85.7	85.1	85.4	85.0	86.7	87.0						
80	61.2	61.5	61.3	62.1	60.1	59.5	59.6	59.1	59.5	59.1	60.8	61.0						
85	38.6	39.0	39.5	39.6	38.3	37.3	37.1	36.7	37.3	37.1	38.5	38.5						
90	20.1	21.6	21.4	21.7	20.6	20.3	20.0	16.6	20.1	20.0	21.2	20.2						
95	9.71	6.89	5.37	8.61	5.95	8.09	9.08	7.17	5.72	7.25	6.36	6.78						
100	1.25	0.78	1.91	1.00	1.58	0.70	3.48	0.86	1.03	0.46	0.92	0.69						
105	2.11	1.72	1.02	0.81	0.94	1.19	2.22	1.73	1.09	0.90	1.06	1.58						
110	3.19	3.01	1.84	1.33	1.81	2.47	3.35	3.40	1.53	1.63	1.92	2.28						
115	5.30	5.26	2.82	2.27	2.65	4.40	5.46	4.95	2.66	2.22	2.32	3.59						
120	6.22	5.85	3.88	3.01	3.57	5.71	6.73	5.79	3.42	3.20	3.18	5.13						
125	6.64	6.85	4.69	4.47	5.46	6.70	7.34	6.44	4.08	4.03	4.55	6.16						
130	6.92	6.53	4.97	4.90	6.46	6.54	7.43	6.56	4.54	4.87	6.14	6.58						
135	6.68	5.84	4.68	5.47	6.06	5.95	7.22	5.25	4.31	5.84	4.74	5.77						
140	6.06	5.57	3.33	4.78	4.70	5.17	5.98	5.14	2.32	4.51	4.54	5.43						
145	5.56	4.10	2.18	4.36	3.54	2.64	5.68	4.13	1.91	2.67	2.66	2.28						
150	2.81	1.34	1.38	2.19	1.29	1.53	3.29	1.52	1.27	2.59	1.68	1.39						
155	1.72	1.79	2.16	1.50	2.12	1.59	1.89	1.71	2.46	2.03	2.07	1.32						
160	1.51	2.64	3.35	2.32	4.31	1.58	2.07	1.94	2.73	2.18	4.30	1.52						
165	4.02	1.76	3.33	2.60	2.55	3.20	4.29	2.26	3.84	2.86	2.09	3.37						
170	2.98	1.66	1.58	1.53	1.56	1.99	3.18	1.86	2.36	1.97	1.55	2.00						
175	1.57	1.56	1.58	1.60	1.57	1.58	1.76	1.65	1.61	1.61	1.58	1.59						
180	1.60	1.61	1.63	1.61	1.59	1.59	1.60	1.63	1.64	1.60	1.60	1.62						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-06-15

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=0.9540]
 Remarks: