
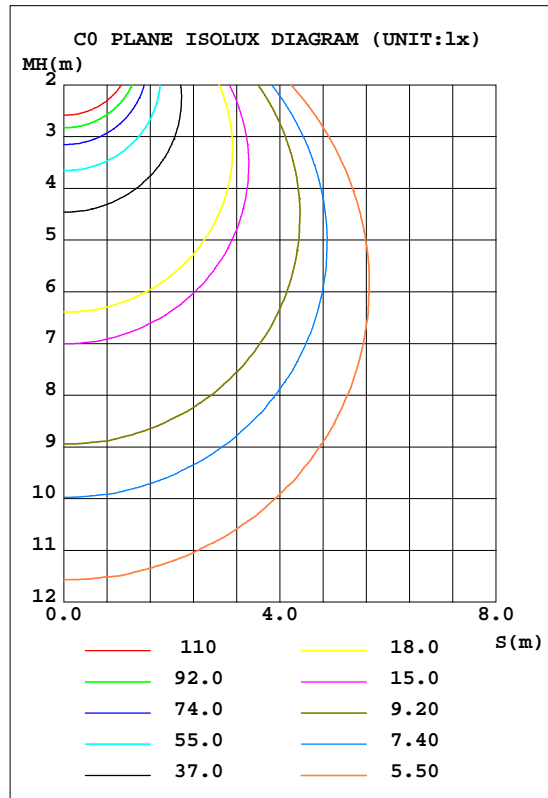


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.20V I:0.2027A P:24.017W PF:0.9855 Freq:59.98Hz Lamp Flux:2142.56x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.46$	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 89.21 lm/W			
MODEL	JBR-12D24AC-WH(3000K)	I <sub>max</sub> (cd)	737.7	S/MH(C0/180)	1.25
NOMINAL POWER(W)	24	LOR(%)	100.0	S/MH(C90/270)	1.27
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	2142.6	h UP, DN(C0-180)	0.2,49.5
NOMINAL FLUX(lm)	2142.56	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.2,50.1
LAMPS INSIDE	1	h up(%)	0.4	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	h down(%)	99.6	CIBSE SHR MAX	1.35

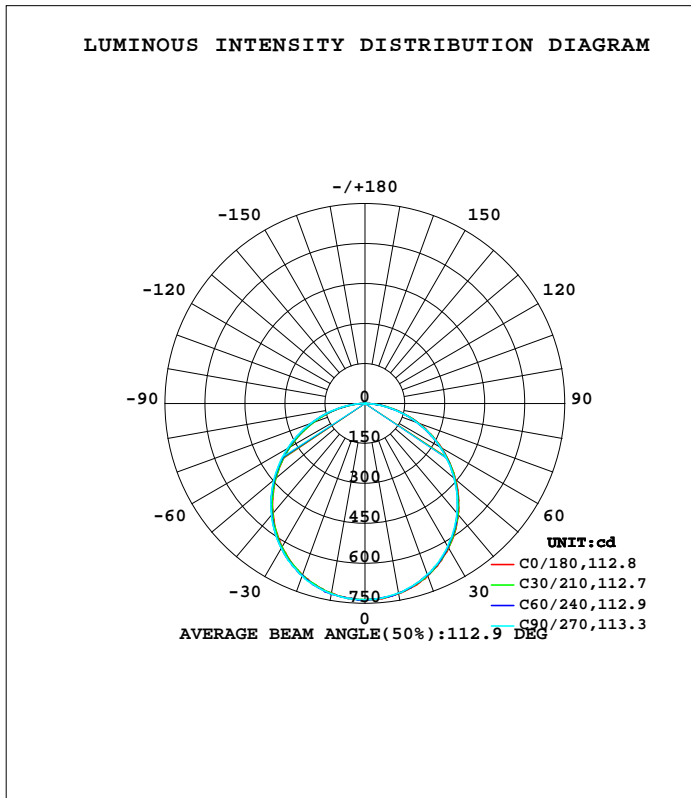

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-10

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=0.9767]  
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	725.0	722.9	722.2	721.7	722.3	724.9	725.2	726.1	0- 10	69.69	69.69	3.25,3.25
20	688.5	686.2	682.5	681.9	685.2	685.8	688.7	689.8	10- 20	199.8	269.5	12.6,12.6
30	627.8	624.1	620.7	619.2	621.9	624.5	628.4	630.4	20- 30	303.3	572.8	26.7,26.7
40	544.4	541.0	537.1	535.5	537.4	541.9	545.9	548.5	30- 40	366.2	939.1	43.8,43.8
50	444.4	439.3	437.1	434.8	435.9	440.8	446.7	449.0	40- 50	380.4	1319	61.6,61.6
60	331.5	326.4	325.3	322.3	323.1	327.6	334.7	337.1	50- 60	344.9	1664	77.7,77.7
70	212.5	208.0	207.6	204.4	204.2	208.4	215.3	219.4	60- 70	266.8	1931	90.1,90.1
80	96.83	92.59	88.66	88.57	88.49	88.58	95.17	98.02	70- 80	158.9	2090	97.5,97.5
90	2.389	0.6555	0.2930	0.3329	0.3381	0.3471	0.3080	1.077	80- 90	43.26	2133	99.6,99.6
100	0.5163	0.5785	0.6258	0.6230	0.7059	0.6779	0.8594	0.7272	90-100	0.5457	2134	99.6,99.6
110	0.9086	1.008	1.048	1.045	1.148	1.102	1.027	1.090	100-110	0.8895	2135	99.6,99.6
120	1.286	1.403	1.480	1.447	1.570	1.522	1.424	1.507	110-120	1.246	2136	99.7,99.7
130	1.629	1.733	1.777	1.763	1.928	1.860	1.737	1.830	120-130	1.463	2137	99.8,99.8
140	1.932	2.053	2.075	2.075	2.221	2.210	2.050	2.147	130-140	1.506	2139	99.8,99.8
150	2.245	2.337	2.363	2.368	2.474	2.473	2.308	2.388	140-150	1.405	2140	99.9,99.9
160	2.543	2.595	2.651	2.656	2.718	2.774	2.646	2.671	150-160	1.162	2141	100,100
170	2.807	2.836	2.909	2.894	2.986	3.014	2.909	2.917	160-170	0.7865	2142	100,100
180	3.040	3.079	3.023	3.071	3.090	3.096	3.088	3.078	170-180	0.2845	2143	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-10

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=0.9767]  
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.20V I:0.2027A P:24.017W PF:0.9855 Freq:59.98Hz Lamp Flux:2142.56x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi$ 0.46	Shielding Angle:

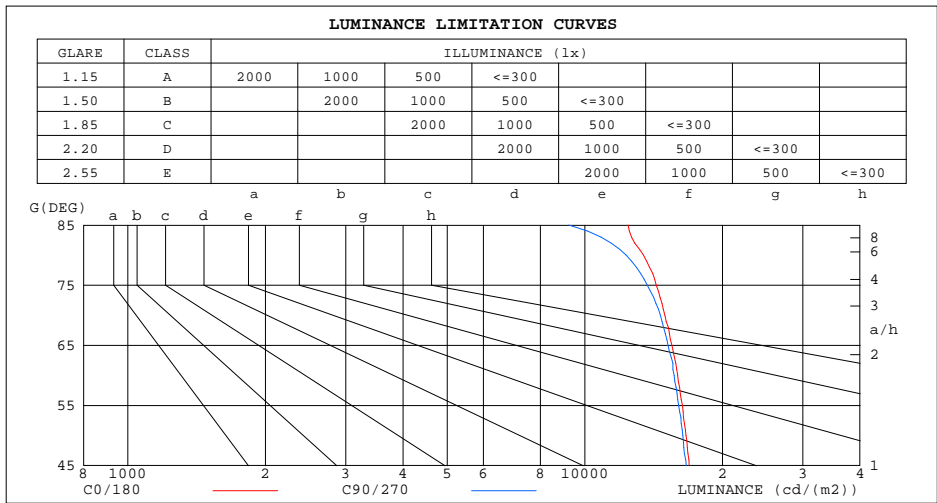

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	12433	9230
80	13430	12307
75	14332	13701
70	14966	14628
65	15520	15209
60	15970	15683
55	16355	16046
50	16650	16390
45	16929	16680


C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-10

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=0.9767]  
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.20V I:0.2027A P:24.017W PF:0.9855 Freq:59.98Hz Lamp Flux:2142.56x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.46$	Shielding Angle:

r <sub>cc</sub>	80%			70%			50%			30%			10%			0
r <sub>w</sub>	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r <sub>fc</sub>	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio      Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.99	.95	1.01	.97	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.90	.83	.77	.88	.82	.76	.84	.79	.74	.81	.77	.73	.78	.74	.71	.69
3.0	.79	.71	.64	.77	.70	.63	.74	.68	.62	.71	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.54	.68	.60	.54	.66	.59	.53	.63	.57	.52	.61	.56	.51	.49
5.0	.62	.53	.46	.61	.53	.46	.59	.51	.46	.57	.50	.45	.55	.49	.45	.42
6.0	.56	.47	.41	.55	.47	.40	.53	.46	.40	.51	.45	.40	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.42	.36	.48	.41	.35	.47	.40	.35	.45	.39	.35	.33
8.0	.46	.38	.32	.46	.37	.32	.44	.37	.31	.43	.36	.31	.42	.36	.31	.29
9.0	.42	.34	.29	.42	.34	.29	.41	.33	.28	.40	.33	.28	.39	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.25	.24

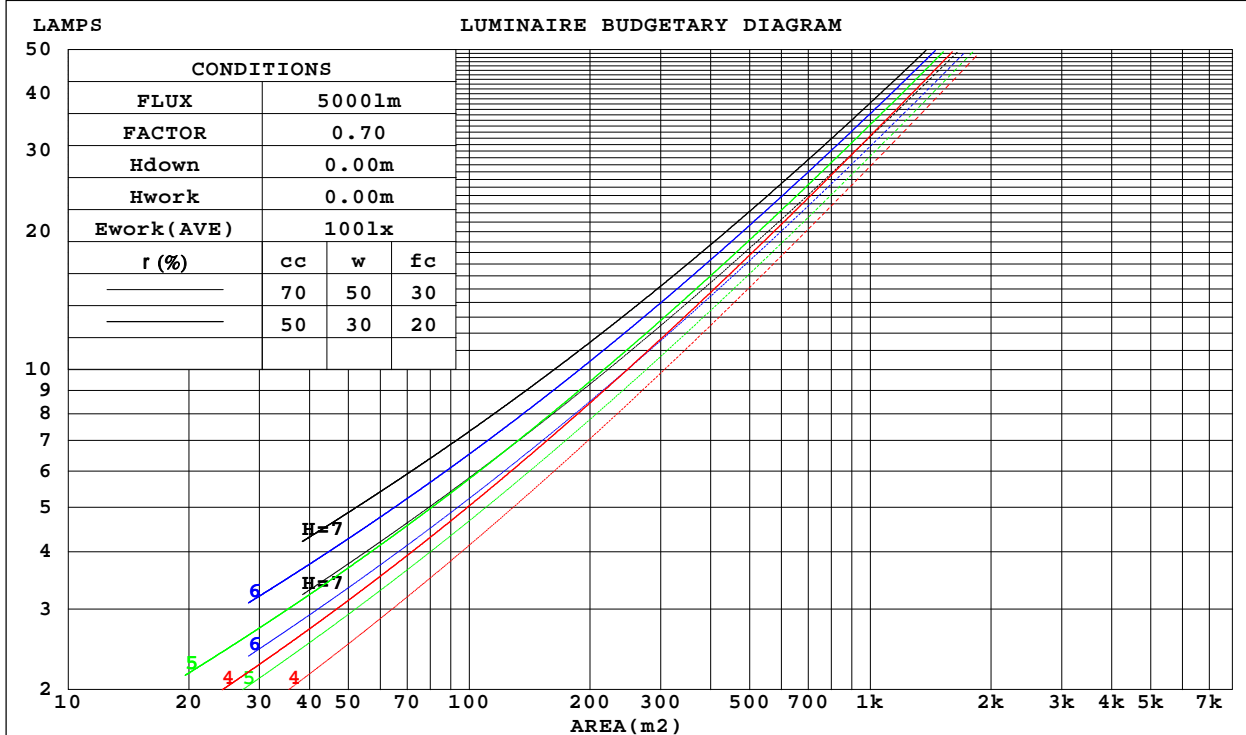

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-10

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=0.9767]  
 Remarks:

WEC AND CCEC

Test:U:120.20V I:0.2027A P:24.017W PF:0.9855 Freq:59.98Hz Lamp Flux:2142.56x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: φ0.46	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.314	.178	.057	.307	.175	.056	.293	.168	.054	.281	.162	.052	.269	.156	.050	
2.0	.295	.161	.050	.288	.159	.049	.276	.154	.048	.265	.149	.047	.255	.144	.045	
3.0	.272	.145	.043	.267	.143	.043	.256	.139	.042	.246	.135	.041	.237	.131	.041	
4.0	.251	.130	.038	.246	.129	.038	.236	.125	.037	.228	.122	.037	.220	.119	.036	
5.0	.232	.118	.034	.227	.117	.034	.219	.114	.034	.211	.111	.033	.204	.109	.033	
6.0	.215	.108	.031	.211	.106	.031	.203	.104	.030	.196	.102	.030	.190	.100	.030	
7.0	.200	.099	.028	.196	.098	.028	.189	.096	.028	.183	.094	.027	.177	.092	.027	
8.0	.186	.091	.026	.183	.090	.025	.177	.089	.025	.172	.087	.025	.166	.085	.025	
9.0	.175	.084	.024	.172	.084	.023	.166	.082	.023	.161	.081	.023	.157	.080	.023	
10.0	.164	.079	.022	.162	.078	.022	.157	.077	.022	.152	.076	.021	.148	.074	.021	

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.194	.194	.194	.166	.166	.166	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.184	.159	.137	.157	.137	.118	.108	.094	.082	.062	.054	.048	.020	.018	.015	
2.0	.176	.135	.101	.151	.116	.087	.103	.081	.061	.060	.047	.036	.019	.015	.012	
3.0	.168	.118	.077	.144	.102	.067	.099	.071	.047	.057	.041	.028	.018	.013	.009	
4.0	.161	.104	.061	.138	.090	.053	.095	.063	.038	.055	.037	.022	.018	.012	.007	
5.0	.153	.094	.050	.132	.081	.044	.091	.057	.031	.052	.033	.018	.017	.011	.006	
6.0	.146	.086	.042	.125	.074	.037	.087	.052	.026	.050	.031	.016	.016	.010	.005	
7.0	.139	.079	.037	.120	.068	.032	.083	.048	.023	.048	.028	.013	.016	.009	.004	
8.0	.133	.073	.032	.114	.063	.028	.079	.044	.020	.046	.026	.012	.015	.009	.004	
9.0	.127	.068	.029	.109	.059	.025	.076	.042	.018	.044	.025	.011	.014	.008	.003	
10.0	.121	.064	.026	.104	.055	.023	.072	.039	.016	.042	.023	.010	.014	.008	.003	

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-10

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=0.9767]  
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.20V I:0.2027A P:24.017W PF:0.9855 Freq:59.98Hz Lamp Flux:2142.56x1 lm										
NAME:					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: ASD LIGHTNG CORP					SUR.: φ0.46			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	21.8	23.5	22.2	23.8	24.1	21.7	23.3	22.1	23.7	24.0
3H	23.7	25.2	24.1	25.6	25.9	23.6	25.1	24.0	25.4	25.8
4H	24.5	25.9	24.9	26.2	26.6	24.3	25.7	24.7	26.1	26.4
6H	25.1	26.4	25.5	26.7	27.1	24.8	26.1	25.2	26.5	26.9
8H	25.3	26.5	25.7	26.9	27.3	25.0	26.2	25.4	26.6	27.0
12H	25.4	26.6	25.8	27.0	27.4	25.1	26.3	25.5	26.7	27.1
4H 2H	22.5	23.9	22.9	24.2	24.6	22.3	23.7	22.7	24.1	24.5
3H	24.6	25.8	25.0	26.2	26.6	24.4	25.6	24.9	26.0	26.4
4H	25.5	26.5	25.9	27.0	27.4	25.3	26.4	25.7	26.8	27.2
6H	26.2	27.1	26.7	27.6	28.0	25.9	26.9	26.4	27.3	27.8
8H	26.5	27.3	26.9	27.8	28.3	26.2	27.0	26.6	27.5	28.0
12H	26.6	27.4	27.1	27.9	28.4	26.3	27.1	26.8	27.6	28.0
8H 4H	25.8	26.7	26.3	27.1	27.6	25.6	26.5	26.1	26.9	27.4
6H	26.7	27.4	27.2	27.9	28.4	26.4	27.1	26.9	27.6	28.1
8H	27.0	27.7	27.5	28.2	28.7	26.7	27.3	27.2	27.8	28.3
12H	27.3	27.9	27.8	28.4	28.9	26.9	27.4	27.4	27.9	28.5
12H 4H	25.8	26.6	26.3	27.1	27.6	25.7	26.4	26.1	26.9	27.4
6H	26.7	27.4	27.3	27.9	28.4	26.5	27.1	27.0	27.6	28.1
8H	27.1	27.7	27.6	28.2	28.8	26.8	27.4	27.3	27.9	28.4
CIE190: 2010										

CIE190: 2010  
Area: 0.0415 m2

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-6-10

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
Humidity:65.0%  
Test Distance:8.600m [K=0.9767]  
Remarks:

## UTILIZATION FACTORS TABLE

Test:U:120.20V I:0.2027A P:24.017W PF:0.9855 Freq:59.98Hz Lamp Flux:2142.56x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.46$	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	45	38	56	45	38	55	45	38	32
0.80	67	55	48	66	55	48	64	54	47	40
1.00	75	64	57	74	64	57	72	65	56	49
1.25	83	72	65	81	71	64	78	70	63	56
1.50	88	78	71	86	77	70	83	75	69	61
2.00	95	86	79	93	85	79	89	82	77	69
2.50	98	91	84	96	89	84	92	86	82	73
3.00	102	95	89	100	93	88	96	90	86	77
4.00	106	100	95	103	98	94	99	95	91	82
5.00	108	103	99	106	101	98	101	98	95	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 2022-6-10

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
Humidity: 65.0%  
Test Distance: 8.600m [K=0.9767]  
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.20V I:0.2027A P:24.017W PF:0.9855 Freq:59.98Hz Lamp Flux:2142.56x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.46$	Shielding Angle:

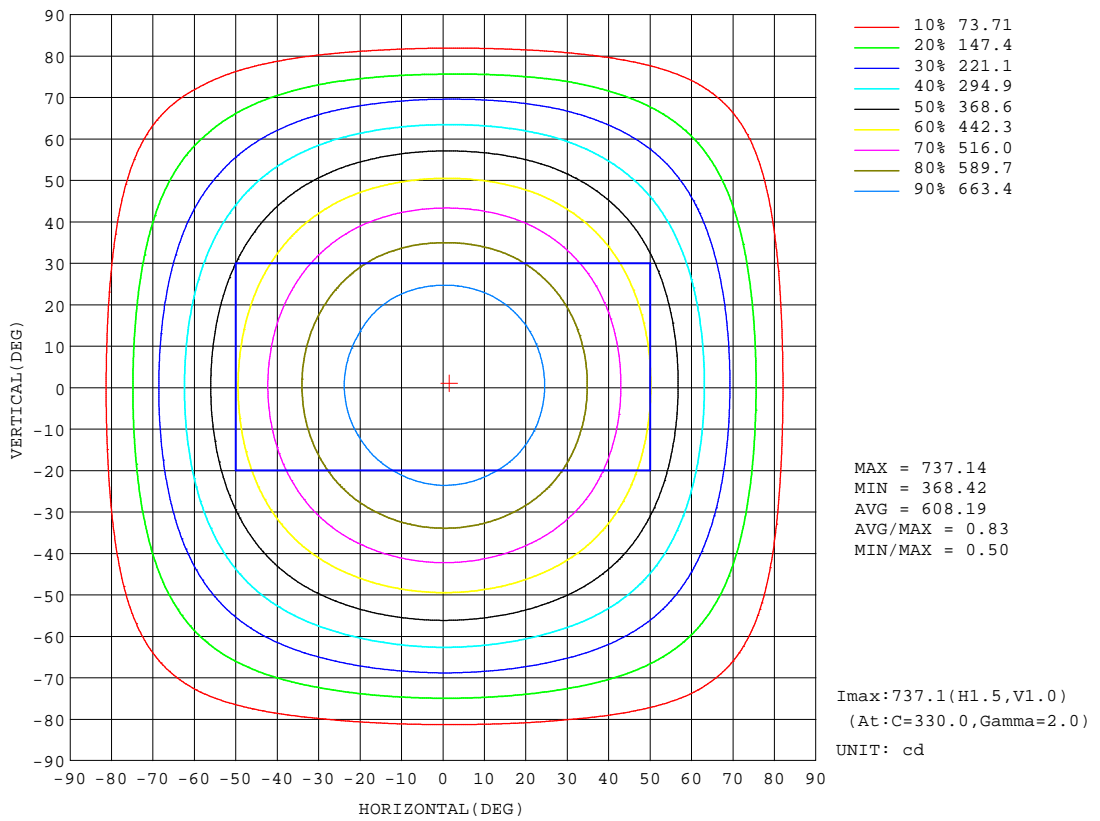

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-10


g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=0.9767]  
 Remarks:



AAI Figure

Test:U:120.20V I:0.2027A P:24.017W PF:0.9855 Freq:59.98Hz Lamp Flux:2142.56x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi$ 0.46	Shielding Angle:

Flux out:1567 lm

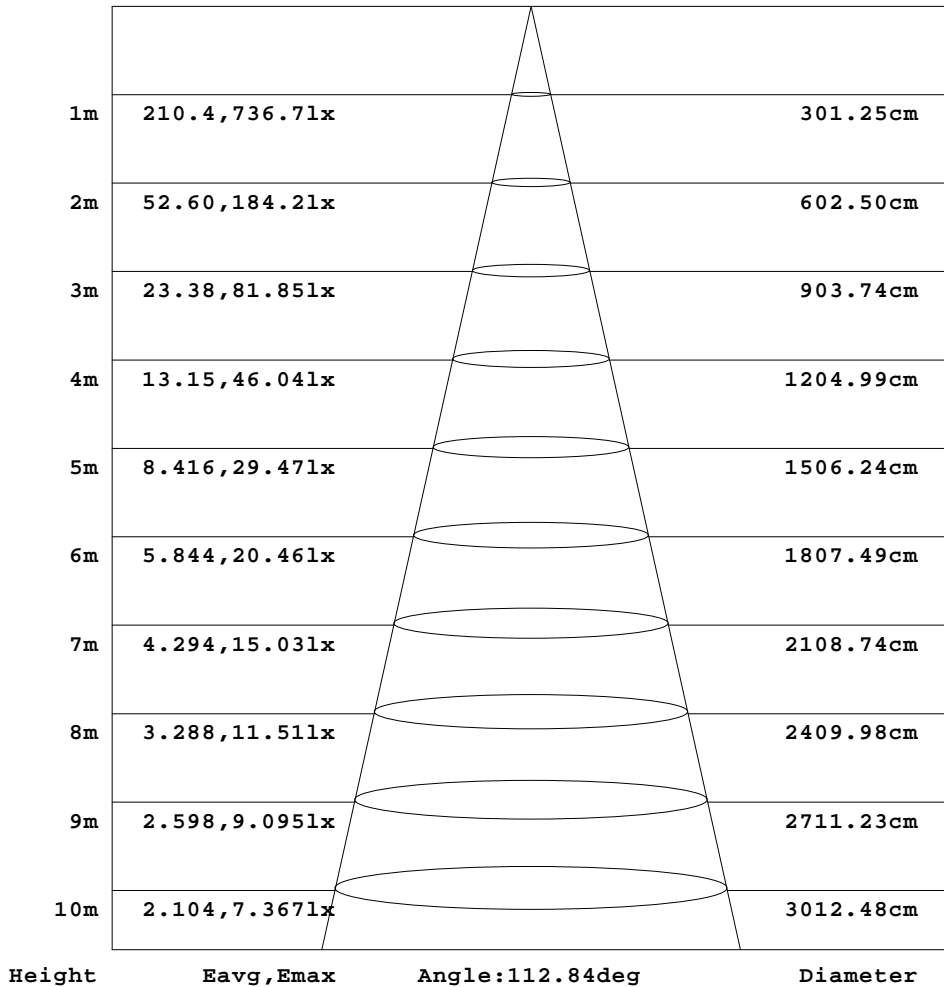


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-10

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=0.9767]  
 Remarks:

ISOLUX DIAGRAM

Test:U:120.20V I:0.2027A P:24.017W PF:0.9855 Freq:59.98Hz Lamp Flux:2142.56x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.46$	Shielding Angle:

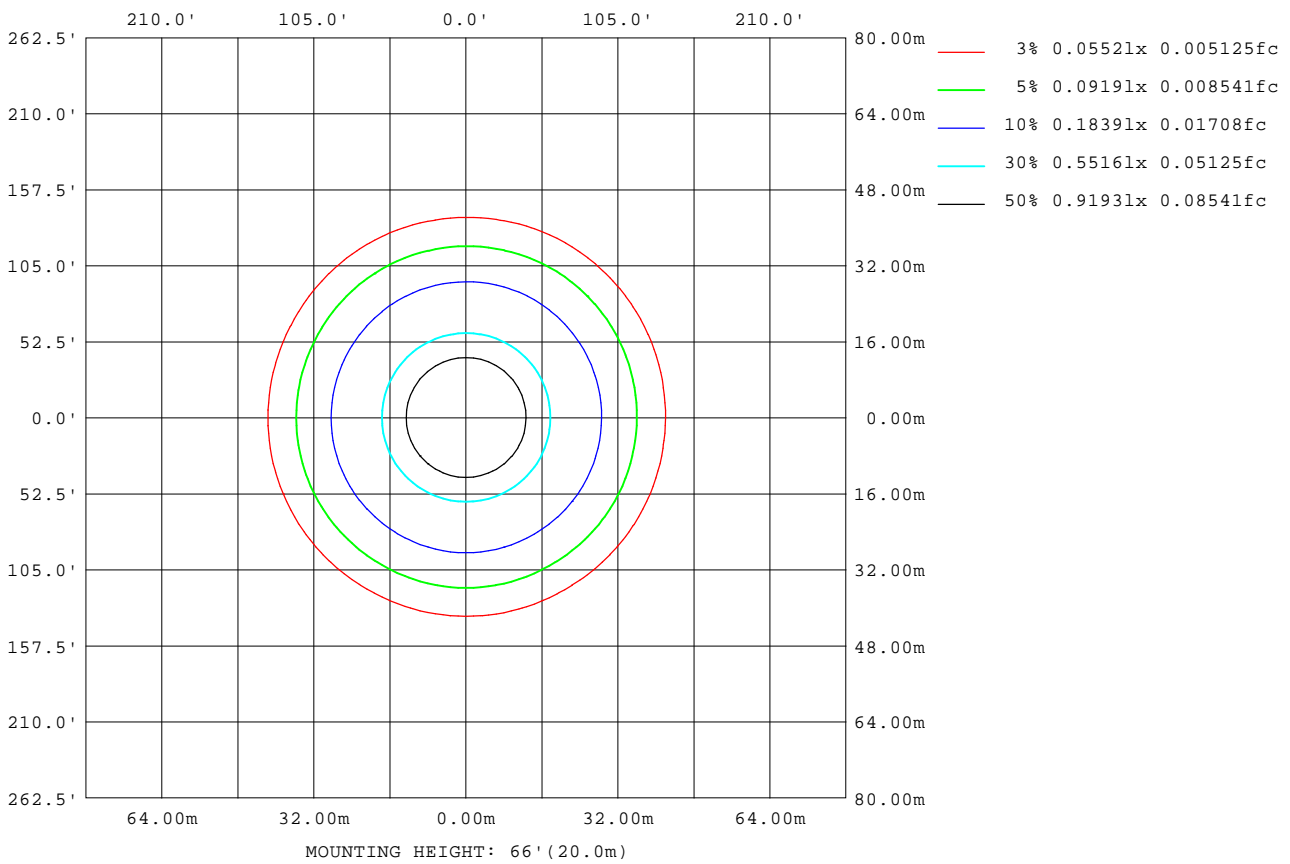

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2022-6-10

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity: 65.0%  
 Test Distance: 8.600m [K=0.9767]  
 Remarks:

## LED Avg.L Report

Test:U:120.20V I:0.2027A P:24.017W PF:0.9855 Freq:59.98Hz Lamp Flux:2142.56x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi$ 0.46	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	15298
L_0~180(75)av	13949
L_0~180(85)av	11223
L_90~270(65)av	15467
L_90~270(75)av	14023
L_90~270(85)av	9988
L_45(65)av	15375
L_45(75)av	14016
L_45(85)av	10156

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-6-10

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
Humidity:65.0%  
Test Distance:8.600m [K=0.9767]  
Remarks:

Planar Illuminance Curve

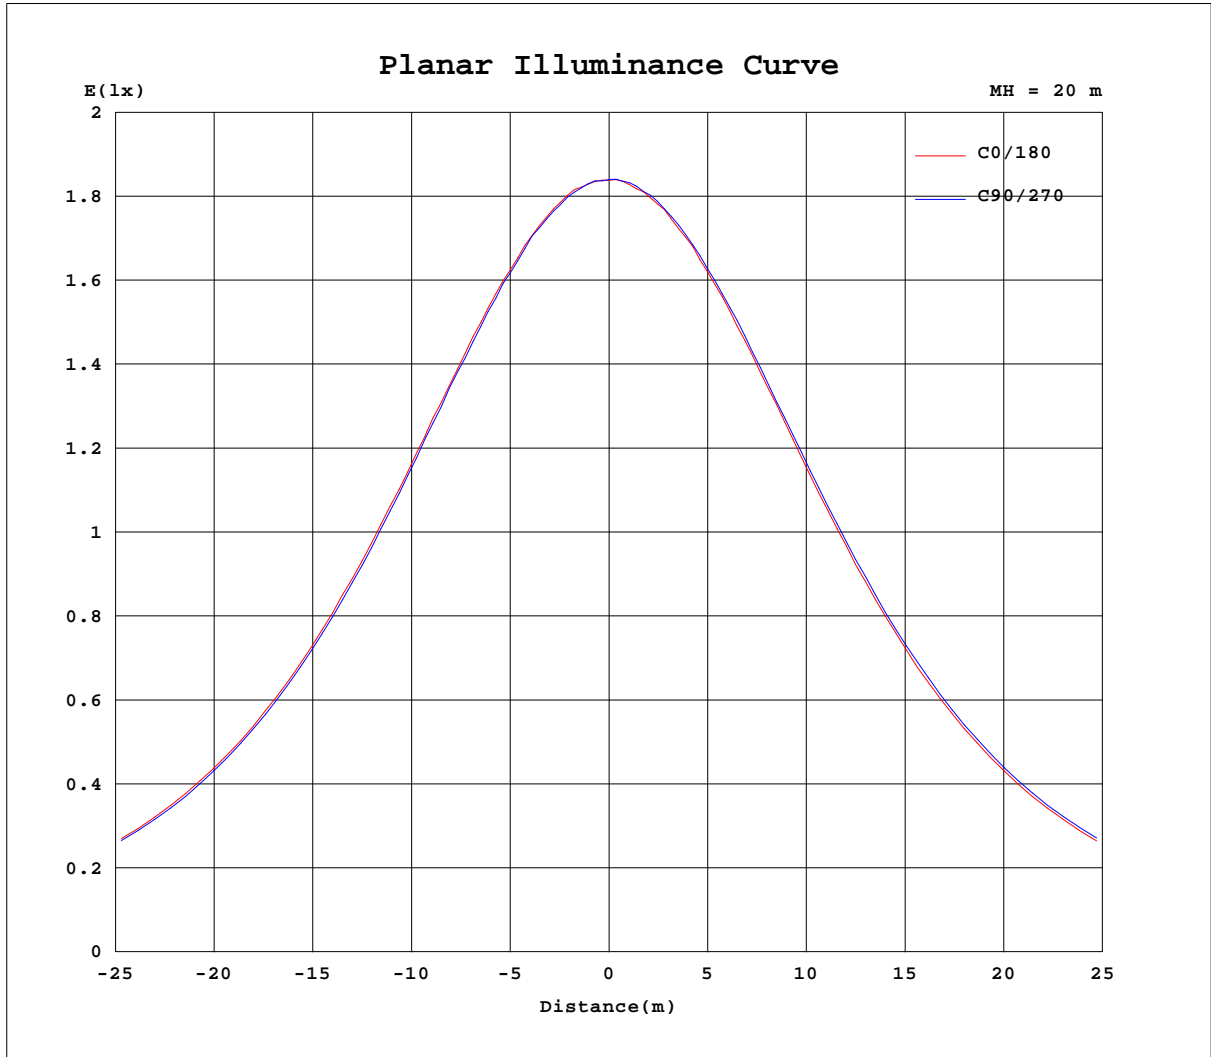

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2022-6-10

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity: 65.0%  
 Test Distance: 8.600m [K=0.9767]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.20V I:0.2027A P:24.017W PF:0.9855 Freq:59.98Hz Lamp Flux:2142.56x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: φ0.46	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	736	736	736	736	736	736	736	736	736	736	736	736						
5	735	732	732	732	732	734	733	734	735	733	733	735						
10	725	723	722	722	721	722	722	723	726	725	727	726						
15	710	708	707	707	704	707	707	707	710	710	711	710						
20	688	687	685	683	681	683	685	685	687	689	690	690						
25	660	658	658	656	652	654	656	658	661	661	662	663						
30	628	625	623	621	619	620	622	622	627	628	630	631						
35	588	586	584	581	579	581	583	584	589	589	592	592						
40	544	543	539	537	534	537	537	539	545	546	549	548						
45	497	494	491	489	486	487	490	490	497	498	501	500						
50	444	441	437	437	434	436	436	437	444	447	450	448						
55	389	387	383	382	378	380	381	382	389	392	395	393						
60	332	328	325	325	322	323	323	324	331	335	338	336						
65	272	270	266	267	263	264	264	264	273	276	280	278						
70	213	210	206	208	204	205	204	204	213	215	220	219						
75	154	151	148	147	145	147	146	144	152	154	160	157						
80	96.8	94.9	90.3	88.7	87.3	89.8	88.5	85.2	92.0	95.2	98.4	97.7						
85	45.0	42.7	35.9	33.4	32.3	36.4	36.2	31.5	35.2	38.9	40.3	41.0						
90	2.39	1.02	0.29	0.29	0.32	0.35	0.34	0.37	0.33	0.31	0.34	1.82						
95	0.34	0.42	0.36	0.43	0.40	0.45	0.50	0.48	0.56	0.42	0.58	0.55						
100	0.52	0.61	0.55	0.63	0.61	0.64	0.71	0.66	0.70	0.86	0.79	0.67						
105	0.72	0.81	0.76	0.83	0.82	0.85	0.92	0.88	0.89	0.80	0.88	0.86						
110	0.91	1.03	0.99	1.05	1.02	1.07	1.15	1.11	1.10	1.03	1.11	1.07						
115	1.11	1.23	1.20	1.26	1.24	1.26	1.37	1.32	1.31	1.22	1.32	1.29						
120	1.29	1.42	1.39	1.48	1.45	1.45	1.57	1.53	1.52	1.42	1.51	1.51						
125	1.48	1.61	1.57	1.66	1.63	1.63	1.73	1.70	1.68	1.60	1.68	1.67						
130	1.63	1.76	1.70	1.78	1.77	1.76	1.93	1.88	1.84	1.74	1.83	1.83						
135	1.79	1.92	1.89	1.96	1.90	1.91	2.08	2.06	2.03	1.91	2.00	1.99						
140	1.93	2.06	2.05	2.08	2.07	2.08	2.22	2.22	2.20	2.05	2.14	2.15						
145	2.09	2.17	2.19	2.23	2.21	2.23	2.35	2.38	2.32	2.18	2.27	2.27						
150	2.25	2.32	2.35	2.36	2.35	2.39	2.47	2.51	2.43	2.31	2.39	2.39						
155	2.40	2.42	2.48	2.52	2.49	2.52	2.61	2.63	2.59	2.48	2.54	2.51						
160	2.54	2.55	2.64	2.65	2.63	2.68	2.72	2.81	2.73	2.65	2.68	2.66						
165	2.68	2.62	2.81	2.78	2.76	2.76	2.88	2.93	2.86	2.77	2.81	2.77						
170	2.81	2.75	2.93	2.91	2.87	2.92	2.99	3.04	2.99	2.91	2.94	2.89						
175	2.93	2.92	3.02	2.98	3.03	3.02	3.11	3.15	3.07	2.98	3.07	3.00						
180	3.04	3.07	3.09	3.02	3.07	3.08	3.09	3.08	3.11	3.09	3.10	3.06						

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-10

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=0.9767]  
 Remarks: