
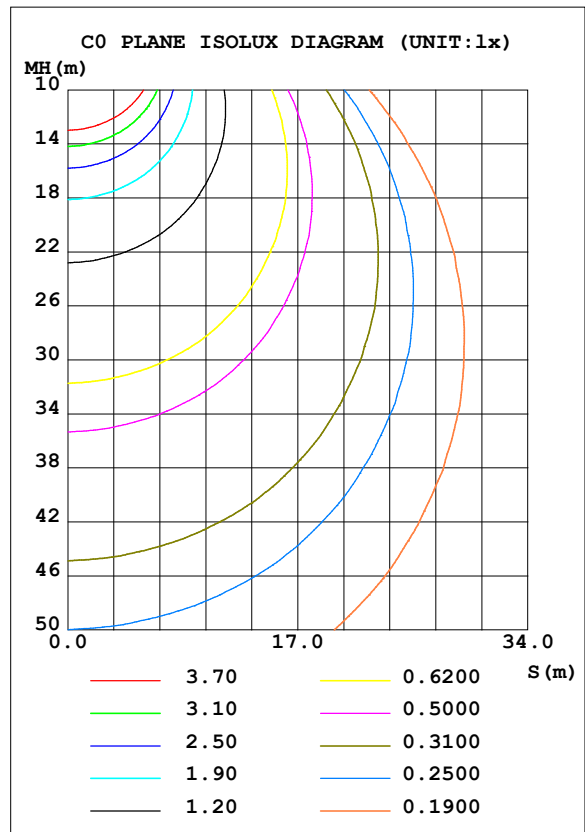


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.05V I:0.3917A P:42.881W PF:0.9110 Freq:0Hz Lamp Flux:2475.82x1 lm		
NAME: ADS lighting Corp	TYPE:	WEIGHT:
SPEC.:ASD-LFC-LF-20D42-AC-BK-4000K	DIM.:	SERIAL No.:
MFR.: ADS lighting Corp	SUR.:0.485*0.485	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 57.74 lm/W			
MODEIASD-LFC-LF-20D42-AC-BK		Imax (cd)	624.5	S/MH (C0/180)	1.31
NOMINAL POWER (W)	--	LOR (%)	100.0	S/MH (C90/270)	1.33
RATED VOLTAGE (V)	--	TOTAL FLUX (lm)	2475.8	<input type="checkbox"/> UP, DN (C0-180)	7.3, 42.7
NOMINAL FLUX (lm)	2475.82	CIE CLASS	SEMI-D.	<input type="checkbox"/> UP, DN (C180-360)	7.2, 42.8
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	14.5	CIBSE SHR NOM	1.50
TEST VOLTAGE (V)	--	<input type="checkbox"/> down (%)	85.5	CIBSE SHR MAX	1.50

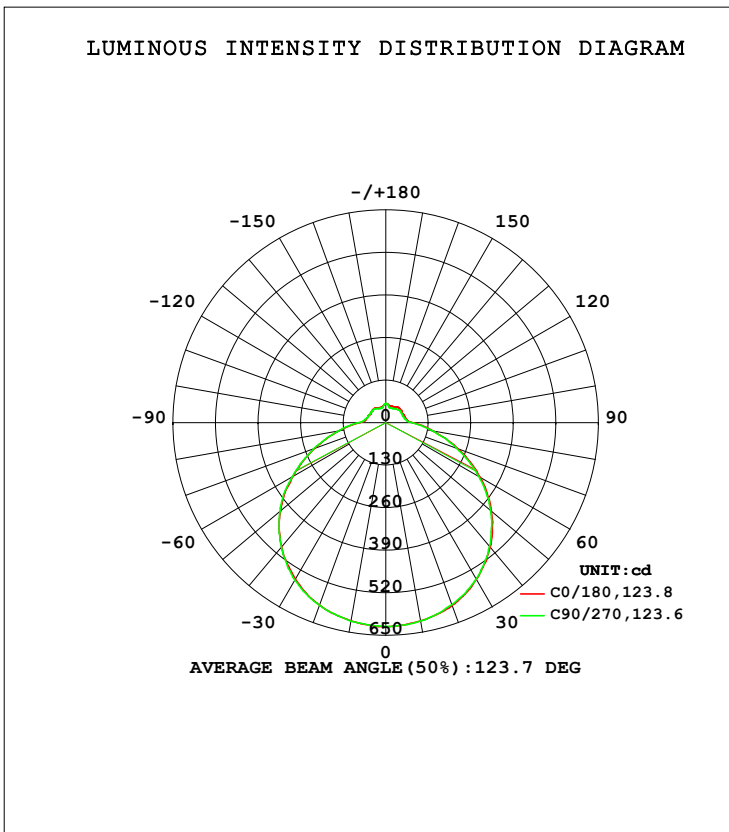

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: admin
 Test Date: 2022-03-16

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 8.780m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	□ zone	□ total	%lum,lamp
10	615.0	616.2	615.3	616.6	614.7	614.4	615.6	616.7	0- 10	59.05	59.05	2.39,2.39
20	594.3	593.4	591.7	592.3	593.1	592.9	593.5	593.6	10- 20	171.3	230.4	9.3,9.3
30	553.1	552.4	551.6	551.2	552.2	552.7	555.5	555.3	20- 30	265.4	495.7	20,20
40	496.9	495.3	493.3	492.5	494.9	495.4	496.0	497.1	30- 40	329.3	825.1	33.3,33.3
50	422.3	419.5	417.4	417.3	419.3	422.4	422.2	423.7	40- 50	354.8	1180	47.7,47.7
60	332.6	332.9	328.0	329.0	326.5	328.1	328.7	329.1	50- 60	337.1	1517	61.3,61.3
70	235.4	234.2	230.8	232.7	232.4	232.4	236.1	233.6	60- 70	278.5	1795	72.5,72.5
80	146.6	147.4	144.7	144.4	145.6	145.7	147.4	149.0	70- 80	198.7	1994	80.5,80.5
90	82.70	81.84	79.90	78.80	80.00	82.11	83.25	82.04	80- 90	121.9	2116	85.5,85.5
100	63.91	62.85	61.51	60.39	61.36	61.91	63.59	62.10	90-100	74.93	2191	88.5,88.5
110	61.22	58.10	56.92	55.04	57.93	56.14	57.48	56.78	100-110	63.05	2254	91,91
120	58.98	58.91	56.74	56.24	54.73	56.98	56.11	57.49	110-120	56.12	2310	93.3,93.3
130	60.58	53.62	57.06	51.90	55.99	52.36	55.48	53.67	120-130	49.95	2360	95.3,95.3
140	61.20	51.46	53.85	49.51	56.14	48.73	54.93	50.47	130-140	41.40	2401	97,97
150	56.29	51.85	50.41	48.87	52.36	48.51	50.16	50.88	140-150	32.27	2434	98.3,98.3
160	54.16	50.40	47.60	47.97	49.58	47.66	47.11	49.30	150-160	23.05	2457	99.2,99.2
170	55.21	53.53	51.59	53.73	51.92	51.94	50.06	53.31	160-170	13.87	2471	99.8,99.8
180	58.41	54.55	59.18	54.73	58.43	54.63	59.19	54.67	170-180	5.145	2476	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1001.9 lm

%lum = 40.5%

%lamp = 40.5%

Conical surface Flux(120deg): 1517 lm

%lum = 61.3%


%lamp = 61.3%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:admin
 Test Date:2022-03-16

□ Range: 0 - 180DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:8.780m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.05V I:0.3917A P:42.881W PF:0.9110 Freq:0Hz Lamp Flux:2475.82x1 lm		
NAME: ADS lighting Corp	TYPE:	WEIGHT:
SPEC.:ASD-LFC-LF-20D42-AC-BK-4000K	DIM.:	SERIAL No.:
MFR.: ADS lighting Corp	SUR.:0.485*0.485	Shielding Angle:

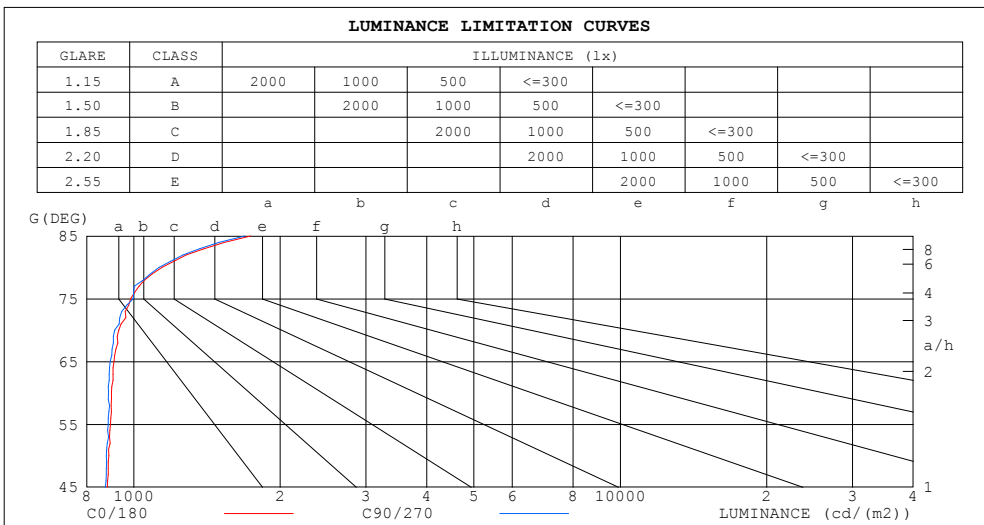

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	1738	1692
80	1142	1128
75	986	997
70	931	913
65	911	895
60	900	888
55	895	886
50	889	879
45	882	875


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:admin
 Test Date:2022-03-16

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:8.780m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.05V I:0.3917A P:42.881W PF:0.9110 Freq:0Hz Lamp Flux:2475.82x1 lm		
NAME: ADS lighting Corp	TYPE:	WEIGHT:
SPEC.:ASD-LFC-LF-20D42-AC-BK-4000K	DIM.:	SERIAL No.:
MFR.: ADS lighting Corp	SUR.:0.485*0.485	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.16	1.16	1.16	1.11	1.11	1.11	1.03	1.03	1.03	.96	.96	.96	.89	.89	.89	.85
1.0	.98	.93	.89	.95	.90	.86	.88	.84	.81	.81	.78	.76	.75	.73	.71	.68
2.0	.85	.77	.71	.82	.75	.69	.76	.70	.65	.70	.66	.62	.65	.61	.58	.55
3.0	.74	.65	.58	.71	.63	.57	.66	.59	.54	.61	.56	.51	.57	.52	.49	.46
4.0	.65	.56	.49	.63	.54	.48	.58	.51	.46	.54	.48	.43	.50	.45	.41	.39
5.0	.58	.49	.42	.56	.47	.41	.52	.45	.39	.48	.42	.37	.45	.40	.36	.33
6.0	.52	.43	.36	.50	.42	.35	.47	.39	.34	.44	.37	.32	.41	.35	.31	.29
7.0	.47	.38	.32	.45	.37	.31	.42	.35	.30	.40	.33	.29	.37	.32	.27	.25
8.0	.43	.34	.28	.41	.33	.27	.39	.32	.26	.36	.30	.25	.34	.29	.24	.22
9.0	.39	.31	.25	.38	.30	.25	.36	.29	.24	.33	.27	.23	.31	.26	.22	.20
10.0	.36	.28	.23	.35	.27	.22	.33	.26	.21	.31	.25	.21	.29	.24	.20	.18

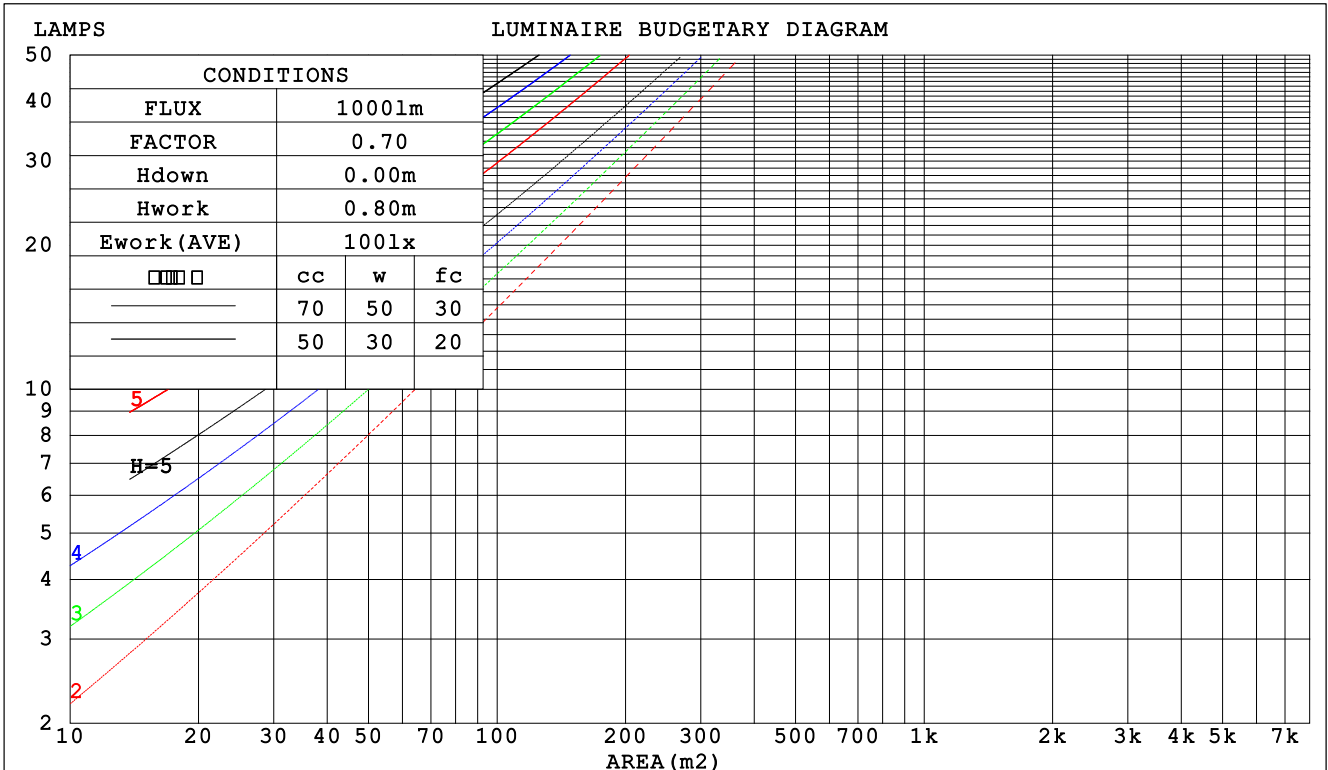

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:admin
 Test Date:2022-03-16

□ Range: 0 - 180DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:8.780m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:120.05V I:0.3917A P:42.881W PF:0.9110 Freq:0Hz Lamp Flux:2475.82x1 lm		
NAME: ADS lighting Corp	TYPE:	WEIGHT:
SPEC.:ASD-LFC-LF-20D42-AC-BK-4000K	DIM.:	SERIAL No.:
MFR.: ADS lighting Corp	SUR.:0.485*0.485	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients (WEC)			
0.0						
1.0	.350 .199 .063	.338 .193 .061	.317 .182 .058	.297 .171 .055	.278 .161 .052	
2.0	.313 .172 .053	.303 .167 .051	.283 .157 .049	.265 .149 .047	.248 .141 .044	
3.0	.283 .151 .045	.273 .146 .044	.256 .139 .042	.240 .131 .040	.224 .124 .038	
4.0	.257 .134 .039	.249 .130 .039	.233 .124 .037	.218 .117 .035	.204 .111 .034	
5.0	.236 .120 .035	.228 .117 .034	.214 .111 .033	.200 .106 .031	.188 .100 .030	
6.0	.217 .109 .031	.210 .106 .031	.197 .101 .029	.185 .096 .028	.173 .091 .027	
7.0	.201 .099 .028	.195 .097 .028	.183 .092 .027	.172 .088 .026	.161 .084 .025	
8.0	.187 .091 .026	.181 .089 .025	.170 .085 .024	.160 .081 .023	.150 .077 .022	
9.0	.175 .085 .024	.169 .083 .023	.159 .079 .022	.150 .075 .022	.141 .072 .021	
10.0	.164 .079 .022	.159 .077 .021	.150 .073 .021	.141 .070 .020	.133 .067 .019	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients (CCEC)			
0.0	.301 .301 .301	.257 .257 .257	.176 .176 .176	.101 .101 .101	.032 .032 .032	
1.0	.295 .267 .243	.252 .230 .209	.172 .158 .145	.099 .091 .084	.032 .029 .027	
2.0	.287 .244 .208	.246 .210 .180	.169 .145 .125	.097 .085 .073	.031 .027 .024	
3.0	.280 .227 .185	.240 .196 .161	.165 .136 .113	.095 .080 .066	.031 .026 .022	
4.0	.272 .215 .171	.234 .185 .148	.161 .129 .104	.093 .076 .062	.030 .025 .020	
5.0	.265 .205 .160	.227 .177 .139	.157 .124 .098	.091 .073 .058	.029 .024 .019	
6.0	.258 .197 .153	.221 .170 .133	.153 .119 .094	.089 .070 .056	.029 .023 .018	
7.0	.251 .190 .147	.216 .165 .128	.149 .115 .091	.087 .068 .054	.028 .022 .018	
8.0	.244 .184 .143	.210 .160 .125	.145 .112 .089	.085 .066 .053	.027 .022 .017	
9.0	.238 .180 .140	.205 .156 .122	.142 .110 .087	.083 .065 .052	.027 .021 .017	
10.0	.232 .175 .137	.200 .152 .120	.139 .107 .085	.081 .063 .051	.026 .021 .017	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:admin
 Test Date:2022-03-16

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:8.780m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.05V I:0.3917A P:42.881W PF:0.9110 Freq:0Hz Lamp Flux:2475.82x1 lm										
NAME: ADS lighting Corp					TYPE:			WEIGHT:		
SPEC.:ASD-LFC-LF-20D42-AC-BK-4000K					DIM.:			SERIAL No.:		
MFR.: ADS lighting Corp					SUR.:0.485*0.485			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	11.7	13.0	12.1	13.5	14.0	11.6	13.0	12.1	13.4	13.9
3H	13.5	14.8	14.0	15.3	15.8	13.4	14.7	13.9	15.2	15.7
4H	14.4	15.6	14.9	16.1	16.7	14.3	15.5	14.8	16.0	16.6
6H	15.3	16.4	15.8	16.9	17.5	15.2	16.3	15.7	16.9	17.4
8H	15.7	16.8	16.3	17.4	17.9	15.7	16.7	16.2	17.3	17.9
12H	16.2	17.3	16.8	17.8	18.4	16.1	17.2	16.7	17.7	18.3
4H 2H	12.3	13.5	12.8	14.0	14.6	12.3	13.5	12.8	14.0	14.5
3H	14.3	15.4	14.9	15.9	16.5	14.3	15.3	14.8	15.9	16.5
4H	15.4	16.4	16.0	16.9	17.6	15.3	16.3	15.9	16.9	17.5
6H	16.5	17.3	17.1	17.9	18.6	16.4	17.2	17.0	17.8	18.5
8H	17.0	17.8	17.6	18.4	19.1	16.9	17.7	17.6	18.3	19.0
12H	17.6	18.4	18.3	19.0	19.7	17.5	18.3	18.2	18.9	19.6
8H 4H	15.8	16.6	16.4	17.2	17.9	15.7	16.5	16.4	17.1	17.8
6H	17.1	17.8	17.7	18.4	19.1	17.0	17.7	17.7	18.3	19.1
8H	17.8	18.4	18.5	19.1	19.8	17.7	18.3	18.4	19.0	19.8
12H	18.6	19.1	19.3	19.8	20.6	18.5	19.1	19.2	19.7	20.5
12H 4H	15.8	16.6	16.5	17.2	17.9	15.8	16.5	16.4	17.2	17.9
6H	17.2	17.8	17.9	18.5	19.2	17.2	17.8	17.9	18.4	19.2
8H	18.1	18.6	18.7	19.3	20.0	18.0	18.5	18.7	19.2	20.0
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.1				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 2476 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 3.1)
 Area: 0.7389 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:admin
 Test Date:2022-03-16

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:8.780m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.05V I:0.3917A P:42.881W PF:0.9110 Freq:0Hz Lamp Flux:2475.82x1 lm		
NAME: ADS lighting Corp	TYPE:	WEIGHT:
SPEC.:ASD-LFC-LF-20D42-AC-BK-4000K	DIM.:	SERIAL No.:
MFR.: ADS lighting Corp	SUR.:0.485*0.485	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	51	39	31	49	38	31	48	37	31	24
0.80	60	48	40	59	47	40	56	46	39	31
1.00	68	56	48	66	55	47	63	55	46	38
1.25	75	63	55	73	62	55	69	60	53	44
1.50	80	69	61	78	67	60	73	64	58	48
2.00	87	77	70	85	75	68	79	72	66	55
2.50	92	83	75	89	80	74	83	76	70	59
3.00	95	87	80	92	85	78	86	80	75	62
4.00	100	93	87	96	90	85	89	84	80	67
5.00	103	97	91	99	93	89	92	87	84	70
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:admin
 Test Date:2022-03-16

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:8.780m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.05V I:0.3917A P:42.881W PF:0.9110 Freq:0Hz Lamp Flux:2475.82x1 lm		
NAME: ADS lighting Corp	TYPE:	WEIGHT:
SPEC.:ASD-LFC-LF-20D42-AC-BK-4000K	DIM.:	SERIAL No.:
MFR.: ADS lighting Corp	SUR.:0.485*0.485	Shielding Angle:

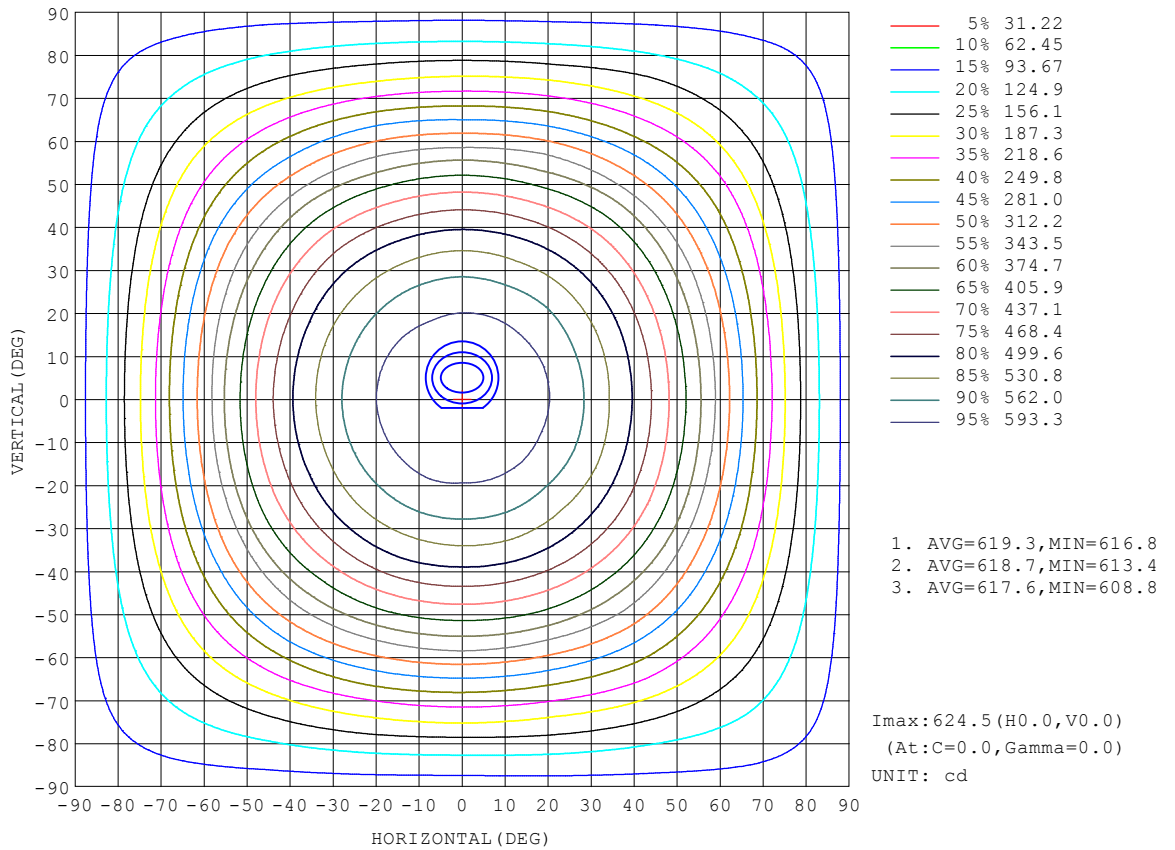


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:admin
 Test Date:2022-03-16

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:8.780m [K=1.0000]
 Remarks:

AAI Figure

Test:U:120.05V I:0.3917A P:42.881W PF:0.9110 Freq:0Hz Lamp Flux:2475.82x1 lm		
NAME: ADS lighting Corp	TYPE:	WEIGHT:
SPEC.:ASD-LFC-LF-20D42-AC-BK-4000K	DIM.:	SERIAL No.:
MFR.: ADS lighting Corp	SUR.:0.485*0.485	Shielding Angle:

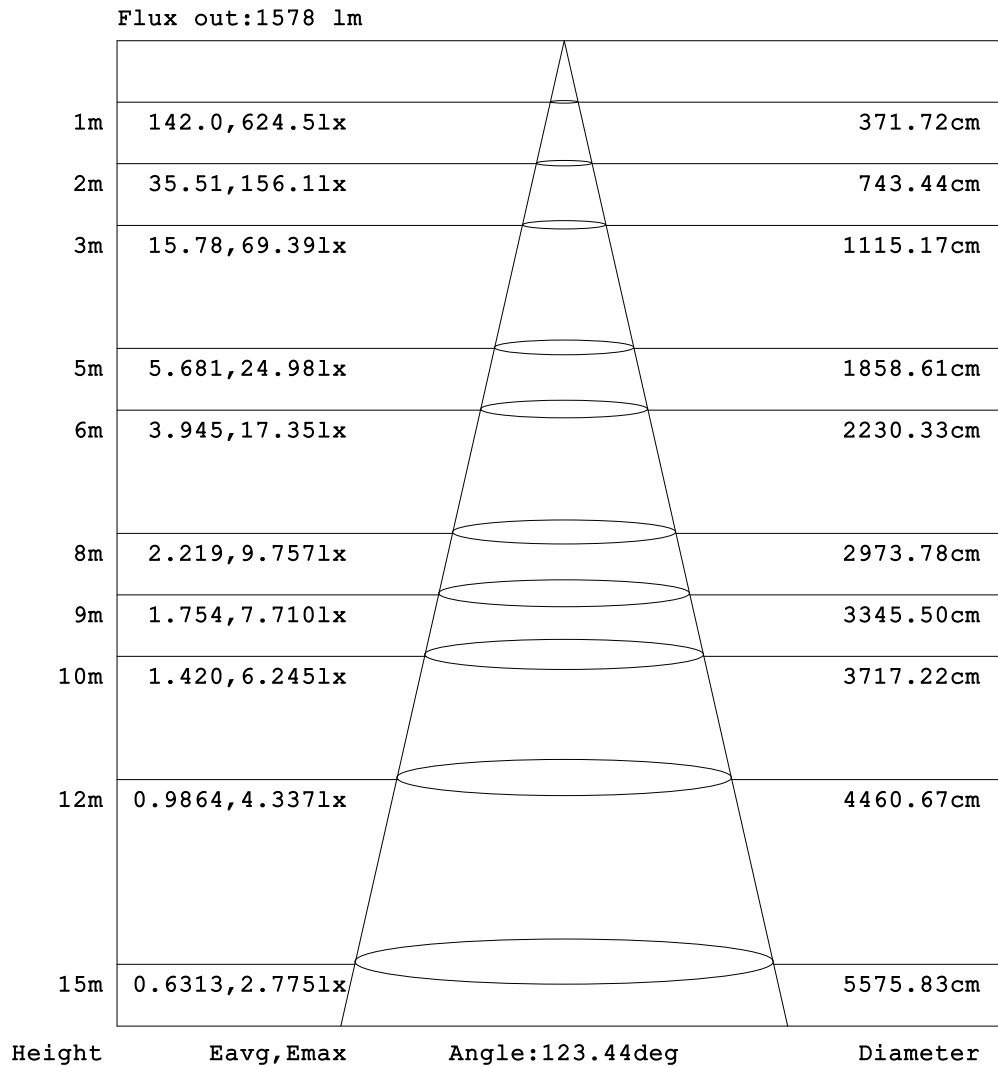


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:admin
 Test Date:2022-03-16

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:8.780m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.05V I:0.3917A P:42.881W PF:0.9110 Freq:0Hz Lamp Flux:2475.82x1 lm		
NAME: ADS lighting Corp	TYPE:	WEIGHT:
SPEC.:ASD-LFC-LF-20D42-AC-BK-4000K	DIM.:	SERIAL No.:
MFR.: ADS lighting Corp	SUR.:0.485*0.485	Shielding Angle:

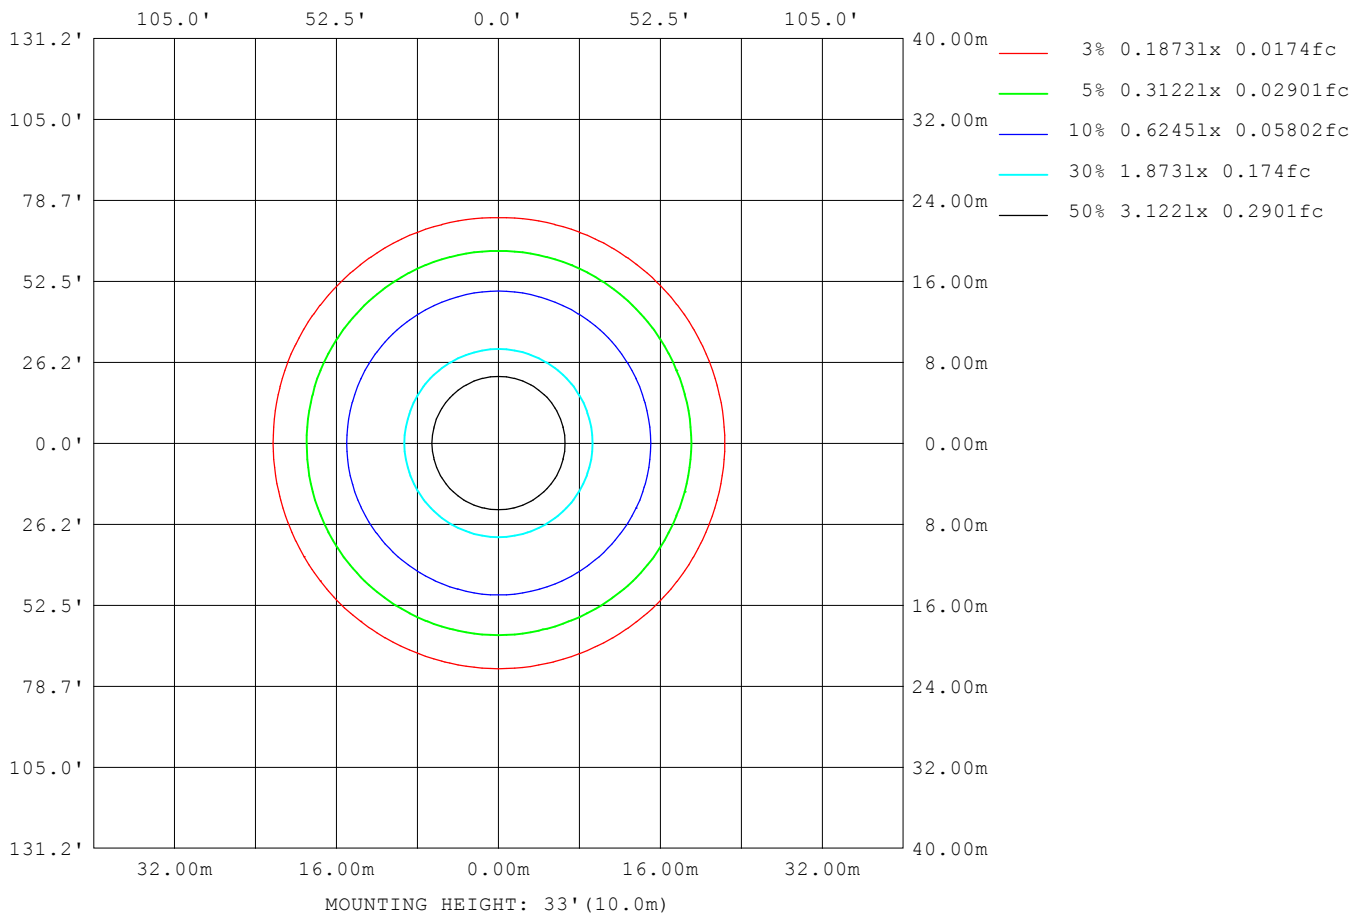

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:admin
 Test Date:2022-03-16

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:8.780m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:120.05V I:0.3917A P:42.881W PF:0.9110 Freq:0Hz Lamp Flux:2475.82x1 lm		
NAME: ADS lighting Corp	TYPE:	WEIGHT:
SPEC.:ASD-LFC-LF-20D42-AC-BK-4000K	DIM.:	SERIAL No.:
MFR.: ADS lighting Corp	SUR.:0.485*0.485	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	904
L_0~180 (75) av	977
L_0~180 (85) av	1721
L_90~270 (65) av	897
L_90~270 (75) av	990
L_90~270 (85) av	1723
L_45 (65) av	901
L_45 (75) av	982
L_45 (85) av	1721

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:admin
 Test Date:2022-03-16

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:8.780m [K=1.0000]
 Remarks:

Planar Illuminance Curve

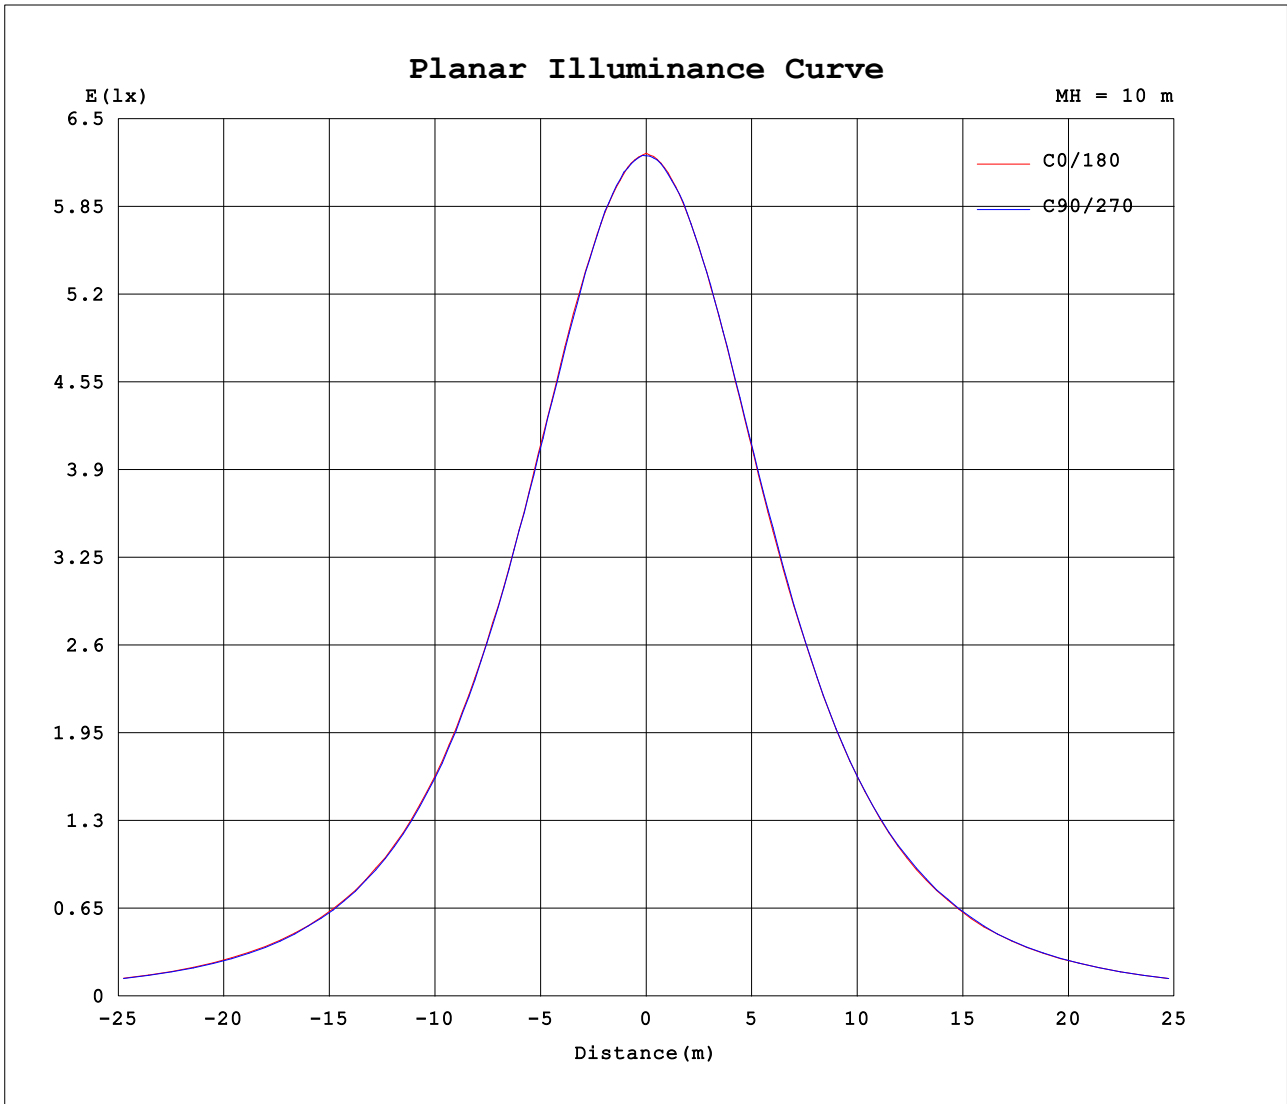

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:admin
 Test Date:2022-03-16

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:8.780m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.05V I:0.3917A P:42.881W PF:0.9110 Freq:0Hz Lamp Flux:2475.82x1 lm		
NAME: ADS lighting Corp	TYPE:	WEIGHT:
SPEC.:ASD-LFC-LF-20D42-AC-BK-4000K	DIM.:	SERIAL No.:
MFR.: ADS lighting Corp	SUR.:0.485*0.485	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	624	623	622	622	623	623	621	622	624	623	622	622	623	623	621	622			
5	621	621	621	620	620	620	619	620	621	620	620	620	620	620	620	620			
10	615	616	616	615	615	615	617	616	615	615	614	616	616	615	617	615			
15	606	606	607	606	605	607	606	607	606	605	607	605	606	607	607	607			
20	594	593	593	592	592	593	592	592	593	593	593	592	593	594	594	594			
25	576	576	574	575	575	575	574	574	575	574	574	574	577	576	577	577			
30	553	555	552	552	552	551	551	551	552	552	553	553	556	553	555	555			
35	526	528	526	525	525	525	524	525	526	525	525	527	528	527	529	527			
40	497	496	495	495	493	494	492	494	495	495	495	495	496	496	497	498			
45	461	461	460	459	457	459	458	459	461	459	461	460	461	461	462	461			
50	422	422	420	419	417	418	417	421	419	422	422	421	422	420	424	422			
55	379	380	378	376	375	375	376	378	378	377	378	377	381	377	382	379			
60	333	329	333	328	328	327	329	327	326	331	328	331	329	333	329	331			
65	284	281	282	278	279	279	280	277	280	282	280	285	281	284	283	282			
70	235	232	234	231	231	230	233	231	232	233	232	236	236	234	234	235			
75	189	190	189	187	191	188	186	186	185	188	187	186	188	189	189	188			
80	147	149	147	148	145	147	144	145	146	144	146	147	147	148	149	148			
85	112	113	111	111	109	110	108	110	110	110	112	112	113	112	112	111			
90	82.7	83.0	81.8	81.3	79.9	79.6	78.8	79.7	80.0	80.4	82.1	82.4	83.2	82.1	82.0	81.5			
95	68.2	68.1	67.5	67.4	66.6	66.1	64.9	65.7	65.5	65.9	67.1	67.8	68.5	68.1	67.6	67.2			
100	63.9	64.1	62.8	62.5	61.5	61.0	60.4	61.3	61.4	61.1	61.9	62.5	63.6	62.9	62.1	62.6			
105	62.2	61.6	60.0	59.7	58.8	58.2	57.7	58.8	58.9	58.7	57.9	58.7	59.9	59.9	58.6	60.7			
110	61.2	59.3	58.1	57.7	56.9	56.5	55.0	56.6	57.9	56.4	56.1	56.5	57.5	57.3	56.8	59.0			
115	60.2	56.9	58.6	57.4	56.5	55.9	55.6	53.8	56.1	53.7	56.4	56.1	56.4	56.2	56.9	56.5			
120	59.0	56.1	58.9	57.5	56.7	55.9	56.2	53.1	54.7	52.3	57.0	56.1	56.1	56.0	57.5	54.9			
125	59.9	55.8	57.8	57.6	57.1	54.9	55.3	52.7	55.4	51.8	56.2	55.7	55.8	55.8	57.2	54.1			
130	60.6	55.8	53.6	56.6	57.1	54.0	51.9	52.6	56.0	51.5	52.4	55.1	55.5	55.2	53.7	53.7			
135	61.1	55.4	51.2	54.4	56.0	51.6	50.1	52.3	56.3	50.5	49.3	53.8	55.2	53.9	51.3	53.1			
140	61.2	54.4	51.5	50.6	53.9	48.8	49.5	51.2	56.1	49.6	48.7	50.4	54.9	51.0	50.5	51.2			
145	59.1	53.7	51.7	50.8	52.3	48.6	48.4	51.2	54.9	49.5	48.9	49.0	52.8	48.9	49.6	51.2			
150	56.3	53.2	51.8	50.7	50.4	48.8	48.9	50.3	52.4	48.7	48.5	49.0	50.2	48.9	50.9	50.9			
155	54.7	53.4	52.0	49.0	48.4	48.8	48.8	49.1	50.3	47.4	48.4	48.7	47.8	47.7	49.9	51.2			
160	54.2	53.9	50.4	46.6	47.6	48.7	48.0	47.8	49.6	46.5	47.7	48.1	47.1	47.0	49.3	51.0			
165	53.6	52.1	48.8	45.6	47.5	48.0	47.4	47.8	49.1	45.9	46.4	47.9	47.3	46.1	48.4	50.3			
170	55.2	55.0	53.5	49.0	51.6	53.6	53.7	50.8	51.9	49.4	51.9	51.9	50.1	49.8	53.3	54.2			
175	57.5	56.9	52.7	52.6	56.7	56.8	52.9	53.3	56.1	52.2	52.4	56.4	55.6	52.3	53.5	57.2			
180	58.4	55.2	54.5	55.9	59.2	55.5	54.7	55.8	58.4	55.3	54.6	55.9	59.2	55.5	54.7	55.8			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:admin
 Test Date:2022-03-16

□ Range: 0 - 180DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:8.780m [K=1.0000]
 Remarks: