

ASD[®] LED WALL SCONCE

► **DESIGN & OPTIONS** - LED WALL SCONCE has a modern, multipurpose design and a stylish look with efficient lighting. It features smooth dimming capabilities ranging from 100% to 10% with modern LED dimmers, and the 120° beam angle provides effective and uniform illumination. This fixture includes a color adjustable option, allowing you to choose either 3000K, 4000K or 5000K with a simple switch and without removing the fixture from the surface. It comes with either a BRUSHED NICKEL or BRONZE finish.

► **INSTALLATION** - Installation is quick and easy: just attach the wall plate to the outlet box with screws, connect the wires, and fasten the fixture to the wall plate. Screws, wire nuts and all necessary installation accessories are provided. Refer to install instructions for detailed steps.

► **APPLICATION** - This LED WALL SCONCE is an ideal maintenance-free solution for residential and commercial installations. It creates a cozy ambience that is great for your family room, bedroom, hallway, corridor, or any other common area in your living space. It is also suitable for Damp locations, making it perfect for kitchens and garages as well. It could also be used as a complimentary light to an already existing ceiling light.

► **ENERGY SAVINGS & EFFICIENCY** - Replacing an incandescent fixture with LED WALL SCONCE can save you 8 times as much on your current energy bill. With a lifespan of 50,000 hours, these fixtures are made to last decades under normal operation! This fixture will save you a significant amount of money in its lifetime.

► **CERTIFICATION & WARRANTY** - Buy with confidence: ASD provides a 5-year warranty along with ETL and ENERGY STAR certifications to guarantee top quality products and safety!

Top US certifications allow participation in rebates; please check the rebate programs available in your state.

Catalog number	
Notes	
Type	



PRODUCT LEGEND:

Family	Modification	Dimmable	Watts	CCT	Finish
ASD-LWS	11	X	XX	XX	XX
LED Wall Sconce		D = Dimmable	15 = 15 W	CC = 3,000/4,000/5,000 K	NK = Brushed Nickel BZ = Oil Rubbed Bronze

LED WALL SCONCE:

Model	Watts	Voltage	Dimmable	CCT	Lumens	Dimensions (LxWxH)	UPC
ASD-LWS-11-D15CC-NK	15 W	120 V	TRIAC	3,000/4,000/5,000 K	950 lm	7" x 3" x 10"	810050732260
ASD-LWS-11-D15CC-BZ	15 W	120 V	TRIAC	3,000/4,000/5,000 K	950 lm	7" x 3" x 10"	810050732277

ORDERING INFORMATION:

Model	Pcs in middle box	Middle box Size	Middle box Weight	GTIN 14 for Middle box	Pcs. per Carton	Carton Size	Carton Weight	GTIN 14 for Carton
ASD-LWS-11-D15CC-NK	2	12.2" x 9.4" x 9.8"	5.6 lb	10810050732267	4	12.8" x 19.7" x 10.4"	12.7 lb	20810050732264
ASD-LWS-11-D15CC-BZ	2	12.2" x 9.4" x 9.8"	5.6 lb	10810050732274	4	12.8" x 19.7" x 10.4"	12.7 lb	20810050732271

For most up-to-date spec sheets please refer to asd-lighting.com

ASD LIGHTING CORP

E-mail: orders@asd-lighting.com | Web site: www.asd-lighting.com





LED WALL SCONCE

PRODUCT SPECIFICATIONS:

Construction & Materials		Electrical System	
Housing	Steel, White Acrylic	Input Voltage	120 V
Lens	PMMA	Max input current	0.19 A
Finish Color	Brushed Nickel, Oil Rubbed Bronze	Inrush current (Action time)	0.125 A (0.1 S)
Weight	2.2 lb (1 kg)	AC input range	min 108 V max 132 V
Environmental System		Dimming Range	
Work Environment	Suitable for Damp Locations	Off State Power	0 W
Operating Temperature	-4°F to 113°F (-20°C to 45°C)	Power Consumption	15 W
L-70 Life	> 50,000 hrs	Power Factor	> 0.9
Optical System		Dimming compatible controls	
Luminous Flux	950 lm	Brand	Lutron
Color Temperature	3,000/4,000/5,000 K	Models	TGCL-153P CTCL-153P P-PKG1W PD-6WCL
CRI	> 80		MACL-153MLH DVCL-153PR STCL-153PH
			Leviton DSL06 RNL06
Regular and Voluntary Certifications			
5-year limited warranty	cETLus certified 4001256	Energy Star listed	

INSTALLATION GUIDE

IMPORTANT SAFETY INFORMATION:

Please read all the instructions below before installation.

- ▶ Make sure that the supply voltage corresponds to the rated product voltage.
- ▶ The product must be installed by a qualified electrician in accordance with the National Electrical Code and corresponding local codes.
- ▶ If the product is damaged, do not use it.

⚠ WARNING

RISK OF PERSONAL INJURY – READ and follow all WARNINGS and installation instructions.

Keep or give to the owner for future reference.




Risk of cuts: Wear gloves to prevent cuts or abrasions when removing from carton, handling, installing, and maintaining this product.

Risk of electric shock: This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


Risk of Fire: Minimum 194°F supply conductors. Consult a qualified electrician to ensure correct branch circuit conductor.

ASD® assumes no responsibility for claims arising out of improper or careless Installation or handling of this product.

PACKAGE CONTENTS:


Description	Q-ty	A	C
LED Wall Sconce	1		
Wire Nut (A)	3		
Screws (B)	2		
Cross bar (C)	1		
Box	1		
Cut sheet	2		

ELECTRICAL SCHEMATIC DIAGRAM:

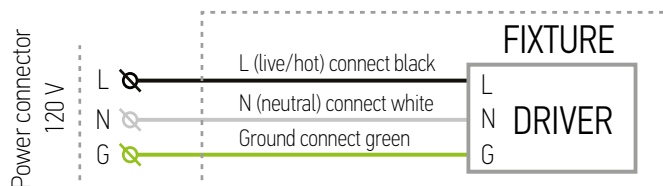

INSTALLATION STEPS:

1. Pull the supply wires out and attach the Crossbar to the Outlet Box with mounting screws. Thread the fixture screws into the appropriate holes of the Crossbar.
2. Connect the wires: Black to Black, White to White, Green to Green. Secure connection with Wire nuts. Carefully tuck all wiring into the Outlet box.
3. Put the fixture back plate to mounting surface allowing for mounting screws to protrude through key slots and tighten securely. Choose needed color temperature by adjusting the switch. Place the acrylic lens.

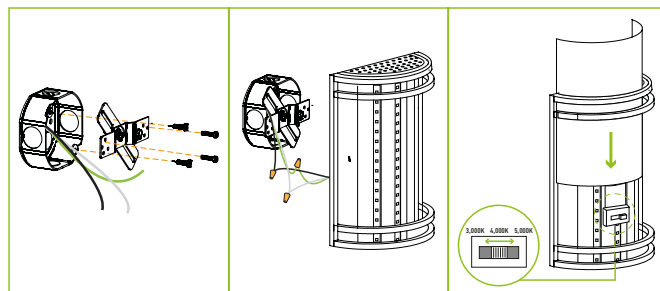

For most up-to-date spec sheets please refer to asd-lighting.com