
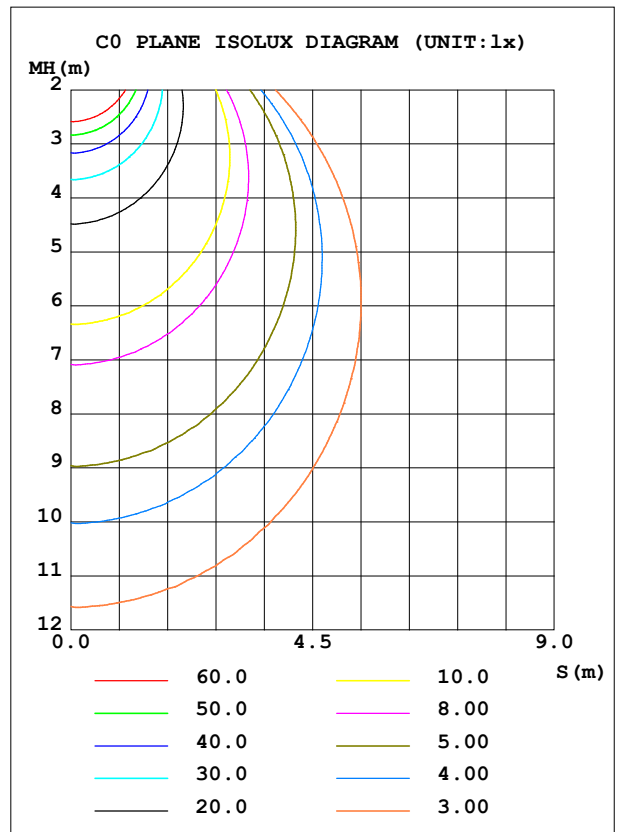


LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 86.01 lm/W
MODEL	SD-LRKS-6D12AC-XX(4000K)	Imax (cd)	403.8	S/MH(C0/180)		1.23
NOMINAL POWER(W)	12	LOR(%)	100.0	S/MH(C90/270)		1.21
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	988.28	<input type="checkbox"/> UP, DN(C0-180)		0.2,50.2
NOMINAL FLUX(lm)	988.275	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN(C180-360)		0.2,49.4
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.4	CIBSE SHR NOM		1.25
TEST VOLTAGE(V)	120.0	<input type="checkbox"/> down (%)	99.6	CIBSE SHR MAX		1.35

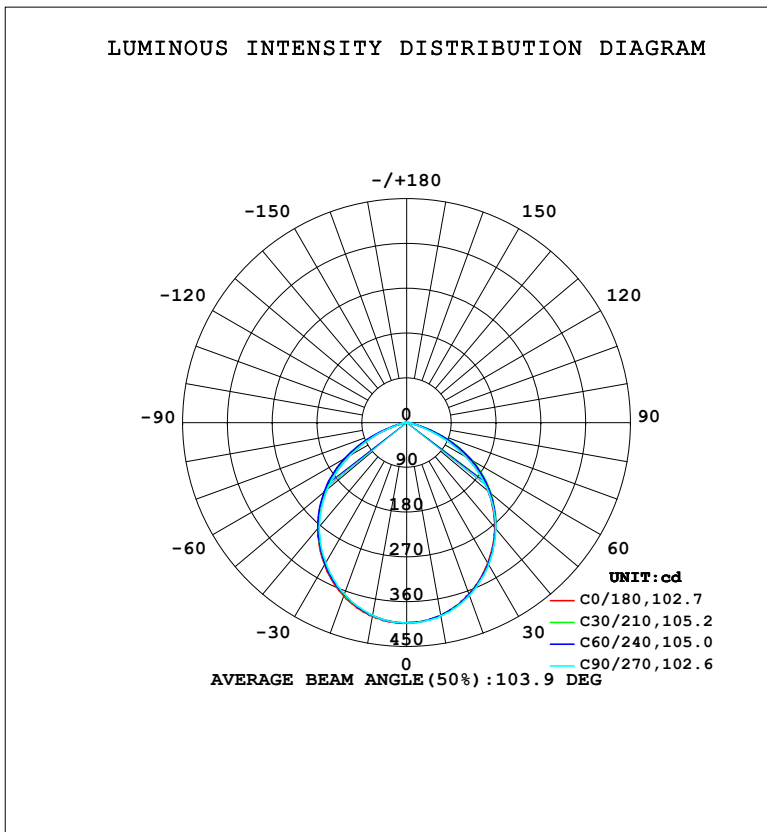

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.000m [K=1.1063]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


◻	C0	C45	C90	C135	C180	C225	C270	C315	◻	◻ zone	◻ total	%lum,lamp
10	394.0	393.4	394.1	394.8	394.7	393.3	393.1	392.2	0- 10	38.01	38.01	3.85,3.85
20	366.8	367.6	369.0	370.0	370.5	367.9	366.3	365.8	10- 20	107.9	146.0	14.8,14.8
30	325.5	328.0	329.8	329.7	330.3	328.2	325.3	325.5	20- 30	161.0	306.9	31.1,31.1
40	275.1	278.5	278.7	279.0	277.4	276.9	273.2	276.3	30- 40	189.9	496.8	50.3,50.3
50	213.6	220.5	214.4	218.0	209.4	215.5	208.5	217.8	40- 50	190.9	687.7	69.6,69.6
60	138.9	151.7	137.2	146.3	131.8	143.1	130.8	148.9	50- 60	161.2	848.9	85.9,85.9
70	55.82	68.55	55.04	62.59	48.93	59.44	49.33	65.96	60- 70	100.5	949.4	96.1,96.1
80	10.15	10.87	10.22	9.979	8.900	9.525	9.094	10.40	70- 80	29.91	979.3	99.1,99.1
90	0.1657	0.0344	0	0.0231	0	0.0089	0.0001	0.0177	80- 90	4.737	984.1	99.6,99.6
100	0.1323	0.1735	0.1490	0.1515	0.1383	0.1350	0.1211	0.1404	90-100	0.0682	984.1	99.6,99.6
110	0.3865	0.4214	0.3918	0.3855	0.3704	0.3581	0.3913	0.3745	100-110	0.2749	984.4	99.6,99.6
120	0.6737	0.6886	0.6510	0.6333	0.6247	0.6197	0.7001	0.6334	110-120	0.5110	984.9	99.7,99.7
130	0.9223	0.9446	0.9267	0.8812	0.8732	0.8456	0.9593	0.8594	120-130	0.6936	985.6	99.7,99.7
140	1.127	1.154	1.131	1.063	1.072	1.044	1.130	1.055	130-140	0.7713	986.4	99.8,99.8
150	1.243	1.292	1.252	1.214	1.227	1.201	1.268	1.217	140-150	0.7303	987.1	99.9,99.9
160	1.381	1.396	1.417	1.363	1.426	1.380	1.417	1.355	150-160	0.6050	987.7	99.9,99.9
170	1.491	1.501	1.588	1.539	1.602	1.548	1.555	1.517	160-170	0.4117	988.1	100,100
180	1.674	1.672	1.638	1.650	1.685	1.666	1.588	1.644	170-180	0.1516	988.3	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

◻ Range: 0 - 180DEG
 ◻ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.1063]
 Remarks:

LUMINANCE LIMITATION CURVES

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

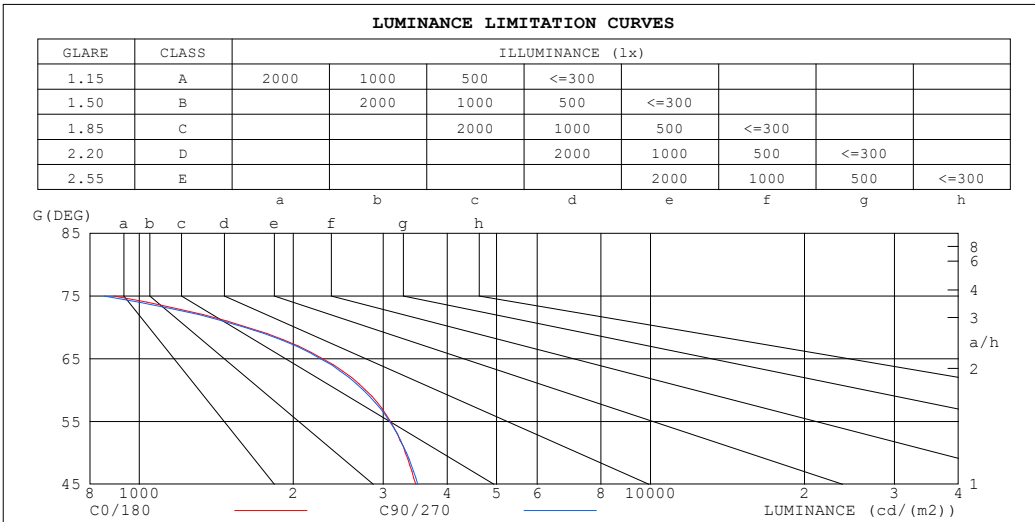

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	523	532
80	583	588
75	892	853
70	1629	1609
65	2285	2262
60	2771	2743
55	3101	3086
50	3315	3334
45	3473	3504


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.000m [K=1.1063]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.06	1.02	.99	1.04	1.00	.97	.99	.97	.94	.95	.93	.91	.92	.90	.88	.86
2.0	.94	.87	.82	.92	.86	.81	.88	.83	.79	.85	.81	.77	.82	.79	.76	.74
3.0	.83	.75	.69	.81	.74	.69	.78	.72	.67	.76	.70	.66	.73	.69	.65	.63
4.0	.74	.66	.59	.72	.65	.59	.70	.63	.58	.68	.62	.57	.65	.61	.56	.54
5.0	.66	.58	.51	.65	.57	.51	.63	.56	.51	.61	.55	.50	.59	.54	.49	.47
6.0	.60	.51	.45	.59	.51	.45	.57	.50	.44	.55	.49	.44	.54	.48	.44	.42
7.0	.54	.46	.40	.53	.46	.40	.52	.45	.40	.50	.44	.39	.49	.43	.39	.37
8.0	.50	.41	.36	.49	.41	.36	.48	.40	.35	.46	.40	.35	.45	.39	.35	.33
9.0	.46	.38	.32	.45	.37	.32	.44	.37	.32	.43	.36	.32	.42	.36	.32	.30
10.0	.42	.34	.29	.42	.34	.29	.41	.34	.29	.40	.33	.29	.39	.33	.29	.27

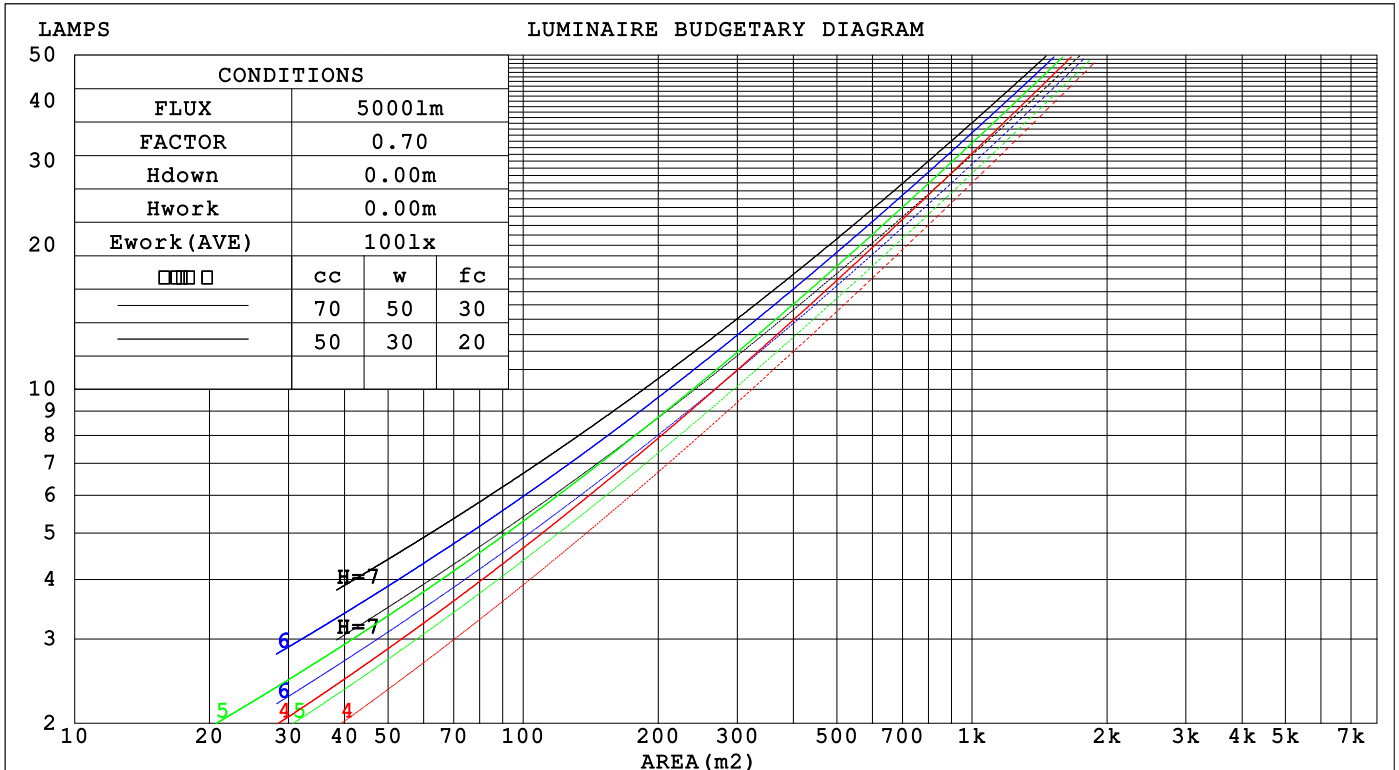

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

□ Range: 0 - 180DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.1063]
 Remarks:

WEC AND CCEC

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.269	.153	.048	.262	.149	.047	.248	.142	.045	.236	.136	.044	.225	.130	.042	
2.0	.261	.143	.044	.255	.140	.043	.243	.135	.042	.233	.131	.041	.223	.126	.040	
3.0	.247	.131	.039	.242	.129	.039	.231	.125	.038	.222	.122	.037	.213	.118	.036	
4.0	.232	.120	.035	.227	.119	.035	.218	.115	.034	.209	.112	.034	.201	.109	.033	
5.0	.217	.110	.032	.212	.109	.032	.204	.106	.031	.197	.104	.031	.190	.101	.030	
6.0	.203	.102	.029	.199	.100	.029	.192	.098	.029	.185	.096	.028	.179	.094	.028	
7.0	.190	.094	.027	.186	.093	.026	.180	.091	.026	.174	.089	.026	.168	.087	.026	
8.0	.178	.087	.024	.175	.086	.024	.169	.085	.024	.164	.083	.024	.159	.082	.024	
9.0	.168	.081	.023	.165	.080	.023	.160	.079	.022	.155	.078	.022	.150	.076	.022	
10.0	.158	.076	.021	.156	.075	.021	.151	.074	.021	.147	.073	.021	.142	.072	.021	

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.194	.194	.194	.166	.166	.166	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.181	.160	.141	.155	.137	.121	.106	.094	.084	.061	.055	.049	.020	.018	.016	
2.0	.171	.135	.105	.147	.117	.091	.101	.081	.063	.058	.047	.037	.019	.015	.012	
3.0	.163	.117	.081	.140	.101	.070	.096	.070	.049	.056	.041	.029	.018	.013	.009	
4.0	.156	.104	.064	.134	.090	.056	.092	.063	.039	.053	.037	.023	.017	.012	.008	
5.0	.149	.093	.053	.128	.081	.046	.088	.056	.032	.051	.033	.019	.016	.011	.006	
6.0	.142	.085	.044	.122	.074	.038	.084	.051	.027	.049	.030	.016	.016	.010	.005	
7.0	.135	.078	.038	.116	.068	.033	.080	.047	.023	.047	.028	.014	.015	.009	.005	
8.0	.129	.072	.033	.111	.063	.029	.077	.044	.020	.045	.026	.012	.014	.009	.004	
9.0	.124	.067	.029	.106	.058	.026	.074	.041	.018	.043	.024	.011	.014	.008	.004	
10.0	.118	.063	.026	.102	.055	.023	.071	.039	.016	.041	.023	.010	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.1063]
 Remarks:

UGR(Unified Glare Rating) Table

NAME: LED DOWNLIGHT		TYPE:					WEIGHT:				
SPEC.:		DIM.:					SERIAL No.:				
MFR.: ASD LIGHTING CORP		SUR.: 0.1*0.1					Shielding Angle:				
ceiling/cavity		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H		16.9	18.4	17.2	18.6	18.8	16.9	18.3	17.1	18.5	18.7
	3H	17.7	19.0	18.0	19.3	19.5	17.6	18.9	17.9	19.2	19.4
	4H	17.8	19.0	18.1	19.3	19.5	17.7	18.9	18.0	19.2	19.5
	6H	17.7	18.9	18.1	19.2	19.5	17.7	18.8	18.0	19.1	19.4
	8H	17.7	18.8	18.0	19.1	19.4	17.6	18.7	18.0	19.0	19.3
	12H	17.7	18.7	18.0	19.0	19.4	17.6	18.7	17.9	19.0	19.3
	4H 2H	17.4	18.7	17.7	18.9	19.2	17.4	18.6	17.7	18.9	19.1
	3H	18.3	19.4	18.7	19.7	20.0	18.3	19.3	18.6	19.6	19.9
	4H	18.5	19.4	18.8	19.8	20.1	18.4	19.4	18.8	19.7	20.0
	6H	18.4	19.3	18.8	19.7	20.0	18.4	19.2	18.8	19.6	19.9
	8H	18.4	19.2	18.8	19.6	20.0	18.3	19.1	18.8	19.5	19.9
	12H	18.4	19.1	18.8	19.5	19.9	18.3	19.1	18.8	19.4	19.9
	8H 4H	18.5	19.3	18.9	19.6	20.0	18.4	19.2	18.8	19.6	19.9
	6H	18.5	19.1	18.9	19.6	20.0	18.4	19.1	18.9	19.5	19.9
	8H	18.5	19.1	19.0	19.5	20.0	18.4	19.0	18.9	19.4	19.9
	12H	18.5	19.0	19.0	19.4	19.9	18.4	18.9	18.9	19.4	19.8
	12H 4H	18.4	19.2	18.9	19.5	20.0	18.4	19.1	18.8	19.5	19.9
	6H	18.5	19.0	18.9	19.5	19.9	18.4	19.0	18.8	19.4	19.8
	8H	18.5	19.0	19.0	19.4	19.9	18.4	18.9	18.9	19.3	19.8
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H		+ 0.3 / - 0.4					+ 0.3 / - 0.4				
1.5H		+ 0.4 / - 0.6					+ 0.3 / - 0.6				
2.0H		+ 0.5 / - 0.7					+ 0.5 / - 0.7				

CIE Pub.117, 988.3 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.0)
 Area: 0.1 m2

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.1063]
 Remarks:

UTILIZATION FACTORS TABLE

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	60	49	43	60	49	42	58	48	42	36
0.80	71	60	53	70	59	53	68	59	52	46
1.00	79	69	62	78	69	62	76	70	62	55
1.25	87	77	70	85	76	70	82	75	69	62
1.50	91	82	76	90	82	76	87	80	75	67
2.00	98	90	85	96	89	84	93	87	82	75
2.50	101	94	89	99	93	88	96	90	86	78
3.00	104	98	94	102	97	92	98	94	90	82
4.00	108	103	99	106	101	98	102	98	95	86
5.00	110	106	102	108	104	101	103	100	98	89
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.1063]
 Remarks:

ISOCANDELA DIAGRAM

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

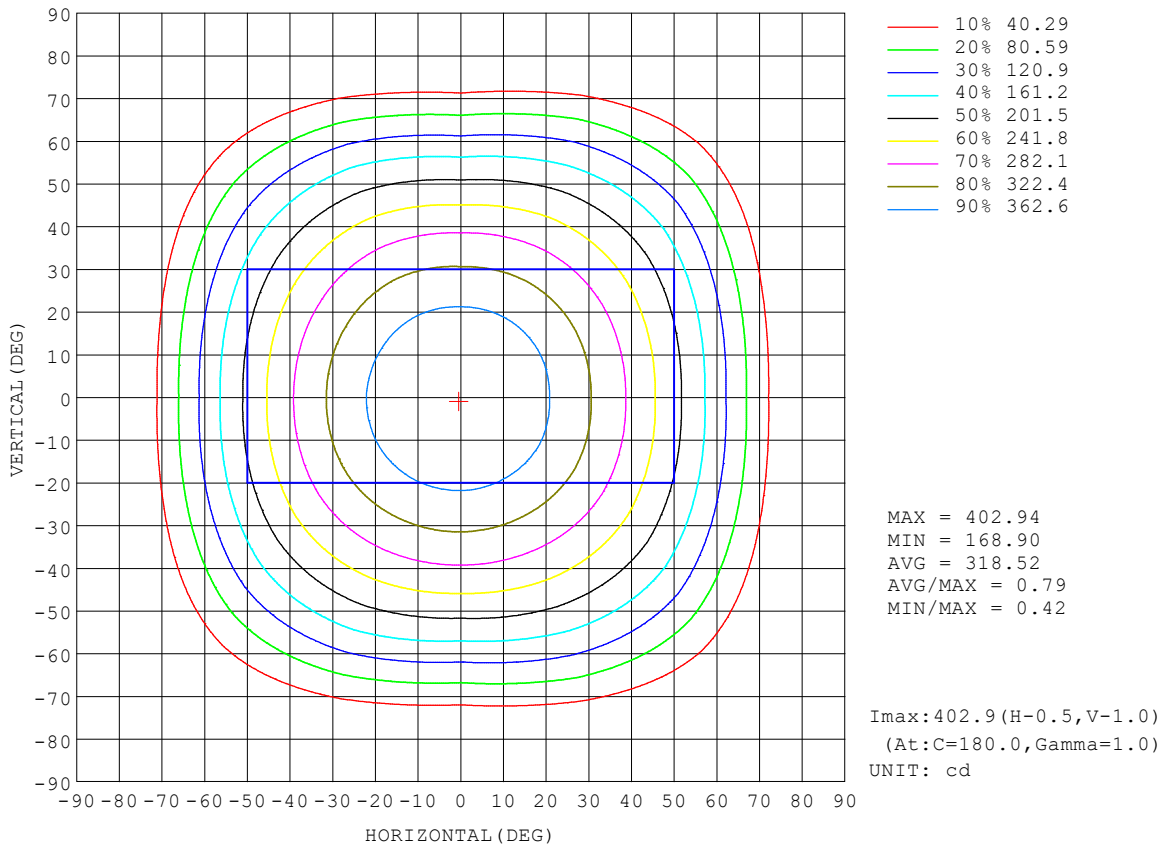


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.000m [K=1.1063]
 Remarks:

AAI Figure

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

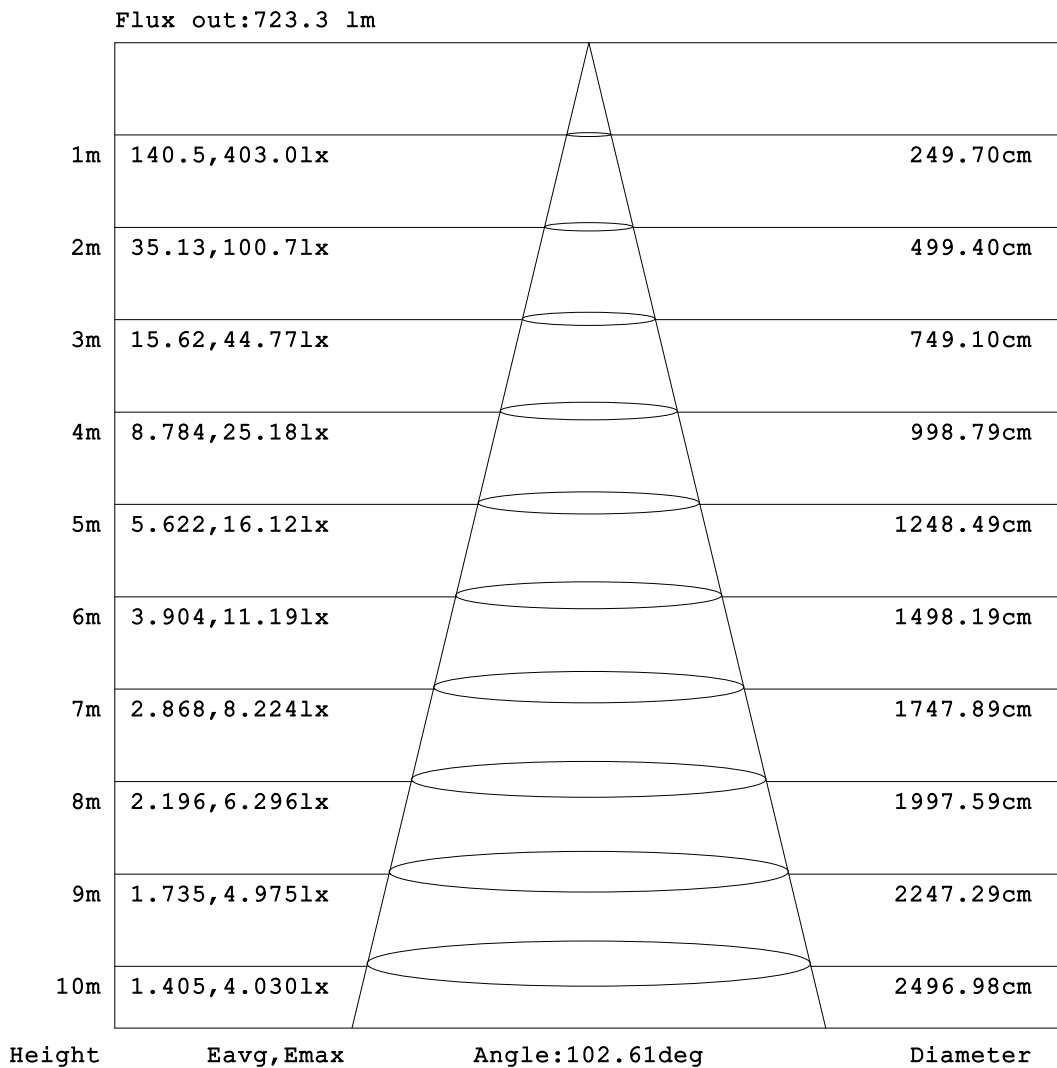


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.000m [K=1.1063]
 Remarks:

ISOLUX DIAGRAM

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

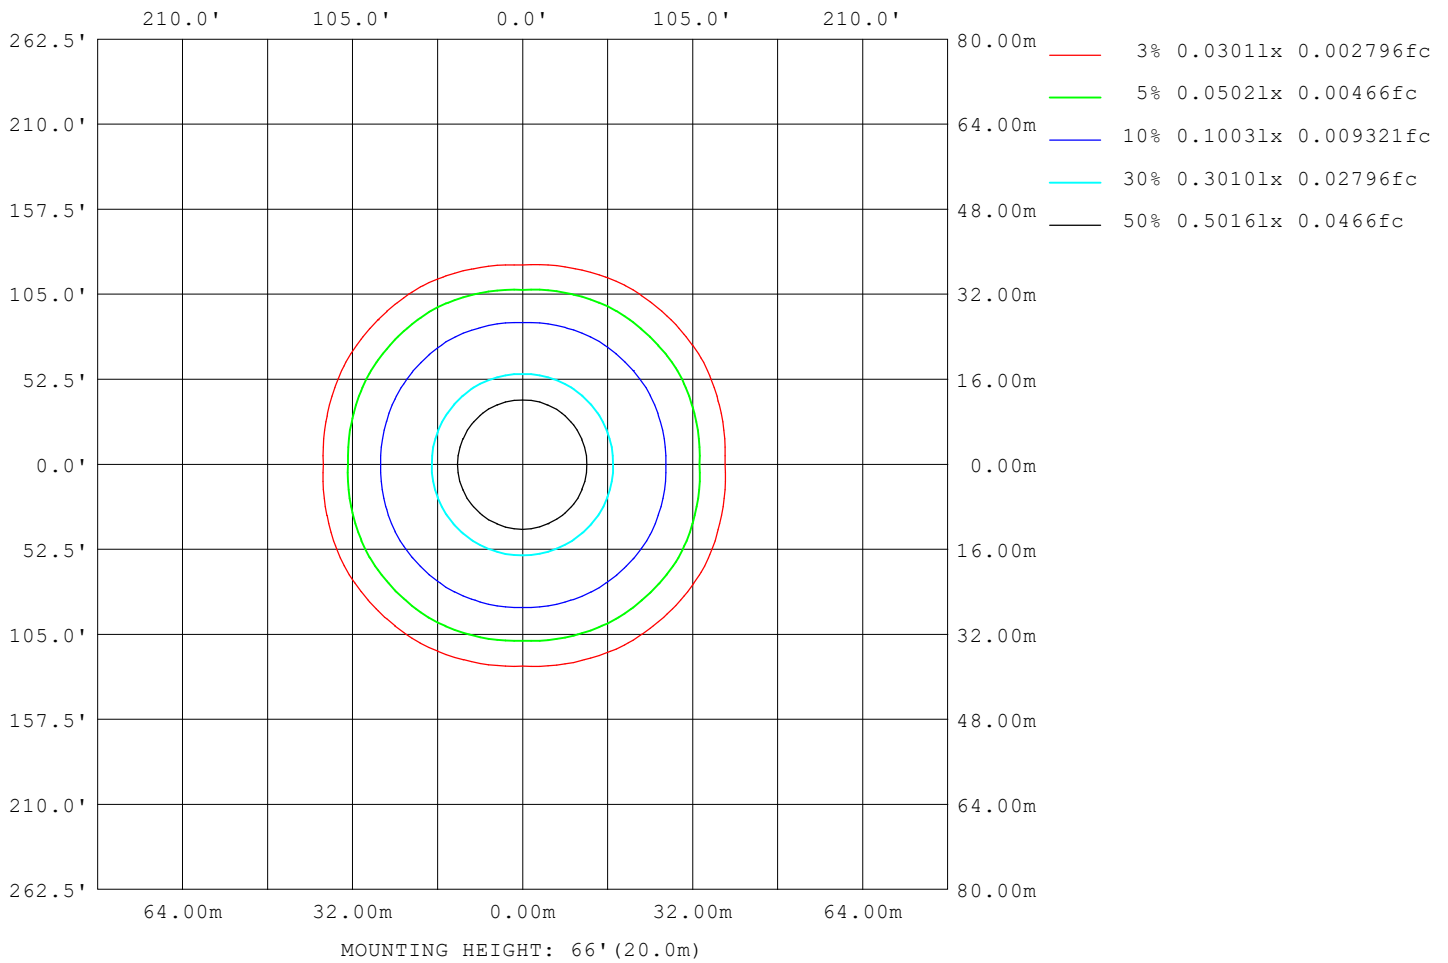

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.000m [K=1.1063]
 Remarks:

LED Avg.L Report

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	2207
L_0~180 (75) av	789
L_0~180 (85) av	476
L_90~270 (65) av	2188
L_90~270 (75) av	787
L_90~270 (85) av	485
L_45 (65) av	2559
L_45 (75) av	1073
L_45 (85) av	470

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.1063]
 Remarks:

Planar Illuminance Curve

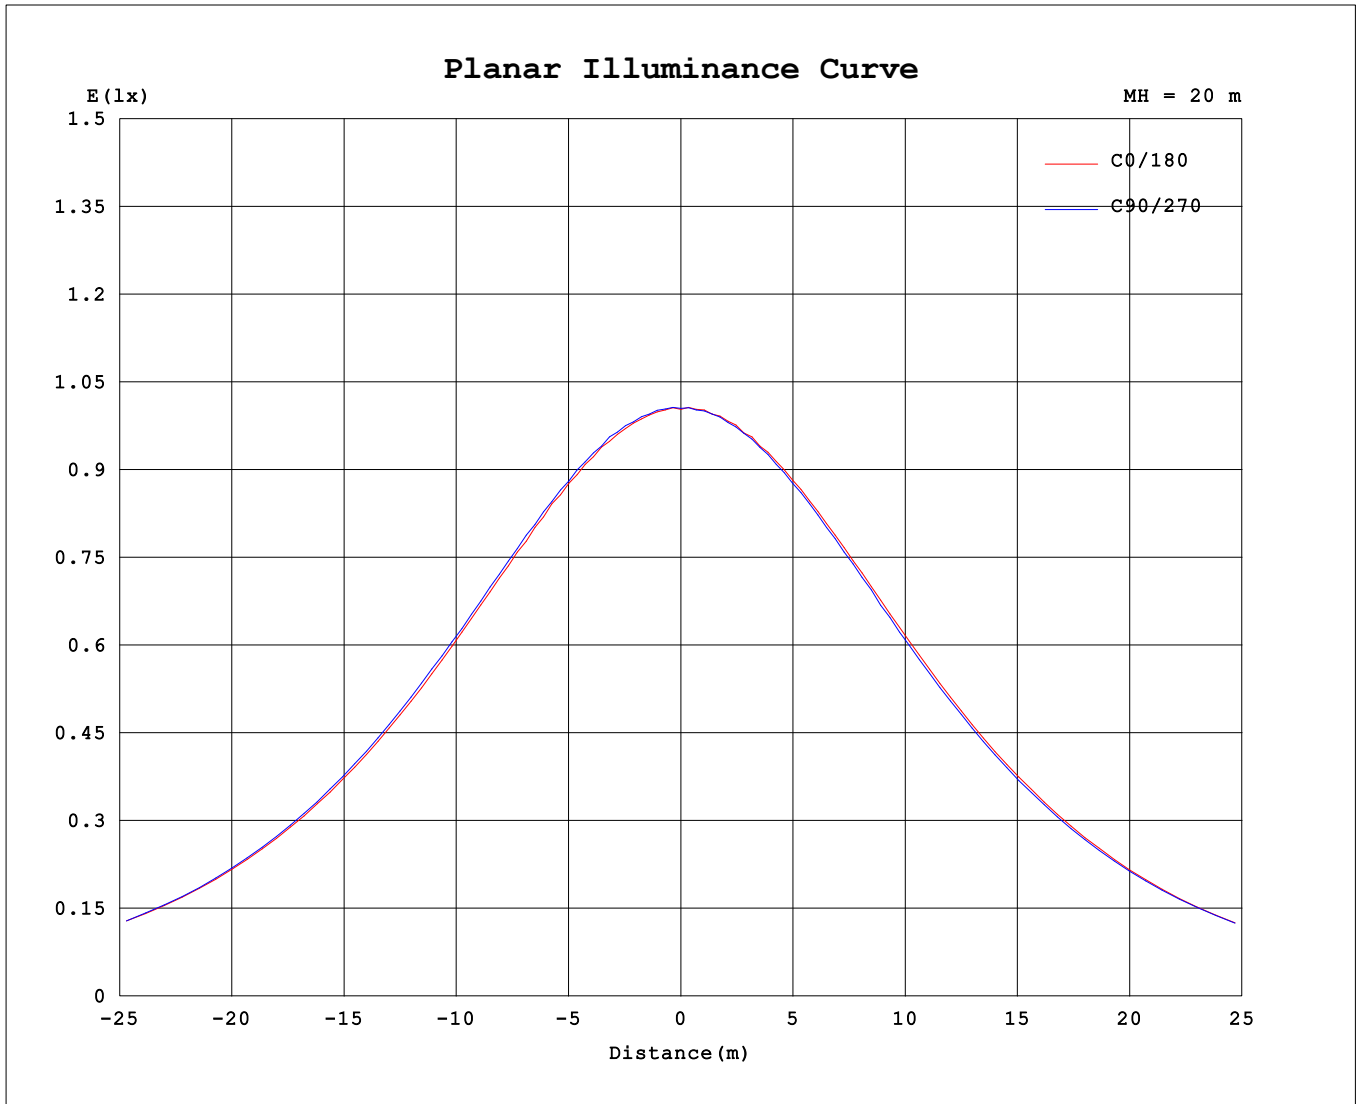

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.1063]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ □ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	402	402	402	402	402	402	402	402	402	402	402	402							
5	400	400	400	401	401	401	402	401	400	401	400	400							
10	394	393	394	394	395	395	395	393	394	393	392	392							
15	381	382	382	384	383	384	385	384	384	382	382	381							
20	367	367	368	369	369	371	371	368	368	366	366	365							
25	348	349	349	351	350	351	352	350	350	348	348	348							
30	326	328	328	330	330	330	330	328	329	325	326	325							
35	302	304	303	305	305	306	305	304	303	300	302	302							
40	275	279	278	279	279	279	277	276	277	273	277	276							
45	246	251	250	248	250	250	245	247	248	242	248	249							
50	214	222	219	214	218	218	209	214	217	208	217	219							
55	178	189	186	177	185	182	172	179	182	171	183	186							
60	139	153	150	137	147	145	132	142	144	131	147	151							
65	96.8	112	110	95.7	106	104	89.7	101	102	89.3	106	110							
70	55.8	69.3	67.8	55.0	63.4	61.8	48.9	58.8	60.1	49.3	64.7	67.2							
75	23.1	30.9	29.6	22.1	26.6	24.9	17.7	22.7	24.3	18.6	27.4	29.2							
80	10.1	11.0	10.8	10.2	10.2	9.76	8.90	9.32	9.72	9.09	10.3	10.5							
85	4.57	4.95	4.79	4.64	4.25	4.04	3.73	2.93	3.92	3.81	4.41	3.53							
90	0.17	0.06	0.01	0.00	0.02	0.03	0.00	0.01	0.01	0.00	0.00	0.04							
95	0.04	0.12	0.02	0.05	0.03	0.09	0.05	0.02	0.08	0.02	0.05	0.04							
100	0.13	0.24	0.11	0.15	0.10	0.20	0.14	0.10	0.17	0.12	0.13	0.15							
105	0.26	0.35	0.23	0.25	0.21	0.31	0.25	0.21	0.28	0.25	0.24	0.27							
110	0.39	0.49	0.36	0.39	0.35	0.42	0.37	0.32	0.40	0.39	0.36	0.39							
115	0.53	0.63	0.48	0.52	0.46	0.55	0.49	0.44	0.53	0.54	0.48	0.53							
120	0.67	0.76	0.62	0.65	0.59	0.68	0.62	0.58	0.66	0.70	0.61	0.66							
125	0.81	0.90	0.74	0.78	0.71	0.81	0.76	0.70	0.78	0.83	0.72	0.79							
130	0.92	1.02	0.87	0.93	0.83	0.93	0.87	0.82	0.87	0.96	0.83	0.89							
135	1.05	1.12	1.00	1.05	0.91	1.04	0.98	0.91	0.98	1.05	0.95	1.00							
140	1.13	1.20	1.11	1.13	1.01	1.12	1.07	1.01	1.07	1.13	1.04	1.07							
145	1.18	1.28	1.19	1.19	1.08	1.18	1.15	1.10	1.13	1.20	1.13	1.14							
150	1.24	1.33	1.26	1.25	1.16	1.27	1.23	1.18	1.22	1.27	1.21	1.22							
155	1.33	1.40	1.31	1.34	1.23	1.33	1.31	1.28	1.29	1.36	1.26	1.30							
160	1.38	1.42	1.38	1.42	1.32	1.40	1.43	1.37	1.39	1.42	1.35	1.36							
165	1.43	1.43	1.46	1.51	1.43	1.47	1.52	1.44	1.49	1.49	1.46	1.39							
170	1.49	1.48	1.52	1.59	1.52	1.56	1.60	1.56	1.54	1.56	1.57	1.46							
175	1.59	1.65	1.61	1.65	1.62	1.61	1.68	1.63	1.64	1.59	1.68	1.53							
180	1.67	1.69	1.65	1.64	1.68	1.62	1.68	1.67	1.66	1.59	1.65	1.64							

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

□ Range: 0 - 180DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.1063]
 Remarks: