
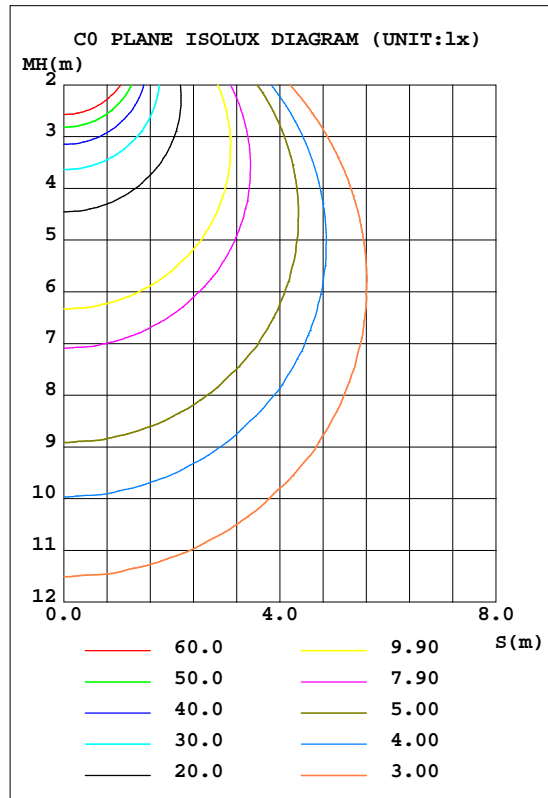


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.22V I:0.1212A P:14.360W PF:0.9853 Freq:59.98Hz Lamp Flux:1153.96x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.14$	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODELASD-JBR-6D15AC(4000K)		Imax(cd)	397.5	S/MH(C0/180)	1.26
NOMINAL POWER(W)	15	LOR(%)	100.0	S/MH(C90/270)	1.28
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	1154.0	h UP,DN(C0-180)	0.2,49.2
NOMINAL FLUX(lm)	1153.96	CIE CLASS	DIRECT	h UP,DN(C180-360)	0.1,50.5
LAMPS INSIDE	1	h up(%)	0.3	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	h down(%)	99.7	CIBSE SHR MAX	1.35

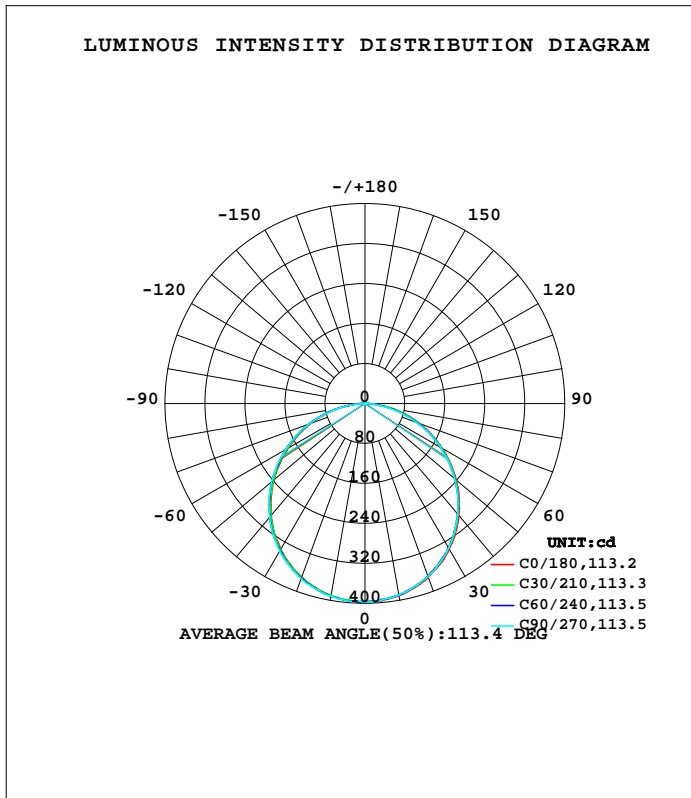

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-8

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1395]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	390.0	389.2	389.8	389.0	390.3	391.1	391.2	391.1	0- 10	37.56	37.56	3.26,3.26
20	370.2	368.3	368.0	368.2	369.7	371.4	372.8	372.7	10- 20	107.8	145.3	12.6,12.6
30	337.2	334.3	334.7	334.3	337.1	339.1	340.8	340.2	20- 30	163.7	309.0	26.8,26.8
40	292.2	289.5	288.8	289.4	292.2	294.9	296.7	296.0	30- 40	197.7	506.8	43.9,43.9
50	238.5	235.4	234.7	234.6	237.7	241.3	244.0	242.1	40- 50	205.5	712.3	61.7,61.7
60	178.0	175.5	174.0	173.1	176.9	181.1	183.3	181.3	50- 60	186.5	898.8	77.9,77.9
70	114.7	112.2	108.1	108.9	113.4	117.4	117.6	117.0	60- 70	144.5	1043	90.4,90.4
80	52.36	48.03	43.04	45.28	51.39	52.16	49.97	51.15	70- 80	85.78	1129	97.9,97.9
90	0.1789	0.0946	0.0882	0.1117	0.2944	0.0543	0.0747	0.0485	80- 90	21.23	1150	99.7,99.7
100	0.2433	0.2217	0.2775	0.2605	0.1556	0.1586	0.2057	0.1600	90-100	0.1555	1151	99.7,99.7
110	0.4593	0.4321	0.4939	0.4801	0.3386	0.3207	0.3312	0.2739	100-110	0.3095	1151	99.7,99.7
120	0.7228	0.6177	0.6901	0.6762	0.6218	0.4929	0.5072	0.4328	110-120	0.4796	1151	99.8,99.8
130	0.9257	0.7620	0.8134	0.8229	0.8044	0.6348	0.6763	0.5498	120-130	0.5903	1152	99.8,99.8
140	1.002	0.8710	0.8659	0.9129	0.8585	0.7699	0.8048	0.6459	130-140	0.6001	1153	99.9,99.9
150	1.072	0.9827	1.123	1.032	0.9599	0.8812	0.9334	0.7270	140-150	0.5579	1153	99.9,99.9
160	1.138	1.075	1.162	1.111	1.061	0.9915	0.9728	0.8278	150-160	0.4621	1154	100,100
170	1.199	1.126	1.163	1.147	1.201	1.123	1.204	0.9411	160-170	0.3035	1154	100,100
180	1.217	1.188	1.163	1.136	1.244	1.141	1.143	1.156	170-180	0.1075	1154	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm			

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-6-8

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.600m [K=1.1395]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.22V I:0.1212A P:14.360W PF:0.9853 Freq:59.98Hz Lamp Flux:1153.96x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: ϕ 0.14	Shielding Angle:

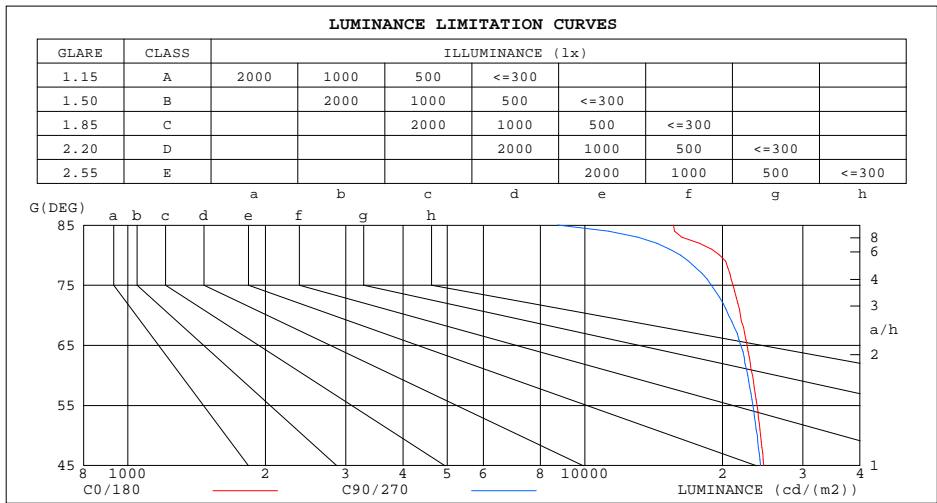

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	15635	8715
80	19708	16188
75	21106	18913
70	21911	20639
65	22669	21950
60	23275	22734
55	23802	23333
50	24254	23842
45	24638	24257


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-8

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1395]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.22V I:0.1212A P:14.360W PF:0.9853 Freq:59.98Hz Lamp Flux:1153.96x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.14$	Shielding Angle:

r _{cc}	80%			70%			50%			30%			10%			0
r _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.99	.95	1.01	.97	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.90	.83	.77	.88	.82	.76	.85	.79	.75	.81	.77	.73	.78	.74	.71	.69
3.0	.79	.71	.64	.77	.70	.64	.74	.68	.62	.72	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.54	.69	.60	.54	.66	.59	.53	.64	.57	.52	.61	.56	.51	.49
5.0	.62	.53	.47	.61	.53	.46	.59	.52	.46	.57	.50	.45	.55	.49	.45	.43
6.0	.56	.47	.41	.55	.47	.40	.53	.46	.40	.52	.45	.40	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.42	.36	.48	.41	.35	.47	.40	.35	.46	.39	.35	.33
8.0	.46	.38	.32	.46	.37	.32	.44	.37	.32	.43	.36	.31	.42	.36	.31	.29
9.0	.43	.34	.29	.42	.34	.29	.41	.33	.28	.40	.33	.28	.39	.33	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.25	.24

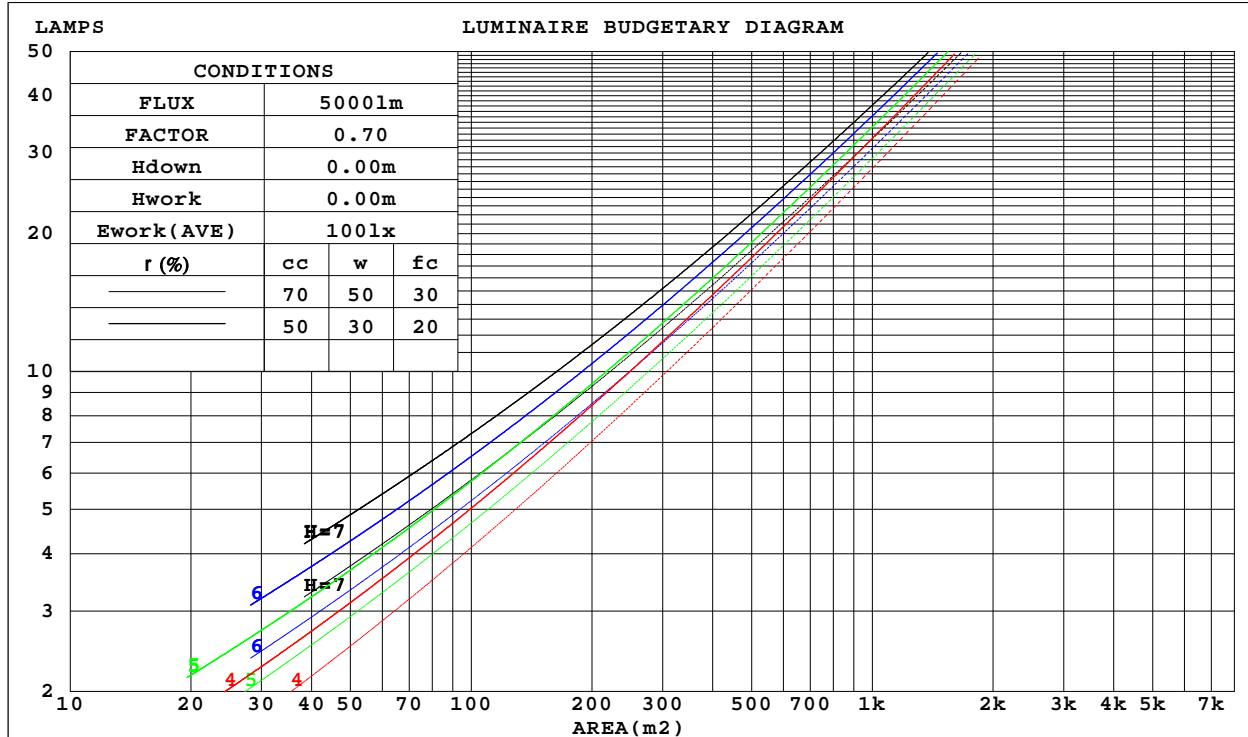

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-8

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1395]
 Remarks:

WEC AND CCEC

Test:U:120.22V I:0.1212A P:14.360W PF:0.9853 Freq:59.98Hz Lamp Flux:1153.96x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: φ0.14	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.312	.178	.056	.305	.174	.055	.292	.167	.053	.279	.161	.052	.268	.155	.050	
2.0	.294	.161	.049	.288	.158	.049	.276	.153	.048	.265	.149	.046	.255	.144	.045	
3.0	.272	.145	.043	.266	.143	.043	.256	.139	.042	.246	.135	.041	.237	.131	.041	
4.0	.251	.130	.038	.246	.129	.038	.236	.125	.037	.228	.122	.037	.220	.119	.036	
5.0	.232	.118	.034	.227	.117	.034	.219	.114	.034	.211	.111	.033	.204	.109	.033	
6.0	.215	.108	.031	.211	.106	.031	.203	.104	.030	.196	.102	.030	.190	.100	.030	
7.0	.200	.099	.028	.196	.098	.028	.190	.096	.028	.183	.094	.027	.178	.092	.027	
8.0	.186	.091	.026	.183	.090	.025	.177	.089	.025	.172	.087	.025	.167	.085	.025	
9.0	.175	.084	.024	.172	.084	.023	.166	.082	.023	.161	.081	.023	.157	.080	.023	
10.0	.164	.079	.022	.162	.078	.022	.157	.077	.022	.152	.076	.021	.148	.074	.021	

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.193	.193	.193	.165	.165	.165	.112	.112	.112	.065	.065	.065	.021	.021	.021	
1.0	.183	.158	.137	.156	.136	.118	.107	.094	.081	.062	.054	.047	.020	.017	.015	
2.0	.175	.134	.100	.150	.116	.087	.103	.080	.060	.059	.047	.035	.019	.015	.012	
3.0	.167	.117	.076	.143	.101	.066	.098	.070	.046	.057	.041	.027	.018	.013	.009	
4.0	.160	.103	.061	.137	.089	.053	.094	.062	.037	.054	.036	.022	.018	.012	.007	
5.0	.152	.093	.049	.131	.081	.043	.090	.056	.030	.052	.033	.018	.017	.011	.006	
6.0	.145	.085	.041	.125	.073	.036	.086	.051	.026	.050	.030	.015	.016	.010	.005	
7.0	.138	.078	.036	.119	.067	.031	.082	.047	.022	.048	.028	.013	.015	.009	.004	
8.0	.132	.072	.031	.113	.062	.027	.078	.044	.019	.046	.026	.011	.015	.008	.004	
9.0	.126	.067	.028	.108	.058	.024	.075	.041	.017	.044	.024	.010	.014	.008	.003	
10.0	.120	.063	.025	.103	.055	.022	.072	.038	.015	.042	.023	.009	.014	.007	.003	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-8

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1395]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.22V I:0.1212A P:14.360W PF:0.9853 Freq:59.98Hz Lamp Flux:1153.96x1 lm										
NAME:			TYPE:			WEIGHT:				
SPEC.:			DIM.:			SERIAL No.:				
MFR.: ASD LIGHTNG CORP			SUR.: φ0.14			Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.1	24.8	23.5	25.1	25.4	23.0	24.6	23.4	25.0	25.3
3H	25.1	26.5	25.4	26.9	27.2	24.8	26.3	25.2	26.6	27.0
4H	25.8	27.2	26.2	27.6	28.0	25.5	26.9	25.9	27.2	27.6
6H	26.4	27.7	26.8	28.1	28.5	25.9	27.2	26.4	27.6	28.0
8H	26.6	27.8	27.0	28.2	28.6	26.1	27.3	26.5	27.7	28.1
12H	26.7	27.9	27.1	28.3	28.7	26.1	27.3	26.5	27.7	28.1
4H 2H	23.8	25.2	24.2	25.5	25.9	23.6	25.0	24.0	25.4	25.8
3H	25.9	27.1	26.3	27.5	27.9	25.7	26.9	26.1	27.3	27.7
4H	26.8	27.9	27.3	28.3	28.8	26.5	27.5	26.9	27.9	28.4
6H	27.6	28.5	28.0	28.9	29.4	27.0	28.0	27.5	28.4	28.9
8H	27.8	28.7	28.3	29.1	29.6	27.2	28.1	27.7	28.5	29.0
12H	27.9	28.7	28.4	29.2	29.7	27.3	28.1	27.8	28.5	29.0
8H 4H	27.2	28.0	27.6	28.5	28.9	26.8	27.7	27.2	28.1	28.6
6H	28.0	28.7	28.5	29.2	29.7	27.5	28.2	28.0	28.7	29.2
8H	28.3	29.0	28.8	29.5	30.0	27.7	28.3	28.2	28.8	29.3
12H	28.6	29.1	29.1	29.6	30.2	27.8	28.4	28.3	28.9	29.4
12H 4H	27.2	28.0	27.7	28.4	28.9	26.8	27.6	27.3	28.1	28.6
6H	28.1	28.7	28.6	29.2	29.7	27.5	28.2	28.1	28.7	29.2
8H	28.4	29.0	28.9	29.5	30.1	27.8	28.4	28.3	28.9	29.4
CIE190: 2010										

CIE190: 2010
Area: 0.0153 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-6-8

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.600m [K=1.1395]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.22V I:0.1212A P:14.360W PF:0.9853 Freq:59.98Hz Lamp Flux:1153.96x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.14$	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	45	38	56	45	38	55	45	38	32
0.80	67	55	48	66	55	48	64	54	47	40
1.00	76	64	57	74	64	57	72	65	56	49
1.25	83	72	65	81	71	64	78	70	64	56
1.50	88	78	71	86	77	70	83	75	69	61
2.00	95	86	79	93	85	79	89	82	77	69
2.50	99	91	85	96	89	84	93	87	82	73
3.00	102	95	89	100	93	88	96	90	86	78
4.00	106	100	96	104	98	94	99	95	91	82
5.00	108	104	100	106	102	98	101	98	95	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-6-8

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity: 65.0%
Test Distance: 8.600m [K=1.1395]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.22V I:0.1212A P:14.360W PF:0.9853 Freq:59.98Hz Lamp Flux:1153.96x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.14$	Shielding Angle:

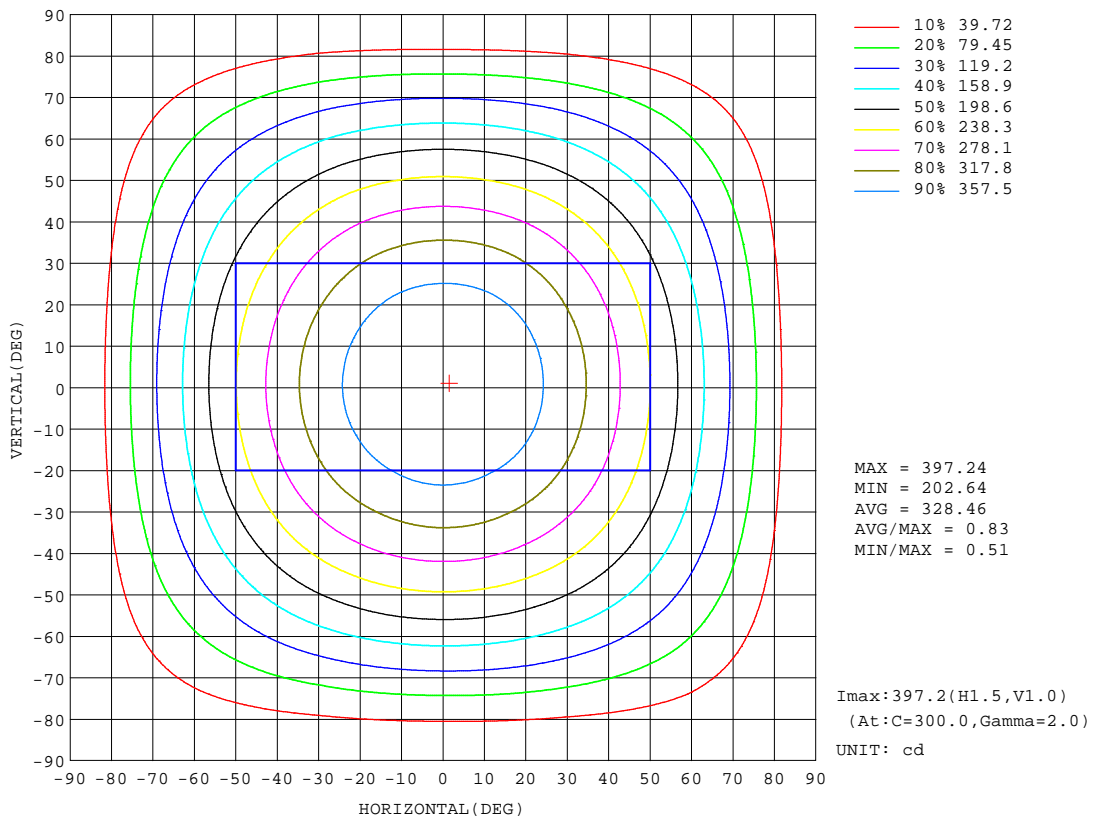


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-8

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1395]
 Remarks:

AAI Figure

Test:U:120.22V I:0.1212A P:14.360W PF:0.9853 Freq:59.98Hz Lamp Flux:1153.96x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: φ0.14	Shielding Angle:

Flux out:846.3 lm

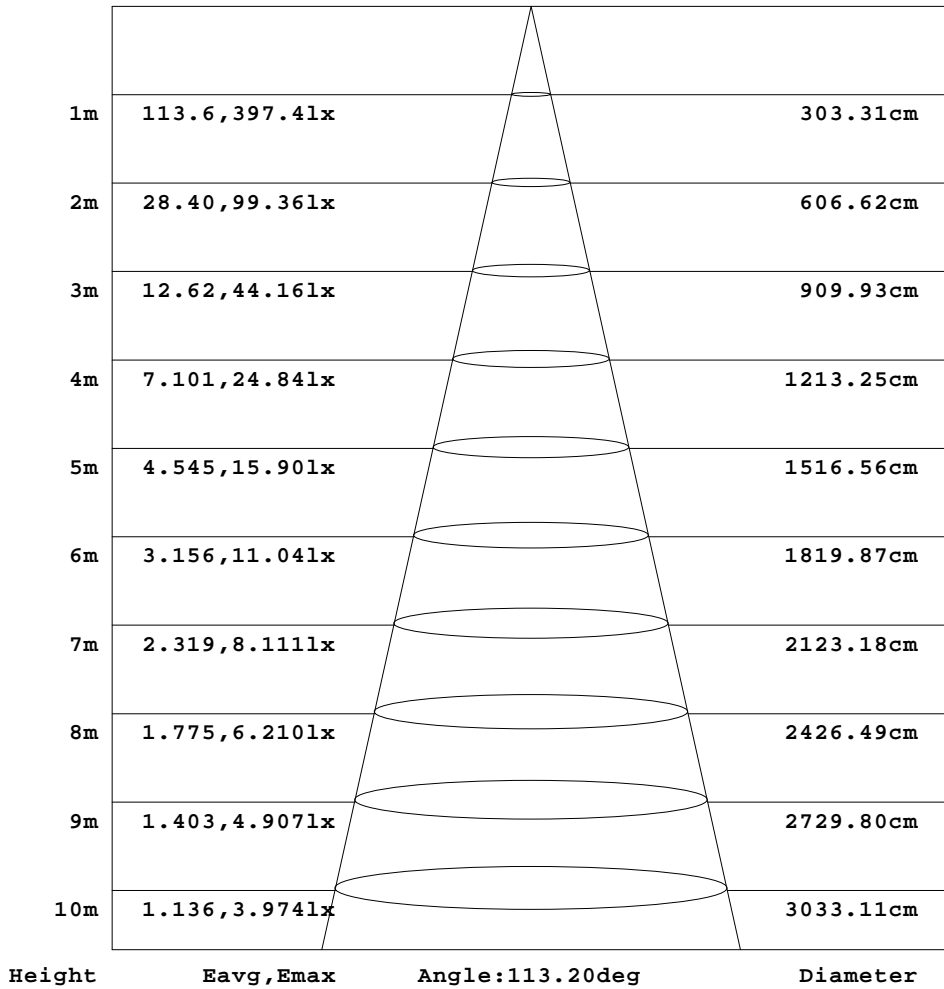


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-8

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1395]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.22V I:0.1212A P:14.360W PF:0.9853 Freq:59.98Hz Lamp Flux:1153.96x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.14$	Shielding Angle:

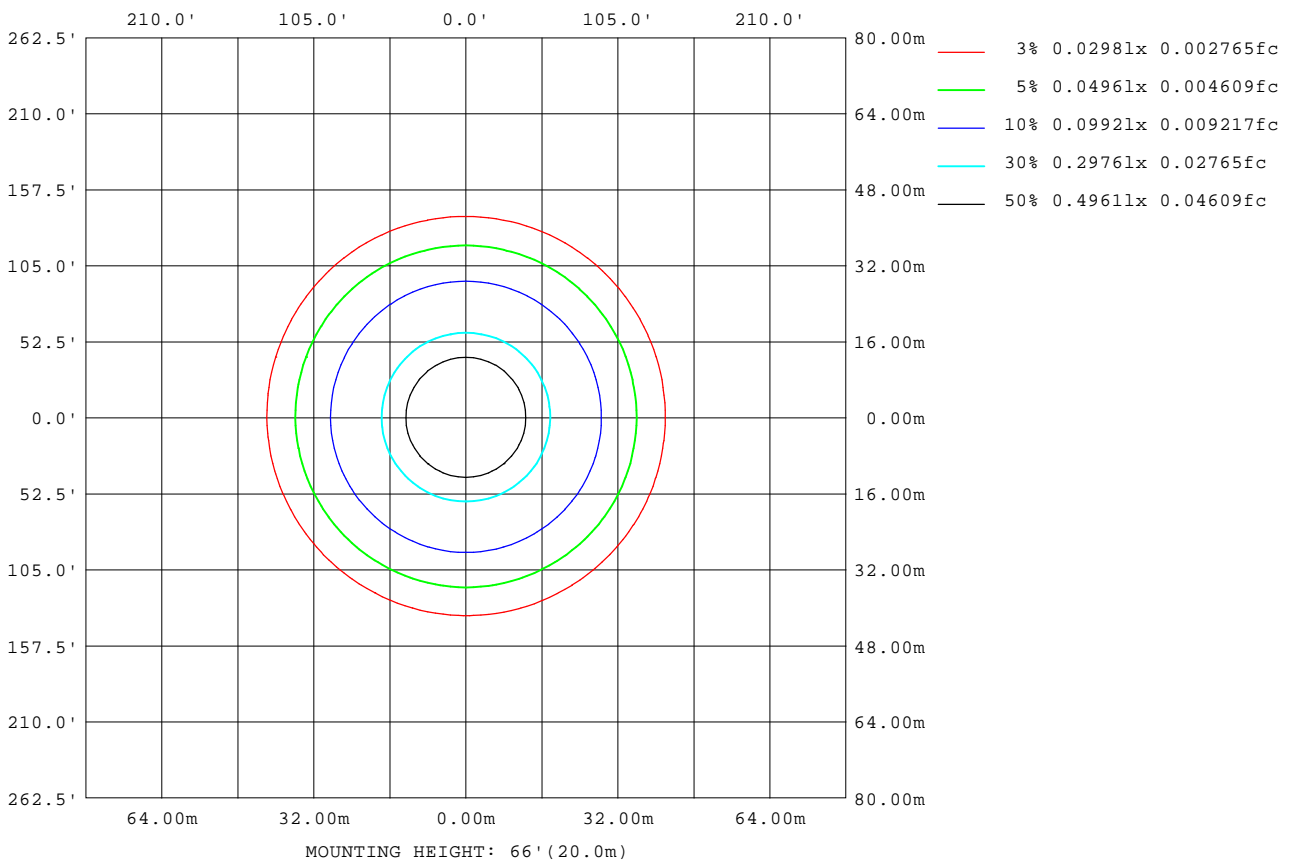

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-8

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=1.1395]
 Remarks:

LED Avg.L Report

Test:U:120.22V I:0.1212A P:14.360W PF:0.9853 Freq:59.98Hz Lamp Flux:1153.96x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.14$	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	22558
L_0~180(75)av	20950
L_0~180(85)av	15299
L_90~270(65)av	22695
L_90~270(75)av	20033
L_90~270(85)av	10749
L_45(65)av	22607
L_45(75)av	20515
L_45(85)av	13322

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-6-8

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.600m [K=1.1395]
Remarks:

Planar Illuminance Curve

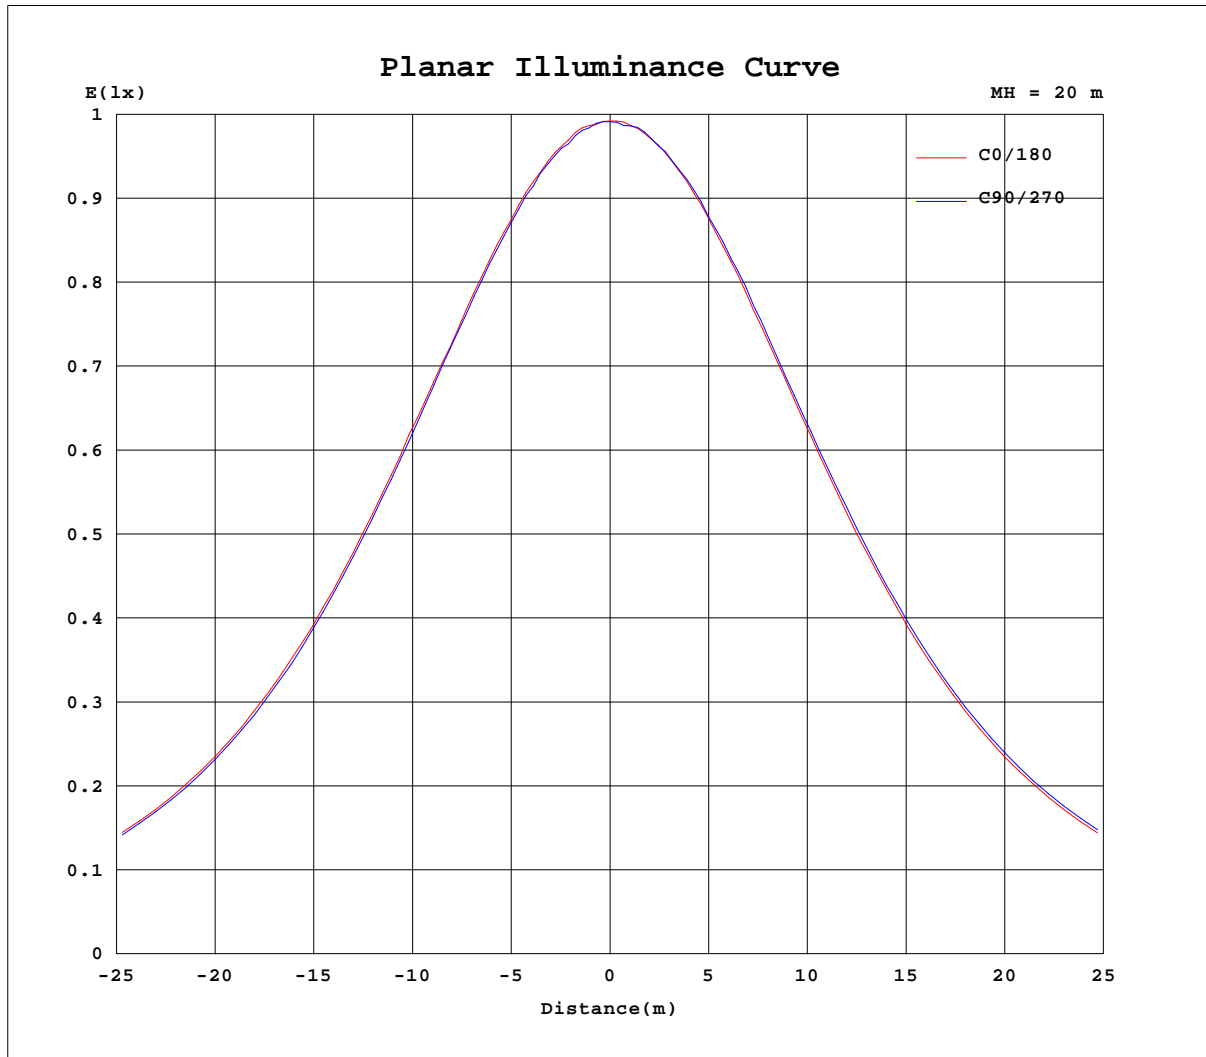

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-8

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=1.1395]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.22V I:0.1212A P:14.360W PF:0.9853 Freq:59.98Hz Lamp Flux:1153.96x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: φ0.14	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	397	397	397	397	397	397	397	397	397	397	397	397						
5	396	394	394	395	395	395	396	394	396	397	396	395						
10	390	389	389	390	388	390	390	390	392	391	391	391						
15	382	381	380	380	379	381	382	382	383	384	383	383						
20	370	369	368	368	368	369	370	371	372	373	373	372						
25	355	354	351	353	353	353	355	355	357	358	359	357						
30	337	335	334	335	334	334	337	338	340	341	341	339						
35	316	314	312	313	313	313	316	317	320	320	322	318						
40	292	290	289	289	289	290	292	293	297	297	297	295						
45	267	264	263	263	262	264	265	267	270	272	271	269						
50	239	236	235	235	234	235	238	240	243	244	243	241						
55	209	207	205	205	204	205	208	210	213	214	214	211						
60	178	177	174	174	173	174	177	179	183	183	182	180						
65	147	145	143	142	141	142	145	148	152	151	151	148						
70	115	114	111	108	108	110	113	116	119	118	118	116						
75	83.6	82.2	77.5	75.0	74.7	78.4	82.4	84.1	85.4	83.7	84.1	83.5						
80	52.4	50.8	45.2	43.0	43.2	47.4	51.4	52.0	52.3	50.0	51.0	51.3						
85	20.8	20.3	14.7	11.6	13.2	18.7	20.0	18.2	19.4	17.0	18.7	18.6						
90	0.18	0.09	0.10	0.09	0.09	0.13	0.29	0.09	0.02	0.07	0.04	0.06						
95	0.15	0.14	0.33	0.43	0.39	0.18	0.10	0.08	0.09	0.05	0.09	0.05						
100	0.24	0.22	0.22	0.28	0.23	0.29	0.16	0.16	0.16	0.21	0.16	0.16						
105	0.34	0.32	0.32	0.39	0.32	0.40	0.25	0.22	0.25	0.26	0.24	0.19						
110	0.46	0.44	0.43	0.49	0.43	0.53	0.34	0.31	0.33	0.33	0.28	0.26						
115	0.61	0.53	0.52	0.59	0.53	0.61	0.49	0.42	0.41	0.41	0.37	0.36						
120	0.72	0.61	0.62	0.69	0.64	0.72	0.62	0.50	0.49	0.51	0.42	0.45						
125	0.83	0.71	0.69	0.76	0.72	0.79	0.70	0.59	0.55	0.60	0.49	0.49						
130	0.93	0.75	0.77	0.81	0.79	0.85	0.80	0.65	0.62	0.68	0.55	0.55						
135	1.01	0.80	0.82	0.83	0.85	0.87	0.81	0.72	0.68	0.76	0.61	0.57						
140	1.00	0.86	0.88	0.87	0.91	0.92	0.86	0.81	0.73	0.80	0.66	0.63						
145	1.05	0.92	0.95	1.01	0.97	0.97	0.93	0.88	0.79	0.89	0.71	0.67						
150	1.07	0.97	1.00	1.12	1.04	1.02	0.96	0.93	0.83	0.93	0.75	0.70						
155	1.11	1.01	1.12	1.14	1.12	1.05	1.03	0.99	0.87	1.01	0.82	0.76						
160	1.14	1.05	1.10	1.16	1.13	1.09	1.06	1.06	0.92	0.97	0.85	0.80						
165	1.16	1.07	1.10	1.16	1.15	1.11	1.11	1.16	0.98	1.16	0.90	0.94						
170	1.20	1.12	1.13	1.16	1.17	1.12	1.20	1.08	1.16	1.20	0.98	0.90						
175	1.20	1.15	1.16	1.18	1.20	1.13	1.20	1.08	1.09	1.14	1.03	0.99						
180	1.22	1.20	1.18	1.16	1.17	1.10	1.24	1.14	1.14	1.14	1.17	1.14						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-8

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1395]
 Remarks: