
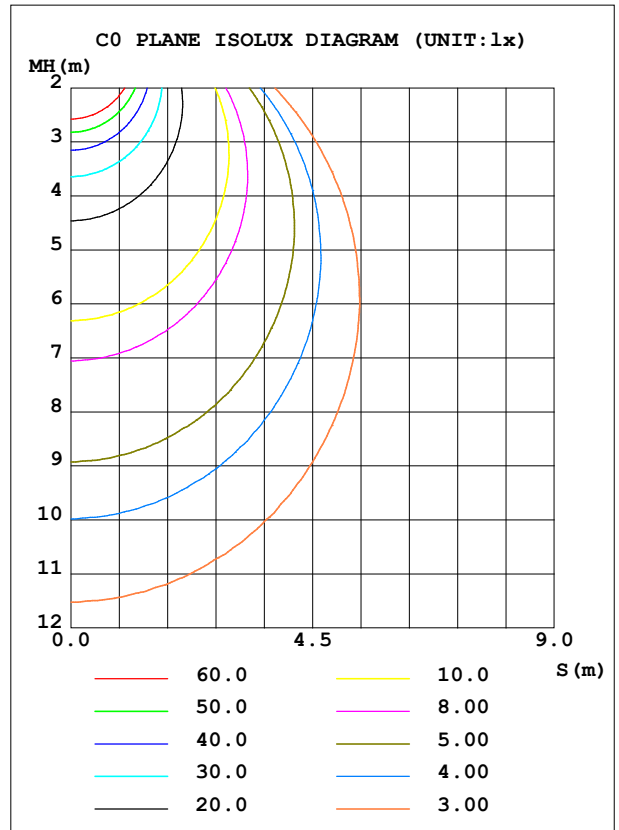


LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 84.39 lm/W
MODEL: SD-LRKS-6D12AC-XX (3000K)		I _{max} (cd)	399.3	S/MH (C0/180)	1.22	
NOMINAL POWER (W)	12	LOR (%)	100.0	S/MH (C90/270)	1.21	
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	977.28	<input type="checkbox"/> UP, DN (C0-180)	0.2, 50.2	
NOMINAL FLUX (lm)	977.278	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.2, 49.4	
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.4	CIBSE SHR NOM	1.25	
TEST VOLTAGE (V)	120.0	<input type="checkbox"/> down (%)	99.6	CIBSE SHR MAX	1.35	

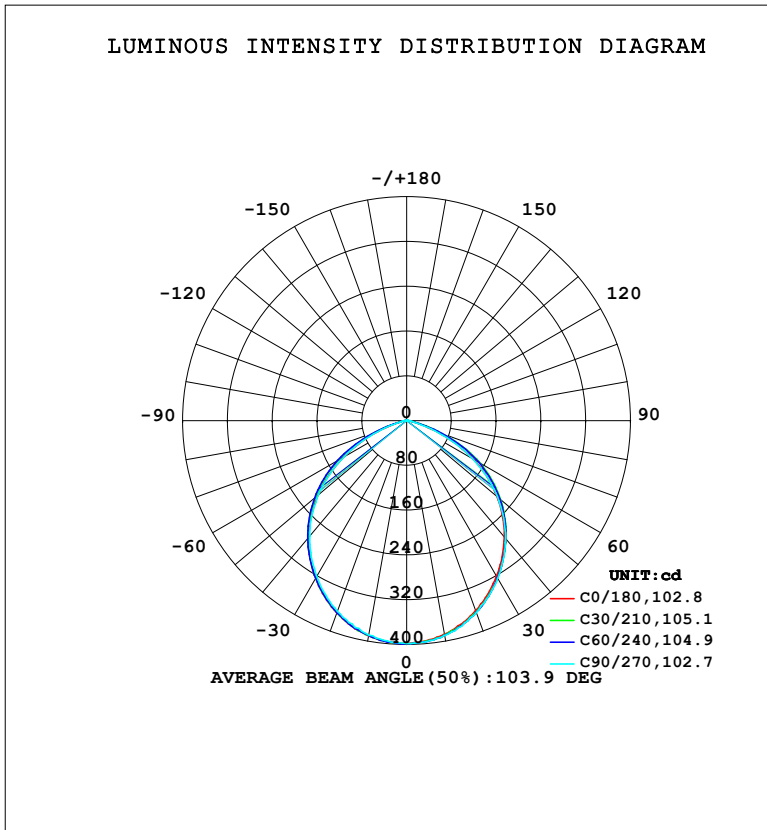

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.000m [K=1.1000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


☐	C0	C45	C90	C135	C180	C225	C270	C315	☐	☐ zone	☐ total	%lum,lamp
10	387.4	388.6	389.5	390.5	390.5	389.7	388.9	388.0	0- 10	37.59	37.59	3.85,3.85
20	360.8	363.5	364.4	365.8	365.6	364.6	362.5	361.4	10- 20	106.7	144.3	14.8,14.8
30	320.9	324.8	325.6	326.5	325.3	325.2	321.2	322.5	20- 30	159.2	303.5	31.1,31.1
40	271.3	275.7	275.0	276.4	273.7	274.2	268.9	273.4	30- 40	187.8	491.3	50.3,50.3
50	210.7	218.4	212.0	216.0	206.0	213.5	205.3	215.4	40- 50	188.8	680.1	69.6,69.6
60	136.9	150.1	135.3	144.8	129.7	141.7	129.3	147.2	50- 60	159.4	839.5	85.9,85.9
70	55.08	67.92	54.34	62.00	48.10	58.87	48.67	65.18	60- 70	99.41	938.9	96.1,96.1
80	9.998	10.75	10.09	9.887	8.770	9.437	8.976	10.29	70- 80	29.58	968.5	99.1,99.1
90	0.1578	0.0149	0.0110	0.0202	0.0001	0.0115	0.0055	0.0067	80- 90	4.683	973.2	99.6,99.6
100	0.1196	0.1255	0.1744	0.1553	0.1526	0.1364	0.1142	0.1199	90-100	0.0651	973.2	99.6,99.6
110	0.3753	0.3490	0.4142	0.3842	0.3649	0.3601	0.3483	0.3434	100-110	0.2612	973.5	99.6,99.6
120	0.6419	0.6055	0.6865	0.6348	0.6154	0.6110	0.6043	0.6077	110-120	0.4874	974.0	99.7,99.7
130	0.9033	0.8700	0.9588	0.8610	0.8602	0.8510	0.8330	0.8338	120-130	0.6679	974.7	99.7,99.7
140	1.099	1.072	1.149	1.055	1.040	1.050	0.9965	1.046	130-140	0.7458	975.4	99.8,99.8
150	1.241	1.219	1.275	1.215	1.203	1.195	1.203	1.256	140-150	0.7188	976.1	99.9,99.9
160	1.366	1.361	1.384	1.363	1.426	1.388	1.383	1.350	150-160	0.5998	976.7	99.9,99.9
170	1.491	1.519	1.514	1.504	1.497	1.571	1.514	1.510	160-170	0.4084	977.1	100,100
180	1.622	1.620	1.596	1.608	1.649	1.666	1.569	1.572	170-180	0.1491	977.3	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

☐ Range: 0 - 180DEG
 ☐ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.1000]
 Remarks:

LUMINANCE LIMITATION CURVES

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

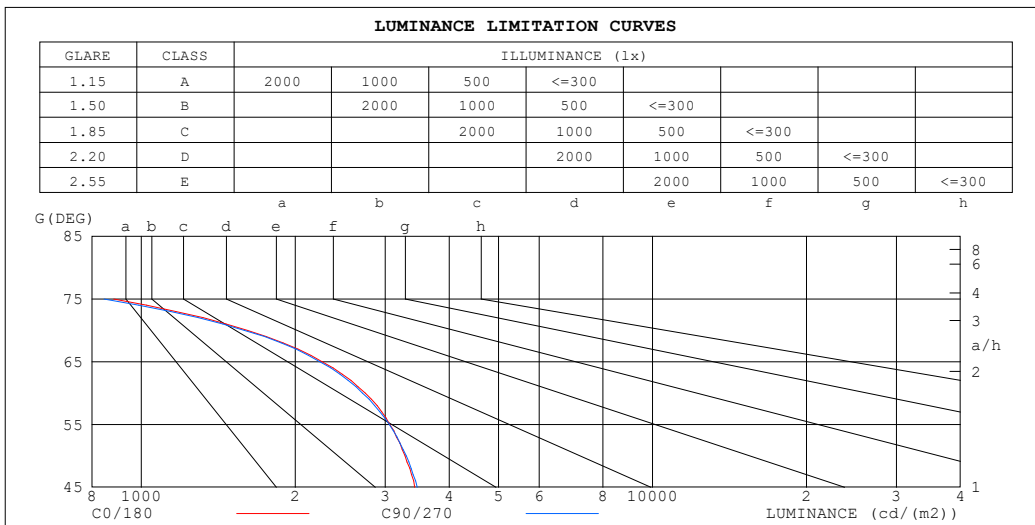

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	517	528
80	576	582
75	883	845
70	1612	1590
65	2258	2236
60	2741	2708
55	3060	3057
50	3282	3301
45	3423	3466


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.000m [K=1.1000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.06	1.02	.99	1.04	1.00	.97	.99	.97	.94	.95	.93	.91	.92	.90	.88	.86
2.0	.94	.87	.82	.92	.86	.81	.88	.83	.79	.85	.81	.77	.82	.79	.76	.74
3.0	.83	.75	.69	.81	.74	.69	.78	.72	.67	.76	.70	.66	.73	.69	.65	.63
4.0	.74	.66	.59	.72	.65	.59	.70	.63	.58	.68	.62	.57	.65	.61	.56	.54
5.0	.66	.58	.51	.65	.57	.51	.63	.56	.51	.61	.55	.50	.59	.54	.49	.47
6.0	.60	.51	.45	.59	.51	.45	.57	.50	.44	.55	.49	.44	.54	.48	.44	.42
7.0	.54	.46	.40	.53	.46	.40	.52	.45	.40	.50	.44	.39	.49	.43	.39	.37
8.0	.50	.41	.36	.49	.41	.36	.48	.40	.35	.46	.40	.35	.45	.39	.35	.33
9.0	.46	.38	.32	.45	.37	.32	.44	.37	.32	.43	.36	.32	.42	.36	.32	.30
10.0	.42	.34	.29	.42	.34	.29	.41	.34	.29	.40	.33	.29	.39	.33	.29	.27

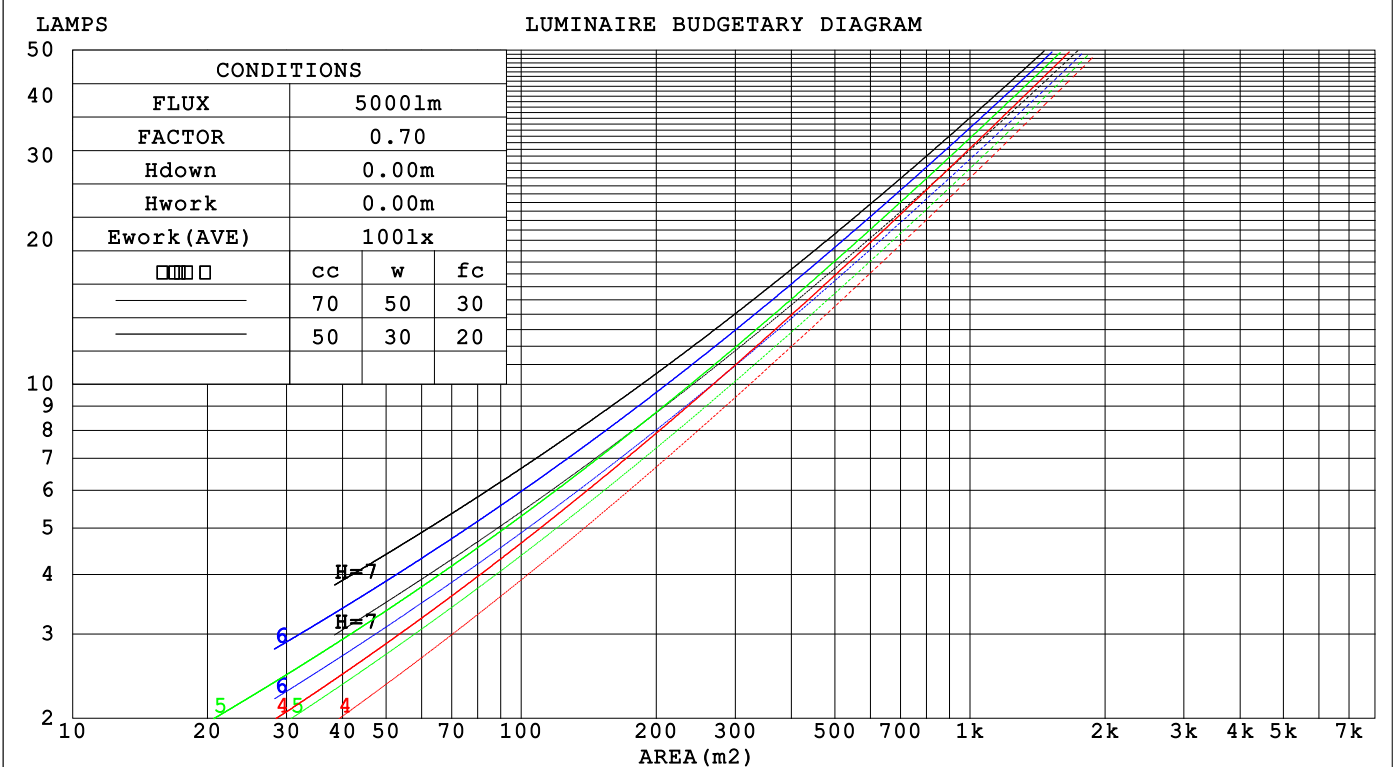

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

□ Range: 0 - 180DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.1000]
 Remarks:

WEC AND CCEC

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.269	.153	.048	.262	.149	.047	.248	.142	.045	.236	.136	.044	.225	.130	.042	
2.0	.261	.143	.044	.255	.140	.043	.243	.135	.042	.233	.131	.041	.223	.126	.040	
3.0	.247	.131	.039	.242	.129	.039	.231	.125	.038	.222	.122	.037	.213	.118	.036	
4.0	.232	.120	.035	.227	.119	.035	.218	.115	.034	.209	.112	.034	.201	.109	.033	
5.0	.217	.110	.032	.212	.109	.032	.204	.106	.031	.197	.104	.031	.190	.101	.030	
6.0	.203	.102	.029	.199	.100	.029	.192	.098	.029	.185	.096	.028	.179	.094	.028	
7.0	.190	.094	.027	.186	.093	.026	.180	.091	.026	.174	.089	.026	.168	.087	.026	
8.0	.178	.087	.024	.175	.086	.024	.169	.085	.024	.164	.083	.024	.159	.082	.024	
9.0	.168	.081	.023	.165	.080	.023	.160	.079	.022	.155	.078	.022	.150	.076	.022	
10.0	.158	.076	.021	.156	.075	.021	.151	.074	.021	.147	.073	.021	.143	.072	.021	

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.194	.194	.194	.166	.166	.166	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.181	.160	.141	.155	.137	.121	.106	.094	.084	.061	.055	.049	.019	.018	.016	
2.0	.171	.135	.105	.147	.116	.091	.101	.081	.063	.058	.047	.037	.019	.015	.012	
3.0	.163	.117	.081	.140	.101	.070	.096	.070	.049	.056	.041	.029	.018	.013	.009	
4.0	.156	.104	.064	.134	.090	.056	.092	.063	.039	.053	.037	.023	.017	.012	.008	
5.0	.149	.093	.053	.128	.081	.046	.088	.056	.032	.051	.033	.019	.016	.011	.006	
6.0	.142	.085	.044	.122	.074	.038	.084	.051	.027	.049	.030	.016	.016	.010	.005	
7.0	.135	.078	.038	.116	.068	.033	.080	.047	.023	.047	.028	.014	.015	.009	.005	
8.0	.129	.072	.033	.111	.063	.029	.077	.044	.020	.045	.026	.012	.014	.008	.004	
9.0	.123	.067	.029	.106	.058	.026	.074	.041	.018	.043	.024	.011	.014	.008	.004	
10.0	.118	.063	.026	.102	.055	.023	.071	.038	.016	.041	.023	.010	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.1000]
 Remarks:

UGR(Unified Glare Rating) Table

NAME: LED DOWNLIGHT		TYPE:					WEIGHT:				
SPEC.:		DIM.:					SERIAL No.:				
MFR.: ASD LIGHTING CORP		SUR.: 0.1*0.1					Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
x = 2H y = 2H	16.9	18.4	17.2	18.6	18.8	16.9	18.3	17.1	18.5	18.7	
3H	17.7	19.0	18.0	19.3	19.5	17.6	18.9	17.9	19.2	19.4	
4H	17.8	19.0	18.1	19.3	19.5	17.7	18.9	18.0	19.2	19.5	
6H	17.7	18.9	18.1	19.2	19.5	17.7	18.8	18.0	19.1	19.4	
8H	17.7	18.8	18.0	19.1	19.4	17.6	18.7	18.0	19.0	19.3	
12H	17.7	18.7	18.0	19.0	19.4	17.6	18.7	17.9	19.0	19.3	
4H 2H	17.4	18.7	17.7	18.9	19.2	17.4	18.6	17.7	18.9	19.1	
3H	18.3	19.4	18.7	19.7	20.0	18.3	19.3	18.6	19.6	19.9	
4H	18.5	19.4	18.8	19.8	20.1	18.4	19.4	18.8	19.7	20.0	
6H	18.4	19.3	18.8	19.7	20.0	18.4	19.2	18.8	19.6	19.9	
8H	18.4	19.2	18.8	19.6	20.0	18.3	19.1	18.8	19.5	19.9	
12H	18.4	19.1	18.8	19.5	19.9	18.3	19.1	18.8	19.4	19.9	
8H 4H	18.5	19.3	18.9	19.6	20.0	18.4	19.2	18.8	19.6	19.9	
6H	18.5	19.1	18.9	19.6	20.0	18.4	19.1	18.9	19.5	19.9	
8H	18.5	19.1	19.0	19.5	20.0	18.4	19.0	18.9	19.4	19.9	
12H	18.5	19.0	19.0	19.4	19.9	18.4	18.9	18.9	19.4	19.8	
12H 4H	18.4	19.2	18.9	19.5	20.0	18.4	19.1	18.8	19.5	19.9	
6H	18.5	19.0	18.9	19.5	19.9	18.4	19.0	18.8	19.4	19.8	
8H	18.5	19.0	19.0	19.4	19.9	18.4	18.9	18.9	19.3	19.8	
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H	+ 0.3 / - 0.4					+ 0.3 / - 0.4					
1.5H	+ 0.4 / - 0.6					+ 0.3 / - 0.6					
2.0H	+ 0.5 / - 0.7					+ 0.5 / - 0.7					

CIE Pub.117, 977.3 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.1)
 Area: 0.1 m2

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.1000]
 Remarks:

UTILIZATION FACTORS TABLE

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	60	49	43	60	49	42	58	48	42	36
0.80	71	60	53	70	59	53	68	59	52	46
1.00	79	69	62	78	69	62	76	70	62	55
1.25	87	77	70	85	76	70	82	75	69	62
1.50	91	82	76	90	82	76	87	80	75	67
2.00	98	90	85	96	89	84	93	87	82	75
2.50	101	94	89	99	93	88	96	90	86	78
3.00	104	98	94	102	97	92	98	94	90	82
4.00	108	103	99	106	101	98	102	98	95	86
5.00	110	106	102	108	104	101	103	100	98	89
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.1000]
 Remarks:

ISOCANDELA DIAGRAM

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

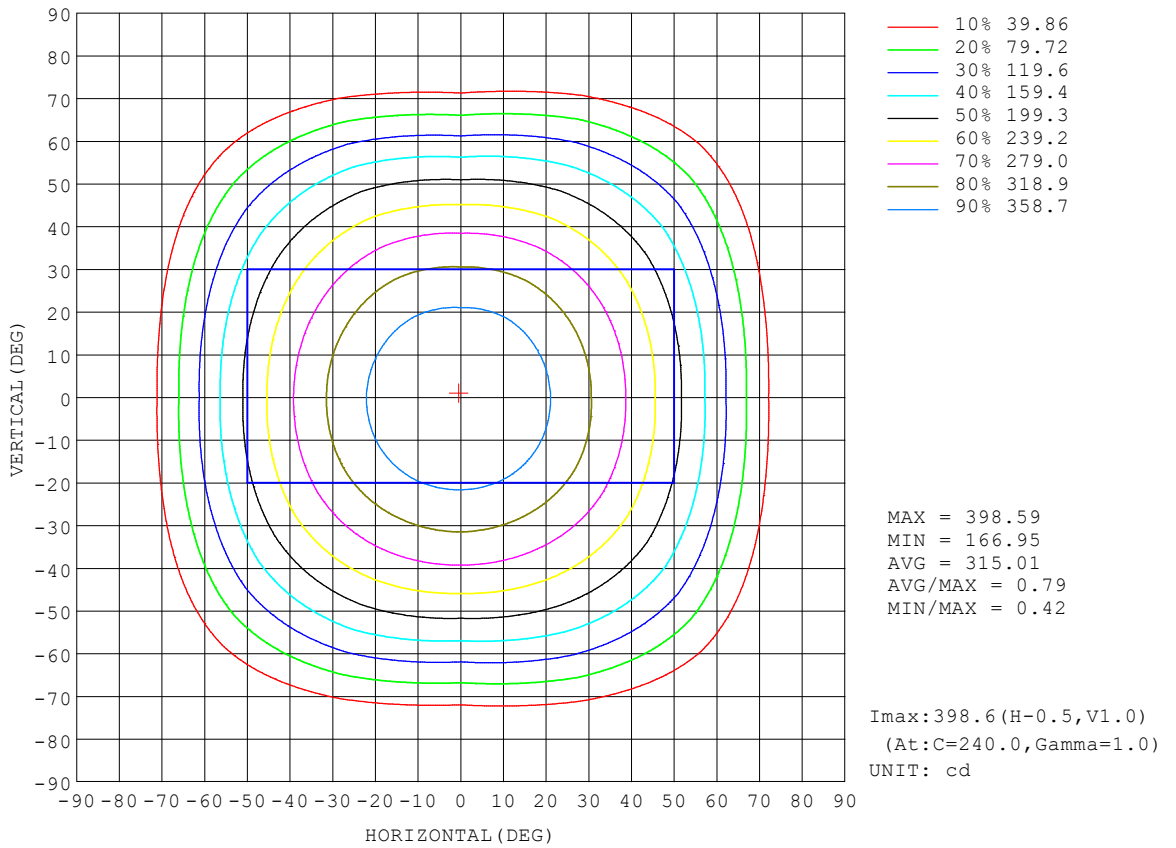


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.000m [K=1.1000]
 Remarks:

AAI Figure

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

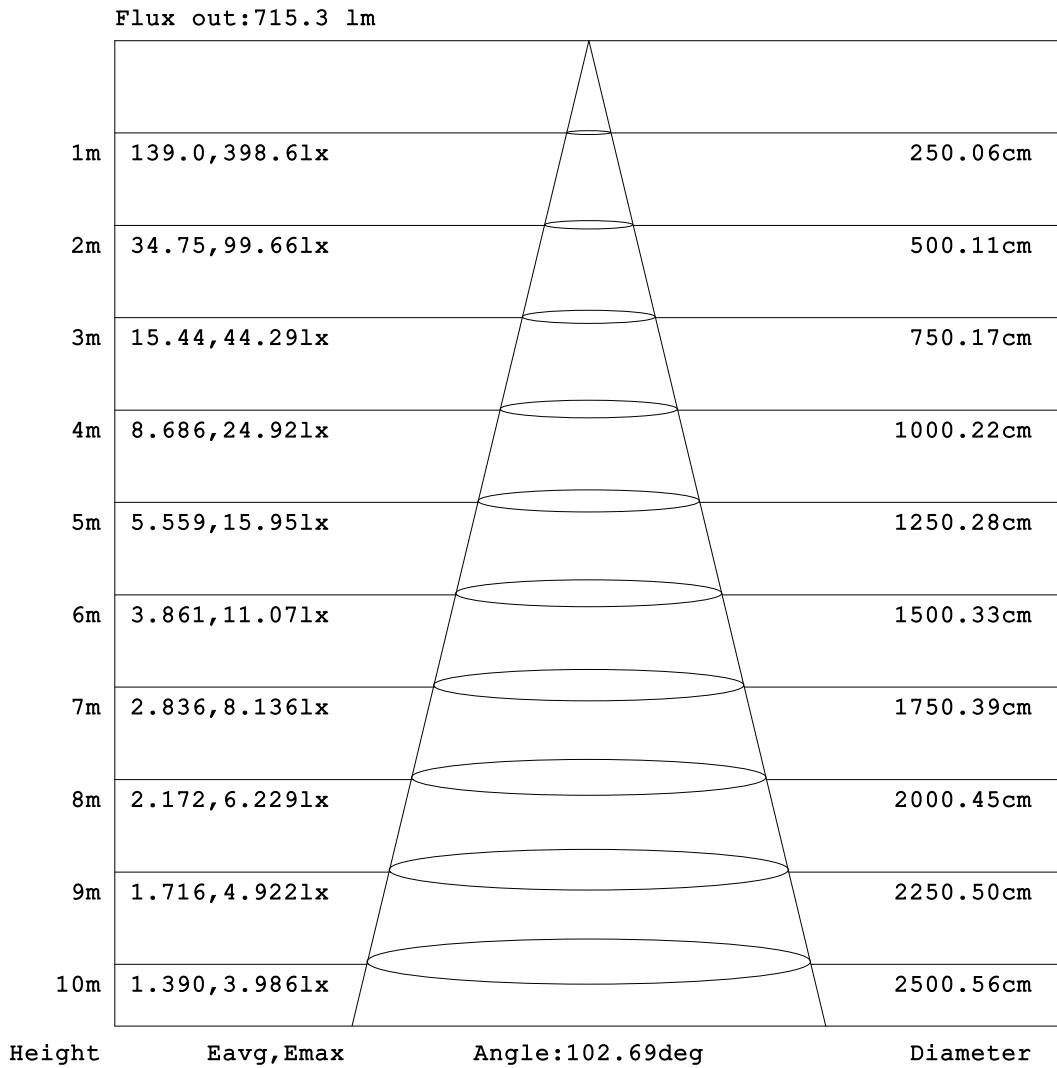


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.000m [K=1.1000]
 Remarks:

ISOLUX DIAGRAM

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

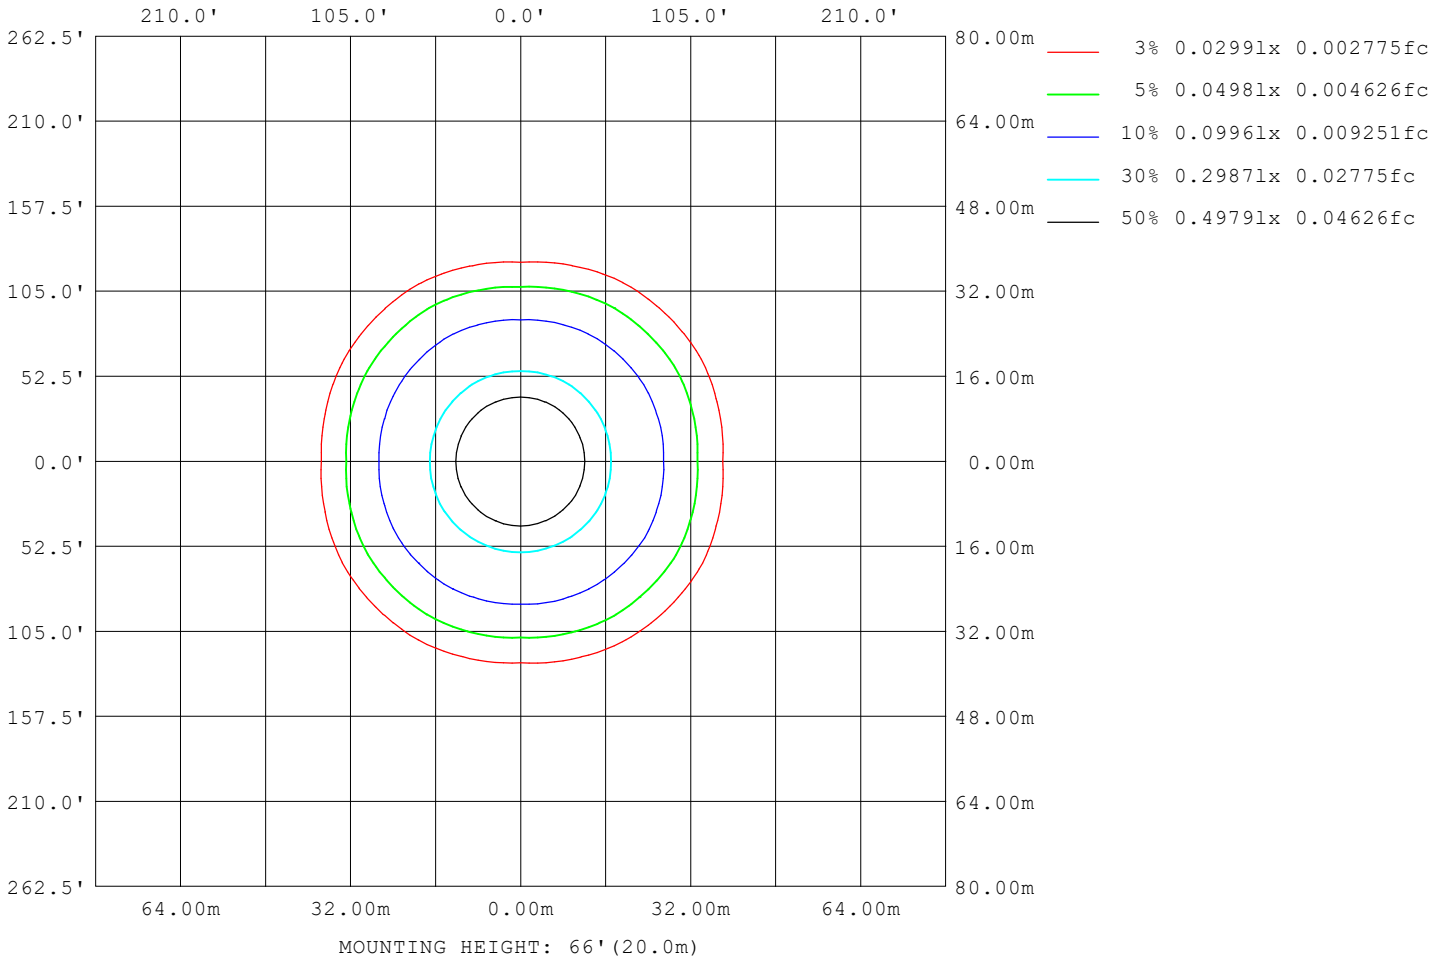

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.1000]
 Remarks:

LED Avg.L Report

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	2174
L_0~180 (75) av	779
L_0~180 (85) av	469
L_90~270 (65) av	2162
L_90~270 (75) av	778
L_90~270 (85) av	481
L_45 (65) av	2536
L_45 (75) av	1063
L_45 (85) av	465

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.1000]
 Remarks:

Planar Illuminance Curve

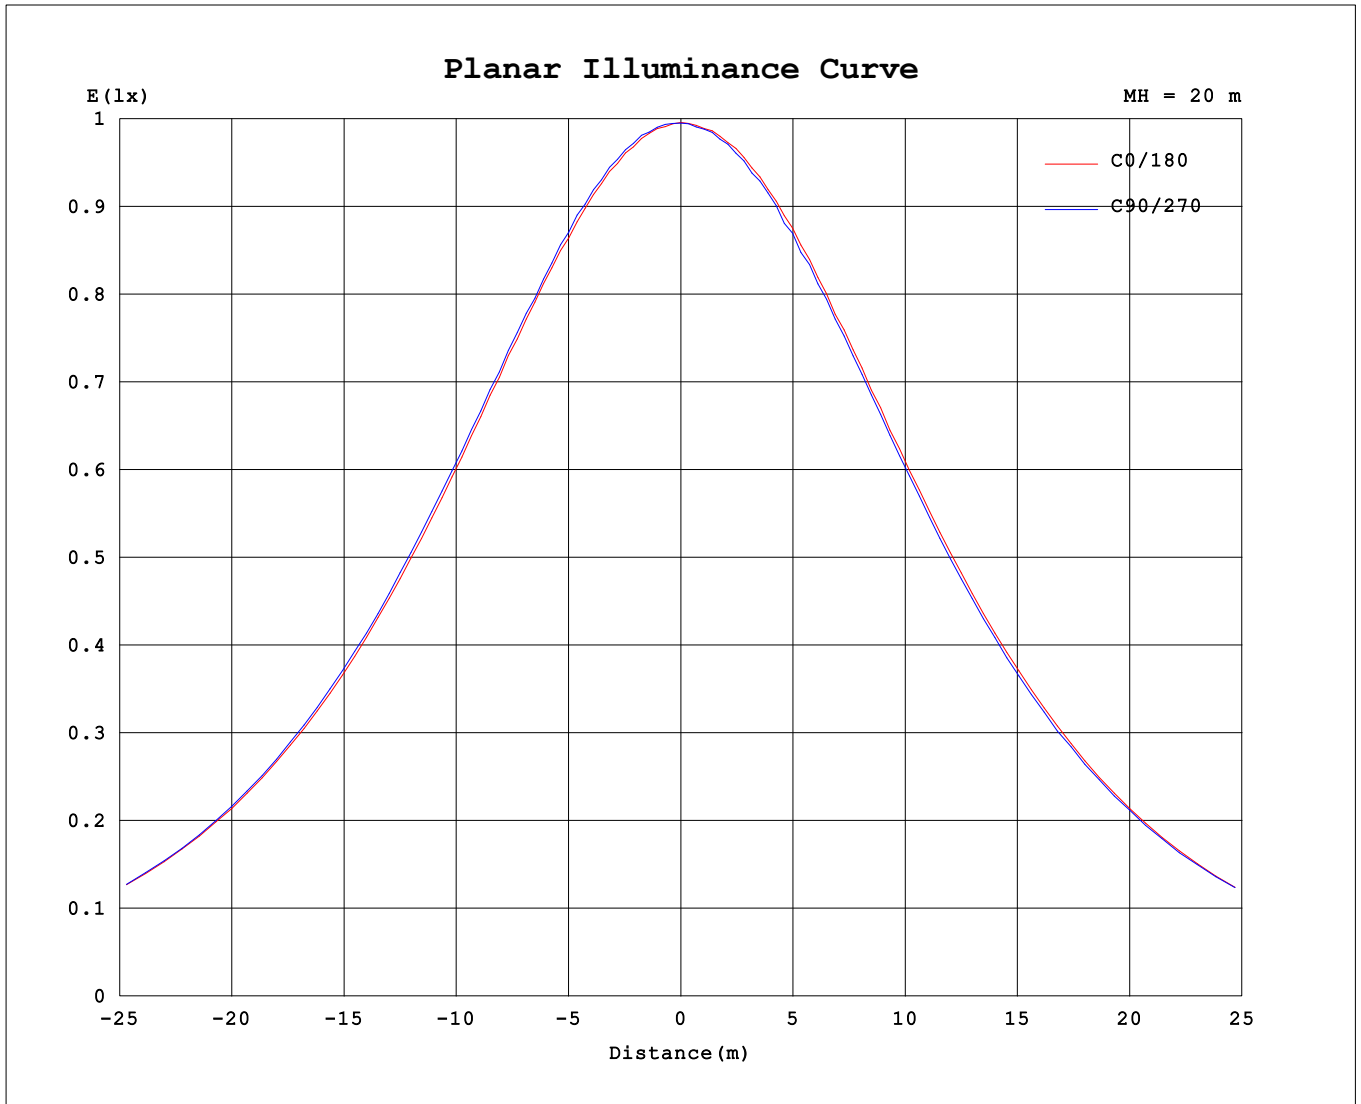

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.1000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ □ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	398	398	398	398	398	398	398	398	398	398	398	398							
5	395	396	397	397	397	397	396	397	397	397	395	396							
10	387	388	389	390	390	391	391	389	390	389	388	388							
15	377	379	380	380	380	381	380	380	380	376	378	378							
20	361	363	364	364	365	366	366	364	365	363	361	361							
25	343	345	346	347	347	348	346	347	346	343	345	345							
30	321	325	324	326	326	327	325	325	325	321	323	322							
35	297	301	301	301	301	303	301	301	301	297	299	299							
40	271	276	276	275	276	277	274	274	275	269	274	273							
45	242	249	248	245	247	248	242	245	246	240	246	246							
50	211	219	218	212	216	215	206	212	214	205	215	216							
55	175	187	184	175	182	181	170	177	180	169	181	184							
60	137	152	149	135	146	144	130	141	143	129	145	149							
65	95.3	111	109	94.4	105	103	88.4	100	101	88.3	105	109							
70	55.1	68.6	67.2	54.3	62.8	61.2	48.1	58.3	59.5	48.7	64.0	66.3							
75	22.8	30.7	29.3	21.9	26.3	24.7	17.5	22.5	24.2	18.4	27.1	28.9							
80	10.00	10.8	10.7	10.1	10.1	9.66	8.77	9.24	9.63	8.98	10.2	10.4							
85	4.50	4.90	4.74	4.60	4.21	4.01	3.68	2.90	3.90	3.78	4.38	3.48							
90	0.16	0.02	0.01	0.01	0.02	0.02	0.00	0.00	0.02	0.01	0.01	0.00							
95	0.03	0.07	0.02	0.08	0.02	0.10	0.07	0.01	0.09	0.03	0.08	0.00							
100	0.12	0.16	0.09	0.17	0.11	0.20	0.15	0.09	0.19	0.11	0.17	0.07							
105	0.24	0.27	0.19	0.28	0.23	0.31	0.26	0.19	0.30	0.23	0.29	0.17							
110	0.38	0.39	0.31	0.41	0.35	0.42	0.36	0.30	0.42	0.35	0.41	0.28							
115	0.50	0.52	0.41	0.56	0.47	0.55	0.49	0.43	0.55	0.47	0.56	0.39							
120	0.64	0.68	0.53	0.69	0.59	0.68	0.62	0.53	0.69	0.60	0.69	0.52							
125	0.79	0.82	0.65	0.82	0.71	0.80	0.75	0.67	0.81	0.71	0.81	0.65							
130	0.90	0.95	0.79	0.96	0.81	0.91	0.86	0.78	0.92	0.83	0.91	0.76							
135	1.01	1.07	0.90	1.06	0.92	1.01	0.95	0.89	1.02	0.91	1.03	0.86							
140	1.10	1.16	0.98	1.15	0.99	1.12	1.04	0.98	1.12	1.00	1.13	0.97							
145	1.18	1.24	1.04	1.24	1.07	1.21	1.15	1.06	1.20	1.08	1.22	1.12							
150	1.24	1.34	1.10	1.27	1.14	1.29	1.20	1.15	1.24	1.20	1.28	1.23							
155	1.32	1.39	1.17	1.32	1.21	1.34	1.29	1.25	1.35	1.31	1.31	1.31							
160	1.37	1.45	1.28	1.38	1.32	1.41	1.43	1.35	1.42	1.38	1.37	1.33							
165	1.41	1.49	1.38	1.44	1.41	1.48	1.45	1.44	1.53	1.48	1.45	1.44							
170	1.49	1.57	1.47	1.51	1.48	1.53	1.50	1.55	1.59	1.51	1.53	1.49							
175	1.56	1.67	1.56	1.58	1.55	1.57	1.58	1.64	1.60	1.54	1.60	1.56							
180	1.62	1.64	1.60	1.60	1.61	1.61	1.65	1.67	1.66	1.57	1.62	1.52							

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

□ Range: 0 - 180DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.1000]
 Remarks: