
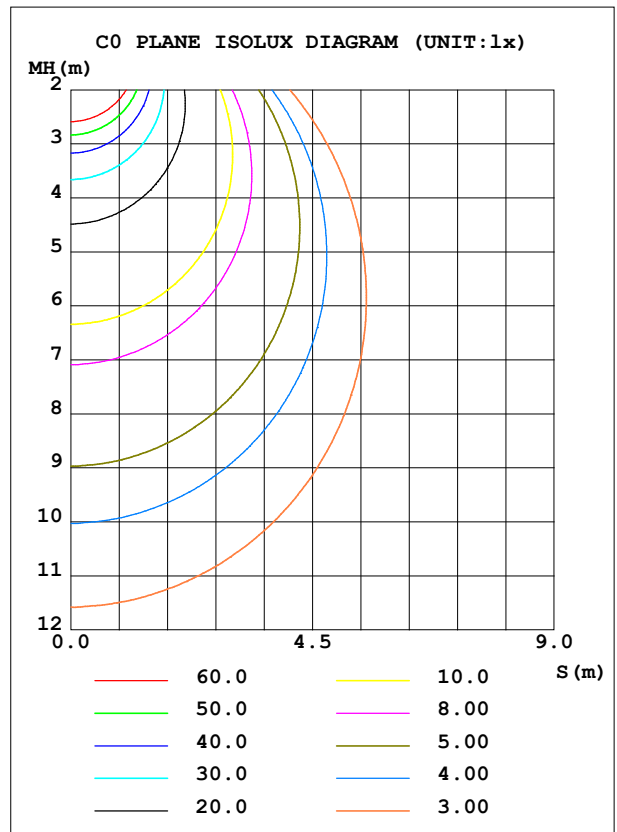


LUMINAIRE PHOTOMETRIC TEST REPORT

| | | |
|---|-------|------------------|
| Test:U:119.77V I:0.1175A P:13.886W PF:0.9866 Freq:59.98Hz | | |
| UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1119.88x1 lm | | |
| NAME: ASD-JFR-6D15AC-WH | TYPE: | WEIGHT: |
| SPEC.: 5000K | DIM.: | SERIAL No.: |
| MFR.: ASD LIGHTING CORP | SUR.: | Shielding Angle: |

| DATA OF LAMP | | PHOTOMETRIC DATA | | | |
|-------------------|-------------------|------------------|--------|--------------------------|-----------|
| MODEL | ASD-JFR-6D15AC-WH | Imax (cd) | 402.3 | S/MH (C0/180) | 1.26 |
| NOMINAL POWER (W) | 15 | LOR (%) | 100.0 | S/MH (C90/270) | 1.23 |
| RATED VOLTAGE (V) | 120 | TOTAL FLUX (lm) | 1119.9 | η UP, DN (C0-180) | 0.0, 50.5 |
| NOMINAL FLUX (lm) | 1119.88 | CIE CLASS | DIRECT | η UP, DN (C180-360) | 0.0, 49.5 |
| LAMPS INSIDE | 1 | η up (%) | 0.0 | CIBSE SHR NOM | 1.25 |
| TEST VOLTAGE (V) | 120 | η down (%) | 100.0 | CIBSE SHR MAX | 1.35 |

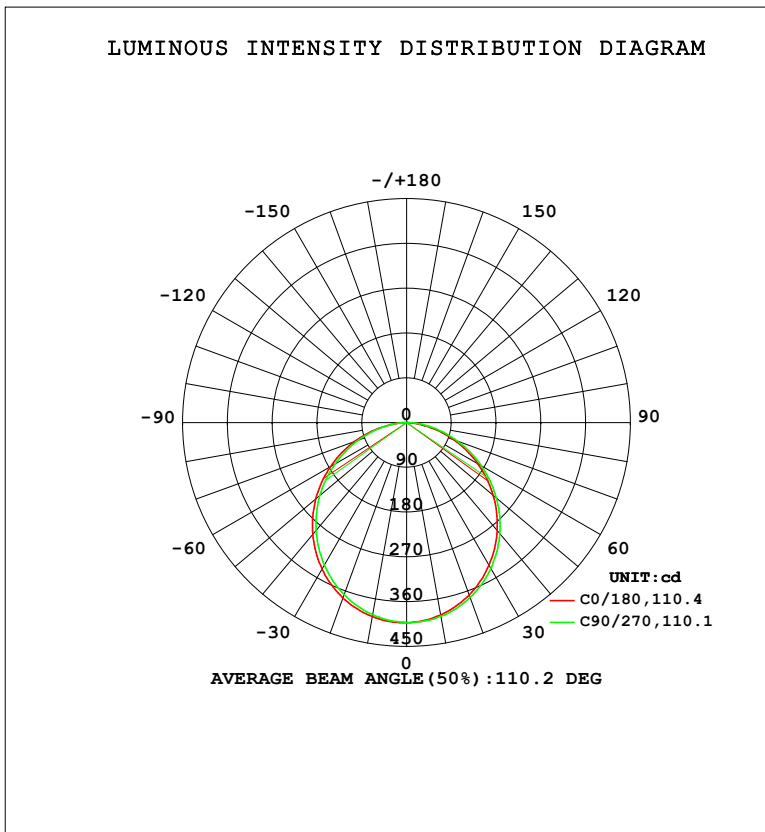

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2023-04-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


| γ | C0 | C45 | C90 | C135 | C180 | C225 | C270 | C315 | γ | Φ zone | Φ total | %lum,lamp |
|----------|-----------------------|--------|--------|--------|--------|--------|--------|--------|----------|-------------|--------------|-----------|
| 10 | 392.7 | 394.0 | 395.6 | 396.2 | 396.0 | 393.9 | 392.2 | 391.6 | 0- 10 | 37.98 | 37.98 | 3.39,3.39 |
| 20 | 368.4 | 371.5 | 374.0 | 375.2 | 374.9 | 371.2 | 368.0 | 367.0 | 10- 20 | 108.4 | 146.4 | 13.1,13.1 |
| 30 | 331.3 | 334.8 | 338.7 | 340.7 | 340.1 | 334.9 | 330.9 | 329.7 | 20- 30 | 163.4 | 309.8 | 27.7,27.7 |
| 40 | 283.4 | 287.3 | 291.7 | 294.3 | 293.7 | 287.6 | 283.1 | 281.8 | 30- 40 | 195.5 | 505.3 | 45.1,45.1 |
| 50 | 227.1 | 231.0 | 235.6 | 238.7 | 238.5 | 232.4 | 227.4 | 226.2 | 40- 50 | 201.1 | 706.4 | 63.1,63.1 |
| 60 | 165.3 | 168.9 | 173.3 | 176.5 | 176.6 | 170.7 | 166.2 | 164.8 | 50- 60 | 180.3 | 886.7 | 79.2,79.2 |
| 70 | 101.5 | 104.6 | 108.5 | 111.3 | 111.6 | 106.5 | 102.5 | 101.1 | 60- 70 | 136.7 | 1023 | 91.4,91.4 |
| 80 | 37.21 | 42.20 | 47.23 | 47.39 | 44.89 | 43.83 | 43.14 | 39.63 | 70- 80 | 78.27 | 1102 | 98.4,98.4 |
| 90 | 0.4488 | 0.4477 | 0.6605 | 0.4414 | 0.2601 | 0.2854 | 0.3200 | 0.3111 | 80- 90 | 18.21 | 1120 | 100,100 |
| 100 | | | | | | | | | 90-100 | | | |
| 110 | | | | | | | | | 100-110 | | | |
| 120 | | | | | | | | | 110-120 | | | |
| 130 | | | | | | | | | 120-130 | | | |
| 140 | | | | | | | | | 130-140 | | | |
| 150 | | | | | | | | | 140-150 | | | |
| 160 | | | | | | | | | 150-160 | | | |
| 170 | | | | | | | | | 160-170 | | | |
| 180 | | | | | | | | | 170-180 | | | |
| DEG | LUMINOUS INTENSITY:cd | | | | | | | | | UNIT:lm | | |

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2023-04-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

| | | |
|---|-------|------------------|
| Test:U:119.77V I:0.1175A P:13.886W PF:0.9866 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1119.88x1 lm | | |
| NAME: ASD-JFR-6D15AC-WH | TYPE: | WEIGHT: |
| SPEC.: 5000K 90 | DIM.: | SERIAL No.: |
| MFR.: ASD LIGHTING CORP | SUR.: | Shielding Angle: |

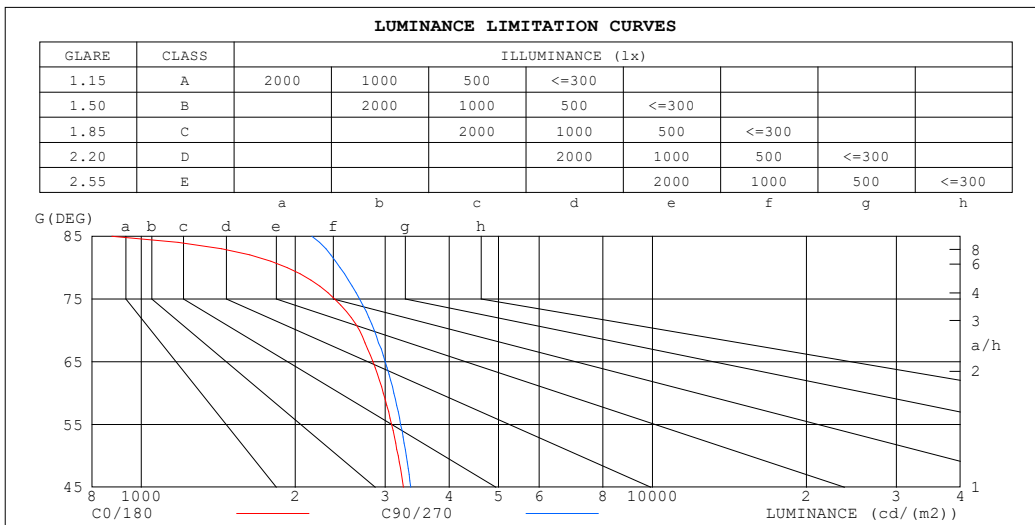

| LUMINANCE cd/(m2) | | |
|-------------------|--------|---------|
| G (DEG) | C0/180 | C90/270 |
| 85 | 875 | 2155 |
| 80 | 1928 | 2448 |
| 75 | 2389 | 2674 |
| 70 | 2672 | 2855 |
| 65 | 2839 | 2998 |
| 60 | 2975 | 3120 |
| 55 | 3086 | 3217 |
| 50 | 3180 | 3299 |
| 45 | 3259 | 3368 |


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators:
 Test Date: 2023-04-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

| | | |
|---|-------|------------------|
| Test:U:119.77V I:0.1175A P:13.886W PF:0.9866 Freq:59.98Hz | | |
| UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1119.88x1 lm | | |
| NAME: ASD-JFR-6D15AC-WH | TYPE: | WEIGHT: |
| SPEC.: 5000K 90 | DIM.: | SERIAL No.: |
| MFR.: ASD LIGHTING CORP | SUR.: | Shielding Angle: |

| ρcc | 80% | | | 70% | | | 50% | | | 30% | | | 10% | | | 0 |
|------|---------------------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| ρw | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 0 |
| ρfc | 20% | | | 20% | | | 20% | | | 20% | | | 20% | | | 0 |
| RCR | RCR:Room Cavity Ratio | | | | | | | | | | | | | | | |
| | Coefficients of Utilization(CU) | | | | | | | | | | | | | | | |
| 0.0 | 1.19 | 1.19 | 1.19 | 1.16 | 1.16 | 1.16 | 1.11 | 1.11 | 1.11 | 1.06 | 1.06 | 1.06 | 1.02 | 1.02 | 1.02 | 1.00 |
| 1.0 | 1.04 | .00 | .96 | 1.02 | .98 | .94 | .98 | .94 | .91 | .94 | .91 | .89 | .90 | .88 | .86 | .84 |
| 2.0 | .91 | .84 | .78 | .89 | .83 | .77 | .85 | .80 | .75 | .82 | .78 | .74 | .79 | .75 | .72 | .70 |
| 3.0 | .80 | .71 | .65 | .78 | .70 | .64 | .75 | .69 | .63 | .72 | .67 | .62 | .70 | .65 | .61 | .59 |
| 4.0 | .71 | .62 | .55 | .69 | .61 | .55 | .67 | .59 | .54 | .64 | .58 | .53 | .62 | .57 | .52 | .50 |
| 5.0 | .63 | .54 | .47 | .62 | .53 | .47 | .60 | .52 | .47 | .58 | .51 | .46 | .56 | .50 | .46 | .43 |
| 6.0 | .57 | .48 | .41 | .56 | .47 | .41 | .54 | .46 | .41 | .52 | .46 | .40 | .51 | .45 | .40 | .38 |
| 7.0 | .51 | .43 | .36 | .51 | .42 | .36 | .49 | .42 | .36 | .48 | .41 | .36 | .46 | .40 | .36 | .34 |
| 8.0 | .47 | .38 | .33 | .46 | .38 | .32 | .45 | .38 | .32 | .44 | .37 | .32 | .42 | .36 | .32 | .30 |
| 9.0 | .43 | .35 | .29 | .42 | .35 | .29 | .41 | .34 | .29 | .40 | .34 | .29 | .39 | .33 | .29 | .27 |
| 10.0 | .40 | .32 | .27 | .39 | .32 | .26 | .38 | .31 | .26 | .37 | .31 | .26 | .36 | .30 | .26 | .24 |

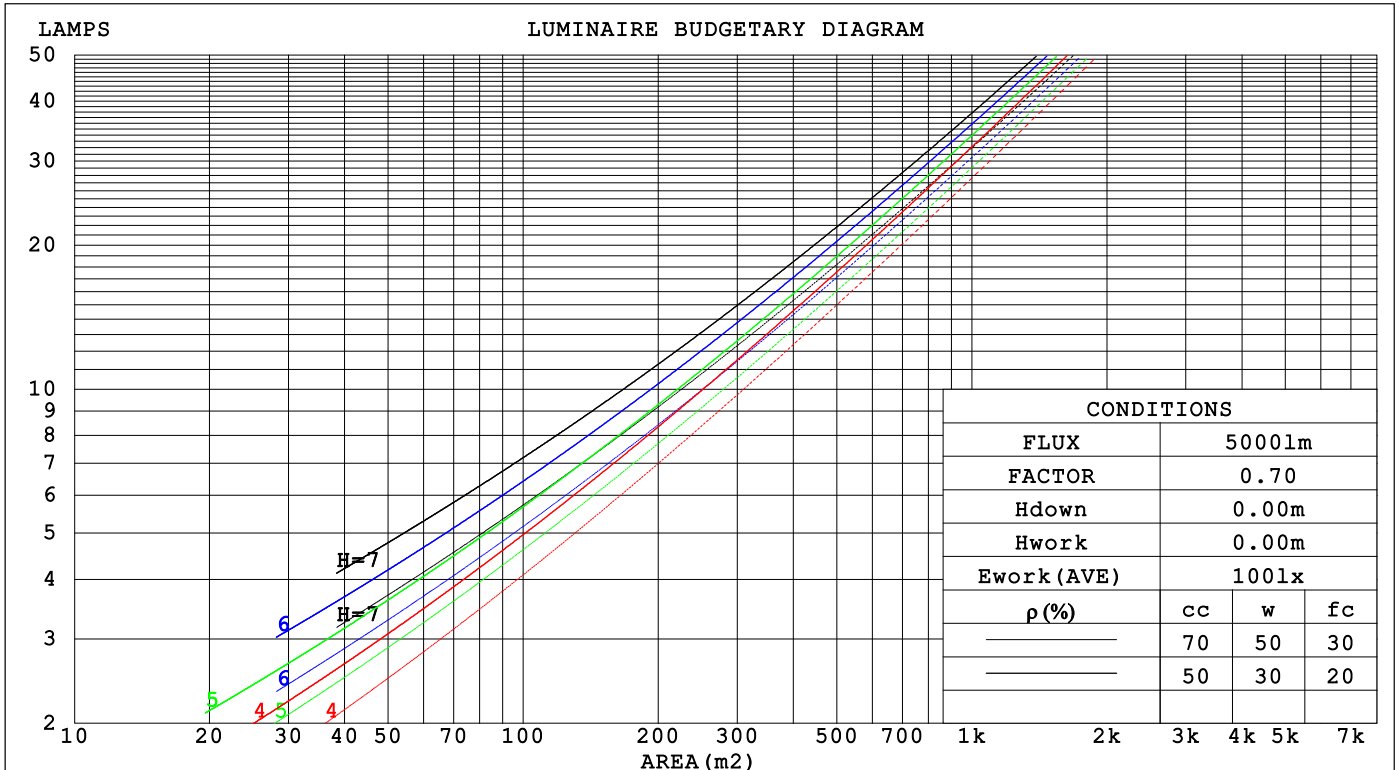

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2023-04-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

WEC AND CCEC

| | | |
|---|-------|------------------|
| Test:U:119.77V I:0.1175A P:13.886W PF:0.9866 Freq:59.98Hz | | |
| UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1119.88x1 lm | | |
| NAME: ASD-JFR-6D15AC-WH | TYPE: | WEIGHT: |
| SPEC.: 5000K 90 | DIM.: | SERIAL No.: |
| MFR.: ASD LIGHTING CORP | SUR.: | Shielding Angle: |

| ρ_{CC} | 80% | | | 70% | | | 50% | | | 30% | | | 10% | | | 0 |
|-------------|-----------------------|------|------|------|------|------|---------------------------------|------|------|------|------|------|------|------|------|---|
| ρ_w | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 0 |
| ρ_{fc} | 20% | | | 20% | | | 20% | | | 20% | | | 20% | | | 0 |
| RCR | RCR:Room Cavity Ratio | | | | | | Wall Exitance Coefficients(WEC) | | | | | | | | | |
| 0.0 | | | | | | | | | | | | | | | | |
| 1.0 | .306 | .174 | .055 | .299 | .171 | .054 | .286 | .164 | .052 | .274 | .158 | .051 | .263 | .152 | .049 | |
| 2.0 | .290 | .159 | .049 | .283 | .156 | .048 | .272 | .151 | .047 | .261 | .146 | .046 | .251 | .142 | .045 | |
| 3.0 | .268 | .143 | .043 | .263 | .141 | .042 | .253 | .137 | .042 | .243 | .133 | .041 | .234 | .130 | .040 | |
| 4.0 | .248 | .129 | .038 | .243 | .127 | .038 | .234 | .124 | .037 | .225 | .121 | .037 | .218 | .118 | .036 | |
| 5.0 | .229 | .117 | .034 | .225 | .116 | .034 | .217 | .113 | .033 | .209 | .110 | .033 | .202 | .108 | .032 | |
| 6.0 | .213 | .107 | .031 | .209 | .106 | .030 | .202 | .103 | .030 | .195 | .101 | .030 | .189 | .099 | .029 | |
| 7.0 | .198 | .098 | .028 | .195 | .097 | .028 | .188 | .095 | .027 | .182 | .093 | .027 | .177 | .092 | .027 | |
| 8.0 | .185 | .090 | .025 | .182 | .090 | .025 | .176 | .088 | .025 | .171 | .087 | .025 | .166 | .085 | .025 | |
| 9.0 | .174 | .084 | .023 | .171 | .083 | .023 | .166 | .082 | .023 | .161 | .081 | .023 | .156 | .079 | .023 | |
| 10.0 | .163 | .078 | .022 | .161 | .078 | .022 | .156 | .076 | .022 | .152 | .075 | .021 | .147 | .074 | .021 | |

| ρ_{CC} | 80% | | | 70% | | | 50% | | | 30% | | | 10% | | | 0 |
|-------------|-----------------------|------|------|------|------|------|--|------|------|------|------|------|------|------|------|---|
| ρ_w | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 0 |
| ρ_{fc} | 20% | | | 20% | | | 20% | | | 20% | | | 20% | | | 0 |
| RCR | RCR:Room Cavity Ratio | | | | | | Ceiling Cavity Exitance Coefficients(CCEC) | | | | | | | | | |
| 0.0 | .190 | .190 | .190 | .163 | .163 | .163 | .111 | .111 | .111 | .064 | .064 | .064 | .020 | .020 | .020 | |
| 1.0 | .180 | .156 | .135 | .154 | .134 | .116 | .105 | .092 | .080 | .061 | .053 | .047 | .019 | .017 | .015 | |
| 2.0 | .172 | .132 | .098 | .147 | .114 | .085 | .101 | .079 | .059 | .058 | .046 | .035 | .019 | .015 | .011 | |
| 3.0 | .164 | .114 | .075 | .141 | .099 | .065 | .097 | .068 | .045 | .056 | .040 | .027 | .018 | .013 | .009 | |
| 4.0 | .157 | .101 | .058 | .134 | .087 | .051 | .092 | .061 | .036 | .053 | .036 | .021 | .017 | .012 | .007 | |
| 5.0 | .149 | .091 | .047 | .128 | .078 | .041 | .088 | .055 | .029 | .051 | .032 | .017 | .016 | .010 | .006 | |
| 6.0 | .142 | .082 | .039 | .122 | .071 | .034 | .084 | .050 | .024 | .049 | .029 | .014 | .016 | .010 | .005 | |
| 7.0 | .135 | .075 | .033 | .116 | .065 | .029 | .080 | .046 | .021 | .047 | .027 | .012 | .015 | .009 | .004 | |
| 8.0 | .129 | .069 | .029 | .111 | .060 | .025 | .077 | .042 | .018 | .045 | .025 | .011 | .014 | .008 | .004 | |
| 9.0 | .123 | .065 | .025 | .106 | .056 | .022 | .073 | .039 | .016 | .043 | .023 | .009 | .014 | .008 | .003 | |
| 10.0 | .117 | .060 | .022 | .101 | .052 | .020 | .070 | .037 | .014 | .041 | .022 | .008 | .013 | .007 | .003 | |

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2023-04-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

| | | | | | | | | | | |
|---|------------------|------|------|-------|------|----------------|------|------------------|------|------|
| Test:U:119.77V I:0.1175A P:13.886W PF:0.9866 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1119.88x1 lm | | | | | | | | | | |
| NAME: ASD-JFR-6D15AC-WH | | | | TYPE: | | | | WEIGHT: | | |
| SPEC.: 5000K 90 | | | | DIM.: | | | | SERIAL No.: | | |
| MFR.: ASD LIGHTING CORP | | | | SUR.: | | | | Shielding Angle: | | |
| ceiling/cavity | 0.7 | 0.7 | 0.5 | 0.5 | 0.3 | 0.7 | 0.7 | 0.5 | 0.5 | 0.3 |
| walls | 0.5 | 0.3 | 0.5 | 0.3 | 0.3 | 0.5 | 0.3 | 0.5 | 0.3 | 0.3 |
| working plane | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 |
| Room dimensions | Viewed crosswise | | | | | Viewed endwise | | | | |
| x = 2H y = 2H | 16.4 | 17.9 | 16.6 | 18.1 | 18.3 | 16.5 | 18.1 | 16.8 | 18.3 | 18.5 |
| 3H | 17.8 | 19.2 | 18.1 | 19.4 | 19.7 | 18.1 | 19.5 | 18.4 | 19.7 | 19.9 |
| 4H | 18.4 | 19.7 | 18.7 | 20.0 | 20.2 | 18.7 | 20.0 | 19.0 | 20.3 | 20.5 |
| 6H | 18.7 | 20.0 | 19.0 | 20.2 | 20.5 | 19.1 | 20.4 | 19.5 | 20.7 | 20.9 |
| 8H | 18.8 | 20.0 | 19.1 | 20.3 | 20.6 | 19.3 | 20.5 | 19.6 | 20.8 | 21.1 |
| 12H | 18.8 | 19.9 | 19.1 | 20.2 | 20.5 | 19.4 | 20.5 | 19.7 | 20.8 | 21.1 |
| 4H 2H | 17.0 | 18.3 | 17.3 | 18.6 | 18.8 | 17.1 | 18.4 | 17.4 | 18.7 | 19.0 |
| 3H | 18.6 | 19.8 | 19.0 | 20.1 | 20.4 | 18.8 | 20.0 | 19.2 | 20.3 | 20.6 |
| 4H | 19.3 | 20.4 | 19.7 | 20.7 | 21.0 | 19.6 | 20.6 | 19.9 | 21.0 | 21.3 |
| 6H | 19.7 | 20.7 | 20.1 | 21.0 | 21.4 | 20.1 | 21.1 | 20.5 | 21.4 | 21.8 |
| 8H | 19.9 | 20.7 | 20.3 | 21.1 | 21.5 | 20.4 | 21.2 | 20.8 | 21.6 | 22.0 |
| 12H | 19.9 | 20.7 | 20.3 | 21.1 | 21.5 | 20.5 | 21.3 | 20.9 | 21.7 | 22.1 |
| 8H 4H | 19.6 | 20.4 | 20.0 | 20.8 | 21.2 | 19.8 | 20.7 | 20.2 | 21.1 | 21.4 |
| 6H | 20.2 | 20.9 | 20.6 | 21.3 | 21.7 | 20.5 | 21.3 | 21.0 | 21.7 | 22.1 |
| 8H | 20.3 | 21.0 | 20.8 | 21.4 | 21.8 | 20.8 | 21.5 | 21.3 | 21.9 | 22.3 |
| 12H | 20.4 | 20.9 | 20.9 | 21.4 | 21.9 | 21.0 | 21.6 | 21.5 | 22.0 | 22.5 |
| 12H 4H | 19.6 | 20.4 | 20.0 | 20.8 | 21.2 | 19.8 | 20.6 | 20.2 | 21.0 | 21.4 |
| 6H | 20.2 | 20.9 | 20.7 | 21.3 | 21.7 | 20.6 | 21.2 | 21.0 | 21.7 | 22.1 |
| 8H | 20.4 | 21.0 | 20.9 | 21.4 | 21.9 | 20.9 | 21.5 | 21.4 | 21.9 | 22.4 |
| Variations with the observer position at spacings(CIE Pub.117): | | | | | | | | | | |
| S = 1.0H | + 0.2 / - 0.2 | | | | | + 0.2 / - 0.2 | | | | |
| 1.5H | + 0.2 / - 0.3 | | | | | + 0.2 / - 0.3 | | | | |
| 2.0H | + 0.2 / - 0.3 | | | | | + 0.2 / - 0.2 | | | | |

CIE Pub.117, 1120 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 0.4)
 Area: 0.111111 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2023-04-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

| | | |
|---|-------|------------------|
| Test:U:119.77V I:0.1175A P:13.886W PF:0.9866 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1119.88x1 lm | | |
| NAME: ASD-JFR-6D15AC-WH | TYPE: | WEIGHT: |
| SPEC.: 5000K 90 | DIM.: | SERIAL No.: |
| MFR.: ASD LIGHTING CORP | SUR.: | Shielding Angle: |


| REFLECTANCE | | | | | | | | | | |
|----------------------------------|--|-----|-----------|-----|-----|-----|---------------|-----|-----|--------|
| Ceiling | 0.8 | 0.8 | 0.8 | 0.7 | 0.7 | 0.7 | 0.5 | 0.5 | 0.5 | 0 |
| Walls | 0.7 | 0.5 | 0.3 | 0.7 | 0.5 | 0.3 | 0.7 | 0.5 | 0.3 | 0 |
| Working plane | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0 |
| ROOM INDEX | UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$ | | | | | | | | | |
| $k = 0.60$ | 58 | 46 | 39 | 57 | 46 | 39 | 56 | 46 | 39 | 33 |
| 0.80 | 68 | 56 | 49 | 67 | 56 | 49 | 65 | 55 | 48 | 41 |
| 1.00 | 76 | 65 | 58 | 75 | 65 | 58 | 73 | 66 | 57 | 50 |
| 1.25 | 83 | 73 | 66 | 82 | 72 | 65 | 79 | 71 | 65 | 57 |
| 1.50 | 88 | 78 | 72 | 87 | 78 | 71 | 84 | 76 | 70 | 62 |
| 2.00 | 95 | 87 | 80 | 93 | 85 | 79 | 90 | 83 | 78 | 70 |
| 2.50 | 99 | 91 | 85 | 97 | 90 | 84 | 93 | 87 | 83 | 74 |
| 3.00 | 102 | 96 | 90 | 100 | 94 | 89 | 96 | 91 | 87 | 78 |
| 4.00 | 106 | 101 | 96 | 104 | 99 | 95 | 100 | 96 | 92 | 83 |
| 5.00 | 109 | 104 | 100 | 106 | 102 | 98 | 102 | 98 | 95 | 86 |
| ROOM INDEX | UF(total) | | | | | | | | | Direct |
| According to DIN EN 13032-2 2004 | | | Suspended | | | | SHRNOM = 1.25 | | | |

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2023-04-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

| | | |
|---|-------|------------------|
| Test:U:119.77V I:0.1175A P:13.886W PF:0.9866 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1119.88x1 lm | | |
| NAME: ASD-JFR-6D15AC-WH | TYPE: | WEIGHT: |
| SPEC.: 5000K 90 | DIM.: | SERIAL No.: |
| MFR.: ASD LIGHTING CORP | SUR.: | Shielding Angle: |

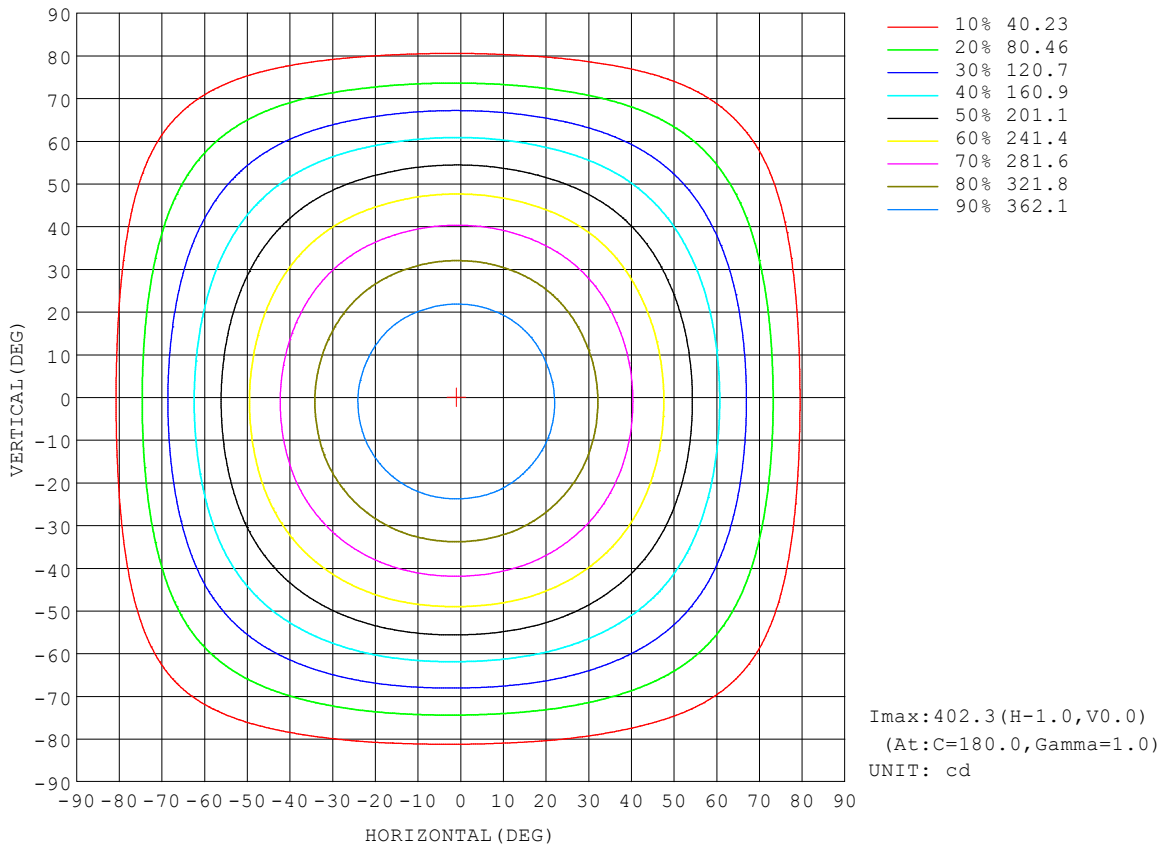


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators:
 Test Date: 2023-04-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

AAI Figure

| | | |
|---|-------|------------------|
| Test:U:119.77V I:0.1175A P:13.886W PF:0.9866 Freq:59.98Hz | | |
| UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1119.88x1 lm | | |
| NAME: ASD-JFR-6D15AC-WH | TYPE: | WEIGHT: |
| SPEC.: 5000K 90 | DIM.: | SERIAL No.: |
| MFR.: ASD LIGHTING CORP | SUR.: | Shielding Angle: |

Flux out:818.7 lm

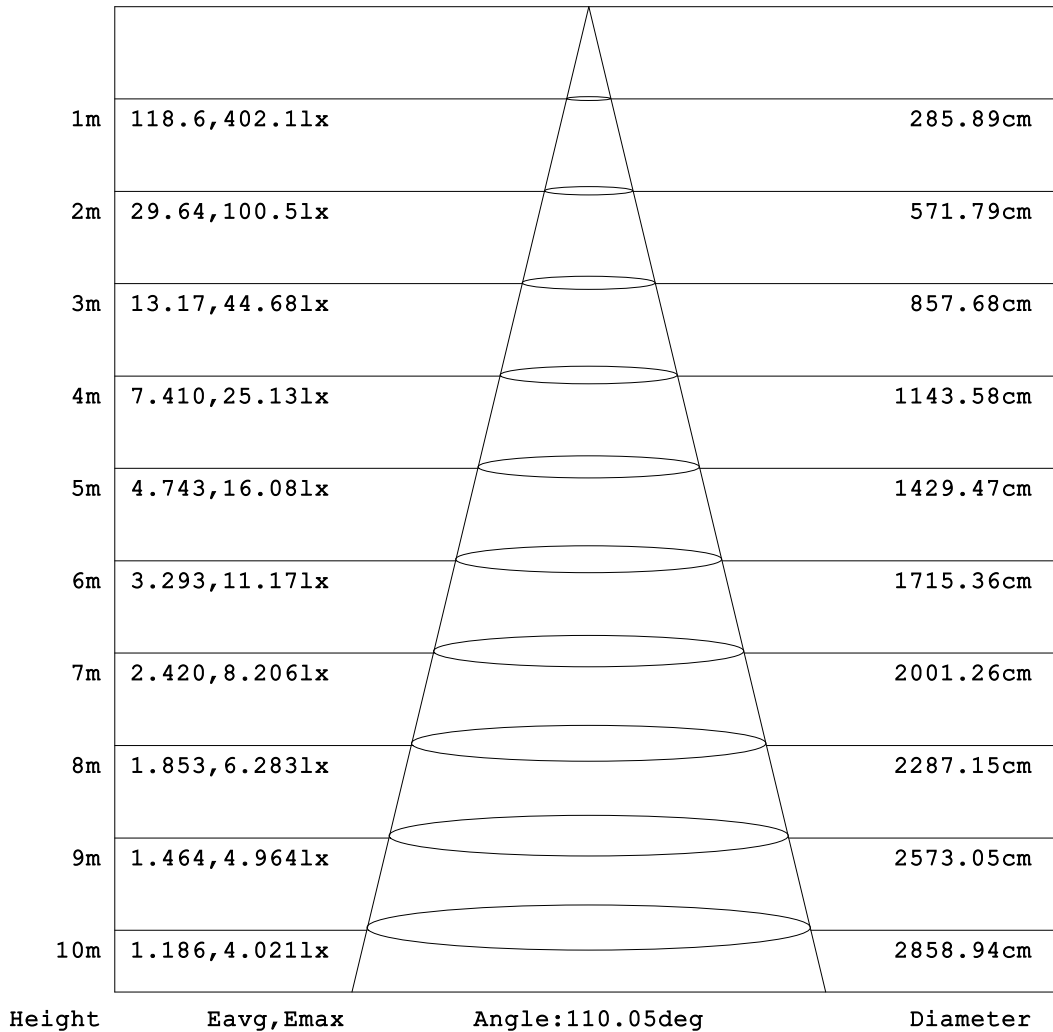


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators:
 Test Date: 2023-04-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

| | | |
|---|-------|------------------|
| Test:U:119.77V I:0.1175A P:13.886W PF:0.9866 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1119.88x1 lm | | |
| NAME: ASD-JFR-6D15AC-WH | TYPE: | WEIGHT: |
| SPEC.: 5000K 90 | DIM.: | SERIAL No.: |
| MFR.: ASD LIGHTING CORP | SUR.: | Shielding Angle: |

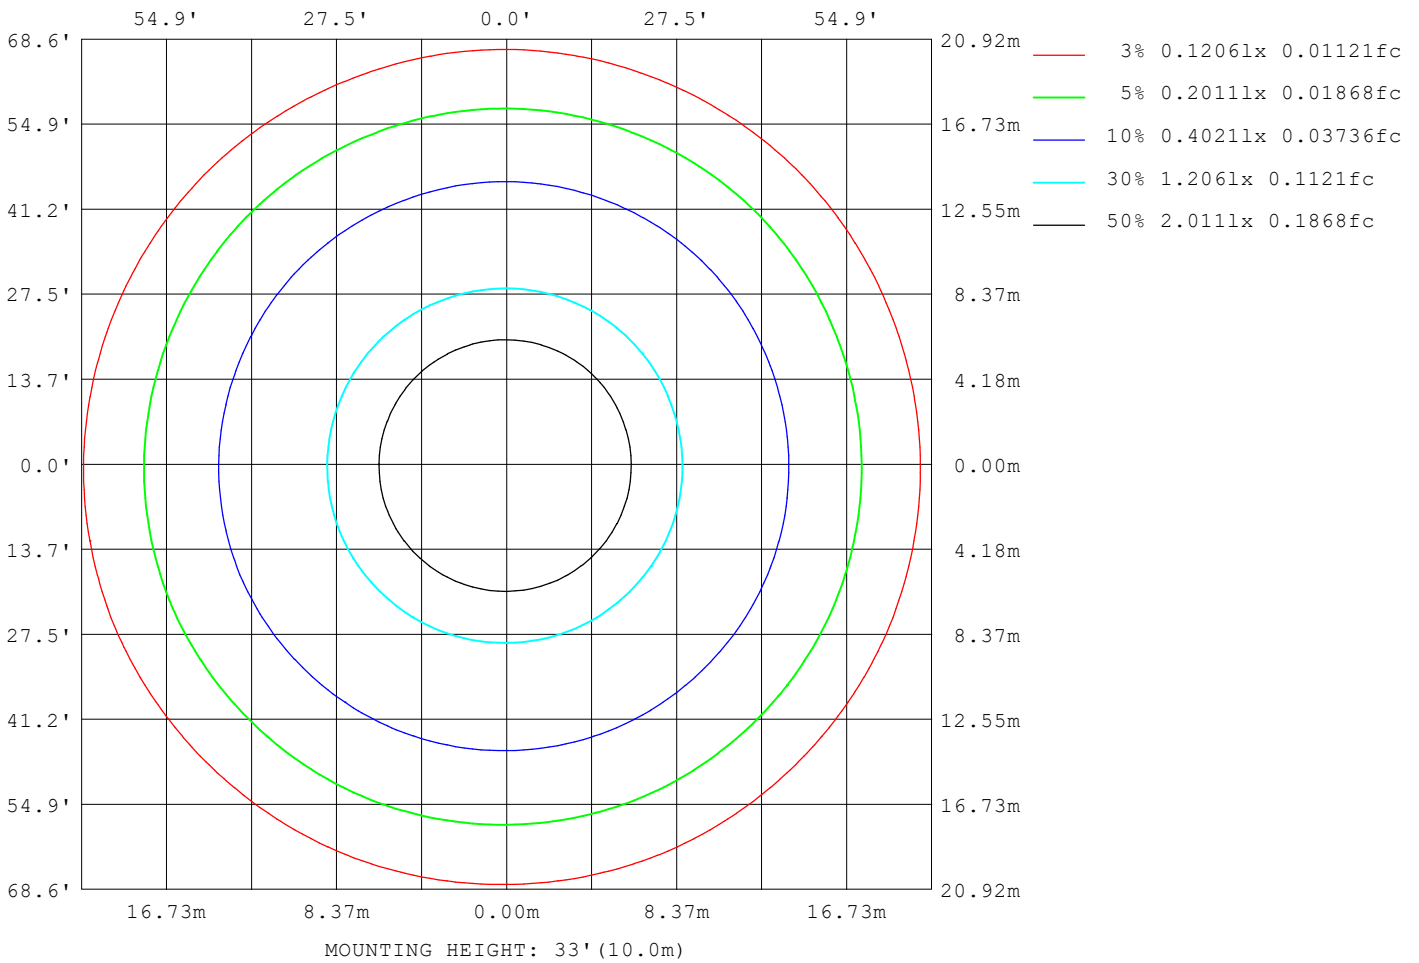

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2023-04-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LED Avg.L Report

| | | |
|---|-------|------------------|
| Test:U:119.77V I:0.1175A P:13.886W PF:0.9866 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1119.88x1 lm | | |
| NAME: ASD-JFR-6D15AC-WH | TYPE: | WEIGHT: |
| SPEC.: 5000K 90 | DIM.: | SERIAL No.: |
| MFR.: ASD LIGHTING CORP | SUR.: | Shielding Angle: |


| AvgL | cd/m2 |
|------------------|-------|
| L_0~180 (65) av | 2956 |
| L_0~180 (75) av | 2549 |
| L_0~180 (85) av | 1171 |
| L_90~270 (65) av | 2931 |
| L_90~270 (75) av | 2584 |
| L_90~270 (85) av | 1984 |
| L_45 (65) av | 2941 |
| L_45 (75) av | 2579 |
| L_45 (85) av | 1486 |

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:
 Test Date:2023-04-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

Planar Illuminance Curve

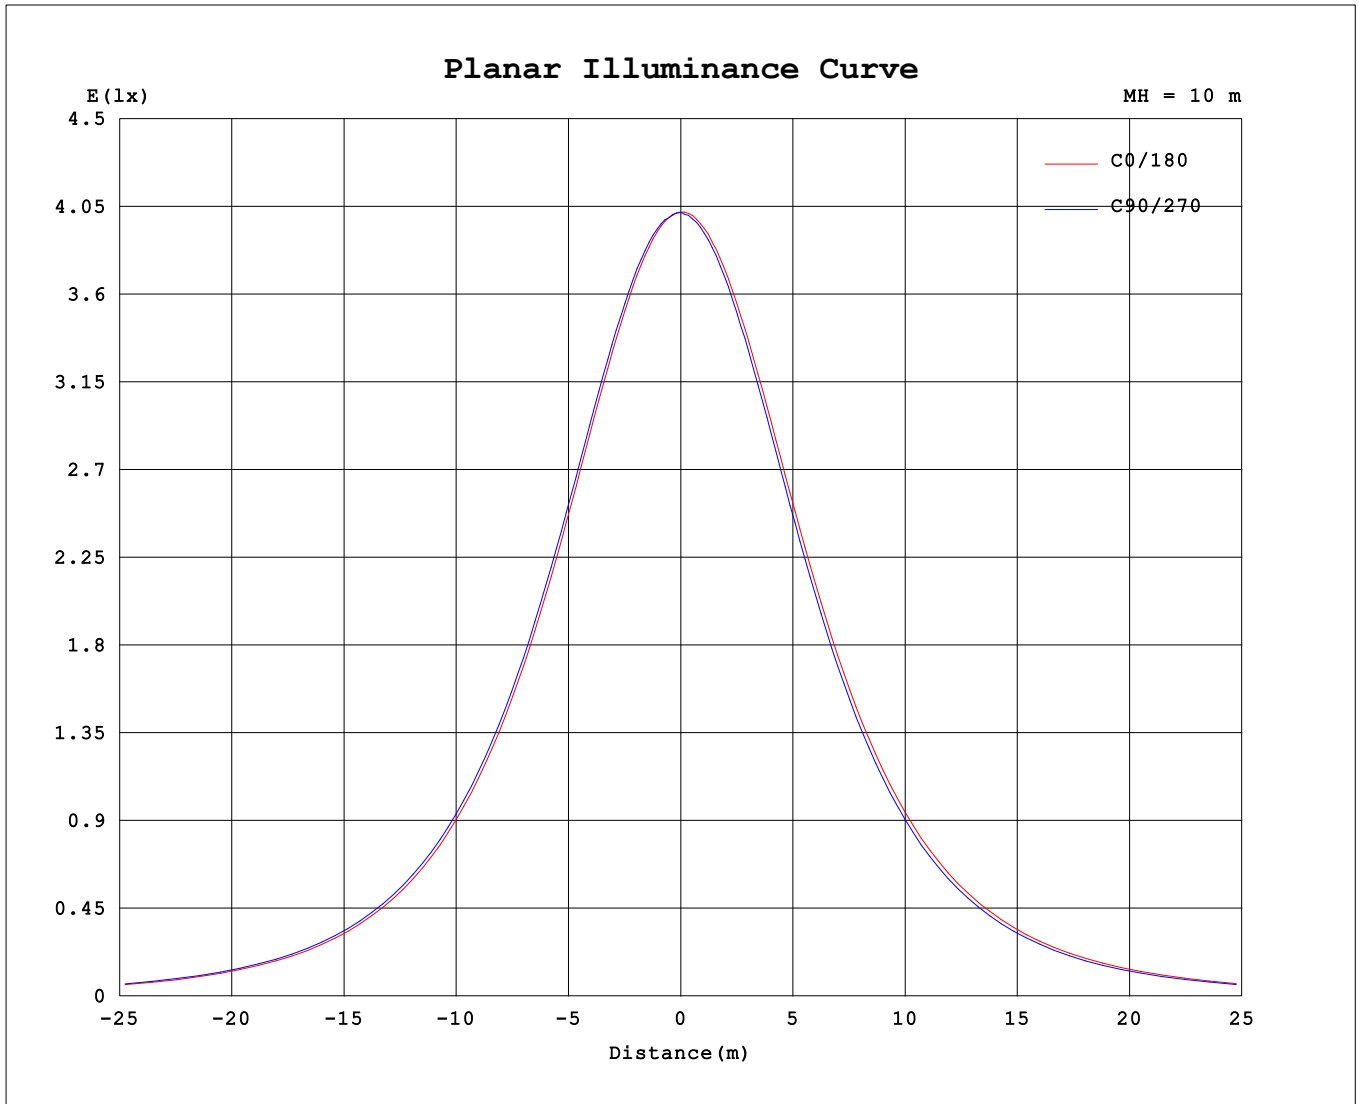

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2023-04-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

