
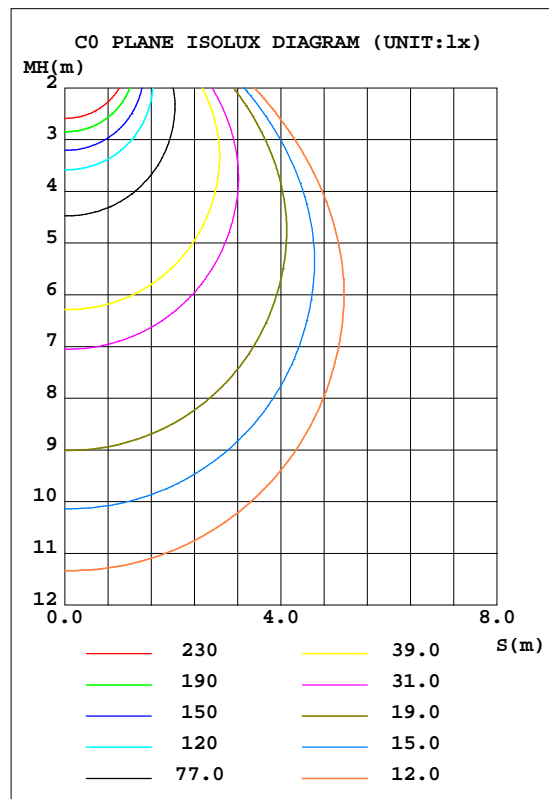


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.07V I:0.3320A P:39.500W PF:0.9911 Freq:60.00Hz Lamp Flux:3312.01x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 83.85 lm/W			
MODEL	DA40AC(40W 4000K)	I _{max} (cd)	1542	S/MH(C0/180)	1.15
NOMINAL POWER(W)	40	LOR(%)	100.0	S/MH(C90/270)	1.18
RATED VOLTAGE(V)	120-277	TOTAL FLUX(lm)	3312.0	h UP, DN(C0-180)	0.2,50.0
NOMINAL FLUX(lm)	3312.01	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.2,49.5
LAMPS INSIDE	1	h up(%)	0.4	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	h down(%)	99.6	CIBSE SHR MAX	1.30

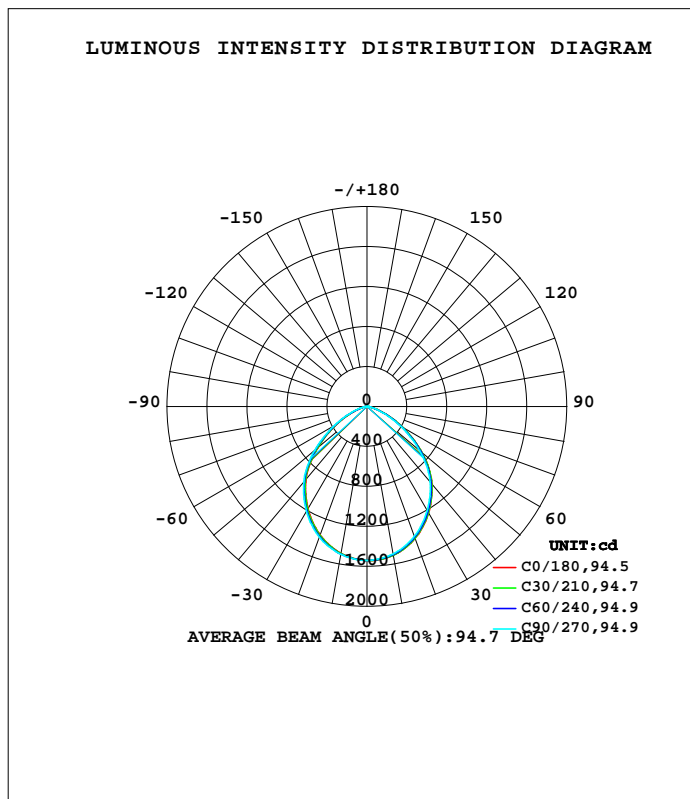

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-12-05

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.1494]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	1512	1508	1499	1492	1492	1497	1504	1512	0- 10	145.2	145.2	4.38,4.38
20	1406	1399	1384	1369	1369	1379	1393	1406	10- 20	409.6	554.9	16.8,16.8
30	1233	1224	1206	1183	1181	1195	1213	1232	20- 30	600.5	1155	34.9,34.9
40	1012	1004	984.9	953.7	950.9	967.1	985.1	1008	30- 40	687.1	1843	55.6,55.6
50	721.7	713.9	692.3	652.9	642.9	660.3	684.9	714.3	40- 50	647.1	2490	75.2,75.2
60	404.5	399.8	379.2	346.5	340.8	351.6	368.9	394.7	50- 60	468.7	2958	89.3,89.3
70	160.5	155.5	141.7	127.3	126.3	131.7	140.3	154.2	60- 70	245.5	3204	96.7,96.7
80	35.90	34.55	30.88	29.55	29.49	29.56	31.20	34.13	70- 80	79.32	3283	99.1,99.1
90	0.6249	0.0949	0.1689	0.1409	0.1482	0.2675	0.1821	0.1782	80- 90	14.36	3298	99.6,99.6
100	0.2600	0.3413	0.6123	0.5561	0.6130	0.5773	0.5198	0.4647	90-100	0.3008	3298	99.6,99.6
110	0.8437	0.9603	1.379	1.313	1.380	1.344	1.258	1.137	100-110	0.8675	3299	99.6,99.6
120	1.667	1.752	2.335	2.253	2.317	2.270	2.186	2.045	110-120	1.619	3300	99.6,99.6
130	2.540	2.558	3.284	3.196	3.253	3.160	3.072	2.936	120-130	2.272	3303	99.7,99.7
140	3.293	3.280	4.135	3.991	3.928	3.888	3.831	3.777	130-140	2.609	3305	99.8,99.8
150	3.976	4.001	4.726	4.562	4.597	4.476	4.556	4.397	140-150	2.557	3308	99.9,99.9
160	4.659	4.824	5.246	5.055	5.181	5.120	5.090	5.016	150-160	2.166	3310	99.9,99.9
170	5.299	5.560	5.724	5.544	5.723	5.686	5.765	5.544	160-170	1.504	3311	100,100
180	5.863	5.961	5.913	5.949	6.046	6.007	6.047	6.012	170-180	0.5500	3312	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-12-05

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.700m [K=1.1494]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.07V I:0.3320A P:39.500W PF:0.9911 Freq:60.00Hz Lamp Flux:3312.01x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

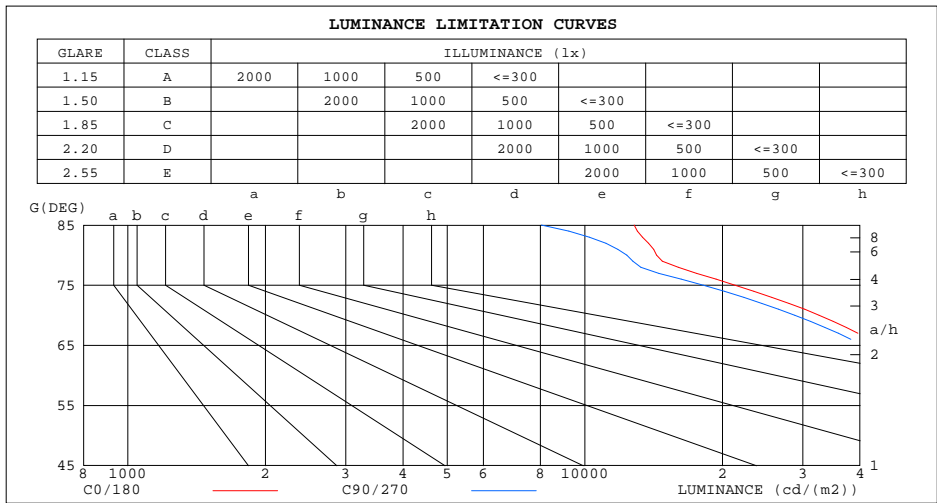

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	12819	8035
80	14354	12360
75	21311	18172
70	32587	28796
65	44282	40596
60	56166	52708
55	67722	64264
50	77961	74856
45	85932	83304


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-12-05

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.1494]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.07V I:0.3320A P:39.500W PF:0.9911 Freq:60.00Hz Lamp Flux:3312.01x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.07	1.03	.00	1.04	1.01	.98	1.00	.98	.95	.96	.94	.92	.93	.91	.89	.87
2.0	.95	.89	.84	.93	.88	.83	.90	.85	.81	.86	.83	.79	.83	.80	.78	.76
3.0	.85	.78	.72	.83	.77	.71	.80	.75	.70	.78	.73	.69	.75	.71	.68	.66
4.0	.76	.68	.62	.75	.68	.62	.72	.66	.61	.70	.65	.60	.68	.63	.59	.57
5.0	.69	.61	.55	.68	.60	.54	.65	.59	.54	.64	.58	.53	.62	.57	.52	.50
6.0	.62	.54	.48	.61	.54	.48	.60	.53	.48	.58	.52	.47	.56	.51	.47	.45
7.0	.57	.49	.43	.56	.48	.43	.55	.48	.43	.53	.47	.42	.52	.46	.42	.40
8.0	.52	.44	.39	.51	.44	.39	.50	.43	.38	.49	.43	.38	.48	.42	.38	.36
9.0	.48	.40	.35	.47	.40	.35	.46	.40	.35	.45	.39	.35	.44	.39	.34	.33
10.0	.44	.37	.32	.44	.37	.32	.43	.36	.32	.42	.36	.32	.41	.36	.31	.30

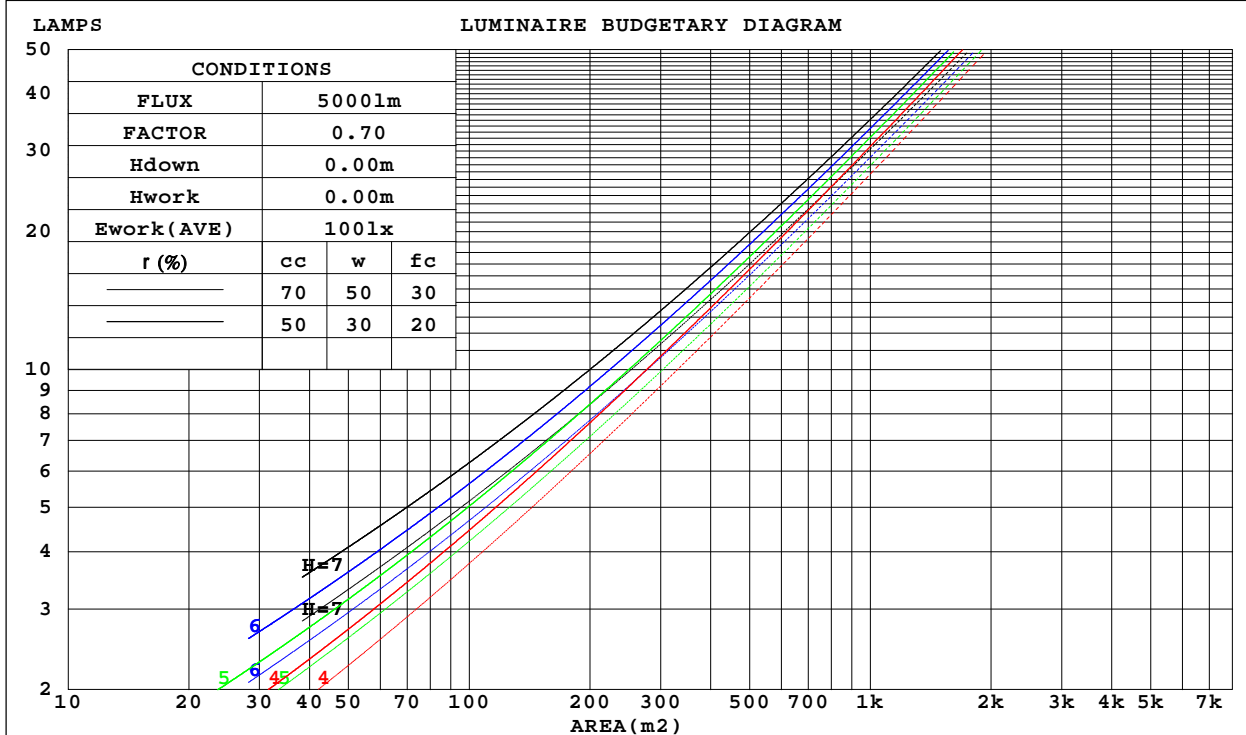

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-12-05

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.1494]
 Remarks:

WEC AND CCEC

Test:U:120.07V I:0.3320A P:39.500W PF:0.9911 Freq:60.00Hz Lamp Flux:3312.01x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.254	.144	.046	.247	.141	.045	.234	.134	.043	.222	.128	.041	.210	.122	.039	
2.0	.247	.135	.042	.241	.133	.041	.229	.128	.040	.219	.123	.038	.209	.118	.037	
3.0	.234	.125	.037	.229	.123	.037	.219	.119	.036	.209	.115	.035	.201	.111	.034	
4.0	.221	.115	.034	.216	.113	.033	.207	.110	.033	.198	.107	.032	.191	.104	.032	
5.0	.207	.106	.031	.203	.104	.030	.195	.101	.030	.188	.099	.029	.181	.096	.029	
6.0	.195	.098	.028	.191	.096	.028	.184	.094	.027	.177	.092	.027	.171	.090	.027	
7.0	.183	.090	.026	.180	.089	.025	.173	.088	.025	.167	.086	.025	.162	.084	.025	
8.0	.172	.084	.024	.169	.083	.024	.164	.082	.023	.158	.080	.023	.153	.079	.023	
9.0	.163	.079	.022	.160	.078	.022	.155	.077	.022	.150	.075	.022	.145	.074	.021	
10.0	.154	.074	.020	.151	.073	.020	.147	.072	.020	.142	.071	.020	.138	.070	.020	

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.194	.194	.194	.166	.166	.166	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.180	.160	.142	.154	.137	.122	.105	.094	.085	.061	.055	.049	.019	.018	.016	
2.0	.170	.136	.107	.145	.117	.092	.100	.081	.064	.057	.047	.038	.018	.015	.012	
3.0	.161	.117	.083	.138	.101	.072	.095	.070	.050	.055	.041	.030	.018	.013	.010	
4.0	.153	.104	.066	.131	.090	.057	.090	.062	.040	.052	.037	.024	.017	.012	.008	
5.0	.146	.093	.054	.125	.081	.047	.086	.056	.033	.050	.033	.020	.016	.011	.006	
6.0	.139	.085	.045	.120	.073	.039	.083	.051	.028	.048	.030	.017	.015	.010	.005	
7.0	.133	.078	.039	.114	.067	.034	.079	.047	.024	.046	.028	.014	.015	.009	.005	
8.0	.127	.072	.034	.109	.062	.030	.076	.044	.021	.044	.026	.012	.014	.008	.004	
9.0	.121	.067	.030	.104	.058	.026	.072	.041	.019	.042	.024	.011	.014	.008	.004	
10.0	.116	.063	.027	.100	.054	.024	.069	.038	.017	.040	.023	.010	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-12-05

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.1494]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.07V I:0.3320A P:39.500W PF:0.9911 Freq:60.00Hz Lamp Flux:3312.01x1 lm										
NAME:					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: ASD LIGHTNG CORP					SUR.: 0.12*0.12			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	26.2	27.7	26.6	28.0	28.4	25.5	27.0	25.9	27.3	27.6
3H	27.1	28.4	27.4	28.7	29.1	26.2	27.6	26.6	27.9	28.3
4H	27.2	28.4	27.6	28.8	29.2	26.4	27.6	26.8	27.9	28.3
6H	27.2	28.4	27.6	28.7	29.1	26.4	27.5	26.8	27.9	28.3
8H	27.2	28.3	27.7	28.7	29.1	26.4	27.4	26.8	27.8	28.2
12H	27.2	28.2	27.7	28.6	29.1	26.3	27.4	26.8	27.8	28.2
4H 2H	26.5	27.8	27.0	28.1	28.5	25.7	27.0	26.2	27.3	27.7
3H	27.5	28.5	27.9	28.9	29.3	26.6	27.6	27.0	28.0	28.4
4H	27.7	28.6	28.1	29.0	29.4	26.7	27.6	27.2	28.1	28.5
6H	27.7	28.5	28.2	29.0	29.4	26.8	27.6	27.3	28.0	28.5
8H	27.7	28.5	28.2	28.9	29.4	26.8	27.5	27.3	28.0	28.4
12H	27.8	28.4	28.2	28.9	29.4	26.8	27.4	27.3	27.9	28.4
8H 4H	27.7	28.4	28.1	28.8	29.3	26.7	27.4	27.2	27.9	28.4
6H	27.8	28.4	28.3	28.9	29.4	26.8	27.4	27.3	27.9	28.4
8H	27.8	28.3	28.3	28.8	29.3	26.8	27.3	27.3	27.9	28.4
12H	27.8	28.3	28.3	28.8	29.4	26.8	27.3	27.3	27.8	28.4
12H 4H	27.6	28.3	28.1	28.8	29.3	26.7	27.3	27.2	27.8	28.3
6H	27.7	28.3	28.3	28.7	29.3	26.8	27.3	27.3	27.8	28.3
8H	27.8	28.3	28.3	28.8	29.3	26.8	27.3	27.3	27.8	28.3
CIE190: 2010										

CIE190: 2010
Area: 0.0144 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-12-05

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.700m [K=1.1494]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.07V I:0.3320A P:39.500W PF:0.9911 Freq:60.00Hz Lamp Flux:3312.01x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	63	53	47	63	53	47	62	52	46	40
0.80	74	64	57	73	63	57	71	62	56	50
1.00	82	73	66	81	72	66	79	73	65	59
1.25	89	80	74	88	79	74	85	78	73	66
1.50	94	85	79	92	84	79	89	83	78	71
2.00	100	93	87	98	91	86	95	89	85	78
2.50	103	96	91	101	95	90	97	92	88	81
3.00	106	100	95	103	98	94	100	96	92	84
4.00	109	104	100	107	102	99	102	99	96	88
5.00	111	107	103	108	105	102	104	101	99	90
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-12-05

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=1.1494]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.07V I:0.3320A P:39.500W PF:0.9911 Freq:60.00Hz Lamp Flux:3312.01x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

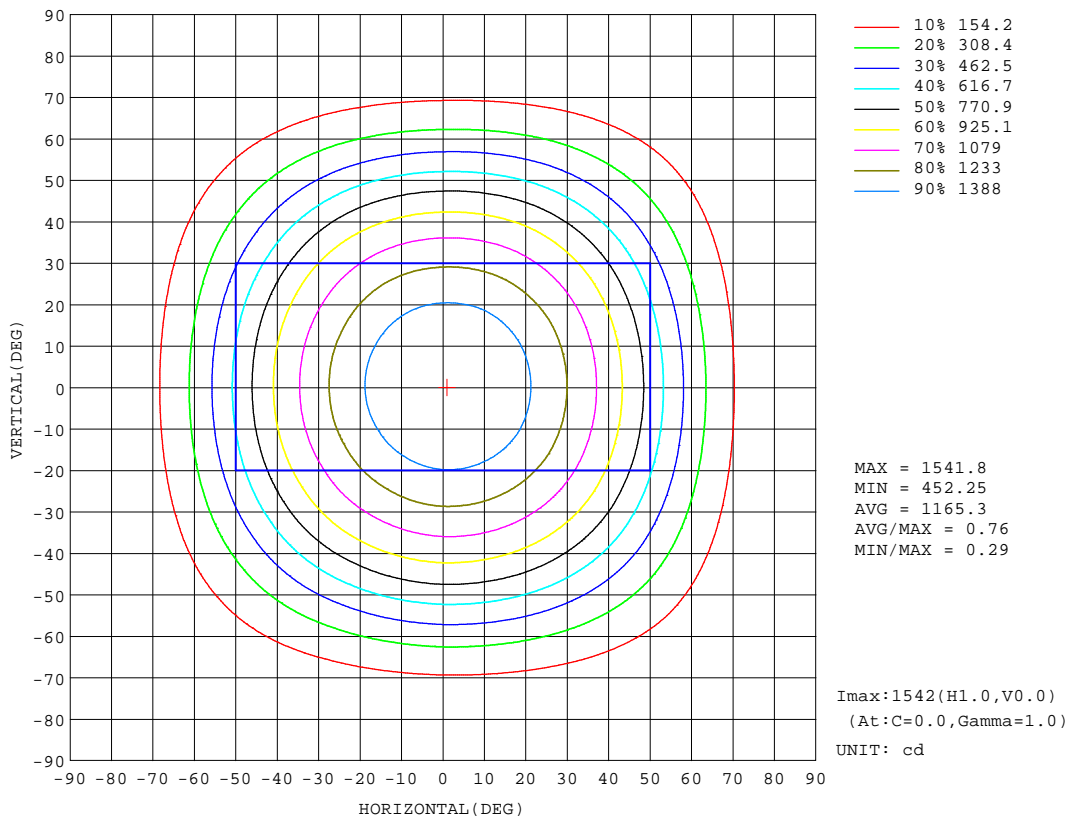


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-12-05

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.1494]
 Remarks:

AAI Figure

Test:U:120.07V I:0.3320A P:39.500W PF:0.9911 Freq:60.00Hz Lamp Flux:3312.01x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

Flux out:2371 lm

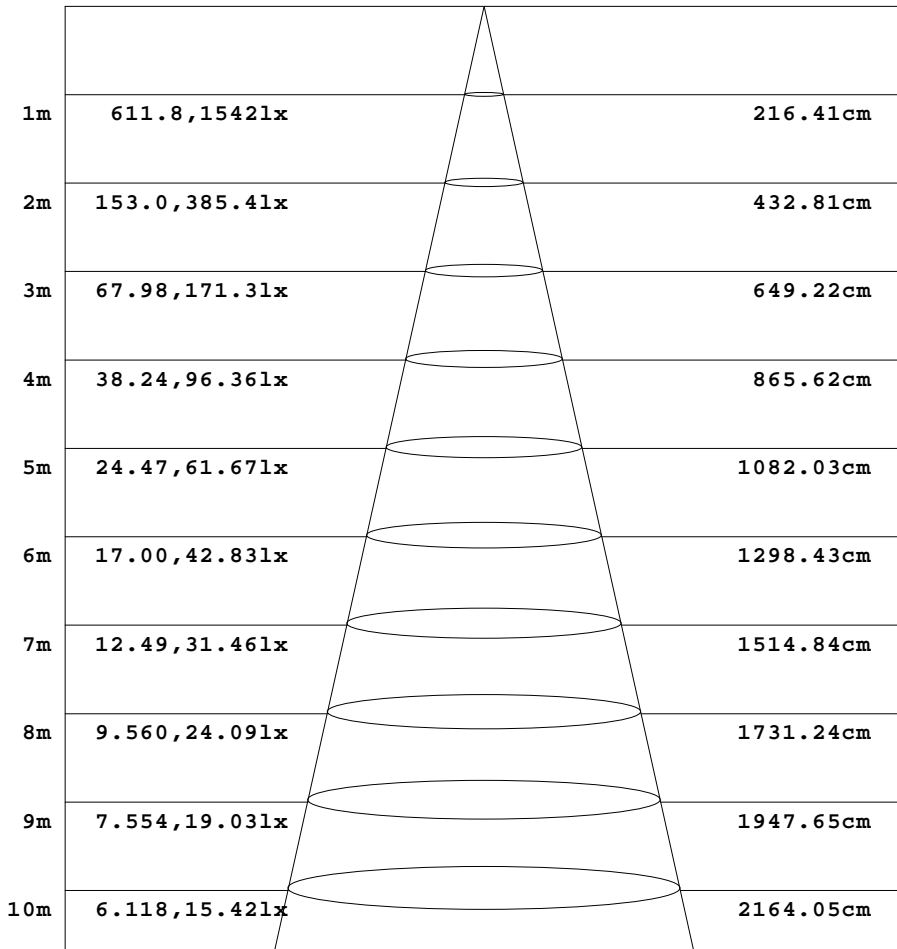

Height Eavg, Emax Angle:94.51deg Diameter


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-12-05

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.1494]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.07V I:0.3320A P:39.500W PF:0.9911 Freq:60.00Hz Lamp Flux:3312.01x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

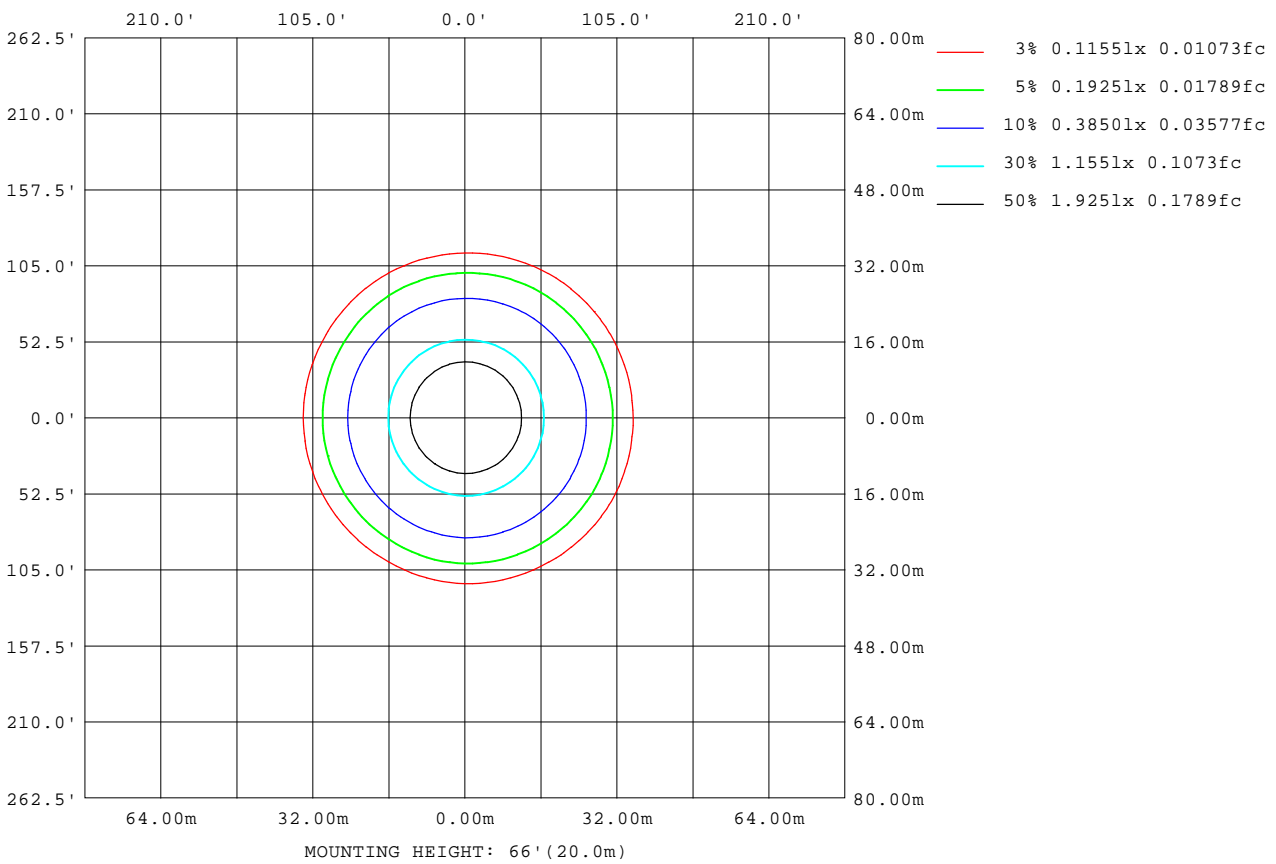

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-12-05

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=1.1494]
 Remarks:

LED Avg.L Report

Test:U:120.07V I:0.3320A P:39.500W PF:0.9911 Freq:60.00Hz Lamp Flux:3312.01x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	40248
L_0~180(75)av	18885
L_0~180(85)av	11037
L_90~270(65)av	40019
L_90~270(75)av	18390
L_90~270(85)av	8315
L_45(65)av	40131
L_45(75)av	18706
L_45(85)av	9470

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-12-05

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.700m [K=1.1494]
Remarks:

Planar Illuminance Curve

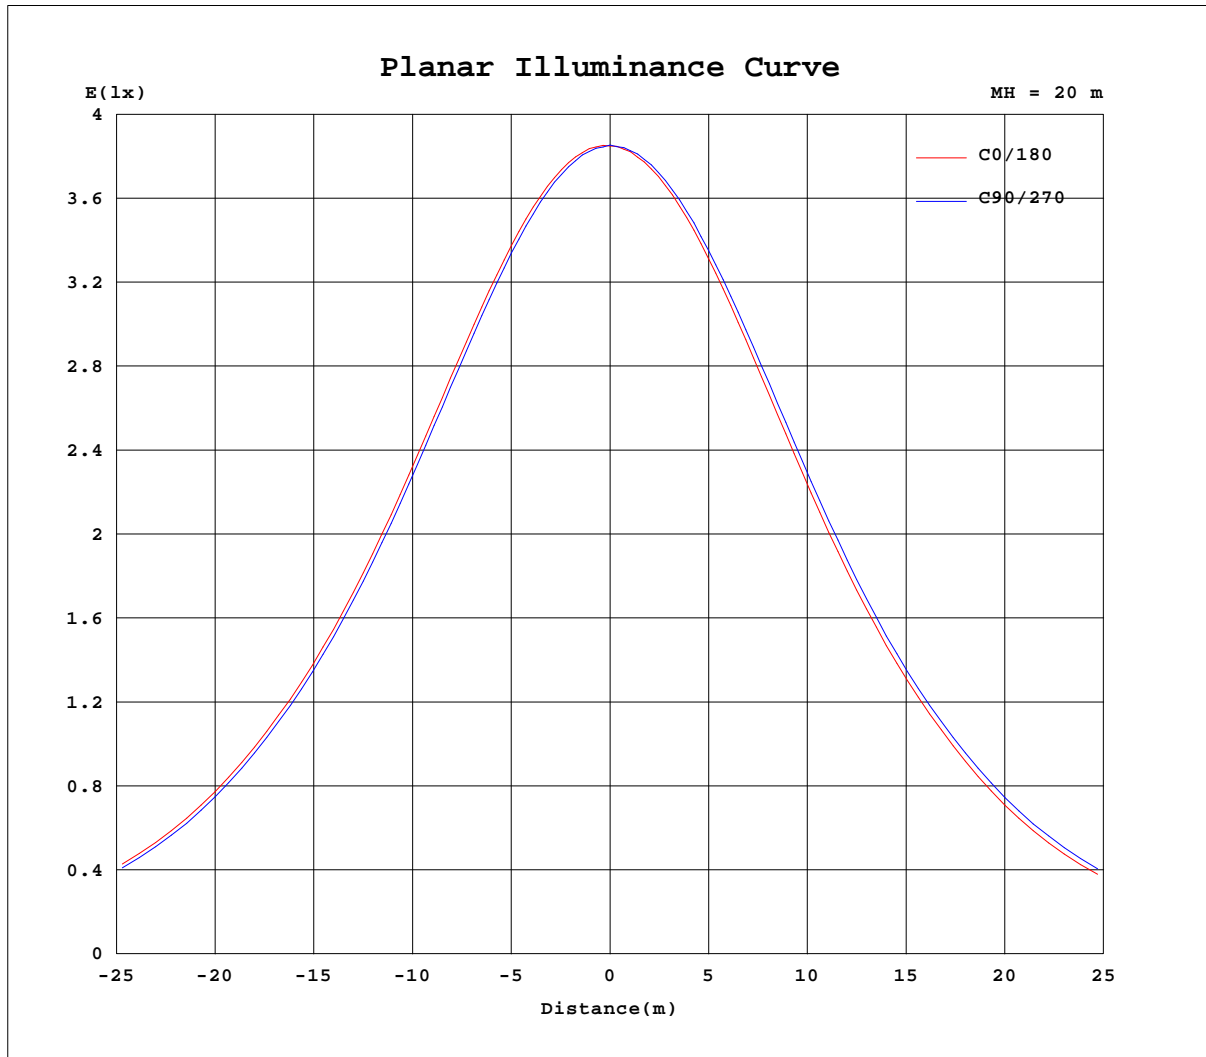

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-12-05

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=1.1494]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.07V I:0.3320A P:39.500W PF:0.9911 Freq:60.00Hz Lamp Flux:3312.01x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	1540	1540	1540	1540	1540	1540	1540	1540	1540	1540	1540	1540						
5	1537	1535	1532	1528	1527	1527	1527	1527	1531	1530	1535	1537						
10	1512	1512	1505	1499	1493	1491	1492	1494	1500	1504	1511	1512						
15	1468	1465	1458	1449	1442	1438	1440	1444	1453	1457	1467	1469						
20	1406	1405	1394	1384	1371	1366	1369	1374	1385	1393	1405	1408						
25	1327	1324	1312	1301	1287	1279	1282	1288	1302	1310	1324	1328						
30	1233	1230	1219	1206	1187	1178	1181	1188	1203	1213	1229	1235						
35	1126	1124	1112	1099	1079	1066	1069	1077	1093	1102	1119	1126						
40	1012	1010	998	985	962	946	951	959	975	985	1004	1011						
45	875	876	860	847	819	802	803	811	831	844	866	875						
50	722	721	707	692	662	644	643	649	671	685	708	720						
55	559	561	546	530	501	485	485	489	509	520	545	555						
60	404	408	392	379	352	341	341	344	360	369	390	400						
65	270	272	258	247	227	219	220	222	234	240	257	265						
70	161	161	150	142	130	125	126	128	135	140	151	157						
75	79.4	79.2	72.7	67.7	62.4	60.8	61.3	62.1	66.6	69.4	75.5	78.2						
80	35.9	36.0	33.1	30.9	29.4	29.7	29.5	28.3	30.8	31.2	34.0	34.3						
85	16.1	16.0	11.9	10.1	9.53	11.3	11.6	9.13	11.4	10.8	13.3	12.9						
90	0.62	0.15	0.04	0.17	0.11	0.18	0.15	0.39	0.14	0.18	0.09	0.26						
95	0.08	0.22	0.08	0.34	0.21	0.38	0.35	0.30	0.31	0.25	0.21	0.23						
100	0.26	0.40	0.28	0.61	0.46	0.65	0.61	0.58	0.57	0.52	0.45	0.48						
105	0.51	0.68	0.55	0.96	0.79	1.01	0.98	0.94	0.91	0.88	0.75	0.79						
110	0.84	1.01	0.91	1.38	1.19	1.44	1.38	1.37	1.32	1.26	1.11	1.16						
115	1.22	1.39	1.26	1.84	1.65	1.90	1.84	1.84	1.77	1.69	1.56	1.61						
120	1.67	1.81	1.70	2.34	2.12	2.38	2.32	2.31	2.23	2.19	2.02	2.07						
125	2.11	2.22	2.12	2.82	2.58	2.87	2.78	2.75	2.66	2.64	2.46	2.49						
130	2.54	2.60	2.51	3.28	3.05	3.35	3.25	3.23	3.09	3.07	2.92	2.96						
135	2.93	2.95	2.91	3.71	3.43	3.76	3.60	3.62	3.48	3.46	3.35	3.40						
140	3.29	3.29	3.26	4.14	3.84	4.15	3.93	3.98	3.79	3.83	3.76	3.79						
145	3.62	3.65	3.62	4.48	4.13	4.49	4.25	4.27	4.13	4.22	4.09	4.08						
150	3.98	4.00	4.00	4.73	4.38	4.75	4.60	4.53	4.43	4.56	4.41	4.38						
155	4.31	4.40	4.43	5.00	4.64	4.98	4.86	4.83	4.76	4.82	4.75	4.64						
160	4.66	4.80	4.85	5.25	5.00	5.11	5.18	5.12	5.12	5.09	5.09	4.94						
165	5.01	5.22	5.28	5.53	5.35	5.29	5.56	5.47	5.50	5.53	5.41	5.18						
170	5.30	5.50	5.62	5.72	5.51	5.58	5.72	5.72	5.65	5.77	5.68	5.41						
175	5.59	5.71	5.92	5.90	5.81	5.87	5.97	6.02	5.93	5.88	5.92	5.72						
180	5.86	5.88	6.04	5.91	5.98	5.91	6.05	6.05	5.96	6.05	6.04	5.98						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-12-05

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.1494]
 Remarks: