


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:119.97V I:0.1097A P:12.968W PF:0.9490 Freq:59.98Hz Lamp Flux:881.107x1 lm					
NAME: ASD-CD-TR-2D15AC-WH		TYPE:		WEIGHT:	
SPEC.:3000K 90		DIM.:		SERIAL No.:	
MFR.: ASD Lighting Corp		SUR.:		Shielding Angle:	

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 67.95 lm/W
MODEL		Imax(cd)	1832	S/MH(C0/180)	0.62	
NOMINAL POWER(W)	15	LOR(%)	100.0	S/MH(C90/270)	0.67	
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	881.11	□ UP,DN(C0-180)	0.0,44.9	
NOMINAL FLUX(lm)	881.107	CIE CLASS	DIRECT	□ UP,DN(C180-360)	0.0,55.1	
LAMPS INSIDE	1	□ up(%)	0.0	CIBSE SHR NOM	0.50	
TEST VOLTAGE(V)	120	□ down(%)	100.0	CIBSE SHR MAX	0.65	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

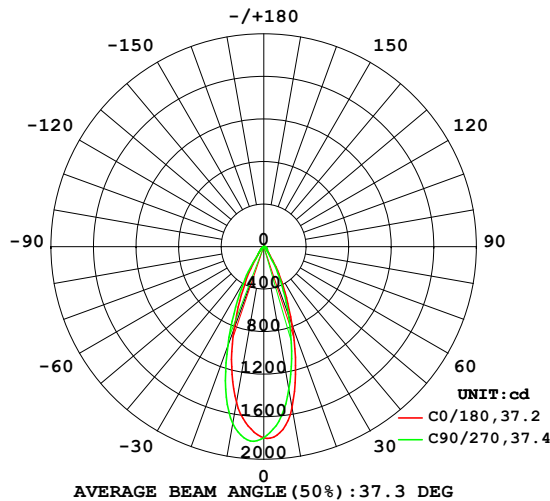

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

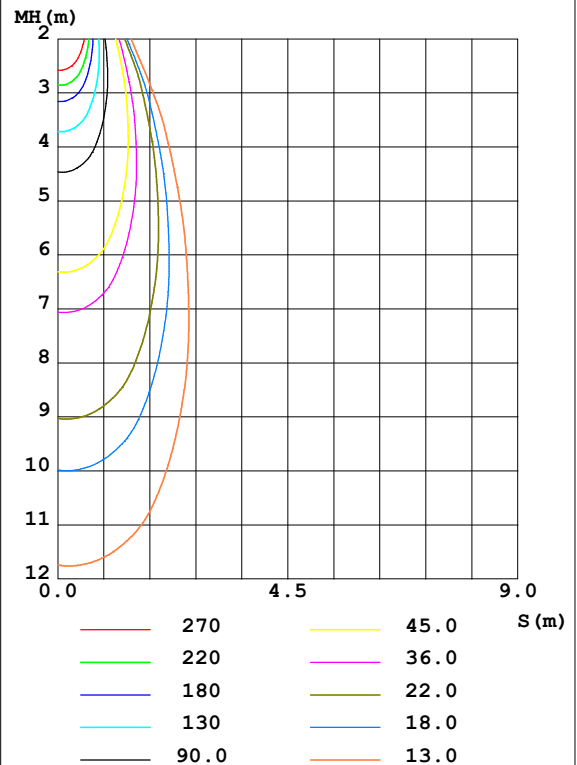

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-10-19

□ Range: 0 - 90DEG
□ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:3.080m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	1537	1456	1362	1446	1486	1576	1688	1592	0- 10	158.4	158.4	18,18
20	778.5	738.2	679.9	734.2	816.0	918.1	993.0	980.8	10- 20	325.5	483.9	54.9,54.9
30	259.1	240.0	204.8	242.2	279.7	339.1	355.1	335.1	20- 30	238.8	722.7	82,82
40	62.82	59.12	55.03	58.65	63.81	68.55	65.87	66.98	30- 40	82.94	805.6	91.4,91.4
50	34.72	34.10	32.30	33.04	33.48	34.54	34.51	34.65	40- 50	35.01	840.6	95.4,95.4
60	18.94	18.49	17.27	17.61	18.02	17.20	16.27	18.16	50- 60	22.32	863.0	97.9,97.9
70	9.987	9.474	7.552	8.281	9.219	7.434	6.400	8.053	60- 70	12.63	875.6	99.4,99.4
80	3.544	2.038	1.011	1.655	3.034	1.238	0.6260	1.339	70- 80	5.039	880.6	99.9,99.9
90	0.0254	0.0266	0.0235	0.0207	0.0408	0.0333	0.0353	0.0408	80- 90	0.4881	881.1	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-10-19

□ Range: 0 - 90DEG
□ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:3.080m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.97V I:0.1097A P:12.968W PF:0.9490 Freq:59.98Hz Lamp Flux:881.107x1 lm		
NAME: ASD-CD-TR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

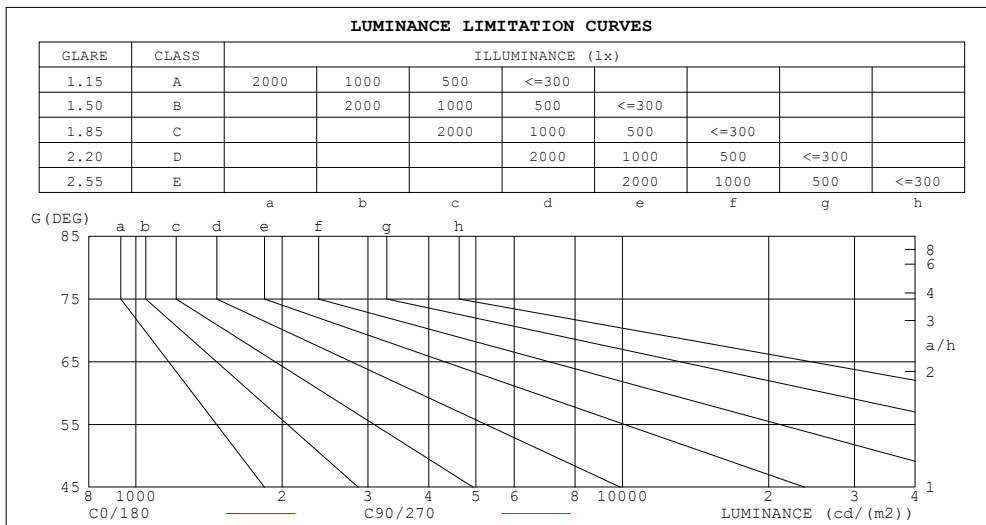

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	48	24
80	183	52
75	224	131
70	262	197
65	302	259
60	340	309
55	405	363
50	485	449
45	578	515


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-10-19

☐ Range: 0 - 90DEG
☐ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.97V I:0.1097A P:12.968W PF:0.9490 Freq:59.98Hz Lamp Flux:881.107x1 lm		
NAME: ASD-CD-TR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
	RCR:Room Cavity Ratio															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.05	1.03	1.02	1.01	.00	.99	.98	.97	.96	.94
2.0	1.04	1.00	.97	1.02	.99	.96	.99	.96	.94	.96	.94	.92	.93	.92	.90	.88
3.0	.98	.93	.90	.96	.92	.89	.94	.90	.87	.91	.89	.86	.89	.87	.85	.83
4.0	.92	.87	.83	.91	.86	.83	.89	.85	.82	.87	.84	.81	.85	.82	.80	.79
5.0	.87	.82	.78	.86	.81	.78	.85	.80	.77	.83	.79	.76	.82	.78	.76	.74
6.0	.83	.77	.74	.82	.77	.73	.81	.76	.73	.79	.75	.72	.78	.75	.72	.71
7.0	.79	.73	.70	.78	.73	.69	.77	.72	.69	.76	.72	.69	.75	.71	.68	.67
8.0	.75	.70	.66	.75	.70	.66	.74	.69	.66	.73	.68	.65	.72	.68	.65	.64
9.0	.72	.67	.63	.71	.66	.63	.71	.66	.63	.70	.65	.62	.69	.65	.62	.61
10.0	.69	.64	.60	.68	.63	.60	.68	.63	.60	.67	.63	.60	.66	.62	.60	.58

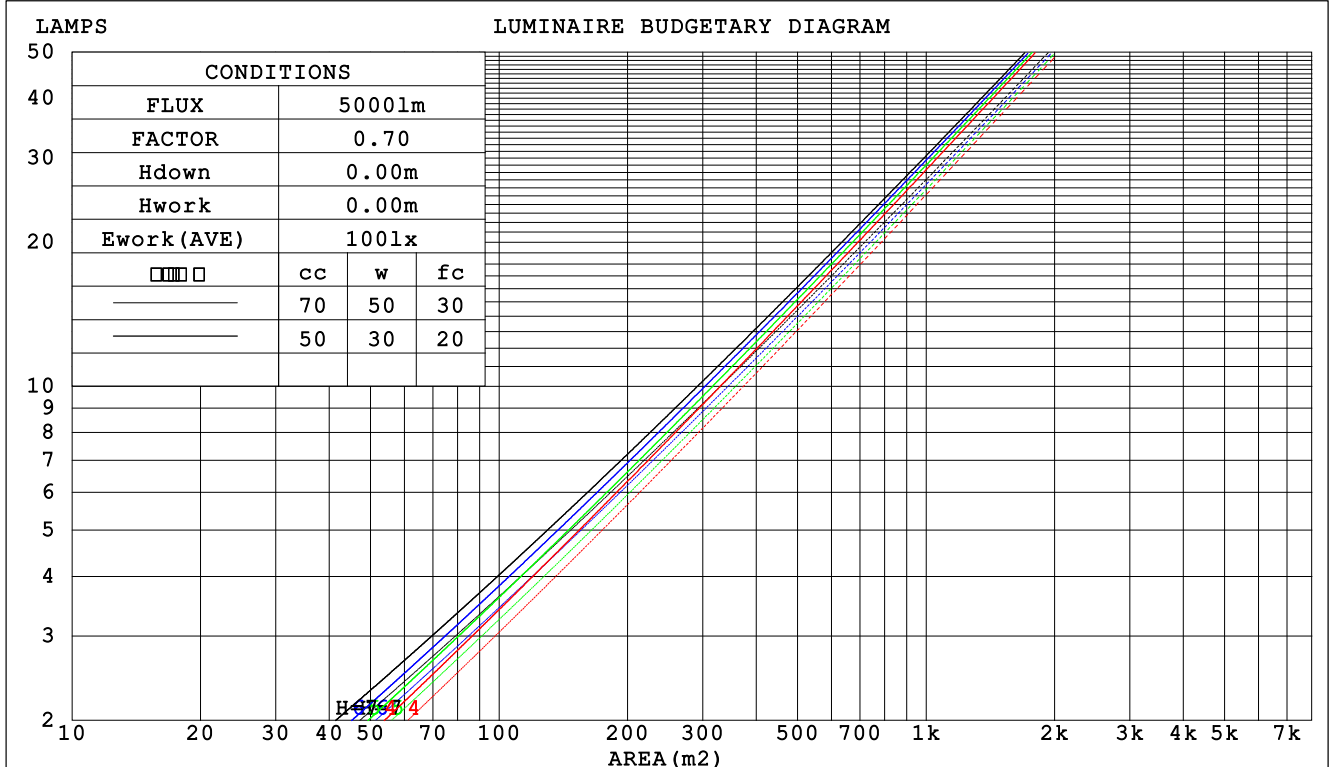

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-10-19

□ Range: 0 - 90DEG
□ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:3.080m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:119.97V I:0.1097A P:12.968W PF:0.9490 Freq:59.98Hz Lamp Flux:881.107x1 lm		
NAME: ASD-CD-TR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

☐ cc	80%	70%	50%	30%	10%	0
☐ w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
☐ fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients (WEC)					
0.0						
1.0	.170 .096 .031	.163 .093 .030	.150 .086 .028	.139 .080 .026	.128 .074 .024	
2.0	.161 .088 .027	.155 .086 .026	.145 .080 .025	.135 .076 .024	.126 .071 .022	
3.0	.152 .081 .024	.147 .079 .024	.138 .075 .023	.130 .071 .022	.122 .068 .021	
4.0	.143 .074 .022	.139 .073 .022	.132 .070 .021	.124 .067 .020	.118 .064 .020	
5.0	.136 .069 .020	.132 .068 .020	.125 .065 .019	.119 .063 .019	.114 .061 .018	
6.0	.129 .064 .018	.126 .063 .018	.120 .061 .018	.114 .059 .017	.109 .058 .017	
7.0	.122 .060 .017	.120 .060 .017	.115 .058 .017	.110 .056 .016	.105 .055 .016	
8.0	.117 .057 .016	.114 .056 .016	.110 .055 .016	.106 .053 .015	.102 .052 .015	
9.0	.111 .054 .015	.109 .053 .015	.105 .052 .015	.102 .051 .015	.098 .050 .014	
10.0	.107 .051 .014	.105 .051 .014	.101 .050 .014	.098 .049 .014	.095 .048 .014	

☐ cc	80%	70%	50%	30%	10%	0
☐ w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
☐ fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients (CCEC)					
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.171 .157 .145	.146 .135 .125	.100 .093 .087	.057 .054 .050	.018 .017 .016	
2.0	.155 .133 .114	.133 .114 .098	.091 .079 .069	.052 .046 .040	.017 .015 .013	
3.0	.142 .113 .091	.121 .098 .079	.083 .068 .055	.048 .040 .033	.015 .013 .011	
4.0	.131 .099 .074	.112 .085 .064	.077 .059 .045	.045 .035 .027	.014 .011 .009	
5.0	.121 .087 .061	.104 .075 .053	.072 .052 .038	.042 .031 .022	.013 .010 .007	
6.0	.113 .077 .051	.098 .067 .045	.067 .047 .032	.039 .028 .019	.013 .009 .006	
7.0	.107 .070 .044	.092 .060 .038	.063 .042 .027	.037 .025 .016	.012 .008 .005	
8.0	.100 .063 .038	.087 .055 .033	.060 .038 .023	.035 .023 .014	.011 .007 .005	
9.0	.095 .058 .033	.082 .050 .028	.057 .035 .020	.033 .021 .012	.011 .007 .004	
10.0	.090 .053 .029	.078 .046 .025	.054 .033 .018	.032 .019 .011	.010 .006 .004	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-10-19

☐ Range: 0 - 90DEG
☐ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:3.080m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.97V I:0.1097A P:12.968W PF:0.9490 Freq:59.98Hz Lamp Flux:881.107x1 lm										
NAME: ASD-CD-TR-2D15AC-WH					TYPE:			WEIGHT:		
SPEC.:3000K 90					DIM.:			SERIAL No.:		
MFR.: ASD Lighting Corp					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	5.0	5.9	5.3	6.1	6.2	4.4	5.2	4.6	5.4	5.5
3H	5.7	6.5	6.0	6.7	6.9	4.9	5.7	5.2	5.9	6.1
4H	6.0	6.7	6.2	6.9	7.1	5.0	5.8	5.3	6.0	6.2
6H	6.1	6.8	6.4	7.1	7.3	5.0	5.7	5.3	5.9	6.2
8H	6.1	6.8	6.4	7.0	7.3	4.9	5.6	5.2	5.9	6.1
12H	6.0	6.7	6.4	7.0	7.2	4.9	5.6	5.2	5.8	6.1
4H 2H	5.3	6.0	5.5	6.2	6.5	4.7	5.4	4.9	5.6	5.9
3H	6.1	6.7	6.4	7.0	7.3	5.4	6.0	5.7	6.3	6.6
4H	6.4	7.0	6.8	7.3	7.6	5.5	6.1	5.9	6.4	6.7
6H	6.6	7.2	7.0	7.5	7.9	5.5	6.0	5.9	6.4	6.7
8H	6.6	7.1	7.0	7.5	7.8	5.5	6.0	5.9	6.3	6.7
12H	6.6	7.0	7.0	7.4	7.8	5.4	5.9	5.8	6.2	6.6
8H 4H	6.4	6.9	6.8	7.3	7.6	5.6	6.1	6.0	6.4	6.8
6H	6.7	7.1	7.1	7.5	7.9	5.6	6.0	6.0	6.4	6.8
8H	6.7	7.1	7.2	7.5	7.9	5.5	5.9	6.0	6.3	6.8
12H	6.7	7.0	7.1	7.4	7.9	5.5	5.8	6.0	6.2	6.7
12H 4H	6.4	6.8	6.8	7.2	7.6	5.6	6.0	6.0	6.4	6.8
6H	6.7	7.0	7.1	7.4	7.9	5.6	5.9	6.0	6.3	6.8
8H	6.7	7.0	7.1	7.4	7.9	5.5	5.8	6.0	6.3	6.7
Variations with the observer position at spacings:										
S = 1.0H	+ 0.6 / - 0.7					+ 0.7 / - 0.9				
1.5H	+ 0.9 / - 0.4					+ 0.5 / - 0.5				
2.0H	+ 0.9 / - 0.8					+ 1.1 / - 1.0				

CIE Pub.117, 881.1 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.4)
Area: 0.111111 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-10-19

☐ Range: 0 - 90DEG
☐ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:3.080m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.97V I:0.1097A P:12.968W PF:0.9490 Freq:59.98Hz Lamp Flux:881.107x1 lm		
NAME: ASD-CD-TR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	86	80	76	86	79	76	85	79	76	72
0.80	94	88	84	93	87	84	92	87	83	79
1.00	98	92	89	97	92	88	96	92	88	84
1.25	102	97	93	101	96	93	99	95	92	88
1.50	105	100	97	104	99	96	102	98	95	91
2.00	108	104	100	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	111	108	105	110	106	104	106	104	102	95
4.00	114	111	108	111	109	107	108	106	104	97
5.00	115	112	111	113	111	109	109	107	106	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-10-19

☐ Range: 0 - 90DEG
☐ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:3.080m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:119.97V I:0.1097A P:12.968W PF:0.9490 Freq:59.98Hz Lamp Flux:881.107x1 lm		
NAME: ASD-CD-TR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

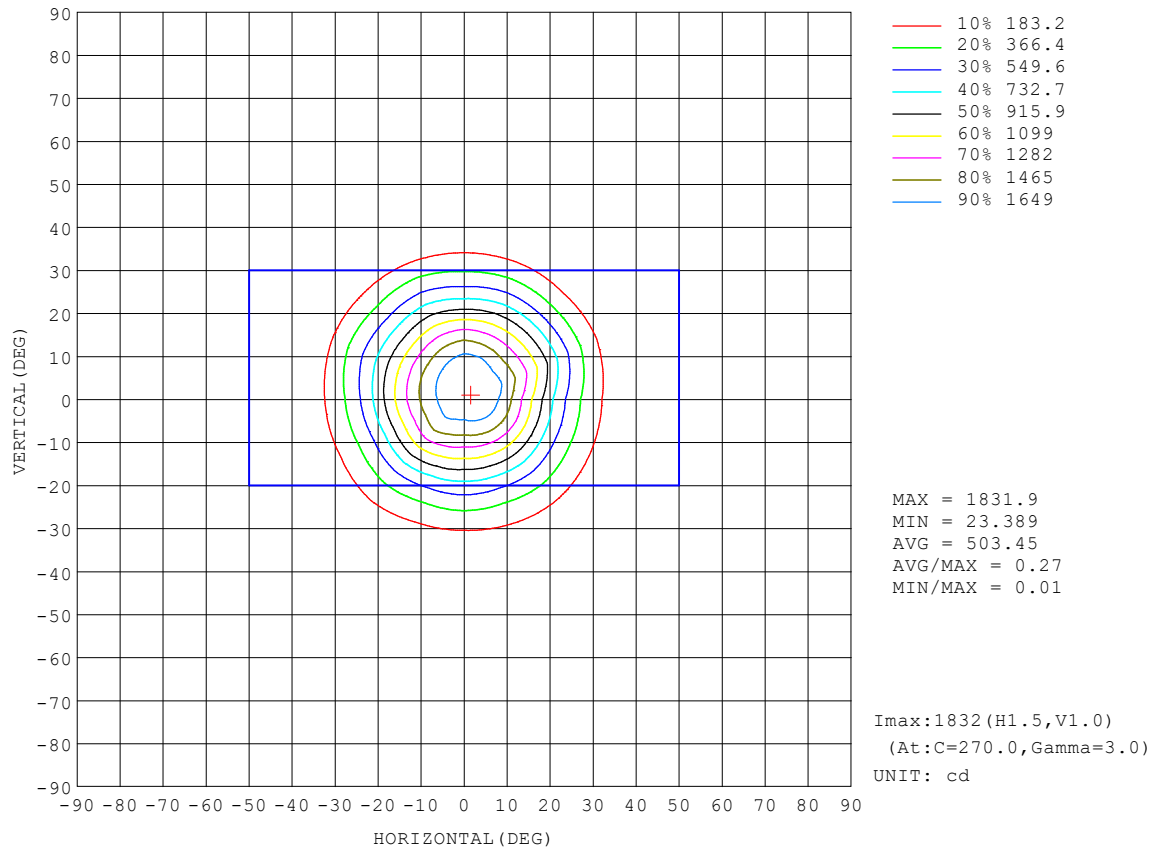


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-10-19

☐ Range: 0 - 90DEG
☐ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:3.080m [K=1.0000]
Remarks:

AAI Figure

Test:U:119.97V I:0.1097A P:12.968W PF:0.9490 Freq:59.98Hz Lamp Flux:881.107x1 lm		
NAME: ASD-CD-TR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

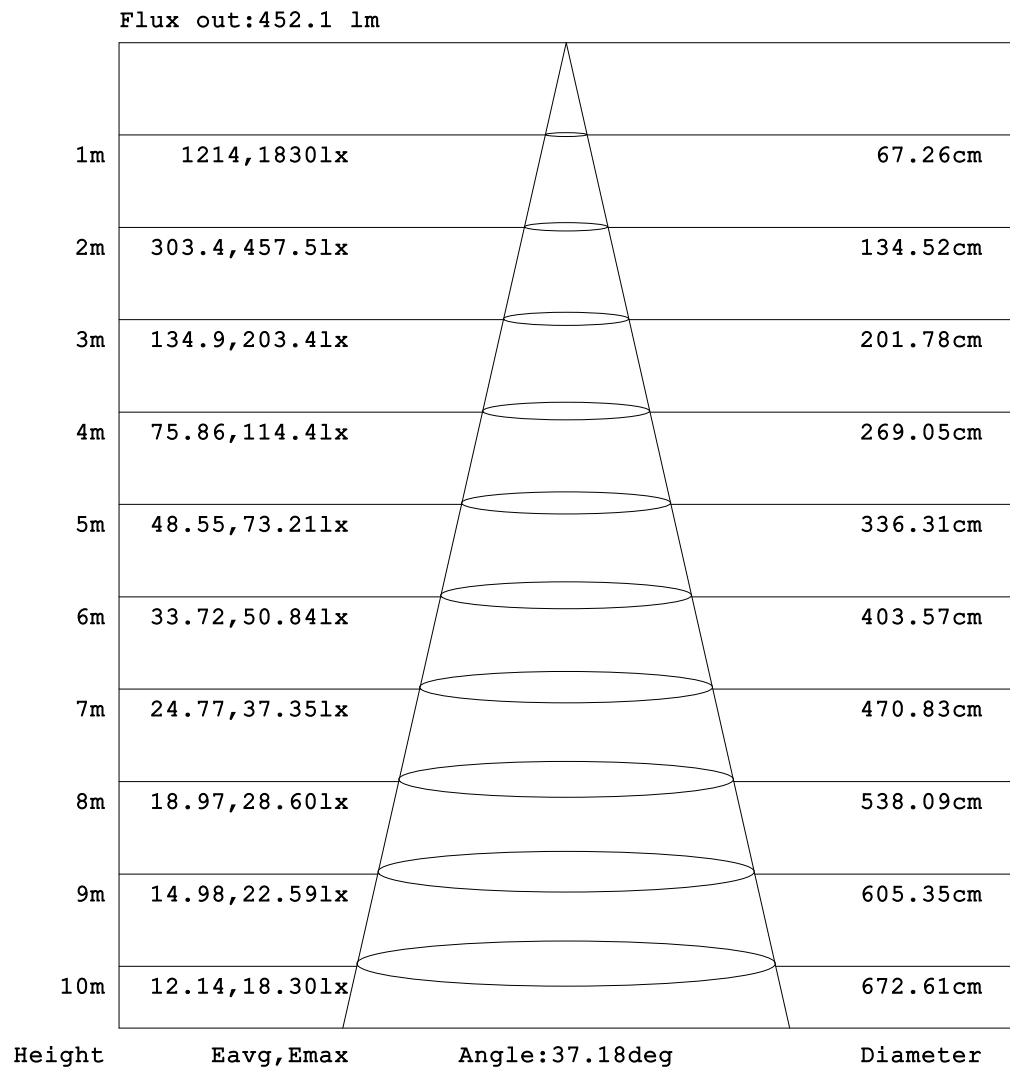


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-10-19

☐ Range: 0 - 90DEG
☐ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.97V I:0.1097A P:12.968W PF:0.9490 Freq:59.98Hz Lamp Flux:881.107x1 lm		
NAME: ASD-CD-TR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

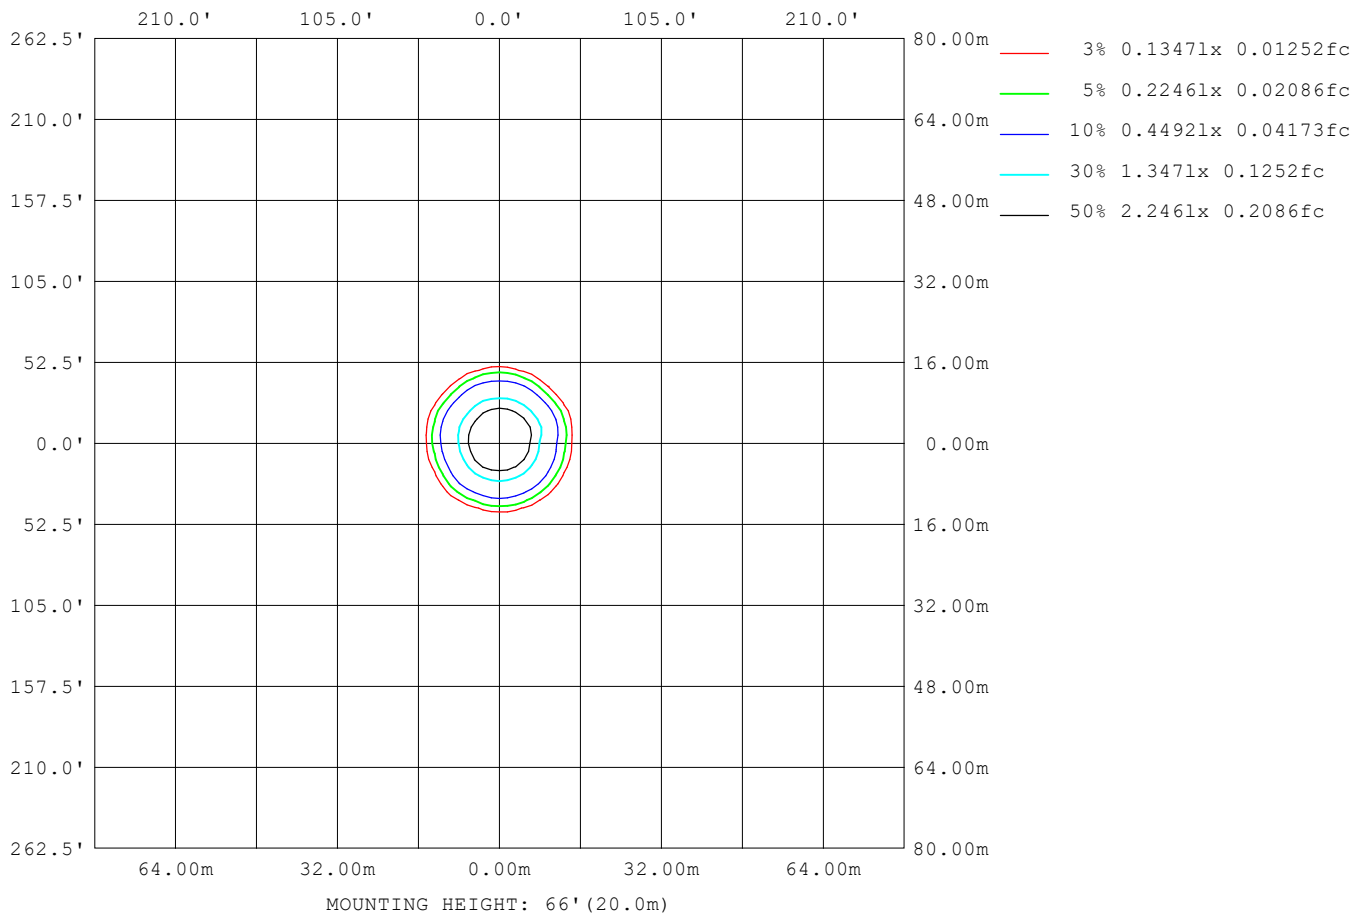

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-10-19

☐ Range: 0 - 90DEG
☐ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:3.080m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:119.97V I:0.1097A P:12.968W PF:0.9490 Freq:59.98Hz Lamp Flux:881.107x1 lm		
NAME: ASD-CD-TR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	292
L_0~180 (75) av	214
L_0~180 (85) av	48
L_90~270 (65) av	245
L_90~270 (75) av	119
L_90~270 (85) av	15
L_45 (65) av	272
L_45 (75) av	158
L_45 (85) av	16

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-10-19

☐ Range: 0 - 90DEG
☐ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
Humidity:65.0%
Test Distance:3.080m [K=1.0000]
Remarks:

Planar Illuminance Curve

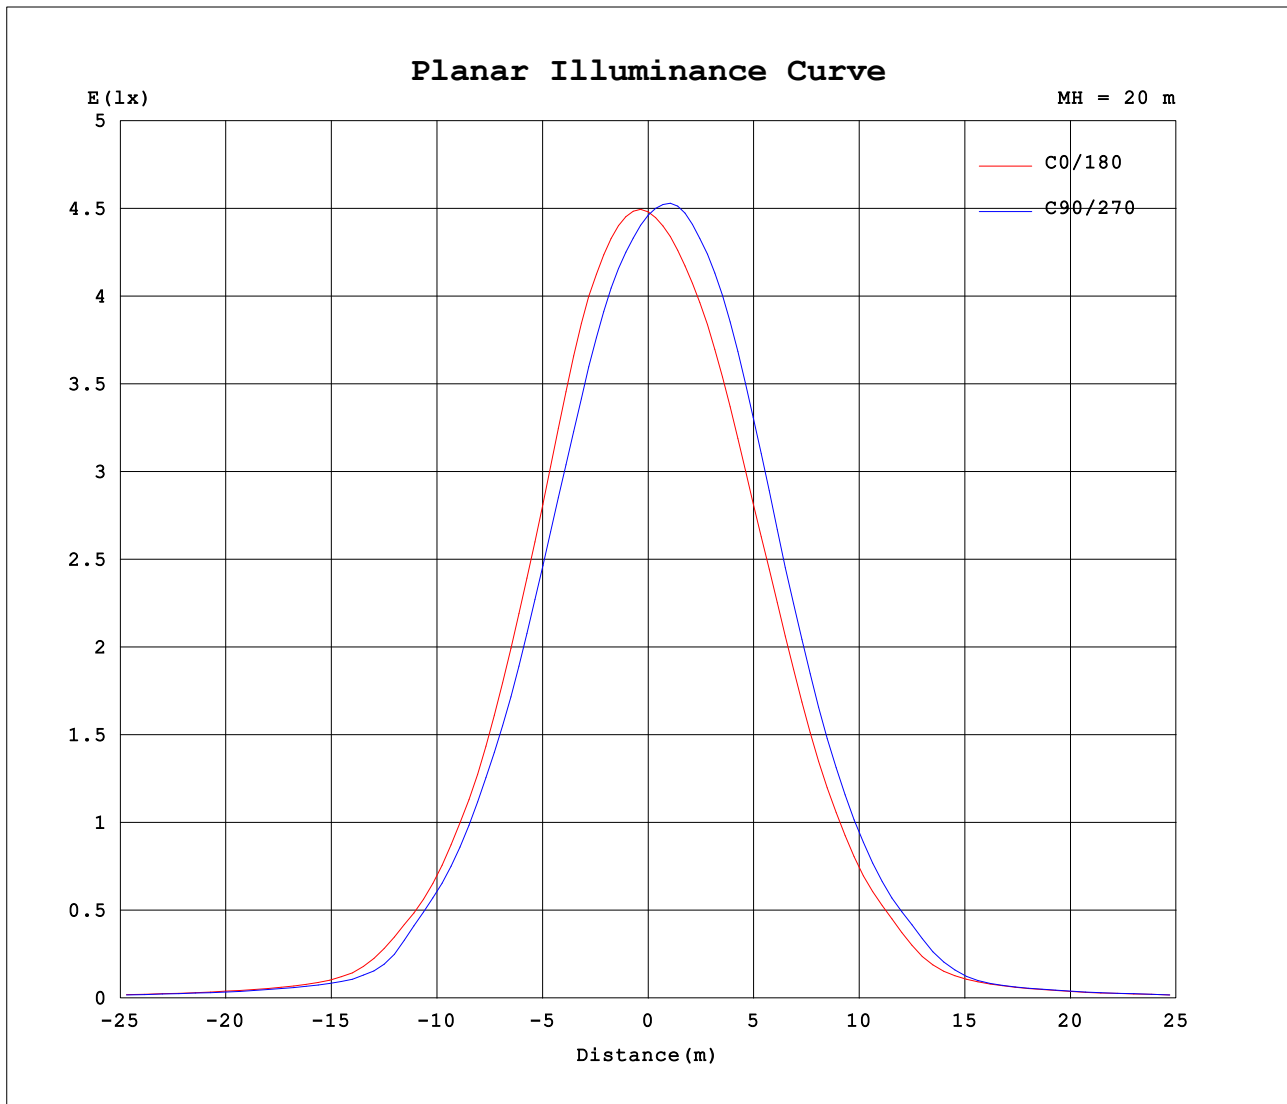

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-10-19

☐ Range: 0 - 90DEG
☐ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

☐ Range: 0 - 90DEG
☐ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks: