
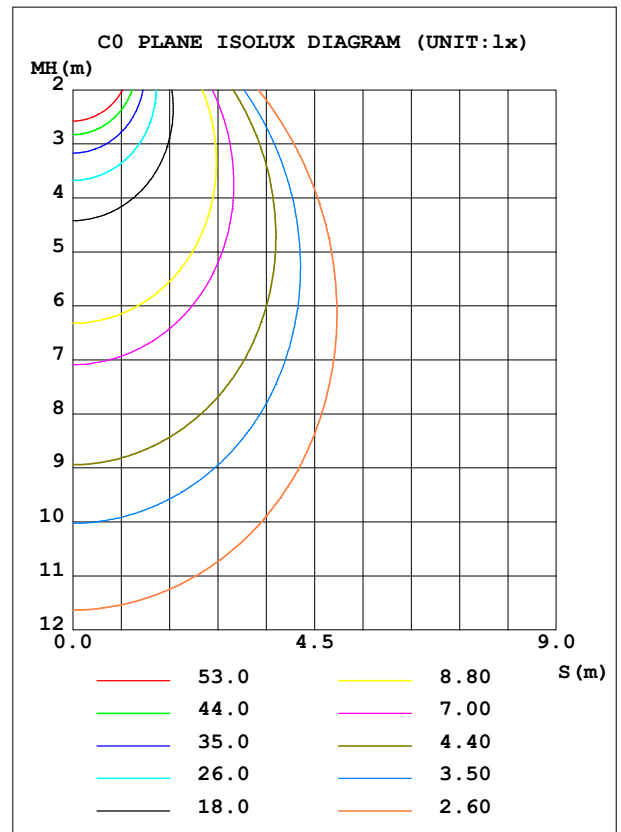


LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODE: ASD-LRKS-4D9AC-XX (4000K)		Imax (cd)	351.5	S/MH (C0/180)	1.12
NOMINAL POWER (W)	8.6	LOR (%)	100.0	S/MH (C90/270)	1.14
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	709.13	<input type="checkbox"/> UP, DN (C0-180)	0.2, 48.8
NOMINAL FLUX (lm)	709.129	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.2, 50.8
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.4	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	120.0	<input type="checkbox"/> down (%)	99.6	CIBSE SHR MAX	1.25

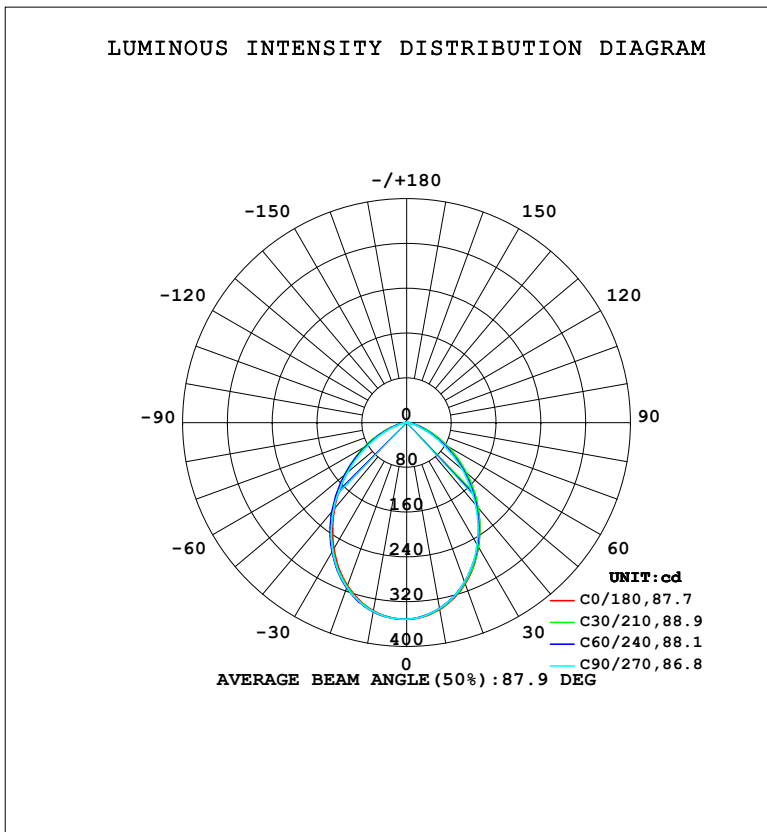

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.000m [K=1.1500]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	339.2	337.4	337.3	338.8	341.4	342.8	342.7	341.5	0- 10	32.99	32.99	4.65,4.65
20	306.4	303.6	302.8	305.5	309.9	313.0	313.1	311.1	10- 20	91.87	124.9	17.6,17.6
30	256.6	254.6	251.7	256.4	260.1	265.3	264.8	263.5	20- 30	131.2	256.1	36.1,36.1
40	197.7	196.8	191.5	198.0	200.7	206.8	203.6	205.5	30- 40	144.0	400.1	56.4,56.4
50	137.1	136.7	128.7	137.1	139.1	144.6	138.3	143.6	40- 50	130.8	530.9	74.9,74.9
60	82.05	79.38	69.84	79.18	84.00	85.33	77.60	84.49	50- 60	97.50	628.4	88.6,88.6
70	37.91	32.96	26.95	32.56	39.48	35.77	29.32	35.05	60- 70	55.41	683.8	96.4,96.4
80	10.22	7.167	5.758	7.084	9.715	7.553	5.712	7.230	70- 80	19.76	703.6	99.2,99.2
90	0.0365	0.0210	0.0060	0.0151	0.0298	0.0299	0.0182	0.0329	80- 90	2.470	706.0	99.6,99.6
100	0.0654	0.0863	0.0954	0.0716	0.1369	0.0744	0.0238	0.0806	90-100	0.0487	706.1	99.6,99.6
110	0.2080	0.2292	0.2564	0.2235	0.2677	0.2174	0.1607	0.2355	100-110	0.1556	706.2	99.6,99.6
120	0.3924	0.4256	0.4590	0.4174	0.4463	0.4168	0.3454	0.4413	110-120	0.3144	706.5	99.6,99.6
130	0.6539	0.6282	0.6914	0.6291	0.6962	0.6222	0.5717	0.6559	120-130	0.4765	707.0	99.7,99.7
140	0.8029	0.8216	0.8881	0.8139	0.8568	0.8068	0.7684	0.8497	130-140	0.5674	707.6	99.8,99.8
150	0.9872	1.003	1.049	0.9958	1.041	0.9883	0.9353	1.014	140-150	0.5719	708.2	99.9,99.9
160	1.136	1.158	1.180	1.154	1.237	1.158	1.096	1.175	150-160	0.4990	708.7	99.9,99.9
170	1.249	1.253	1.287	1.288	1.368	1.277	1.227	1.309	160-170	0.3461	709.0	100,100
180	1.404	1.357	1.365	1.386	1.463	1.387	1.353	1.416	170-180	0.1265	709.1	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

□ Range: 0 - 180DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.1500]
 Remarks:

LUMINANCE LIMITATION CURVES

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

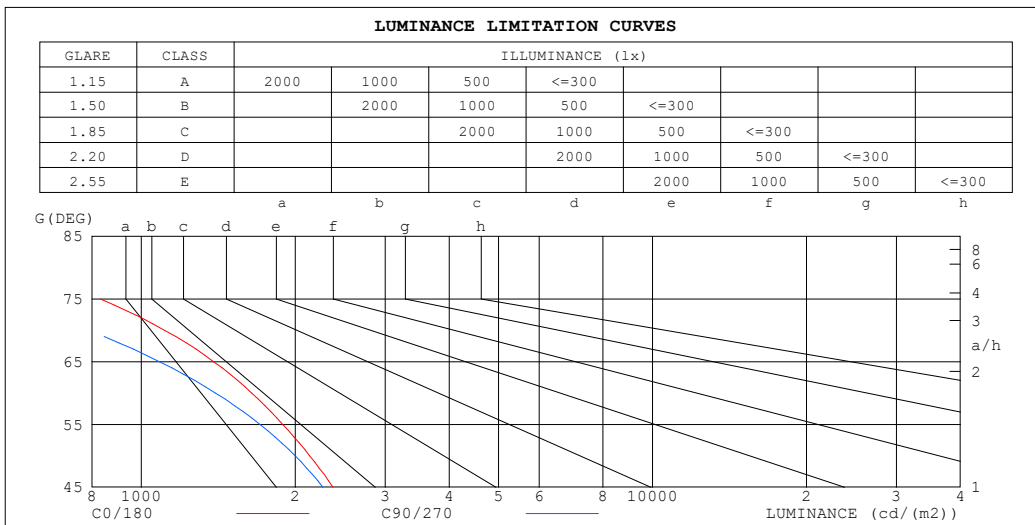

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	228	81
80	590	331
75	832	552
70	1110	788
65	1385	1085
60	1643	1396
55	1892	1708
50	2136	2001
45	2372	2264


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.000m [K=1.1500]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.07	1.03	.00	1.04	1.01	.98	1.00	.98	.95	.96	.94	.92	.93	.91	.89	.87
2.0	.95	.89	.84	.93	.88	.83	.90	.85	.81	.86	.83	.79	.83	.80	.78	.76
3.0	.85	.78	.72	.83	.77	.71	.80	.75	.70	.78	.73	.69	.75	.71	.68	.66
4.0	.76	.68	.62	.75	.68	.62	.72	.66	.61	.70	.65	.60	.68	.63	.59	.58
5.0	.69	.61	.55	.68	.60	.54	.66	.59	.54	.64	.58	.53	.62	.57	.53	.51
6.0	.63	.54	.49	.62	.54	.48	.60	.53	.48	.58	.52	.47	.57	.51	.47	.45
7.0	.57	.49	.43	.56	.49	.43	.55	.48	.43	.53	.47	.43	.52	.47	.42	.40
8.0	.52	.45	.39	.52	.44	.39	.51	.44	.39	.49	.43	.39	.48	.43	.38	.37
9.0	.48	.41	.36	.48	.41	.35	.47	.40	.35	.46	.40	.35	.45	.39	.35	.33
10.0	.45	.37	.33	.44	.37	.32	.43	.37	.32	.42	.36	.32	.42	.36	.32	.30

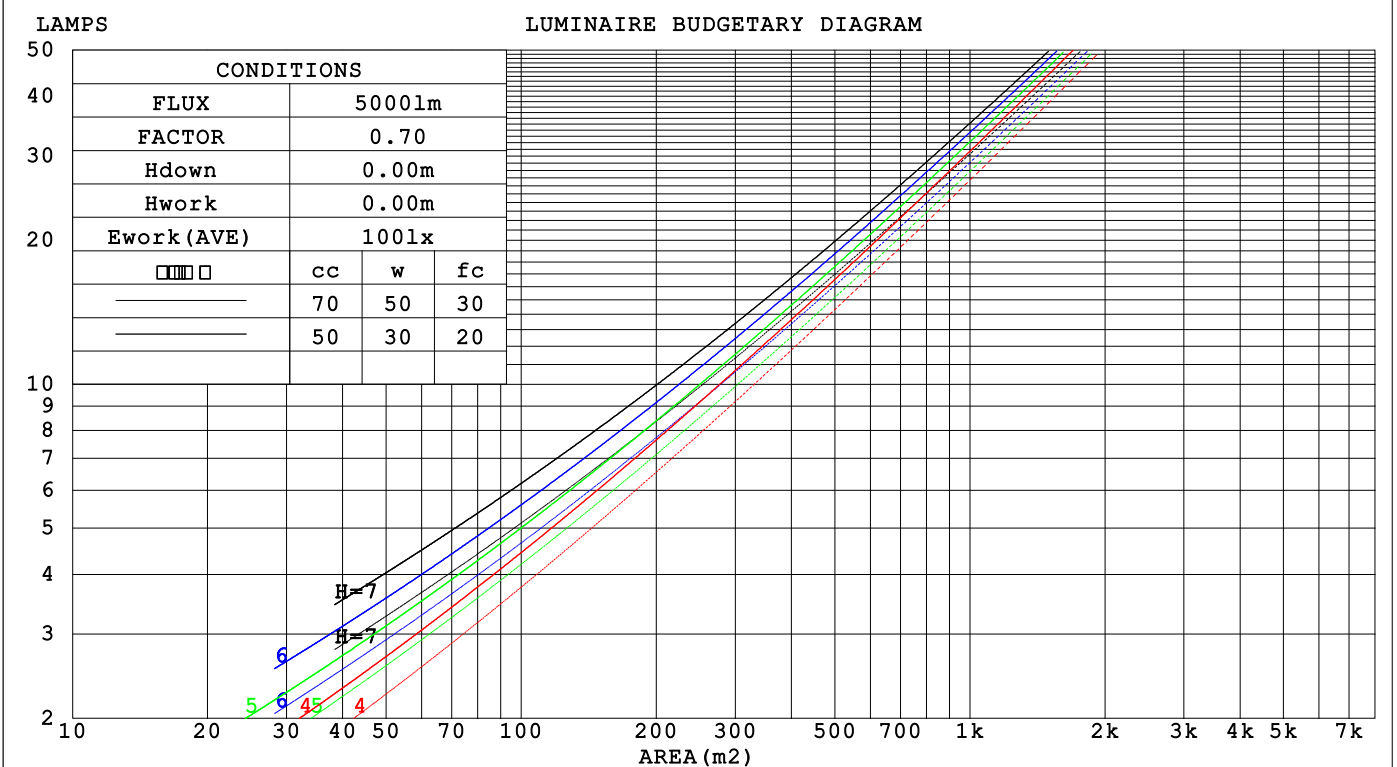

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

□ Range: 0 - 180DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.1500]
 Remarks:

WEC AND CCEC

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.254	.145	.046	.247	.141	.045	.234	.134	.043	.222	.128	.041	.211	.122	.039	
2.0	.247	.135	.042	.241	.133	.041	.229	.128	.040	.219	.123	.038	.209	.118	.037	
3.0	.234	.125	.037	.229	.122	.037	.219	.118	.036	.209	.115	.035	.200	.111	.034	
4.0	.220	.114	.034	.215	.113	.033	.206	.109	.033	.198	.106	.032	.190	.103	.031	
5.0	.206	.105	.030	.202	.104	.030	.194	.101	.030	.187	.099	.029	.180	.096	.029	
6.0	.194	.097	.028	.190	.096	.028	.183	.094	.027	.176	.092	.027	.170	.089	.027	
7.0	.182	.090	.026	.179	.089	.025	.172	.087	.025	.166	.085	.025	.161	.084	.025	
8.0	.171	.084	.024	.168	.083	.023	.163	.081	.023	.157	.080	.023	.152	.078	.023	
9.0	.162	.078	.022	.159	.078	.022	.154	.076	.022	.149	.075	.021	.145	.073	.021	
10.0	.153	.073	.020	.151	.073	.020	.146	.071	.020	.142	.070	.020	.137	.069	.020	

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.194	.194	.194	.166	.166	.166	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.180	.160	.142	.154	.137	.122	.105	.094	.085	.061	.055	.049	.019	.018	.016	
2.0	.170	.136	.107	.145	.117	.092	.100	.081	.064	.057	.047	.038	.018	.015	.012	
3.0	.161	.117	.083	.138	.101	.072	.095	.070	.050	.055	.041	.030	.018	.013	.010	
4.0	.153	.104	.066	.131	.090	.057	.090	.062	.040	.052	.037	.024	.017	.012	.008	
5.0	.146	.093	.054	.125	.081	.047	.086	.056	.033	.050	.033	.020	.016	.011	.007	
6.0	.139	.085	.045	.119	.073	.040	.082	.051	.028	.048	.030	.017	.015	.010	.005	
7.0	.133	.077	.039	.114	.067	.034	.079	.047	.024	.046	.028	.014	.015	.009	.005	
8.0	.127	.072	.034	.109	.062	.030	.075	.044	.021	.044	.026	.013	.014	.008	.004	
9.0	.121	.067	.030	.104	.058	.026	.072	.041	.019	.042	.024	.011	.014	.008	.004	
10.0	.116	.062	.027	.100	.054	.024	.069	.038	.017	.040	.023	.010	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.1500]
 Remarks:

UGR(Unified Glare Rating) Table

NAME: LED DOWNLIGHT		TYPE:					WEIGHT:				
SPEC.:		DIM.:					SERIAL No.:				
MFR.: ASD LIGHTING CORP		SUR.: 0.1*0.1					Shielding Angle:				
ceiling/cavity		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H		15.8	17.2	16.1	17.4	17.6	15.3	16.6	15.5	16.8	17.0
	3H	16.6	17.8	16.9	18.1	18.3	15.8	17.0	16.1	17.2	17.5
	4H	16.8	17.9	17.1	18.2	18.4	15.8	17.0	16.1	17.3	17.5
	6H	16.8	17.9	17.1	18.2	18.5	15.8	16.9	16.1	17.2	17.5
	8H	16.8	17.8	17.1	18.1	18.4	15.8	16.8	16.1	17.1	17.4
	12H	16.7	17.8	17.1	18.1	18.4	15.7	16.7	16.1	17.0	17.3
	4H 2H	16.1	17.3	16.4	17.6	17.8	15.6	16.8	16.0	17.1	17.3
	3H	17.0	18.0	17.3	18.3	18.6	16.2	17.2	16.6	17.5	17.8
	4H	17.2	18.2	17.6	18.5	18.8	16.3	17.3	16.7	17.6	17.9
	6H	17.3	18.2	17.7	18.5	18.9	16.4	17.2	16.8	17.5	17.9
	8H	17.3	18.1	17.7	18.4	18.8	16.3	17.1	16.8	17.5	17.9
	12H	17.3	18.0	17.7	18.4	18.8	16.3	17.0	16.7	17.4	17.8
	8H 4H	17.2	18.0	17.6	18.3	18.7	16.4	17.1	16.8	17.5	17.9
	6H	17.4	18.0	17.8	18.4	18.8	16.4	17.1	16.9	17.5	17.9
	8H	17.4	17.9	17.8	18.3	18.8	16.4	17.0	16.9	17.4	17.9
	12H	17.4	17.8	17.8	18.3	18.8	16.4	16.9	16.9	17.3	17.8
	12H 4H	17.2	17.9	17.6	18.3	18.7	16.3	17.0	16.8	17.4	17.8
	6H	17.3	17.9	17.8	18.3	18.8	16.4	17.0	16.9	17.4	17.8
	8H	17.4	17.8	17.8	18.3	18.8	16.4	16.9	16.9	17.3	17.8
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H		+ 0.4 / - 0.5					+ 0.6 / - 0.7				
1.5H		+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H		+ 0.7 / - 0.7					+ 0.9 / - 1.1				

CIE Pub.117, 709.1 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -1.2)
 Area: 0.1 m2

C Range: 0 - 360DEG	<input type="checkbox"/> Range: 0 - 180DEG
C Interval: 30.0DEG	<input type="checkbox"/> Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Temperature:25.3DEG	Humidity:65.0%
Operators:	Test Distance:8.000m [K=1.1500]
Test Date:2022-08-06	Remarks:

UTILIZATION FACTORS TABLE

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	64	54	47	63	53	47	62	53	47	41
0.80	74	64	58	73	64	57	72	63	57	51
1.00	82	73	67	81	72	66	79	73	66	59
1.25	89	80	74	88	80	74	85	78	73	67
1.50	94	85	80	92	84	79	89	83	78	71
2.00	100	93	87	98	91	86	95	89	85	78
2.50	103	96	91	101	95	90	97	92	89	81
3.00	106	100	95	104	98	94	100	96	92	84
4.00	109	104	100	107	102	99	102	99	96	88
5.00	111	107	104	108	105	102	104	101	99	90
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.000m [K=1.1500]
 Remarks:

ISOCANDELA DIAGRAM

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

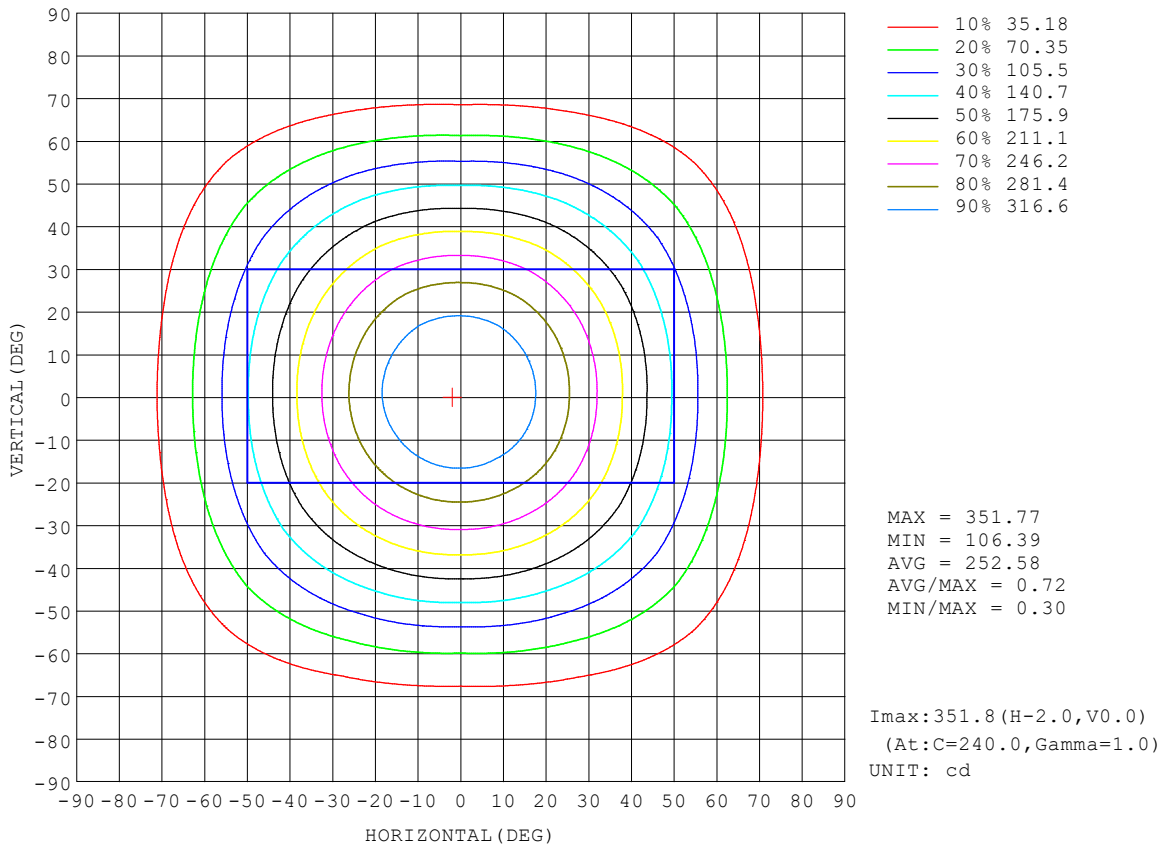


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.000m [K=1.1500]
 Remarks:

AAI Figure

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

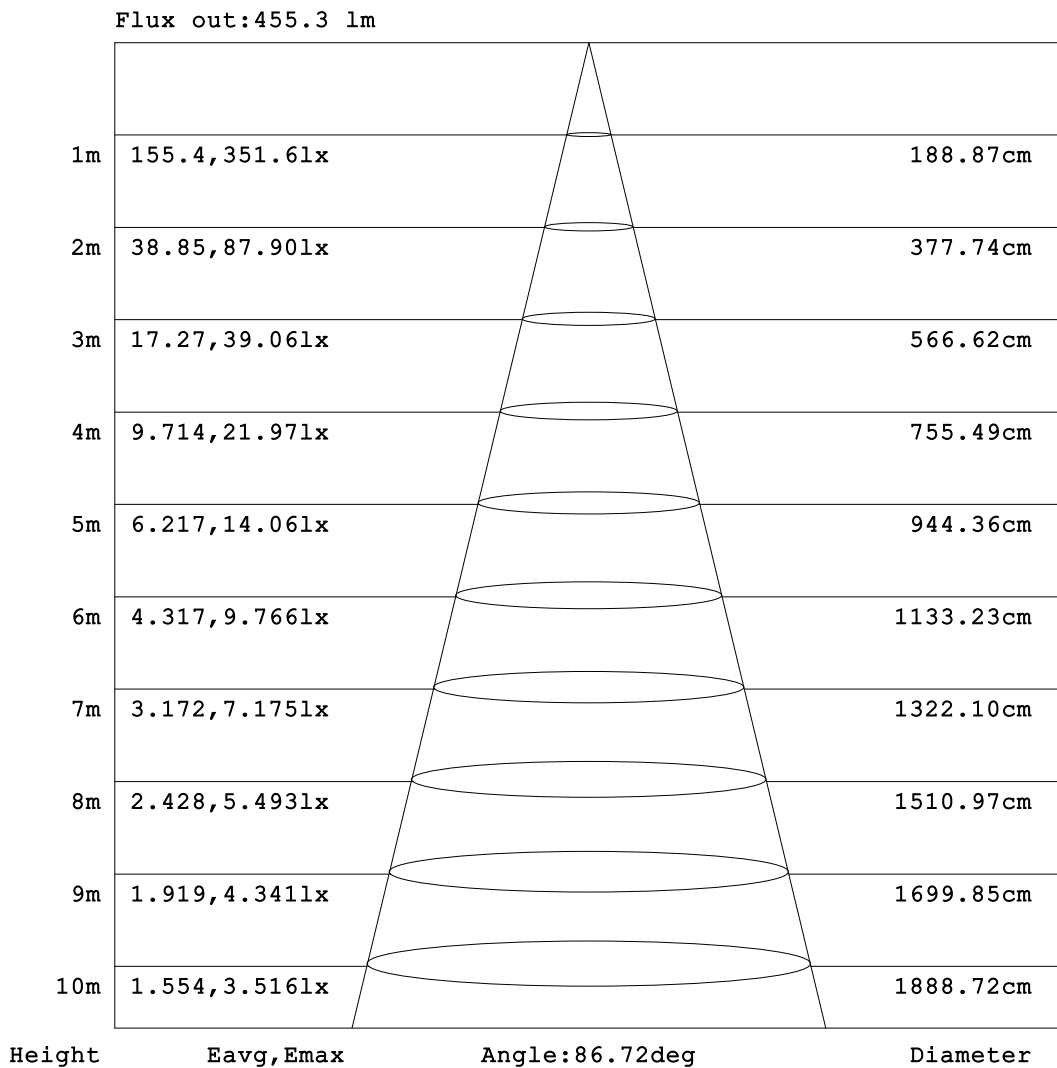


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.000m [K=1.1500]
 Remarks:

ISOLUX DIAGRAM

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

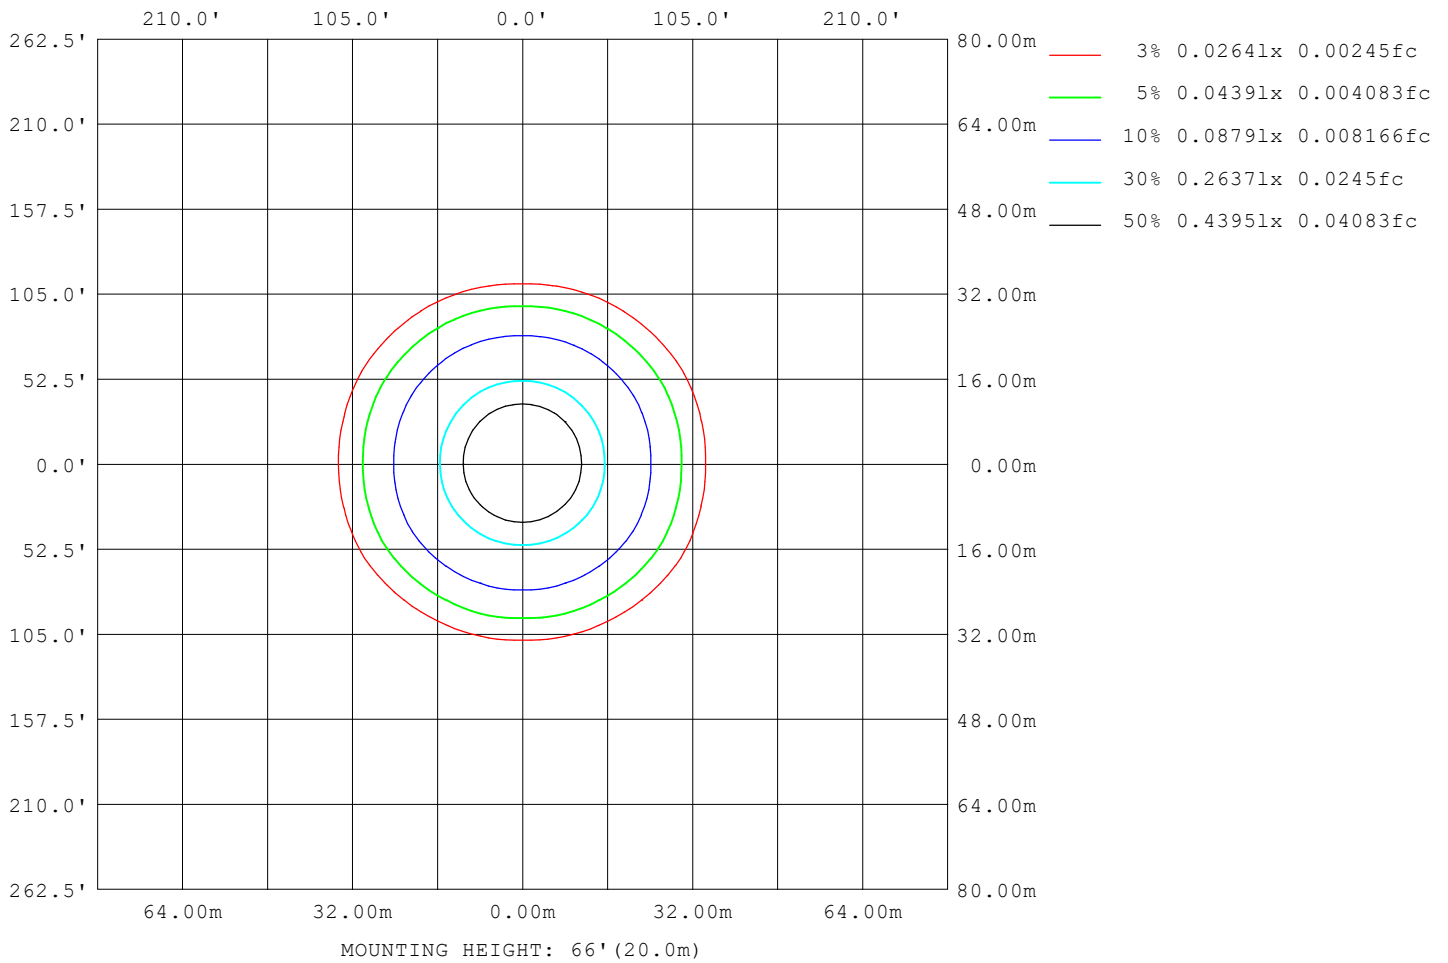

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.1500]
 Remarks:

LED Avg.L Report

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	1405
L_0~180 (75) av	849
L_0~180 (85) av	268
L_90~270 (65) av	1146
L_90~270 (75) av	559
L_90~270 (85) av	85
L_45 (65) av	1339
L_45 (75) av	675
L_45 (85) av	162

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.1500]
 Remarks:

Planar Illuminance Curve

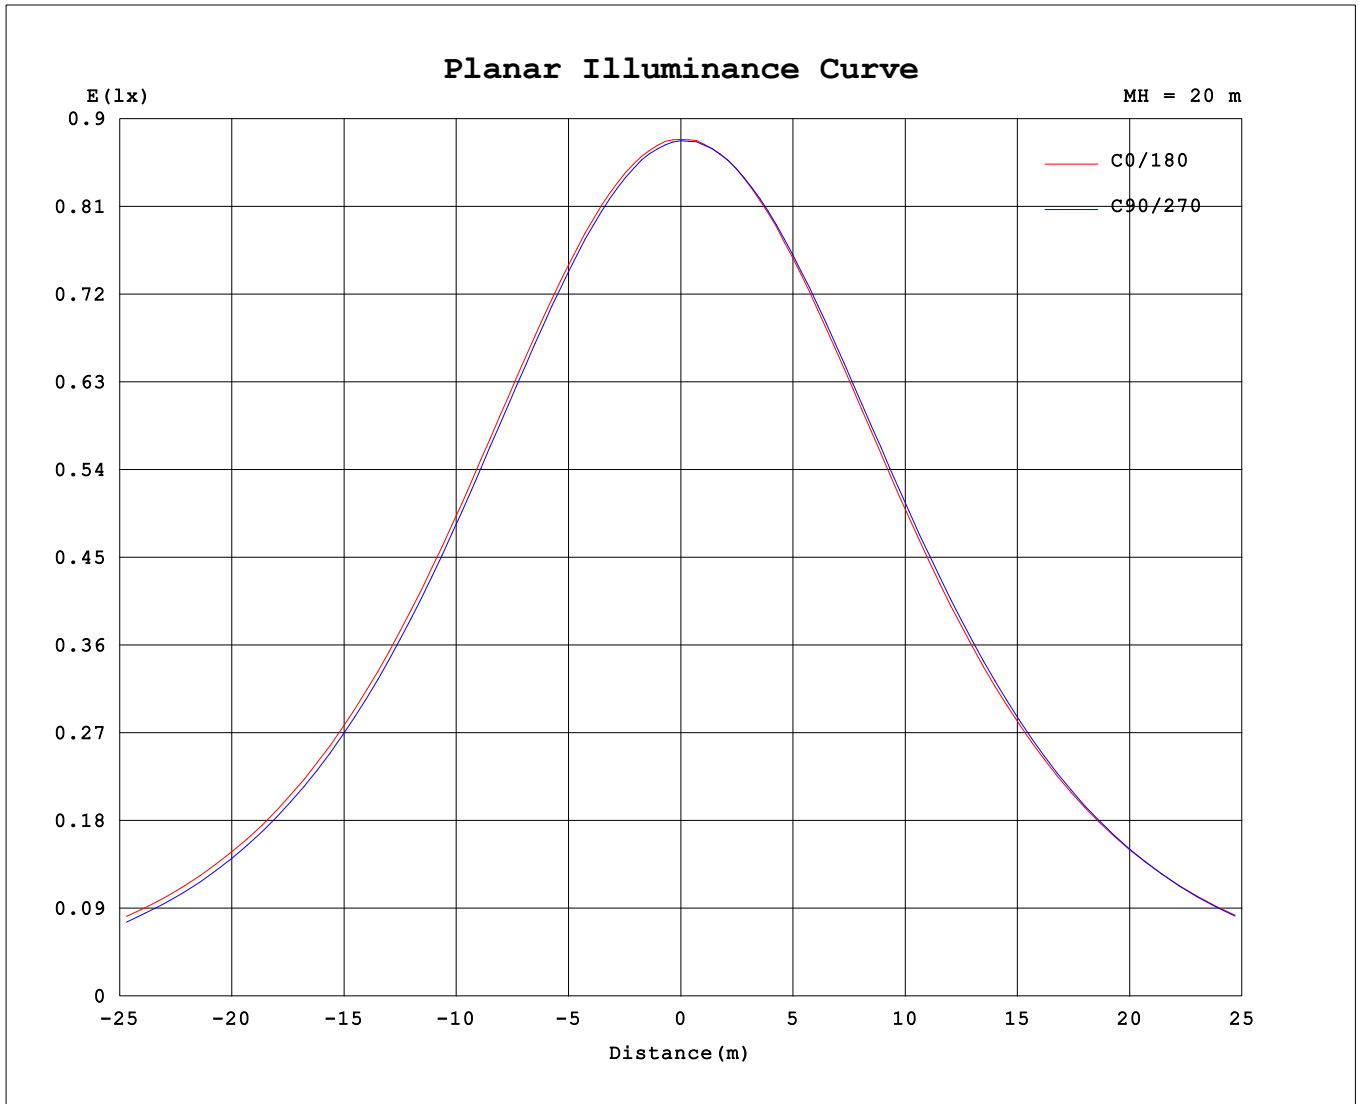

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.1500]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ □ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	351	351	351	351	351	351	351	351	351	351	351	351							
5	348	347	347	347	347	348	349	349	350	350	349	348							
10	339	338	337	337	338	340	341	342	343	343	342	341							
15	325	324	322	322	324	326	328	330	331	330	330	328							
20	306	305	303	303	304	307	310	312	314	313	313	310							
25	283	282	280	279	281	284	287	290	292	291	291	287							
30	257	256	253	252	255	258	260	264	267	265	265	262							
35	228	228	224	223	226	230	231	235	238	235	237	234							
40	198	199	195	191	196	200	201	205	208	204	207	204							
45	167	169	164	160	165	171	170	175	176	171	175	174							
50	137	140	133	129	133	141	139	145	144	138	143	144							
55	108	111	103	98.0	103	112	110	115	113	107	112	115							
60	82.1	83.9	74.8	69.8	74.3	84.1	84.0	87.2	83.5	77.6	82.5	86.5							
65	58.5	58.8	49.8	45.9	49.2	58.6	60.3	61.6	56.3	51.0	55.4	60.6							
70	37.9	36.6	29.3	26.9	28.8	36.3	39.5	38.6	32.9	29.3	32.3	37.8							
75	21.5	19.3	15.2	14.3	15.0	19.0	22.4	20.2	16.4	14.6	16.0	19.5							
80	10.2	8.29	6.04	5.76	5.99	8.17	9.72	8.54	6.57	5.71	6.31	8.15							
85	1.99	2.05	0.82	0.71	0.73	1.94	2.69	2.15	0.98	0.78	0.88	1.84							
90	0.04	0.03	0.01	0.01	0.01	0.02	0.03	0.04	0.02	0.02	0.01	0.06							
95	0.03	0.07	0.04	0.06	0.04	0.06	0.07	0.02	0.05	0.01	0.04	0.03							
100	0.07	0.13	0.05	0.10	0.04	0.10	0.14	0.05	0.10	0.02	0.09	0.07							
105	0.14	0.19	0.11	0.17	0.10	0.18	0.20	0.11	0.17	0.08	0.15	0.15							
110	0.21	0.26	0.20	0.26	0.21	0.24	0.27	0.18	0.25	0.16	0.23	0.24							
115	0.30	0.36	0.30	0.35	0.29	0.34	0.36	0.27	0.35	0.24	0.32	0.33							
120	0.39	0.46	0.39	0.46	0.38	0.45	0.45	0.39	0.45	0.35	0.42	0.46							
125	0.54	0.56	0.49	0.58	0.49	0.57	0.59	0.49	0.54	0.45	0.52	0.57							
130	0.65	0.66	0.60	0.69	0.60	0.66	0.70	0.59	0.65	0.57	0.63	0.69							
135	0.76	0.76	0.70	0.79	0.69	0.75	0.79	0.68	0.74	0.66	0.73	0.77							
140	0.80	0.83	0.81	0.89	0.79	0.84	0.86	0.77	0.84	0.77	0.84	0.86							
145	0.88	0.94	0.89	0.98	0.88	0.94	0.95	0.85	0.93	0.87	0.92	0.95							
150	0.99	1.04	0.97	1.05	0.97	1.02	1.04	0.96	1.02	0.94	0.99	1.04							
155	1.08	1.13	1.04	1.12	1.04	1.12	1.15	1.03	1.11	1.00	1.09	1.11							
160	1.14	1.18	1.14	1.18	1.12	1.19	1.24	1.12	1.19	1.10	1.15	1.20							
165	1.21	1.22	1.22	1.25	1.19	1.23	1.33	1.20	1.25	1.17	1.23	1.25							
170	1.25	1.25	1.26	1.29	1.26	1.32	1.37	1.25	1.30	1.23	1.29	1.33							
175	1.31	1.32	1.33	1.35	1.34	1.39	1.39	1.34	1.38	1.29	1.37	1.39							
180	1.40	1.37	1.35	1.36	1.36	1.41	1.46	1.39	1.39	1.35	1.40	1.44							

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

□ Range: 0 - 180DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.1500]
 Remarks: