
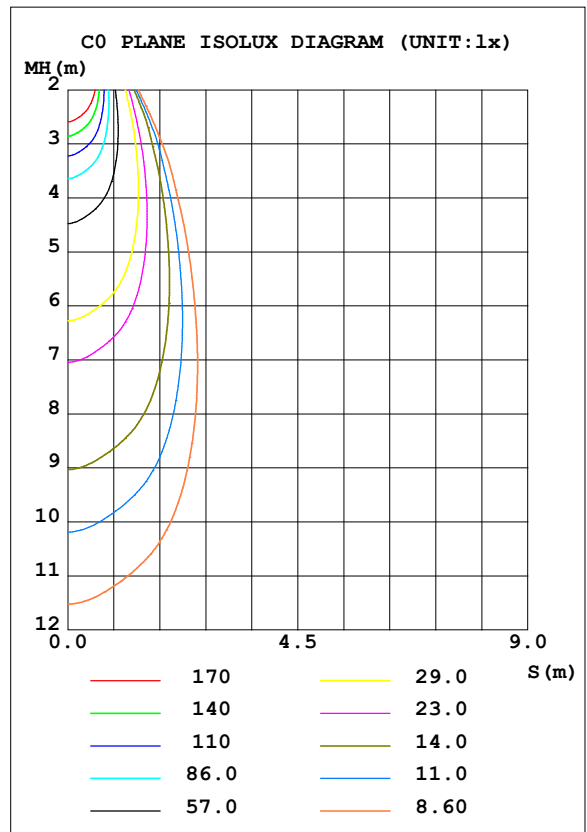


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.06V I:0.0698A P:7.8071W PF:0.9530 Freq:59.98Hz Lamp Flux:550x1 lm		
NAME: ASD-CD-TR-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 68.60 lm/W			
MODEL		I _{max} (cd)	1138	S/MH (C0/180)	0.61
NOMINAL POWER (W)	8	LOR (%)	100.0	S/MH (C90/270)	0.60
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	550	<input type="checkbox"/> UP, DN (C0-180)	0.0, 48.3
NOMINAL FLUX (lm)	550	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 51.7
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	0.65

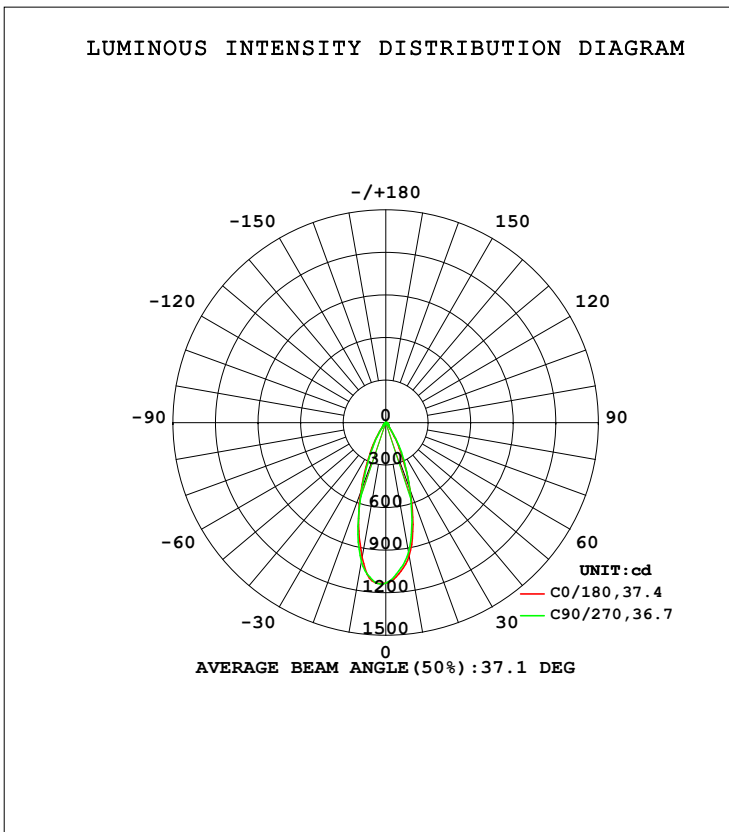

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-10-19

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	952.8	944.1	929.4	962.8	964.7	982.9	994.3	966.8	0- 10	100.1	100.1	18.7,18.7
20	499.5	440.6	494.7	504.2	512.2	584.7	497.4	507.4	10- 20	202.5	302.6	56.5,56.5
30	161.5	144.8	187.9	182.6	177.8	211.9	160.2	165.9	20- 30	142.1	444.6	83,83
40	32.21	33.21	38.02	36.15	35.08	40.71	35.84	34.50	30- 40	49.10	493.7	92.2,92.2
50	18.79	18.83	18.78	18.68	18.66	18.53	18.58	18.93	40- 50	19.56	513.3	95.8,95.8
60	10.03	10.08	9.768	9.763	9.656	9.526	9.046	9.839	50- 60	12.28	525.6	98.1,98.1
70	5.434	4.917	3.989	4.482	4.881	4.281	3.699	4.602	60- 70	6.916	532.5	99.4,99.4
80	2.100	1.030	0.4539	0.8431	1.736	0.8211	0.4001	0.8784	70- 80	2.797	535.3	99.9,99.9
90	0.0103	0.0047	0.0037	0.0047	0.0109	0.0103	0.0090	0.0081	80- 90	0.2742	535.6	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-10-19

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.06V I:0.0698A P:7.8071W PF:0.9530 Freq:59.98Hz Lamp Flux:550x1 lm		
NAME: ASD-CD-TR-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

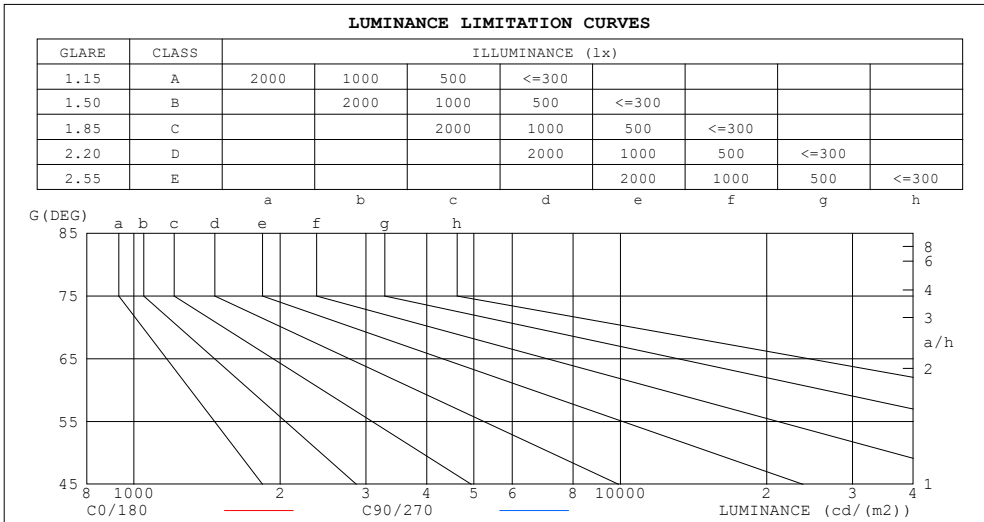

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	40	4
80	110	23
75	127	68
70	144	105
65	163	140
60	182	175
55	215	212
50	265	262
45	311	322


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-10-19

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.06V I:0.0698A P:7.8071W PF:0.9530 Freq:59.98Hz Lamp Flux:550x1 lm		
NAME: ASD-CD-TR-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.05	1.03	1.02	1.01	1.00	.99	.98	.97	.96	.94
2.0	1.04	1.01	.97	1.03	.99	.96	.99	.97	.94	.96	.94	.92	.94	.92	.90	.89
3.0	.98	.94	.90	.97	.93	.89	.94	.91	.88	.92	.89	.87	.90	.87	.85	.84
4.0	.93	.88	.84	.92	.87	.83	.90	.86	.82	.88	.84	.81	.86	.83	.81	.79
5.0	.88	.83	.79	.87	.82	.78	.85	.81	.78	.84	.80	.77	.82	.79	.76	.75
6.0	.83	.78	.74	.83	.78	.74	.81	.77	.74	.80	.76	.73	.79	.75	.73	.71
7.0	.80	.74	.70	.79	.74	.70	.78	.73	.70	.77	.73	.70	.75	.72	.69	.68
8.0	.76	.71	.67	.75	.70	.67	.74	.70	.67	.73	.69	.66	.72	.69	.66	.65
9.0	.73	.67	.64	.72	.67	.64	.71	.67	.64	.70	.66	.63	.70	.66	.63	.62
10.0	.70	.64	.61	.69	.64	.61	.68	.64	.61	.68	.64	.61	.67	.63	.61	.59

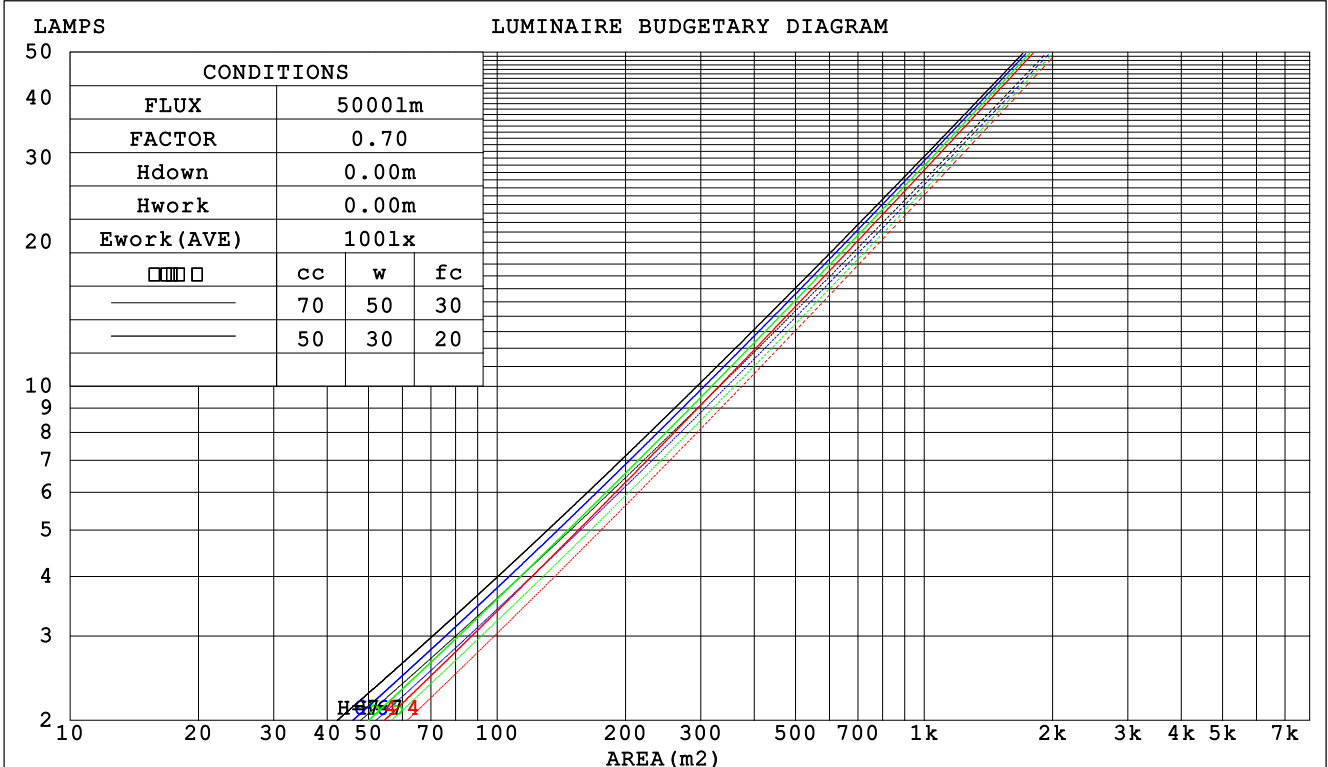

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-10-19

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:120.06V I:0.0698A P:7.8071W PF:0.9530 Freq:59.98Hz Lamp Flux:550x1 lm		
NAME: ASD-CD-TR-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients (WEC)			
0.0						
1.0	.167 .095 .030	.161 .092 .029	.148 .085 .027	.137 .079 .025	.126 .073 .024	
2.0	.158 .087 .027	.153 .084 .026	.142 .079 .025	.133 .074 .023	.124 .070 .022	
3.0	.149 .080 .024	.145 .077 .023	.136 .074 .022	.128 .070 .021	.120 .066 .021	
4.0	.141 .073 .022	.137 .072 .021	.129 .069 .020	.122 .066 .020	.116 .063 .019	
5.0	.133 .068 .020	.130 .067 .019	.123 .064 .019	.117 .062 .018	.112 .060 .018	
6.0	.127 .063 .018	.124 .062 .018	.118 .060 .018	.112 .058 .017	.107 .057 .017	
7.0	.121 .060 .017	.118 .059 .017	.113 .057 .016	.108 .055 .016	.104 .054 .016	
8.0	.115 .056 .016	.113 .055 .016	.108 .054 .015	.104 .053 .015	.100 .051 .015	
9.0	.110 .053 .015	.108 .053 .015	.104 .051 .015	.100 .050 .014	.096 .049 .014	
10.0	.105 .050 .014	.103 .050 .014	.100 .049 .014	.096 .048 .014	.093 .047 .013	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients (CCEC)			
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.170 .157 .146	.146 .135 .125	.100 .093 .087	.057 .054 .050	.018 .017 .016	
2.0	.154 .133 .114	.132 .114 .099	.091 .079 .069	.052 .046 .040	.017 .015 .013	
3.0	.141 .113 .091	.121 .098 .079	.083 .068 .056	.048 .040 .033	.015 .013 .011	
4.0	.130 .099 .074	.112 .085 .065	.077 .059 .046	.044 .035 .027	.014 .011 .009	
5.0	.121 .087 .062	.104 .075 .054	.071 .052 .038	.041 .031 .022	.013 .010 .007	
6.0	.113 .077 .052	.097 .067 .045	.067 .047 .032	.039 .028 .019	.013 .009 .006	
7.0	.106 .069 .044	.091 .060 .038	.063 .042 .027	.037 .025 .016	.012 .008 .005	
8.0	.100 .063 .038	.086 .055 .033	.059 .038 .023	.035 .023 .014	.011 .007 .005	
9.0	.094 .058 .033	.081 .050 .029	.056 .035 .020	.033 .021 .012	.011 .007 .004	
10.0	.090 .053 .029	.077 .046 .025	.054 .032 .018	.031 .019 .011	.010 .006 .004	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-10-19

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.06V I:0.0698A P:7.8071W PF:0.9530 Freq:59.98Hz Lamp Flux:550x1 lm		
NAME: ASD-CD-TR-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	4.5	5.4	4.7	5.5	5.7	4.7	5.5	4.9	5.7	5.9
3H	5.2	5.9	5.4	6.1	6.3	5.0	5.8	5.3	6.0	6.2
4H	5.4	6.1	5.7	6.4	6.6	5.1	5.8	5.4	6.0	6.3
6H	5.6	6.3	5.9	6.5	6.7	5.0	5.7	5.3	6.0	6.2
8H	5.5	6.2	5.9	6.5	6.7	5.0	5.7	5.3	5.9	6.2
12H	5.5	6.2	5.8	6.4	6.7	4.9	5.6	5.3	5.9	6.1
4H 2H	4.7	5.5	5.0	5.7	5.9	4.9	5.6	5.1	5.8	6.0
3H	5.5	6.2	5.8	6.4	6.7	5.3	6.0	5.6	6.2	6.5
4H	5.8	6.4	6.2	6.7	7.0	5.4	6.0	5.8	6.3	6.6
6H	6.1	6.6	6.4	6.9	7.3	5.4	5.9	5.8	6.2	6.6
8H	6.1	6.6	6.5	6.9	7.3	5.3	5.8	5.7	6.2	6.5
12H	6.0	6.5	6.4	6.9	7.2	5.3	5.7	5.7	6.1	6.5
8H 4H	5.8	6.3	6.2	6.7	7.0	5.4	5.9	5.8	6.3	6.6
6H	6.1	6.5	6.5	6.9	7.3	5.4	5.8	5.8	6.2	6.6
8H	6.1	6.5	6.6	6.9	7.3	5.3	5.7	5.8	6.1	6.6
12H	6.1	6.4	6.6	6.9	7.3	5.3	5.6	5.8	6.0	6.5
12H 4H	5.8	6.2	6.2	6.6	7.0	5.4	5.8	5.8	6.2	6.6
6H	6.1	6.4	6.5	6.8	7.3	5.4	5.7	5.8	6.1	6.6
8H	6.1	6.4	6.6	6.8	7.3	5.3	5.6	5.8	6.1	6.5
Variations with the observer position at spacings:										
S = 1.0H	+ 0.6 / - 0.8					+ 1.2 / - 1.2				
1.5H	+ 0.7 / - 0.4					+ 1.8 / - 0.7				
2.0H	+ 1.0 / - 0.8					+ 1.3 / - 1.1				

CIE Pub.117, 535.6 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -2.2)
 Area: 0.111111 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-10-19

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.06V I:0.0698A P:7.8071W PF:0.9530 Freq:59.98Hz Lamp Flux:550x1 lm		
NAME: ASD-CD-TR-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	87	80	76	86	80	76	85	80	76	72
0.80	94	88	84	93	88	84	92	87	84	80
1.00	99	93	89	98	92	89	96	92	88	84
1.25	103	97	94	102	97	93	100	96	93	88
1.50	105	101	97	104	100	97	102	98	96	91
2.00	108	104	101	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	112	108	105	110	107	104	106	104	102	96
4.00	114	111	109	112	109	107	108	106	104	97
5.00	115	113	111	113	111	109	109	107	106	98
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-10-19

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.06V I:0.0698A P:7.8071W PF:0.9530 Freq:59.98Hz Lamp Flux:550x1 lm		
NAME: ASD-CD-TR-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

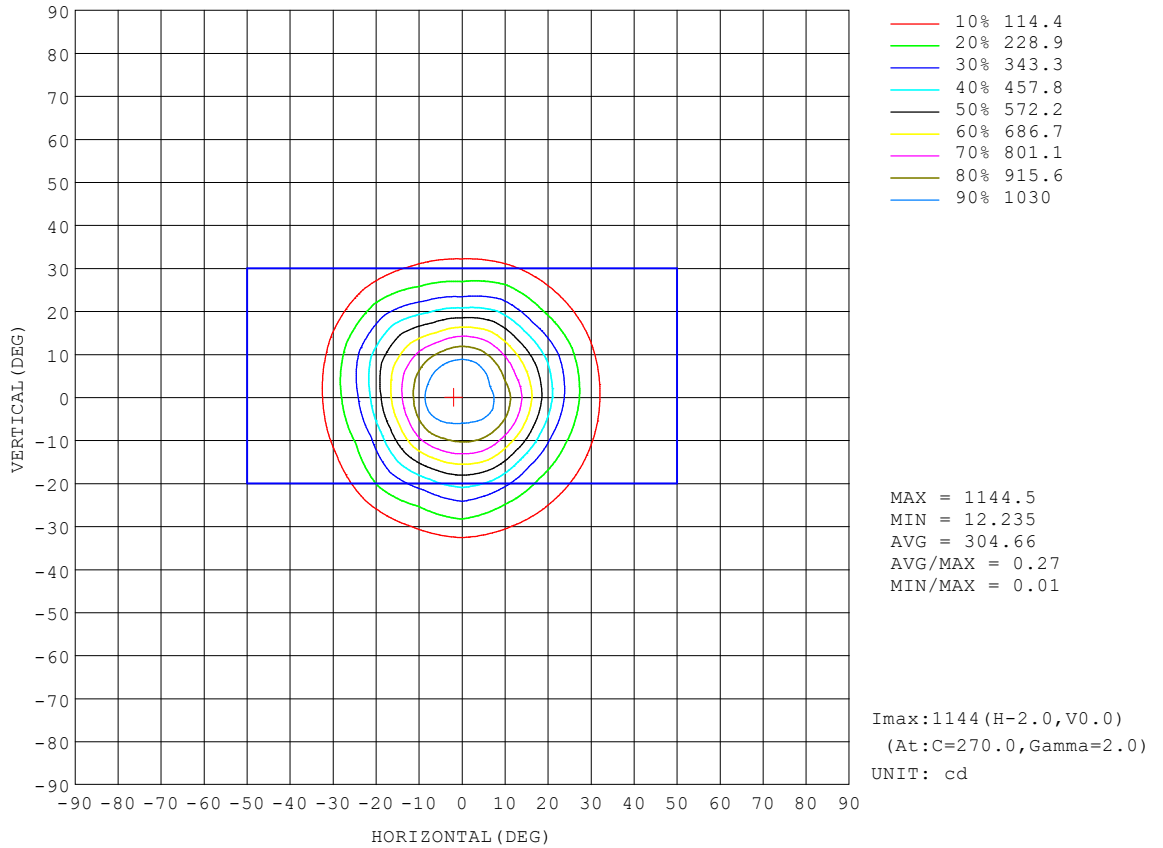


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-10-19

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

AAI Figure

Test:U:120.06V I:0.0698A P:7.8071W PF:0.9530 Freq:59.98Hz Lamp Flux:550x1 lm		
NAME: ASD-CD-TR-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

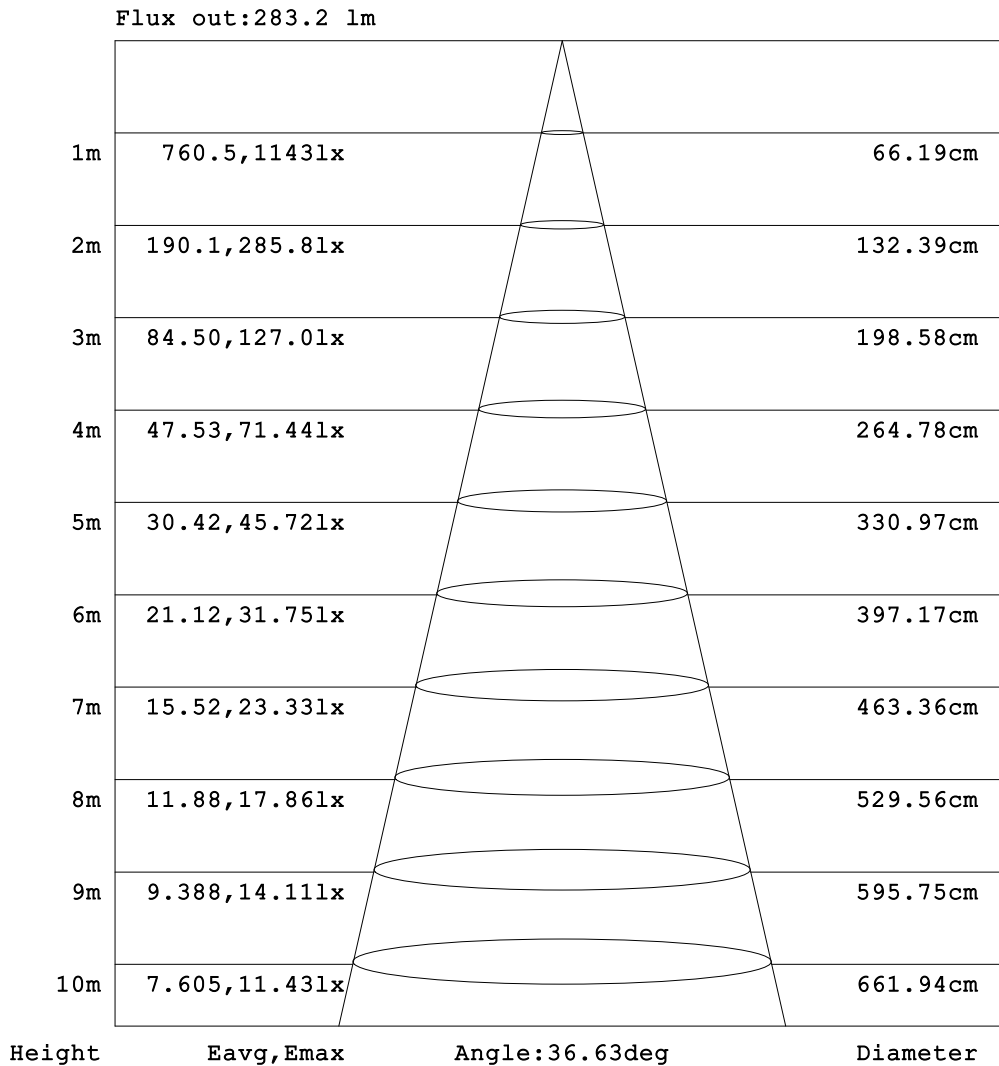


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-10-19

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.06V I:0.0698A P:7.8071W PF:0.9530 Freq:59.98Hz Lamp Flux:550x1 lm		
NAME: ASD-CD-TR-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

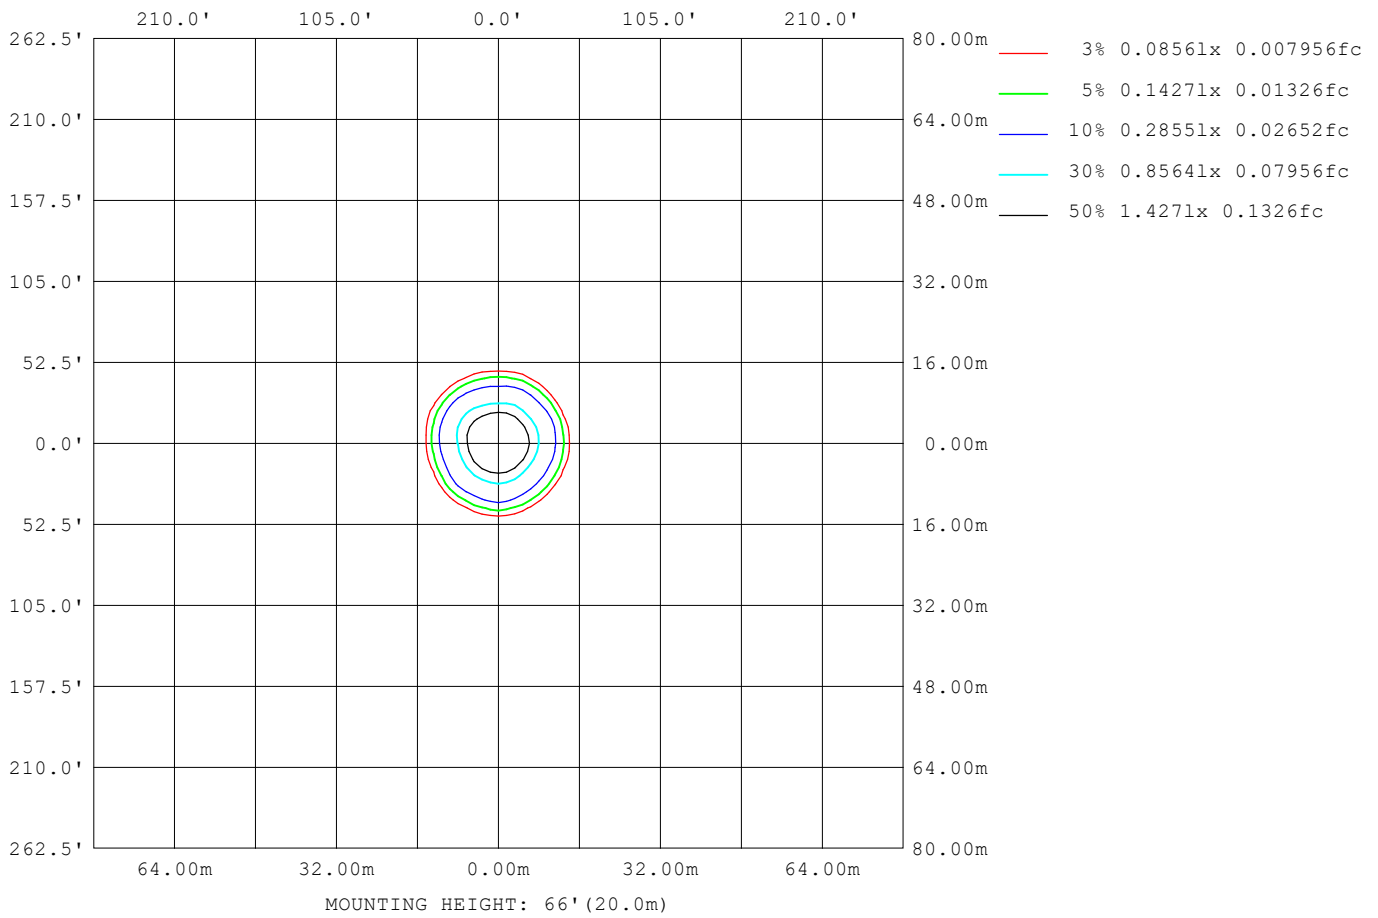

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-10-19

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:120.06V I:0.0698A P:7.8071W PF:0.9530 Freq:59.98Hz Lamp Flux:550x1 lm		
NAME: ASD-CD-TR-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	156
L_0~180 (75) av	117
L_0~180 (85) av	35
L_90~270 (65) av	135
L_90~270 (75) av	65
L_90~270 (85) av	4
L_45 (65) av	150
L_45 (75) av	88
L_45 (85) av	4

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-10-19

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

Planar Illuminance Curve

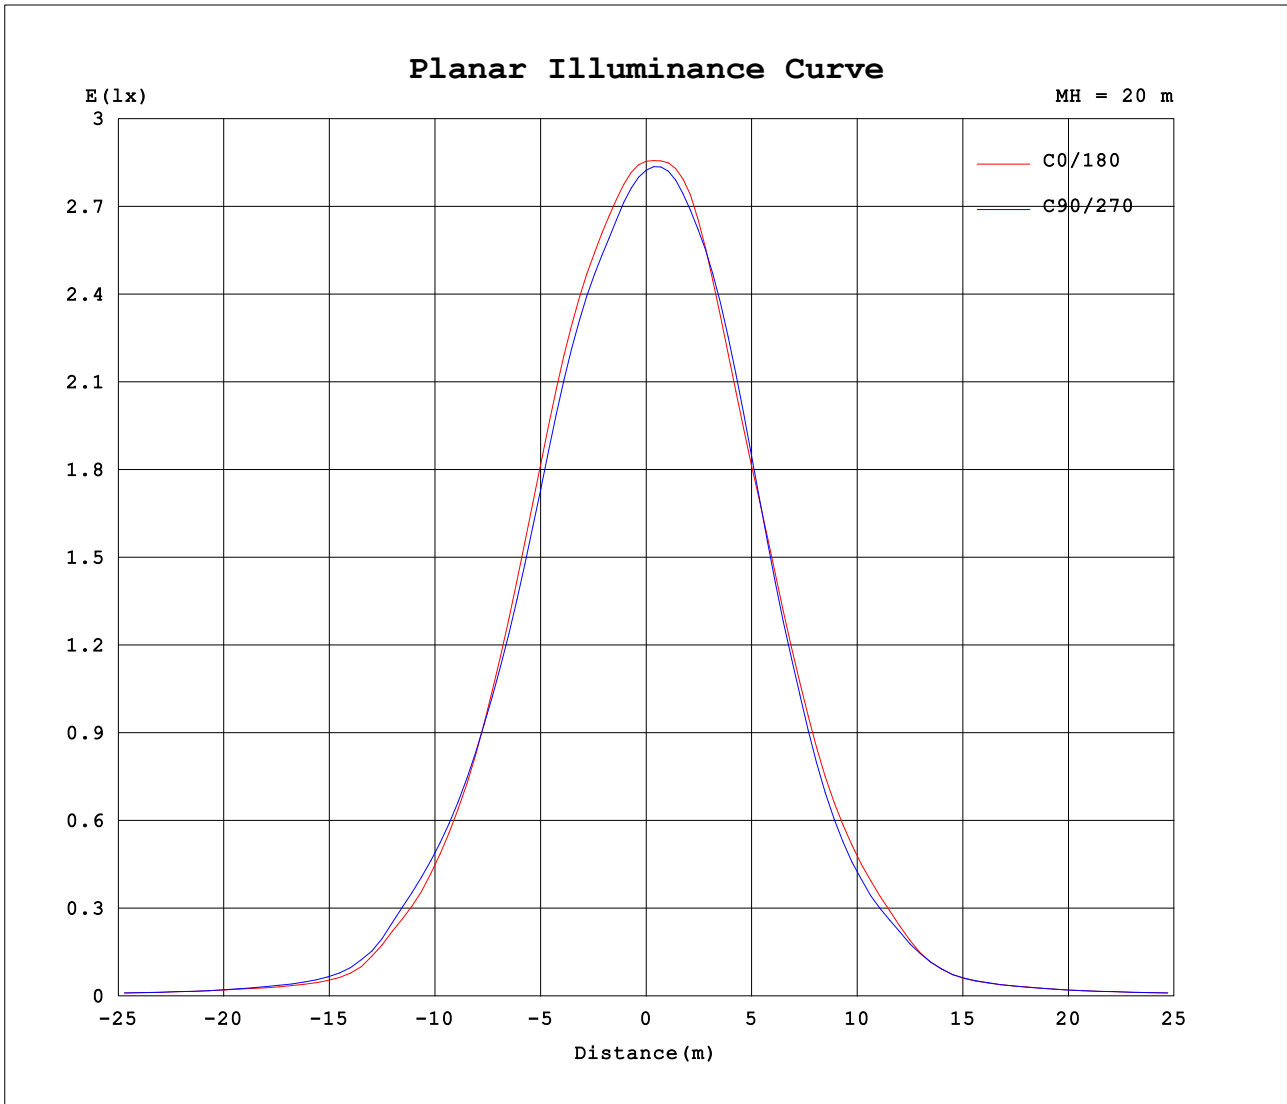

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-10-19

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.06V I:0.0698A P:7.8071W PF:0.9530 Freq:59.98Hz Lamp Flux:550x1 lm		
NAME: ASD-CD-TR-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1132	1132	1132	1132	1132	1132	1132	1132	1132	1132	1132	1132	1132	1132	1132	1132			
5	1070	1068	1060	1050	1051	1067	1094	1121	1120	1110	1110	1111	1112	1107	1100	1082			
10	953	956	944	935	929	934	963	978	965	974	983	986	994	991	967	947			
15	743	722	707	723	715	716	743	737	747	780	783	746	759	770	747	741			
20	499	456	441	478	495	479	504	483	512	582	585	508	497	531	507	519			
25	298	260	250	276	318	285	316	278	312	379	382	305	283	325	300	326			
30	161	148	145	157	188	166	183	159	178	211	212	170	160	178	166	176			
35	57.3	57.4	58.2	62.6	71.7	66.7	69.6	60.3	66.9	84.7	85.3	71.5	68.1	70.2	64.1	60.5			
40	32.2	32.7	33.2	35.6	38.0	35.5	36.1	33.1	35.1	40.4	40.7	36.9	35.8	35.5	34.5	32.9			
45	24.3	24.2	24.4	25.2	25.3	24.5	24.5	24.0	24.2	24.6	25.2	24.7	24.6	24.6	24.5	24.5			
50	18.8	18.9	18.8	18.9	18.8	18.9	18.7	18.7	18.7	18.4	18.5	18.4	18.6	18.6	18.9	18.9			
55	13.6	13.7	13.6	13.7	13.6	13.6	13.4	13.4	13.4	13.2	13.3	13.1	13.2	13.1	13.7	13.6			
60	10.0	10.1	10.1	9.96	9.77	9.73	9.76	9.71	9.66	9.57	9.53	9.14	9.05	9.27	9.84	9.99			
65	7.58	7.61	7.42	6.97	6.60	6.69	6.99	7.11	7.06	6.99	6.69	6.21	6.10	6.39	7.06	7.53			
70	5.43	5.45	4.92	4.33	3.99	4.09	4.48	4.90	4.88	4.78	4.28	3.80	3.70	3.93	4.60	5.29			
75	3.61	3.48	2.77	2.23	1.96	2.07	2.45	3.00	3.14	2.89	2.35	1.92	1.80	1.98	2.53	3.27			
80	2.10	1.75	1.03	0.61	0.45	0.53	0.84	1.41	1.74	1.33	0.82	0.48	0.40	0.48	0.88	1.56			
85	0.39	0.39	0.04	0.04	0.04	0.03	0.04	0.26	0.29	0.24	0.03	0.03	0.03	0.03	0.03	0.32			
90	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-10-19

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks: