
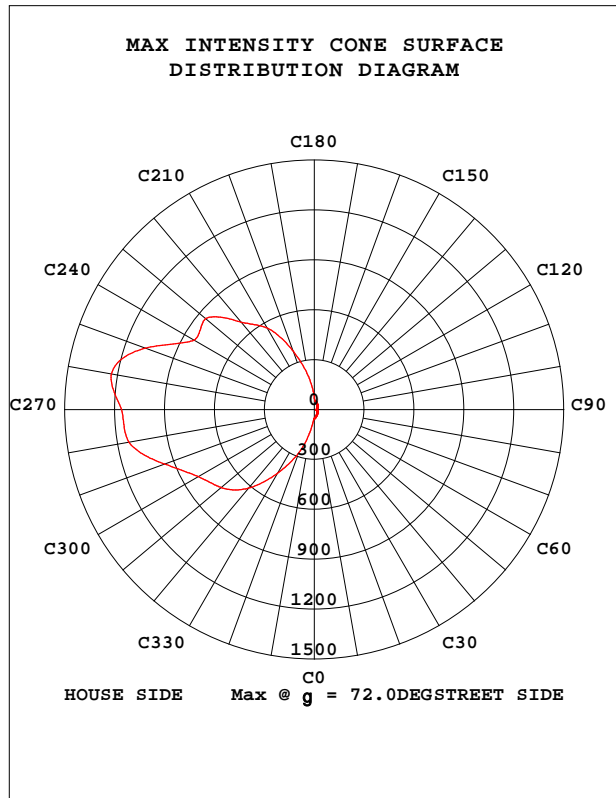


STREETLIGHT PHOTOMETRIC TEST REPORT

Test:U:120.21V I:0.1399A P:16.579W PF:0.9857 Freq:59.98Hz Lamp Flux:2170.27x1 lm		
NAME: ASD-LSWP01-18DCC-PC(4000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 130.91 lm/W			
MSDELSWP01-18DCC-PC(4000K)		Imax(cd)	1239	h street_up(%)	1.1
NOMINAL POWER(W)	18	LOR(%)	100.0	h street_down(%)	8.6
RATED VOLTAGE(V)	120-277	TOTAL FLUX(lm)	2170	h house_up(%)	4.8
NOMINAL FLUX(lm)	2170.27	MAXIMUM @(C,g)	260,72.0	h house_down(%)	85.5
LAMPS INSIDE	1	h up(%)	5.9	76 FLASHAREA(m2)	0.00100
TEST VOLTAGE(V)	120.0	h down(%)	94.1	SLI	15.712

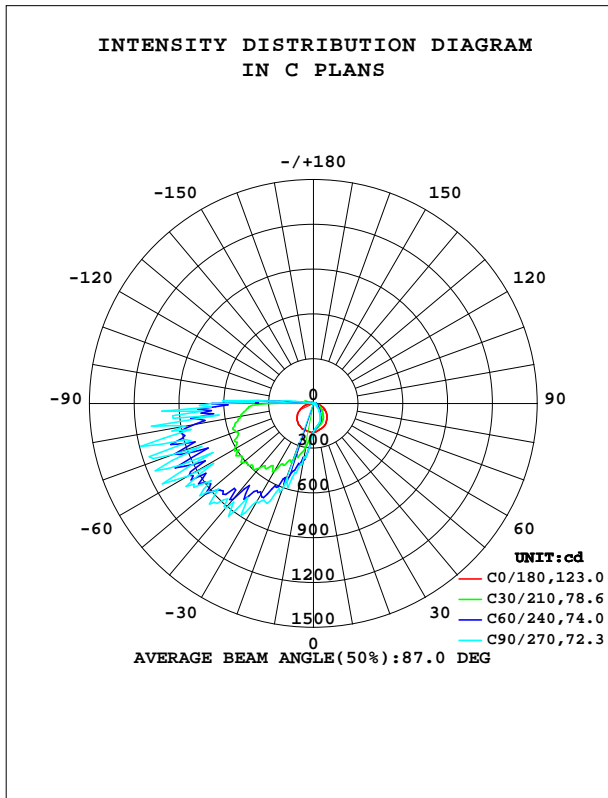


C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2021-05-13

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity: 65.0%
Test Distance: 8.000m [K=1.0000]
Remarks:

STREETLIGHT ISOCANDELA DIAGRAM

Test:U:120.21V I:0.1399A P:16.579W PF:0.9857 Freq:59.98Hz Lamp Flux:2170.27x1 lm		
NAME: ASD-LSWP01-18DCC-PC(4000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

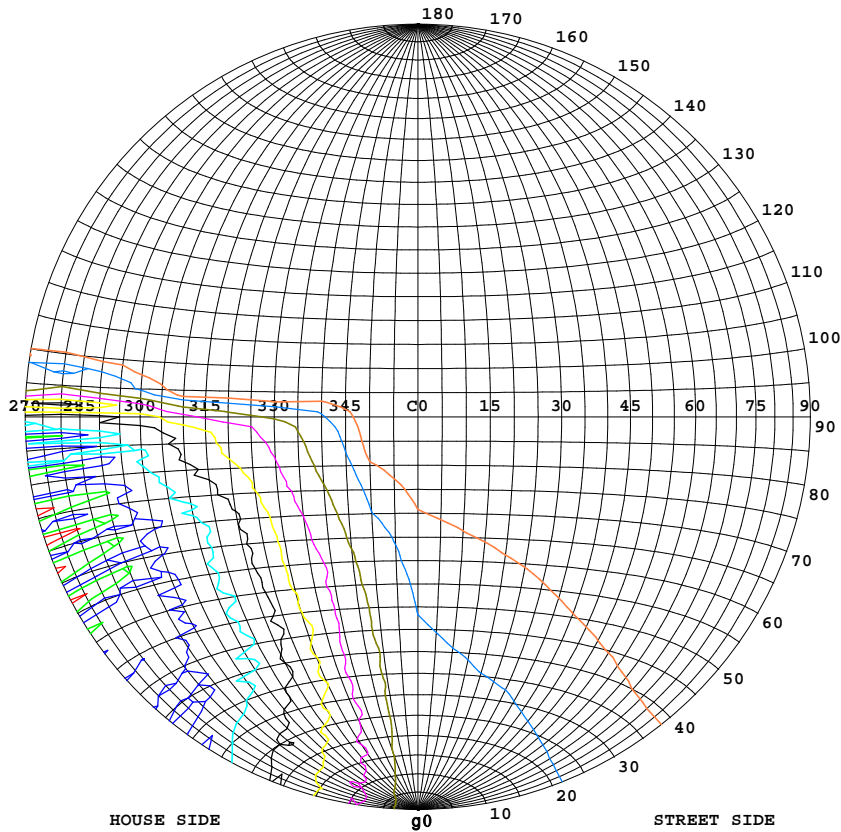

Classification:



IES:Type V - Very Short
 CIE:Narrow - Long
 IES:None cut-off
 CIE:Non-cut-off
 Max.At80:420.0cd/klm
 Max.At90:343.2cd/klm
 Max.80-90:515.4cd/klm

ISOCANDELA DIAGRAM	
UNIT	cd
Imax=100%	1239
90%	1115
80%	991
70%	867
60%	743
50%	619
40%	496
30%	372
20%	248
10%	124
5%	62

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-05-13

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.0000]
 Remarks:

COEFFICIENT OF UTILIZATION CURVE
AND ISOLUX DIAGRAM

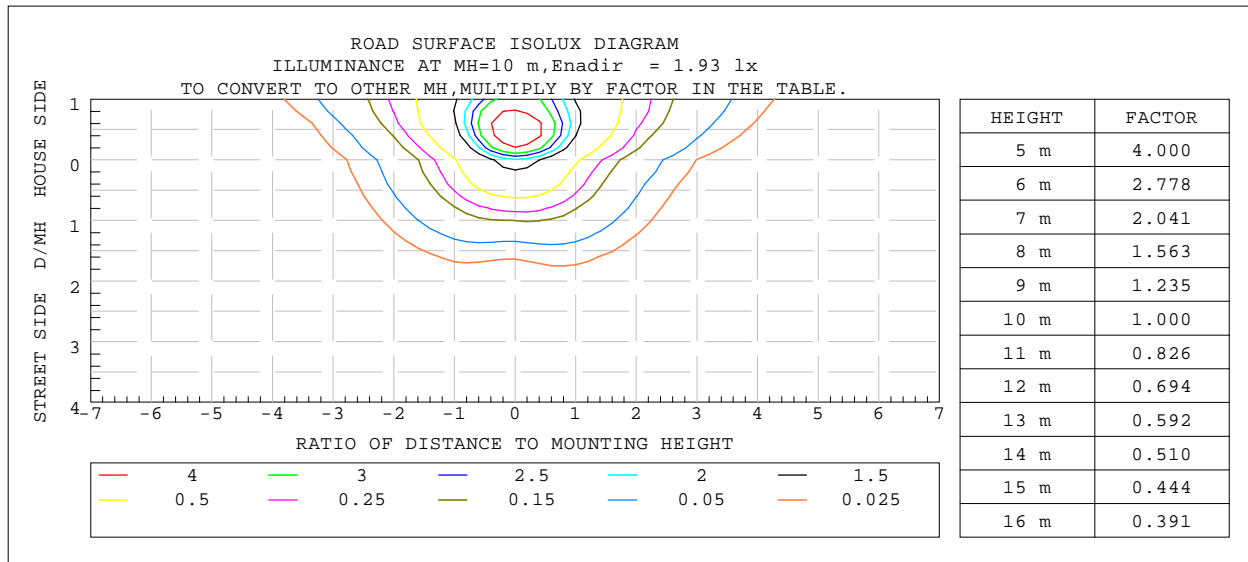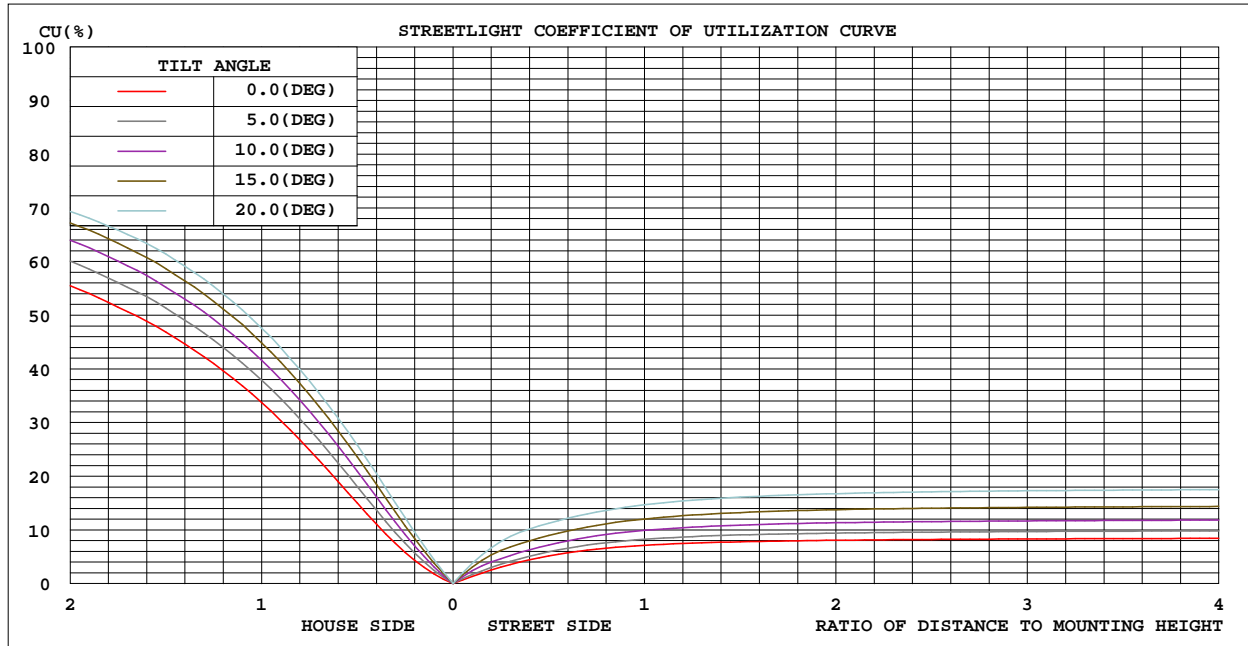

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2021-05-13

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity: 65.0%
Test Distance: 8.000m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

Test:U:120.21V I:0.1399A P:16.579W PF:0.9857 Freq:59.98Hz Lamp Flux:2170.27x1 lm		
NAME: ASD-LSWP01-18DCC-PC(4000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	184.3	158.6	152.6	162.6	190.0	339.3	365.0	342.4	0- 10	21.28	21.28	0.98,0.98
20	174.9	138.8	130.0	143.3	186.2	479.7	607.4	458.4	10- 20	77.18	98.46	4.54,4.54
30	162.5	114.4	89.61	121.7	178.0	633.2	756.8	576.6	20- 30	147.3	245.8	11.3,11.3
40	140.6	83.73	57.30	90.64	164.3	738.6	914.8	688.2	30- 40	220.5	466.3	21.5,21.5
50	118.0	58.41	29.36	63.90	144.8	728.9	918.0	722.1	40- 50	280.2	746.5	34.4,34.4
60	92.28	39.19	16.67	43.44	118.2	716.0	974.3	717.3	50- 60	321.8	1068	49.2,49.2
70	63.25	25.66	11.81	27.88	82.33	711.9	1001	705.1	60- 70	345.6	1414	65.1,65.1
80	31.85	16.47	7.860	17.00	45.46	663.3	871.4	597.1	70- 80	343.3	1757	81,81
90	11.41	9.607	5.791	10.48	19.36	450.3	686.9	356.2	80- 90	285.9	2043	94.1,94.1
100	7.495	8.873	7.750	9.119	11.46	52.39	63.55	40.38	90-100	83.81	2127	98,98
110	8.962	10.79	8.218	10.90	10.52	20.79	3.899	19.48	100-110	16.55	2143	98.8,98.8
120	7.541	9.209	8.204	10.08	8.191	6.117	2.424	6.608	110-120	8.795	2152	99.2,99.2
130	7.517	6.863	7.474	7.269	9.123	5.659	3.521	7.440	120-130	6.913	2159	99.5,99.5
140	5.592	5.491	6.293	5.689	5.915	4.729	5.712	4.147	130-140	5.365	2165	99.7,99.7
150	4.096	4.540	5.261	4.599	4.027	3.350	5.186	1.625	140-150	2.948	2167	99.9,99.9
160	3.588	4.334	4.365	4.132	3.345	2.243	1.840	1.970	150-160	1.565	2169	99.9,99.9
170	4.071	3.662	3.626	3.817	3.787	2.954	2.502	2.892	160-170	0.9116	2170	100,100
180	3.464	3.738	3.456	3.590	3.464	3.743	3.555	3.587	170-180	0.3271	2170	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-05-13

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM


Test:U:120.21V I:0.1399A P:16.579W PF:0.9857 Freq:59.98Hz Lamp Flux:2170.27x1 lm		
NAME: ASD-LSWP01-18DCC-PC(4000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

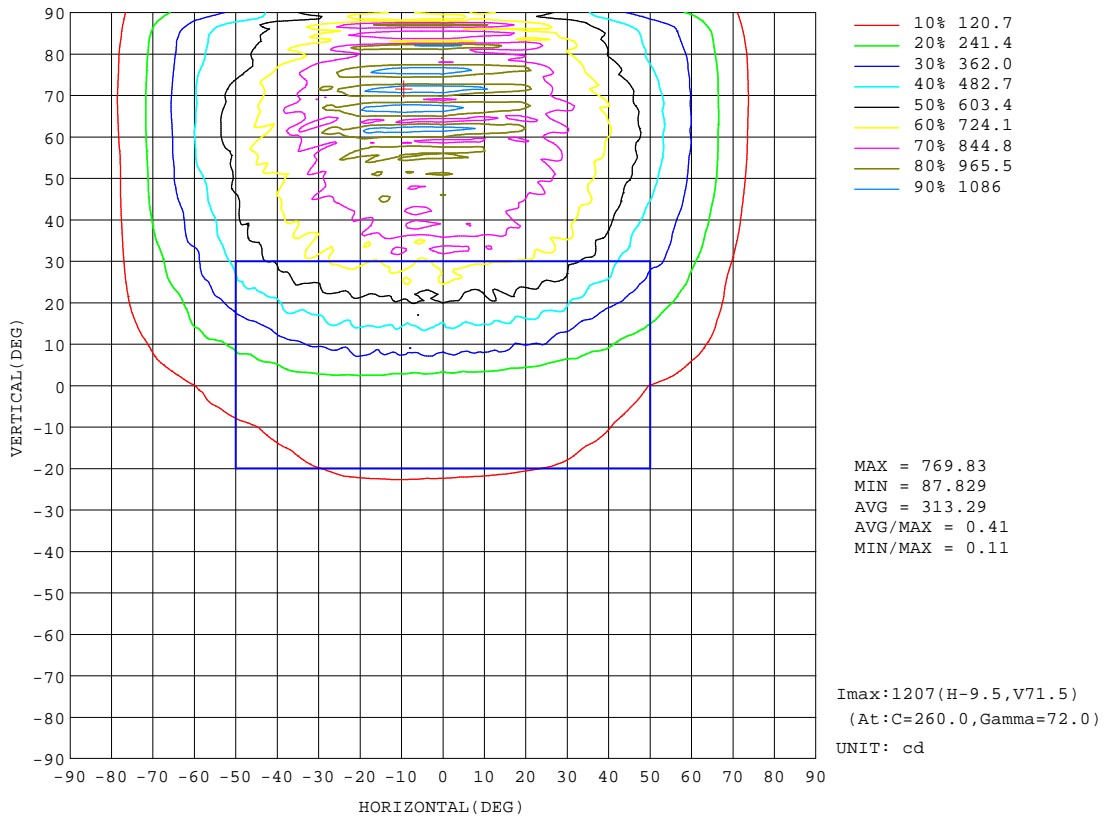

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-05-13

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.0000]
 Remarks:

Planar Illuminance Curve

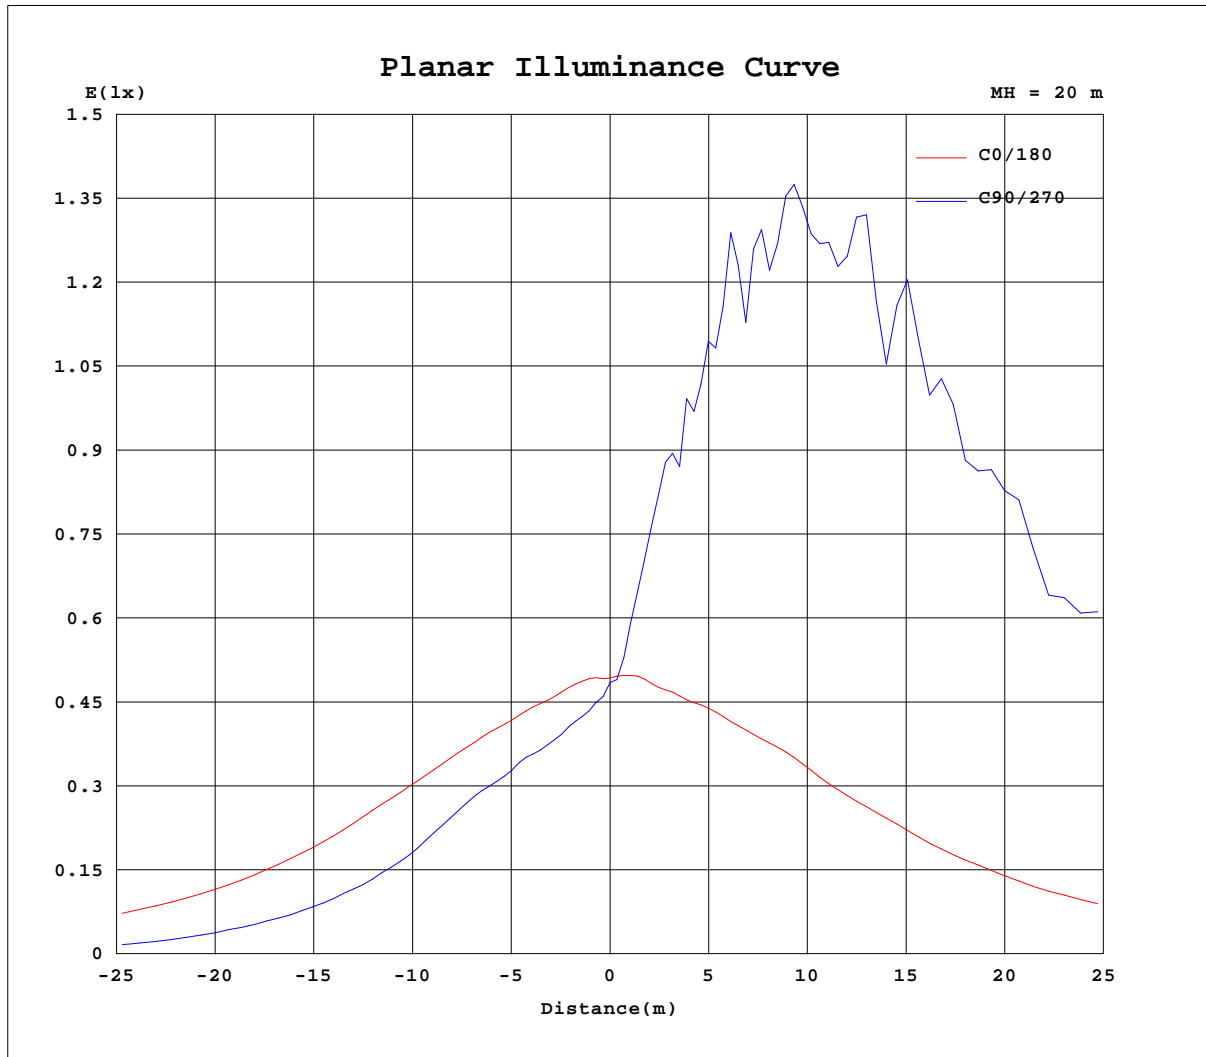


C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-05-13

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.000m [K=1.0000]
 Remarks:

LCS REPORT

Test:U:120.21V I:0.1399A P:16.579W PF:0.9857 Freq:59.98Hz Lamp Flux:2170.27x1 lm		
NAME: ASD-LSWP01-18DCC-PC(4000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

LUMINAIRE CLASSIFICATION SYSTEM(LCS) GRAPH

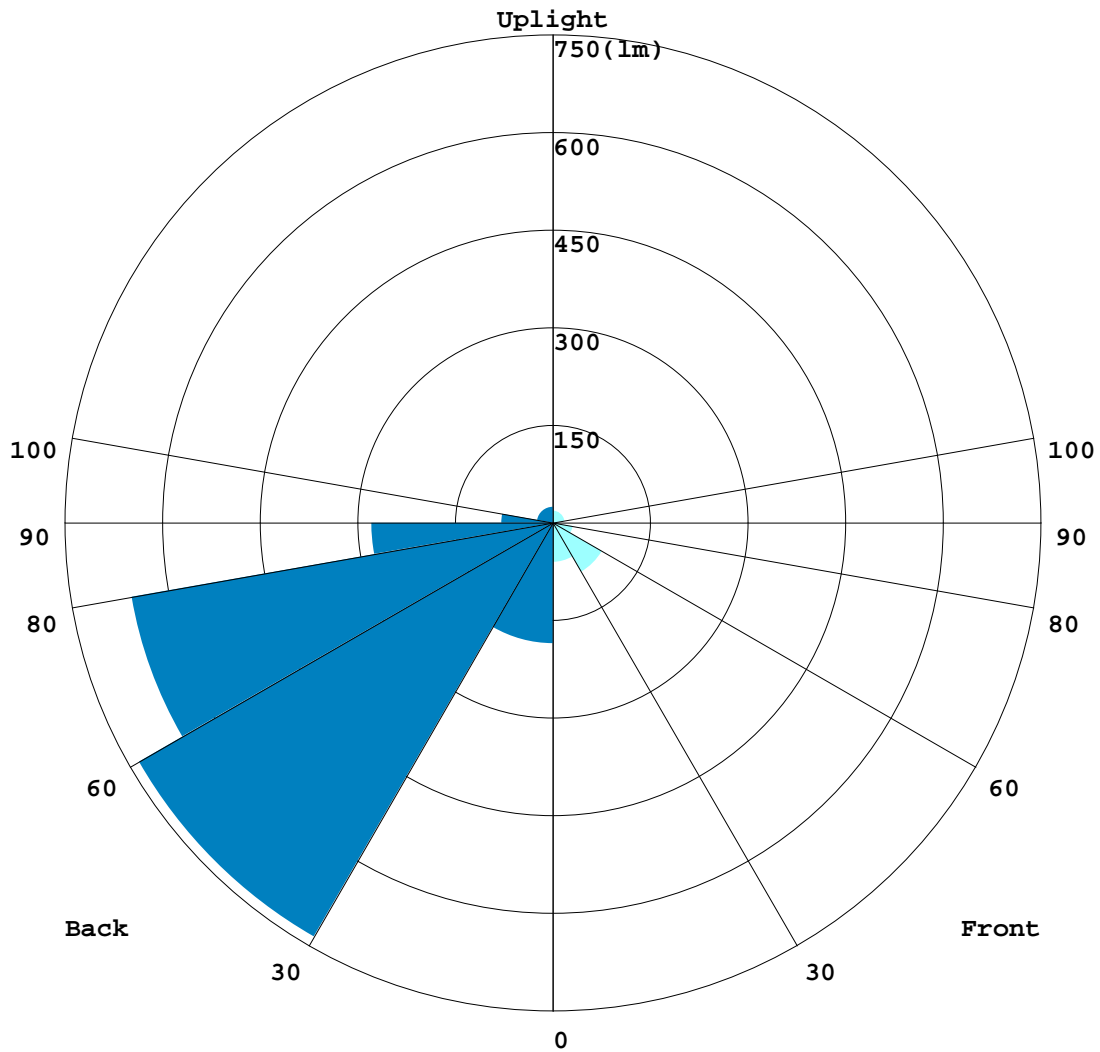

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-05-13

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.0000]
 Remarks:

BUG REPORT

Test:U:120.21V I:0.1399A P:16.579W PF:0.9857 Freq:59.98Hz Lamp Flux:2170.27x1 lm		
NAME: ASD-LSWP01-18DCC-PC(4000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

IESNA Luminaire Flux Distribution Table:

Zone	Lumens	Luminaire %
FL - Front-Low(0-30)	60.513	2.8
FM - Front-Medium(30-60)	87.687	4.0
FH - Front-High(60-80)	31.459	1.4
FVH - Front-Very High(80-90)	7.2163	0.3
Total Forward Light	209.9	9.7

BL - Back-Low(0-30)	185.28	8.5
BM - Back-Medium(30-60)	734.83	33.9
BH - Back-High(60-80)	657.43	30.3
BVH - Back-Very High(80-90)	278.66	12.8
Total Back Light	1960.4	90.3

UL - Uplight-Low(90-100)	83.814	3.9
UH - Uplight-High(100-180)	43.373	2.0
Total Up Light	127.19	5.9

BUG(Back,Up,Glare) Rating	B2-U3-G3
---------------------------	----------

Zone	Downward Lumens	Upward Lumens	Total Lumens
House Side	1856.2	104.17	1960.4
Street Side	186.87	23.021	209.9


C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-05-13

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.000m [K=1.0000]
Remarks:

ROAD ISOCANDELA REPORT

Test:U:120.21V I:0.1399A P:16.579W PF:0.9857 Freq:59.98Hz Lamp Flux:2170.27x1 lm		
NAME: ASD-LSWP01-18DCC-PC(4000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

ROAD SURFACE ISOCANDELA DIAGRAM

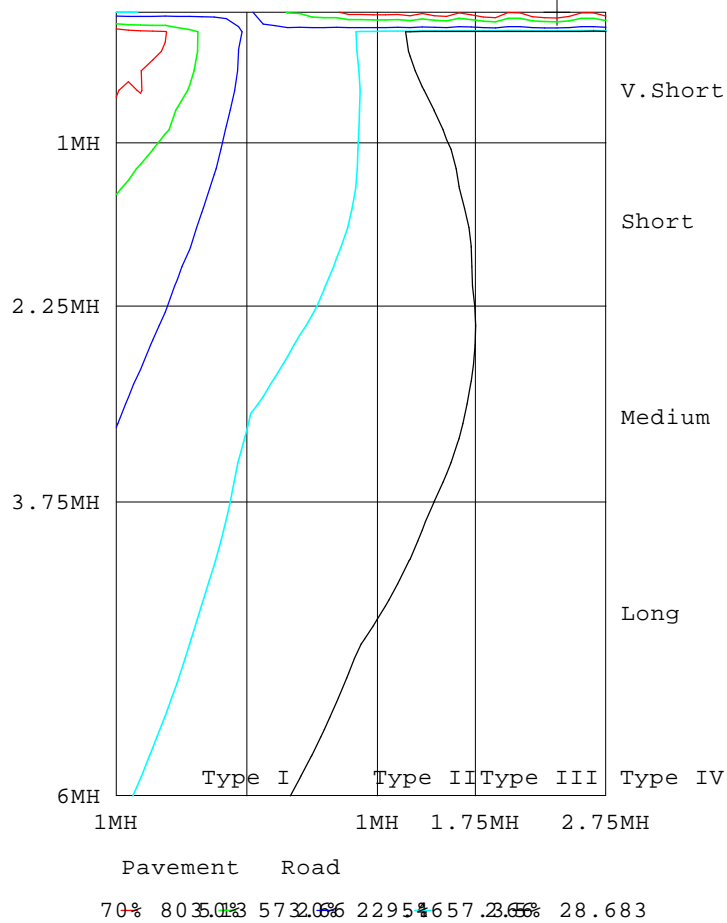

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-05-13

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.000m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.21V I:0.1399A P:16.579W PF:0.9857 Freq:59.98Hz Lamp Flux:2170.27x1 lm		
NAME: ASD-LSWP01-18DCC-PC(4000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180
0	194	194	194	194	194	194	194	194	194	194	194	194	194	194	194	194	194	194	194
5	192	183	180	176	173	171	170	169	168	168	168	169	170	173	176	181	184	196	196
10	184	177	169	165	160	157	155	154	153	153	152	155	156	161	165	171	177	185	190
15	179	169	162	155	151	149	145	143	141	141	141	144	148	152	154	161	169	180	189
20	175	162	152	147	141	137	134	132	130	130	131	134	136	140	146	151	161	174	186
25	169	156	145	137	133	125	119	113	109	109	112	117	124	131	136	144	152	166	186
30	162	145	135	128	120	109	98.4	93.2	90.4	89.6	91.6	96.4	104	117	127	134	143	158	178
35	151	134	124	117	104	92.7	82.8	76.8	72.7	72.2	75.3	80.3	87.3	99.5	113	124	133	147	174
40	141	124	114	102	89.5	78.0	69.0	61.5	57.9	57.3	59.3	66.1	73.0	84.0	97.3	112	121	136	164
45	129	112	102	88.4	75.4	64.6	56.4	49.9	43.9	43.0	46.7	52.9	61.0	70.6	82.6	97.2	109	124	156
50	118	101	89.5	75.4	63.4	53.4	45.1	37.0	30.5	29.4	33.1	40.3	48.7	58.3	69.4	83.4	97.6	111	145
55	105	89.7	77.3	64.1	52.8	42.9	34.7	27.0	21.1	20.1	23.2	30.4	38.3	47.5	57.9	70.5	85.3	97.7	132
60	92.3	78.0	65.3	53.9	43.7	34.7	28.2	22.0	17.1	16.7	18.6	24.7	31.1	38.5	48.4	59.3	72.2	85.2	118
65	78.8	64.6	53.1	44.0	35.2	28.3	24.2	18.5	14.4	14.1	15.5	21.1	26.2	31.0	39.1	47.6	58.4	70.8	99.3
70	63.2	50.4	41.6	34.7	27.9	23.4	20.7	15.7	12.2	11.8	13.0	18.1	22.3	25.2	30.6	37.5	45.7	56.7	82.3
75	46.9	37.1	30.9	26.1	21.9	19.1	17.5	13.3	9.83	9.40	10.8	15.1	18.2	20.2	23.4	28.0	33.5	42.5	63.8
80	31.8	25.0	21.1	18.8	17.1	15.9	15.4	11.6	8.43	7.86	9.38	13.5	15.5	16.4	17.6	19.7	22.8	29.1	45.5
85	19.5	15.4	13.8	13.7	13.8	14.2	14.1	10.5	7.77	6.98	8.49	12.4	14.4	14.2	13.6	13.6	14.6	18.0	29.9
90	11.4	9.62	8.86	9.50	9.68	9.54	9.07	7.85	6.28	5.79	6.95	8.63	9.45	10.7	10.3	9.45	9.47	11.5	19.4
95	8.68	8.09	7.78	7.86	7.32	6.67	7.19	6.94	6.66	6.42	6.71	7.46	7.03	7.83	8.85	8.51	8.77	9.99	13.9
100	7.49	7.30	7.62	7.46	8.45	9.29	8.86	8.09	8.16	7.75	8.02	8.24	9.29	9.44	8.80	8.73	8.63	9.22	11.5
105	8.54	7.69	7.66	8.36	9.86	11.3	9.21	8.26	8.29	8.04	8.19	8.59	10.05	11.8	9.27	8.24	8.17	8.79	11.1
110	8.96	8.27	8.35	9.16	10.9	10.6	8.77	8.28	8.37	8.22	8.29	8.45	9.30	11.6	10.2	9.07	8.22	8.53	10.5
115	8.14	7.96	8.50	9.13	10.9	10.1	8.28	8.17	8.32	8.25	8.28	8.11	8.71	11.4	10.1	9.18	8.60	8.32	9.24
120	7.54	7.68	8.15	8.84	9.91	8.51	7.83	8.11	8.23	8.20	8.25	7.91	8.07	9.50	10.7	8.89	8.94	7.97	8.19
125	7.56	7.52	7.94	8.59	8.74	7.51	7.32	7.97	8.07	8.04	8.11	7.74	7.40	7.99	9.50	8.82	8.38	8.43	9.03
130	7.52	7.46	7.64	7.96	7.00	6.73	6.49	7.37	7.50	7.47	7.56	7.10	6.67	6.98	7.56	9.04	8.27	7.87	9.12
135	7.36	7.29	7.10	6.33	6.08	6.02	5.95	6.54	6.70	6.83	6.61	6.25	5.96	6.15	6.27	6.93	8.06	8.30	9.07
140	5.59	5.55	5.46	5.40	5.68	5.30	5.64	5.95	6.16	6.29	6.08	5.82	5.50	5.87	5.51	5.55	5.61	5.99	5.92
145	4.54	4.76	4.97	5.25	4.55	4.81	5.46	5.68	5.60	5.70	5.61	5.67	5.17	4.75	5.36	5.14	4.86	4.62	4.30
150	4.10	4.07	3.58	4.18	4.57	4.51	4.84	5.09	5.22	5.26	5.14	4.98	4.65	4.67	4.52	3.96	4.35	4.29	4.03
155	3.18	3.35	3.52	3.78	4.37	4.58	4.56	4.68	4.73	4.78	4.76	4.58	4.59	4.53	4.25	3.57	3.29	3.23	2.97
160	3.59	3.73	3.61	3.94	4.23	4.44	4.38	4.26	4.31	4.36	4.37	4.39	4.46	4.42	3.84	3.52	3.66	3.56	3.35
165	3.96	4.24	4.41	4.21	4.13	4.14	4.00	3.96	3.99	3.99	3.97	4.04	4.07	4.15	4.05	4.17	4.03	3.81	3.68
170	4.07	4.18	3.90	3.74	3.69	3.63	3.67	3.67	3.65	3.63	3.60	3.55	3.52	3.81	3.83	3.76	3.82	3.71	3.79
175	3.68	3.56	3.41	3.38	3.40	3.40	3.37	3.35	3.30	3.36	3.35	3.33	3.29	3.28	3.34	3.37	3.34	3.58	3.67
180	3.46	3.41	3.39	3.39	3.68	3.80	3.74	3.75	3.75	3.46	3.67	3.66	3.62	3.61	3.57	3.55	3.55	3.55	3.46

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-05-13

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.21V I:0.1399A P:16.579W PF:0.9857 Freq:59.98Hz Lamp Flux:2170.27x1 lm		
NAME: ASD-LSWP01-18DCC-PC(4000K)	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

Table--2

UNIT: cd

C(DEG) g (DEG)	190	200	210	220	230	240	250	260	270	280	290	300	310	320	330	340	350		
0	194	194	194	194	194	194	194	194	194	194	194	194	194	194	194	194	194		
5	196	210	231	252	269	279	288	284	285	284	288	277	264	243	225	207	196		
10	210	257	295	326	353	389	382	364	365	373	383	375	355	330	289	247	206		
15	242	303	357	376	422	442	499	485	481	499	476	436	432	379	357	289	213		
20	263	355	418	452	508	577	548	558	607	571	515	597	480	436	368	314	228		
25	283	353	456	570	562	606	695	678	739	701	636	611	549	493	403	355	232		
30	304	388	527	580	687	704	758	699	757	745	709	716	610	543	445	341	234		
35	312	407	525	662	722	758	851	688	768	779	865	749	680	581	495	341	237		
40	286	458	567	671	806	841	864	833	915	849	916	758	750	626	505	353	240		
45	286	436	582	731	771	860	927	903	936	921	875	807	813	652	521	356	221		
50	287	454	618	715	743	946	903	885	918	910	889	836	779	665	505	361	218		
55	270	468	612	724	767	939	890	1000	980	967	883	863	816	670	492	347	203		
60	265	431	612	679	753	961	826	949	974	830	916	892	781	654	483	353	176		
65	233	393	584	744	798	1023	777	920	978	799	882	877	789	644	474	318	159		
70	215	374	552	681	743	991	831	933	1001	835	932	893	769	641	456	295	127		
75	190	350	547	692	756	911	891	1033	1067	918	892	814	689	590	425	263	101		
80	142	314	498	599	727	809	851	882	871	911	861	764	663	532	389	223	67.8		
85	112	275	450	567	623	756	886	963	947	975	861	692	588	468	353	188	39.8		
90	79.3	197	298	382	518	682	685	741	687	745	671	574	409	303	231	134	27.2		
95	34.3	55.6	28.9	31.5	67.7	135	191	206	200	223	195	113	29.8	17.5	13.9	28.3	12.9		
100	23.1	50.2	7.61	40.6	64.1	37.6	45.0	63.5	63.6	71.3	46.5	45.7	50.2	30.6	3.94	35.2	9.59		
105	22.8	54.3	61.6	30.1	15.2	14.8	5.51	7.73	6.61	8.67	5.63	11.0	6.02	30.5	60.1	28.4	14.0		
110	18.7	28.7	31.8	26.4	15.2	2.43	3.97	3.89	3.90	3.77	3.07	9.05	3.79	35.2	26.6	20.2	12.8		
115	13.2	15.8	14.1	11.3	6.77	3.81	2.50	1.91	1.79	2.25	2.99	5.68	4.33	13.5	13.6	11.6	9.19		
120	9.91	12.1	11.4	7.14	5.10	3.76	2.94	2.53	2.42	2.72	3.14	4.66	4.02	9.20	11.0	10.05	7.96		
125	12.3	15.5	14.4	6.30	4.89	4.08	3.34	2.91	2.77	3.03	3.49	4.35	4.96	9.76	12.4	9.86	8.20		
130	13.4	19.2	17.7	6.01	5.31	4.79	4.46	3.65	3.52	3.83	4.29	5.06	5.46	9.42	16.8	11.7	8.71		
135	12.5	13.5	8.51	5.04	5.28	5.69	5.30	5.04	4.99	5.17	5.04	5.30	4.54	5.77	10.06	11.4	8.51		
140	5.96	4.40	3.69	4.72	4.73	5.28	5.78	5.74	5.71	5.71	5.31	4.78	4.38	3.92	3.77	4.85	5.39		
145	4.02	3.36	3.65	3.31	4.25	5.11	5.42	5.29	5.42	5.24	5.06	4.60	3.66	1.82	3.10	3.49	3.93		
150	3.76	3.20	1.96	3.58	3.12	4.57	4.99	4.93	5.19	4.86	4.56	3.93	1.46	1.79	1.67	2.72	3.47		
155	2.57	2.25	2.10	2.08	3.70	1.66	1.56	2.69	2.95	2.37	1.38	2.63	1.66	1.69	1.80	2.04	2.39		
160	2.65	2.46	2.31	2.33	2.16	2.07	1.60	2.04	1.84	1.62	1.42	1.71	1.89	2.05	2.16	2.19	2.78		
165	3.10	2.79	2.71	2.60	2.22	2.04	1.90	1.78	1.68	1.69	1.79	1.89	2.28	2.44	2.60	2.71	3.38		
170	3.56	3.17	3.33	3.03	2.88	2.74	2.65	2.49	2.50	2.43	2.49	2.54	2.66	3.12	3.23	3.54	3.82		
175	3.54	3.62	3.58	3.79	3.71	3.67	3.48	3.54	3.61	3.50	3.44	3.39	3.38	3.39	3.44	3.53	3.61		
180	3.41	3.40	3.39	3.68	3.80	3.74	3.75	3.77	3.55	3.67	3.65	3.62	3.60	3.57	3.56	3.55	3.54		

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-05-13

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.0000]
 Remarks: