
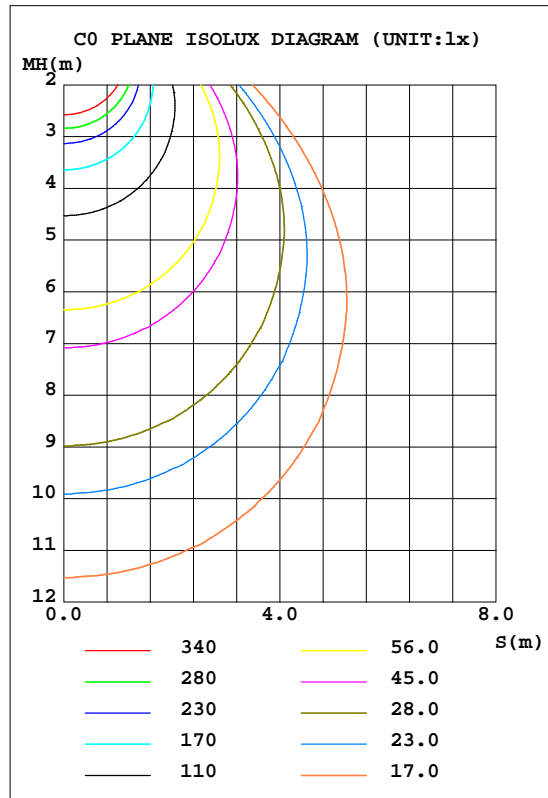


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.99V I:0.5120A P:60.500W PF:0.9851 Freq:60.00Hz Lamp Flux:4903.01x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 81.04 lm/W			
ASMODEL7-10DA60AC(60W 5000K)		I <sub>max</sub> (cd)	2263	S/MH(C0/180)	1.18
NOMINAL POWER(W)	60	LOR(%)	100.0	S/MH(C90/270)	1.17
RATED VOLTAGE(V)	120-277	TOTAL FLUX(lm)	4903.0	h UP, DN(C0-180)	0.2,50.5
NOMINAL FLUX(lm)	4903.01	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.2,49.1
LAMPS INSIDE	1	h up(%)	0.4	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	h down(%)	99.6	CIBSE SHR MAX	1.30

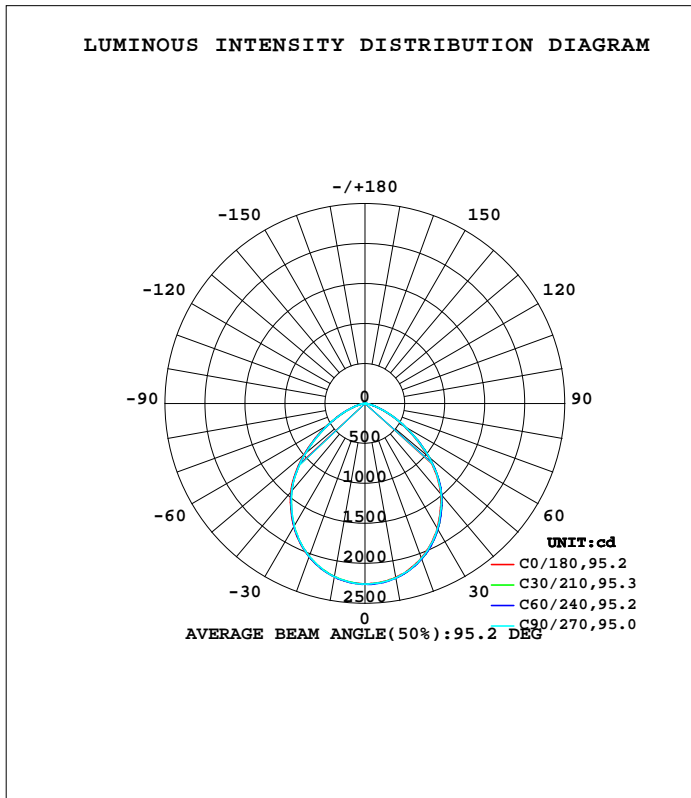

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-12-08

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.2563]  
 Remarks:

## ZONAL FLUX DIAGRAM

## ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	2208	2218	2214	2205	2201	2201	2199	2207	0- 10	213.1	213.1	4.35,4.35
20	2057	2070	2064	2048	2044	2039	2039	2048	10- 20	603.5	816.6	16.7,16.7
30	1806	1822	1814	1789	1782	1776	1774	1788	20- 30	889.5	1706	34.8,34.8
40	1475	1493	1486	1456	1445	1428	1426	1449	30- 40	1018	2725	55.6,55.6
50	1031	1053	1045	1014	994.6	978.6	975.8	1007	40- 50	958.1	3683	75.1,75.1
60	564.0	580.1	576.0	551.6	541.7	526.7	525.4	549.2	50- 60	691.9	4375	89.2,89.2
70	223.7	228.2	224.1	210.1	204.9	200.8	203.2	214.7	60- 70	365.0	4740	96.7,96.7
80	52.89	52.01	48.54	48.30	49.12	48.24	49.16	50.99	70- 80	120.4	4860	99.1,99.1
90	0.4796	0.3520	0.2272	0.2480	0.2610	0.4507	0.2608	0.2977	80- 90	22.13	4882	99.6,99.6
100	0.5796	0.6646	0.7827	0.7852	0.8587	0.7995	0.7393	0.7646	90-100	0.4922	4883	99.6,99.6
110	1.504	1.578	1.775	1.806	1.885	1.818	1.748	1.743	100-110	1.281	4884	99.6,99.6
120	2.757	2.760	2.960	3.107	3.130	3.088	3.092	2.990	110-120	2.325	4886	99.7,99.7
130	4.035	4.022	4.297	4.451	4.484	4.405	4.362	4.317	120-130	3.265	4889	99.7,99.7
140	5.138	5.120	5.415	5.552	5.610	5.482	5.514	5.304	130-140	3.754	4893	99.8,99.8
150	6.147	6.067	6.440	6.547	6.493	6.442	6.473	6.358	140-150	3.681	4897	99.9,99.9
160	7.164	7.073	7.256	7.412	7.503	7.502	7.431	7.286	150-160	3.155	4900	99.9,99.9
170	8.031	7.948	8.055	8.281	8.427	8.436	8.239	8.269	160-170	2.195	4902	100,100
180	8.957	8.566	8.626	8.811	8.822	8.797	8.743	8.739	170-180	0.8067	4903	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-12-08

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
Humidity:65.0%  
Test Distance:8.700m [K=1.2563]  
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.99V I:0.5120A P:60.500W PF:0.9851 Freq:60.00Hz Lamp Flux:4903.01x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

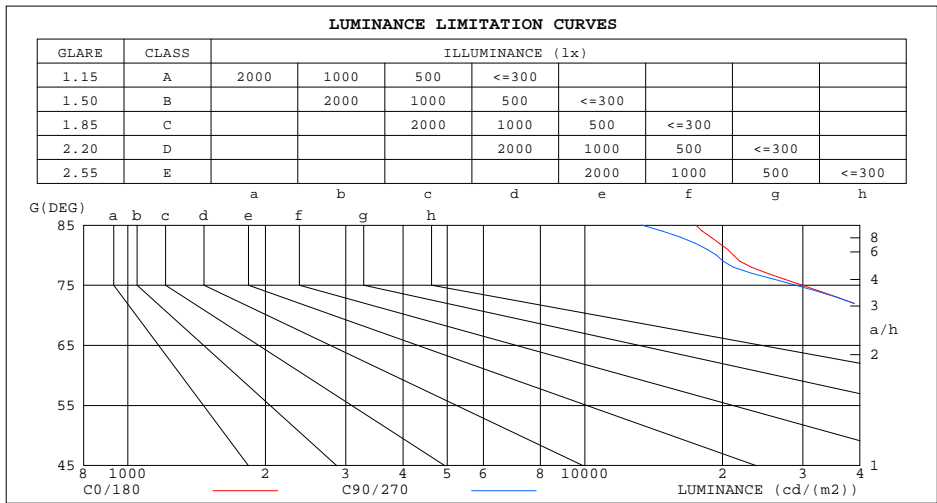

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	17469	13303
80	21145	19414
75	29914	28973
70	45413	45497
65	61313	62685
60	78313	80007
55	95382	97161
50	111340	112885
45	124441	125669


C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-12-08

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.2563]  
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.99V I:0.5120A P:60.500W PF:0.9851 Freq:60.00Hz Lamp Flux:4903.01x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.07	1.03	.00	1.04	1.01	.98	1.00	.98	.95	.96	.94	.92	.93	.91	.89	.87
2.0	.95	.89	.84	.93	.88	.83	.90	.85	.81	.86	.83	.79	.83	.80	.78	.76
3.0	.85	.78	.72	.83	.77	.71	.80	.75	.70	.78	.73	.69	.75	.71	.68	.66
4.0	.76	.68	.62	.75	.67	.62	.72	.66	.61	.70	.65	.60	.68	.63	.59	.57
5.0	.69	.60	.54	.68	.60	.54	.65	.59	.54	.63	.58	.53	.62	.57	.52	.50
6.0	.62	.54	.48	.61	.54	.48	.60	.53	.47	.58	.52	.47	.56	.51	.47	.45
7.0	.57	.49	.43	.56	.48	.43	.54	.48	.42	.53	.47	.42	.52	.46	.42	.40
8.0	.52	.44	.39	.51	.44	.39	.50	.43	.38	.49	.43	.38	.48	.42	.38	.36
9.0	.48	.40	.35	.47	.40	.35	.46	.39	.35	.45	.39	.35	.44	.38	.34	.33
10.0	.44	.37	.32	.44	.37	.32	.43	.36	.32	.42	.36	.32	.41	.35	.31	.30

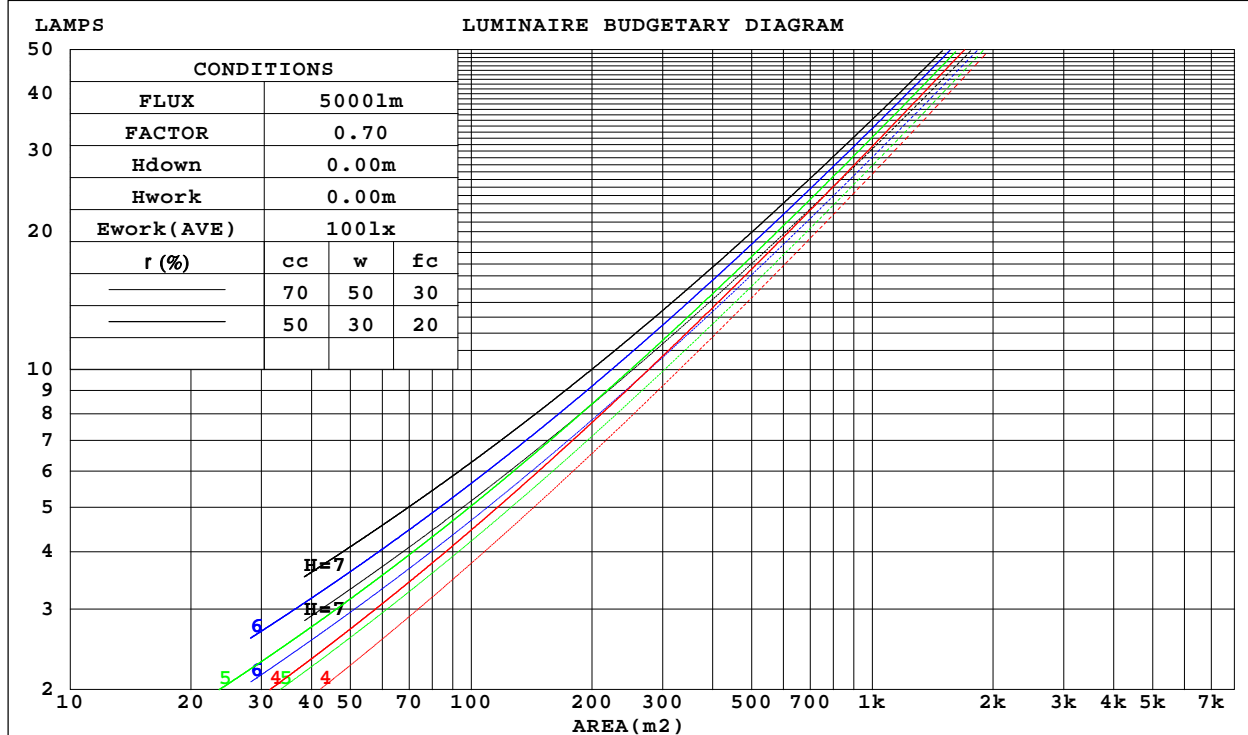

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-12-08

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.2563]  
 Remarks:

WEC AND CCEC

Test:U:119.99V I:0.5120A P:60.500W PF:0.9851 Freq:60.00Hz Lamp Flux:4903.01x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.255	.145	.046	.248	.141	.045	.234	.134	.043	.222	.128	.041	.211	.122	.039	
2.0	.247	.136	.042	.241	.133	.041	.230	.128	.040	.219	.123	.038	.209	.118	.037	
3.0	.235	.125	.037	.229	.123	.037	.219	.119	.036	.210	.115	.035	.201	.111	.034	
4.0	.221	.115	.034	.216	.113	.033	.207	.110	.033	.199	.107	.032	.191	.104	.032	
5.0	.207	.106	.031	.203	.104	.030	.195	.102	.030	.188	.099	.029	.181	.097	.029	
6.0	.195	.098	.028	.191	.096	.028	.184	.094	.027	.177	.092	.027	.171	.090	.027	
7.0	.183	.091	.026	.180	.090	.026	.173	.088	.025	.167	.086	.025	.162	.084	.025	
8.0	.172	.084	.024	.169	.083	.024	.164	.082	.023	.158	.080	.023	.153	.079	.023	
9.0	.163	.079	.022	.160	.078	.022	.155	.077	.022	.150	.075	.022	.146	.074	.021	
10.0	.154	.074	.020	.152	.073	.020	.147	.072	.020	.143	.071	.020	.138	.070	.020	

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.194	.194	.194	.166	.166	.166	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.180	.160	.142	.154	.137	.122	.105	.094	.085	.061	.055	.049	.019	.018	.016	
2.0	.170	.135	.107	.145	.117	.092	.100	.081	.064	.057	.047	.038	.018	.015	.012	
3.0	.161	.117	.083	.138	.101	.072	.095	.070	.050	.055	.041	.030	.018	.013	.010	
4.0	.153	.104	.066	.131	.090	.057	.090	.062	.040	.052	.037	.024	.017	.012	.008	
5.0	.146	.093	.054	.125	.080	.047	.086	.056	.033	.050	.033	.020	.016	.011	.006	
6.0	.139	.084	.045	.120	.073	.039	.083	.051	.028	.048	.030	.017	.015	.010	.005	
7.0	.133	.077	.039	.114	.067	.034	.079	.047	.024	.046	.028	.014	.015	.009	.005	
8.0	.127	.072	.034	.109	.062	.029	.076	.044	.021	.044	.026	.012	.014	.008	.004	
9.0	.121	.067	.030	.104	.058	.026	.072	.041	.019	.042	.024	.011	.014	.008	.004	
10.0	.116	.062	.027	.100	.054	.023	.069	.038	.017	.040	.023	.010	.013	.007	.003	

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-12-08

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.2563]  
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.99V I:0.5120A P:60.500W PF:0.9851 Freq:60.00Hz Lamp Flux:4903.01x1 lm										
NAME:					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: ASD LIGHTNG CORP					SUR.: 0.12*0.12			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	27.3	28.8	27.7	29.1	29.4	27.2	28.6	27.5	29.0	29.3
3H	28.1	29.4	28.5	29.7	30.1	27.9	29.3	28.3	29.6	30.0
4H	28.2	29.5	28.6	29.8	30.2	28.1	29.3	28.5	29.7	30.0
6H	28.3	29.4	28.7	29.8	30.2	28.1	29.2	28.5	29.6	30.0
8H	28.3	29.3	28.7	29.7	30.2	28.1	29.2	28.5	29.6	30.0
12H	28.3	29.3	28.7	29.7	30.1	28.1	29.1	28.5	29.5	29.9
4H 2H	27.6	28.9	28.0	29.2	29.6	27.4	28.7	27.9	29.0	29.4
3H	28.5	29.5	29.0	30.0	30.4	28.3	29.3	28.8	29.7	30.2
4H	28.7	29.6	29.2	30.1	30.5	28.5	29.4	28.9	29.8	30.3
6H	28.8	29.6	29.3	30.0	30.5	28.6	29.3	29.0	29.8	30.3
8H	28.8	29.5	29.3	30.0	30.5	28.6	29.3	29.0	29.7	30.2
12H	28.8	29.5	29.3	30.0	30.4	28.6	29.2	29.0	29.7	30.2
8H 4H	28.7	29.5	29.2	29.9	30.4	28.5	29.2	29.0	29.7	30.2
6H	28.9	29.4	29.4	30.0	30.4	28.6	29.2	29.1	29.7	30.2
8H	28.9	29.4	29.4	29.9	30.4	28.6	29.1	29.1	29.6	30.1
12H	28.9	29.4	29.4	29.9	30.5	28.6	29.1	29.1	29.6	30.1
12H 4H	28.7	29.4	29.2	29.9	30.3	28.5	29.1	29.0	29.6	30.1
6H	28.8	29.4	29.4	29.8	30.4	28.6	29.1	29.1	29.6	30.1
8H	28.9	29.4	29.4	29.9	30.4	28.6	29.1	29.1	29.6	30.1
CIE190: 2010										

CIE190: 2010  
Area: 0.0144 m2

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-12-08

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
Humidity:65.0%  
Test Distance:8.700m [K=1.2563]  
Remarks:

## UTILIZATION FACTORS TABLE

Test:U:119.99V I:0.5120A P:60.500W PF:0.9851 Freq:60.00Hz Lamp Flux:4903.01x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	63	53	47	63	53	46	62	52	46	40
0.80	74	63	57	73	63	57	71	62	56	50
1.00	82	73	66	81	72	66	79	73	65	59
1.25	89	80	74	88	79	74	85	78	73	66
1.50	94	85	79	92	84	79	89	83	78	71
2.00	100	92	87	98	91	86	95	89	85	78
2.50	103	96	91	101	95	90	97	92	88	81
3.00	106	100	95	103	98	94	100	95	92	84
4.00	109	104	100	106	102	99	102	99	96	88
5.00	111	107	103	108	105	102	104	101	99	90
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 2022-12-08

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
Humidity: 65.0%  
Test Distance: 8.700m [K=1.2563]  
Remarks:

ISOCANDELA DIAGRAM

Test:U:119.99V I:0.5120A P:60.500W PF:0.9851 Freq:60.00Hz Lamp Flux:4903.01x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

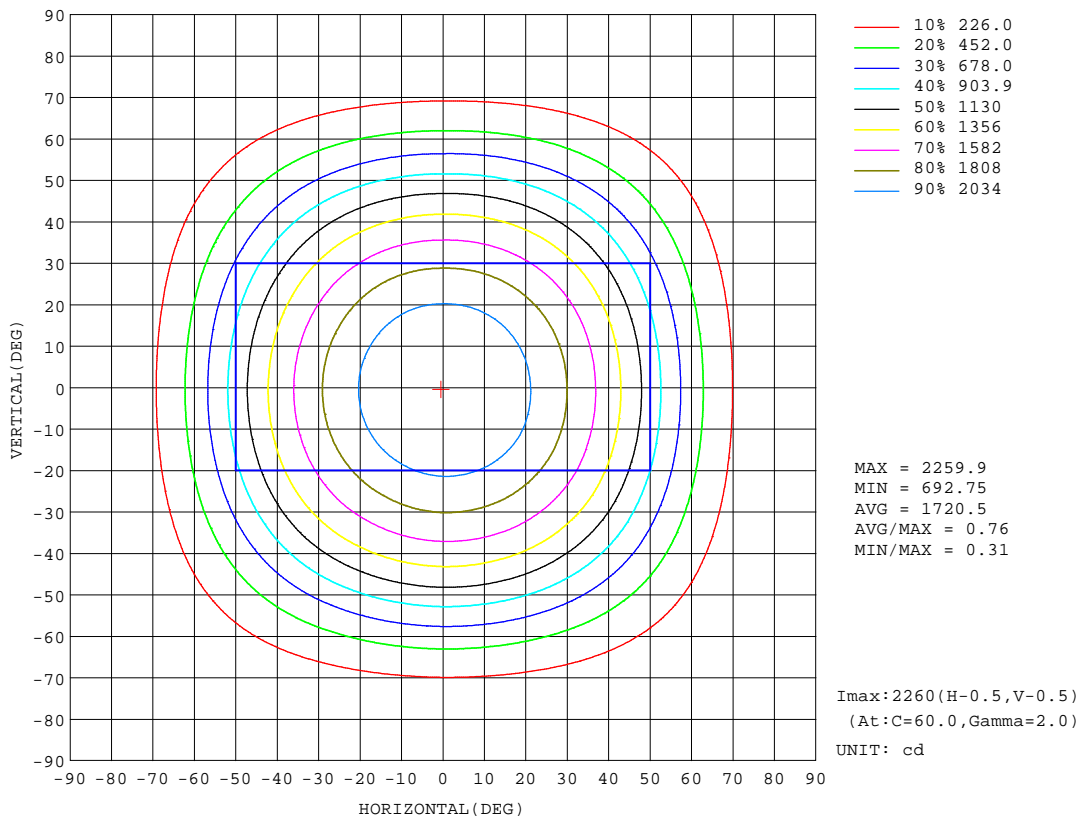

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-12-08


g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.2563]  
 Remarks:



AAI Figure

Test:U:119.99V I:0.5120A P:60.500W PF:0.9851 Freq:60.00Hz Lamp Flux:4903.01x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

Flux out:3507 lm

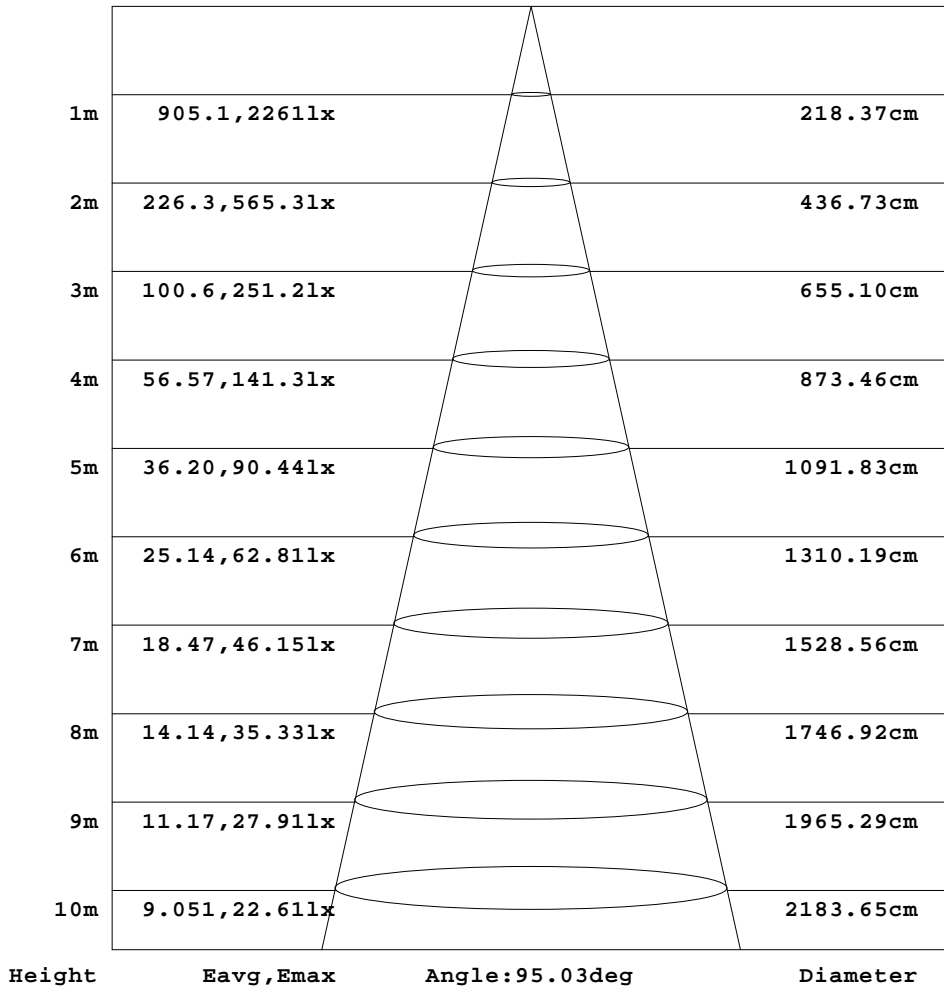


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-12-08

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.2563]  
 Remarks:

ISOLUX DIAGRAM

Test:U:119.99V I:0.5120A P:60.500W PF:0.9851 Freq:60.00Hz Lamp Flux:4903.01x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

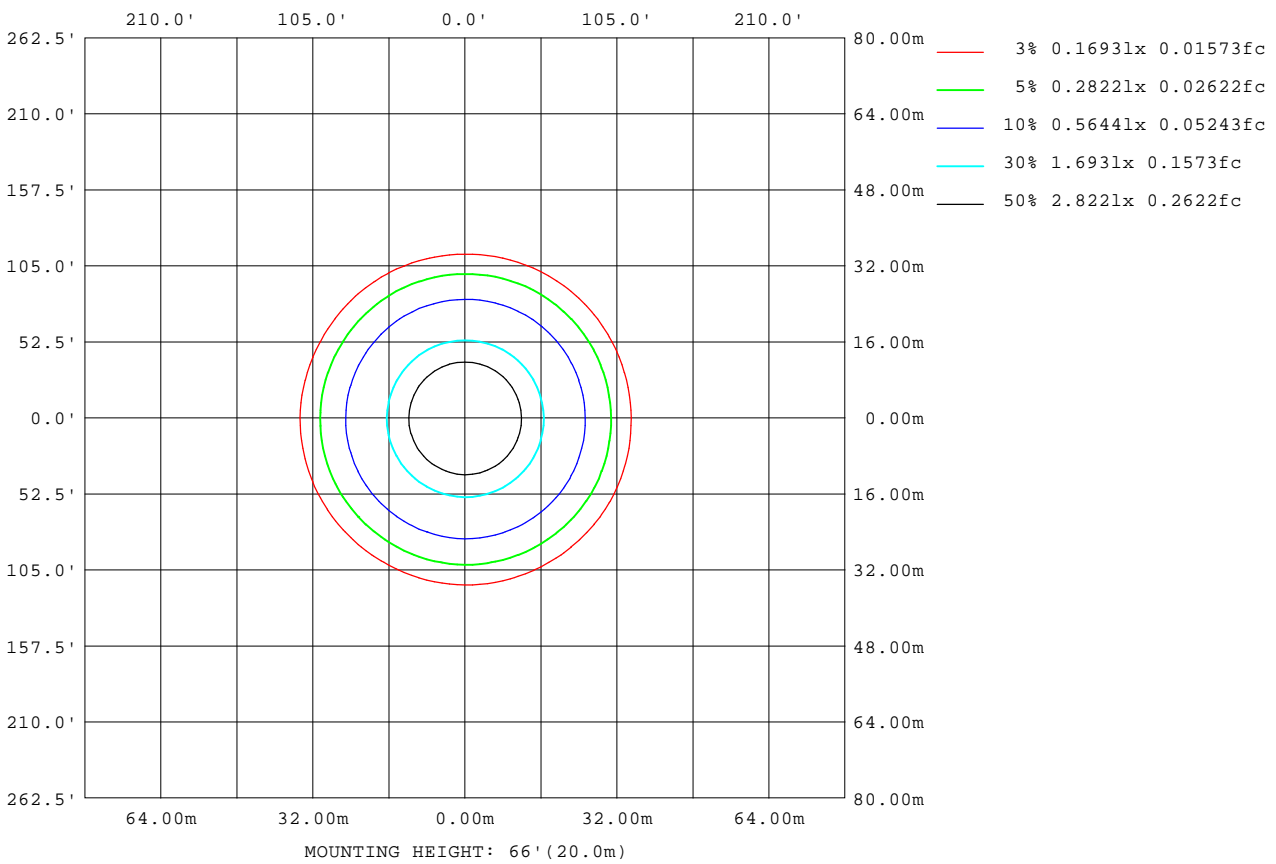

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2022-12-08

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity: 65.0%  
 Test Distance: 8.700m [K=1.2563]  
 Remarks:

## LED Avg.L Report

Test:U:119.99V I:0.5120A P:60.500W PF:0.9851 Freq:60.00Hz Lamp Flux:4903.01x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	59791
L_0~180(75)av	28342
L_0~180(85)av	16251
L_90~270(65)av	59703
L_90~270(75)av	28046
L_90~270(85)av	13212
L_45(65)av	59662
L_45(75)av	28282
L_45(85)av	14470

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-12-08

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
Humidity:65.0%  
Test Distance:8.700m [K=1.2563]  
Remarks:

Planar Illuminance Curve

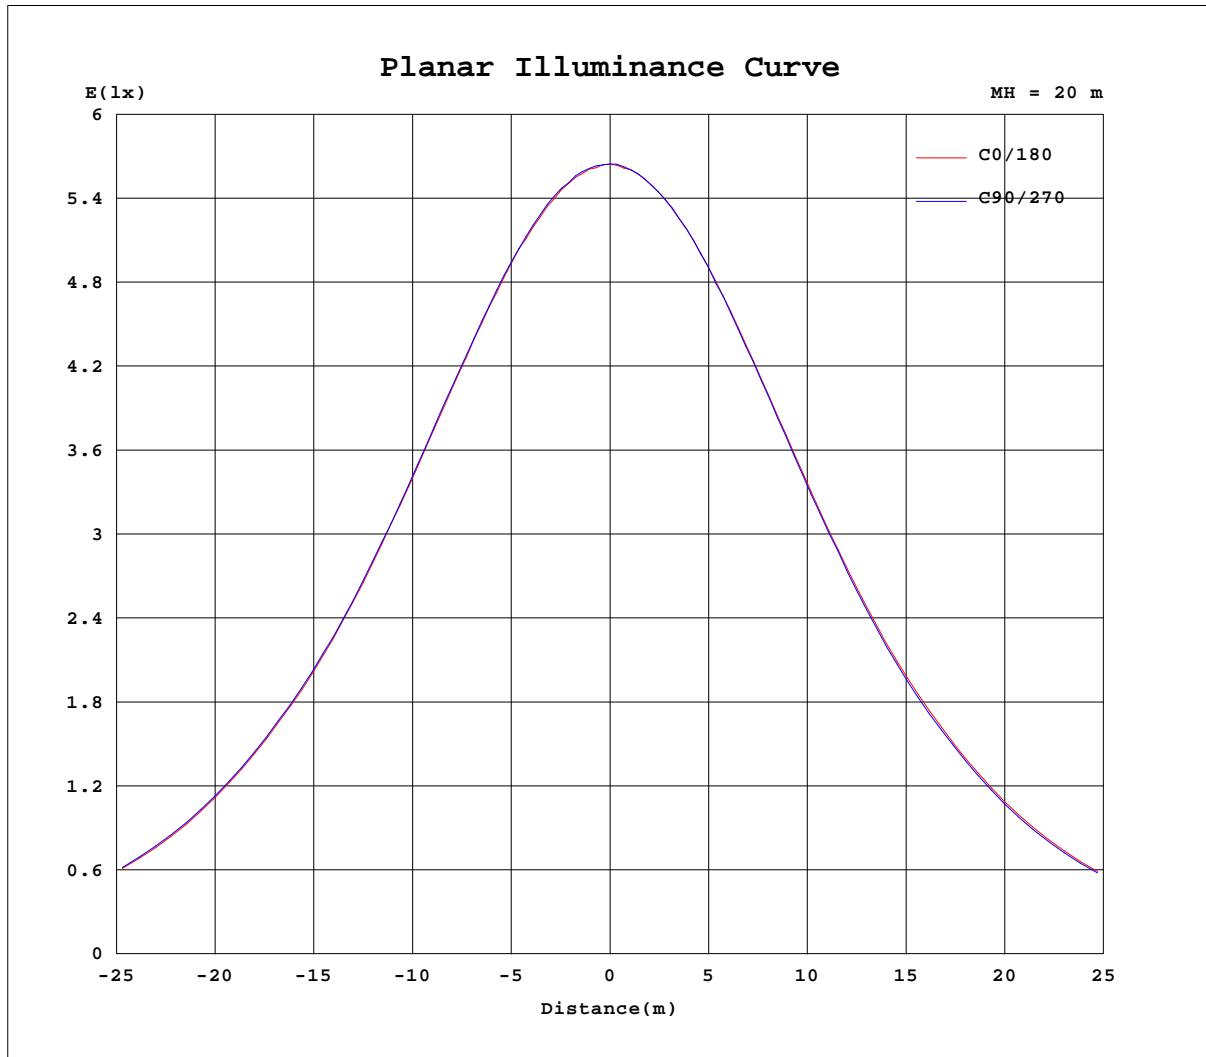

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2022-12-08

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity: 65.0%  
 Test Distance: 8.700m [K=1.2563]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.99V I:0.5120A P:60.500W PF:0.9851 Freq:60.00Hz Lamp Flux:4903.01x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	2258	2258	2258	2258	2258	2258	2258	2258	2258	2258	2258	2258							
5	2246	2245	2253	2250	2247	2243	2243	2239	2248	2241	2245	2244							
10	2208	2217	2219	2214	2206	2205	2201	2200	2201	2199	2204	2210							
15	2148	2153	2159	2154	2145	2137	2135	2130	2136	2128	2137	2139							
20	2057	2069	2071	2064	2051	2044	2044	2037	2041	2039	2043	2052							
25	1944	1955	1960	1948	1935	1924	1922	1914	1921	1913	1926	1933							
30	1806	1822	1823	1814	1793	1785	1782	1774	1777	1774	1781	1795							
35	1644	1661	1662	1652	1632	1620	1616	1606	1608	1601	1617	1629							
40	1475	1492	1495	1486	1462	1451	1445	1427	1429	1426	1440	1457							
45	1267	1288	1286	1280	1254	1242	1231	1214	1216	1213	1235	1248							
50	1031	1056	1051	1045	1019	1009	995	978	980	976	1000	1014							
55	788	808	807	802	777	767	760	741	745	740	763	774							
60	564	582	579	576	554	549	542	524	530	525	545	554							
65	373	385	383	381	363	359	354	342	347	345	360	366							
70	224	229	228	224	212	208	205	199	203	203	212	217							
75	112	115	111	108	102	101	99.7	97.8	101	101	107	109							
80	52.9	53.5	50.5	48.5	47.6	49.0	49.1	46.6	49.9	49.2	51.7	50.3							
85	21.9	22.4	18.4	16.7	16.1	18.5	18.9	15.1	17.5	16.5	19.4	18.2							
90	0.48	0.30	0.40	0.23	0.25	0.24	0.26	0.65	0.25	0.26	0.25	0.34							
95	0.29	0.35	0.35	0.45	0.41	0.47	0.50	0.42	0.47	0.41	0.45	0.39							
100	0.58	0.63	0.70	0.78	0.76	0.82	0.86	0.76	0.83	0.74	0.81	0.72							
105	1.01	1.02	1.14	1.23	1.23	1.29	1.34	1.22	1.30	1.21	1.25	1.14							
110	1.50	1.48	1.67	1.77	1.78	1.83	1.89	1.79	1.85	1.75	1.80	1.69							
115	2.09	2.03	2.31	2.35	2.42	2.48	2.54	2.44	2.45	2.41	2.42	2.27							
120	2.76	2.64	2.88	2.96	3.07	3.14	3.13	3.11	3.07	3.09	3.02	2.96							
125	3.45	3.23	3.57	3.64	3.68	3.86	3.82	3.78	3.81	3.73	3.70	3.69							
130	4.04	3.84	4.20	4.30	4.38	4.53	4.48	4.43	4.38	4.36	4.35	4.28							
135	4.64	4.42	4.83	4.89	4.99	5.13	5.07	4.98	4.91	5.00	4.83	4.81							
140	5.14	4.91	5.33	5.42	5.48	5.63	5.61	5.50	5.47	5.51	5.33	5.28							
145	5.76	5.36	5.86	5.93	5.97	6.11	6.04	6.08	5.87	5.99	5.87	5.78							
150	6.15	5.79	6.34	6.44	6.54	6.55	6.49	6.56	6.33	6.47	6.42	6.30							
155	6.71	6.38	6.81	6.84	7.01	7.00	7.02	7.09	6.93	6.87	6.87	6.83							
160	7.16	6.88	7.27	7.26	7.39	7.43	7.50	7.57	7.44	7.43	7.34	7.23							
165	7.67	7.27	7.74	7.69	7.79	7.91	8.05	8.10	7.95	7.92	7.85	7.59							
170	8.03	7.69	8.20	8.05	8.30	8.26	8.43	8.48	8.40	8.24	8.36	8.18							
175	8.50	8.09	8.63	8.40	8.60	8.72	8.77	8.82	8.66	8.59	8.58	8.36							
180	8.96	8.49	8.64	8.63	8.81	8.81	8.82	8.85	8.74	8.74	8.80	8.68							

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-12-08

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.2563]  
 Remarks: