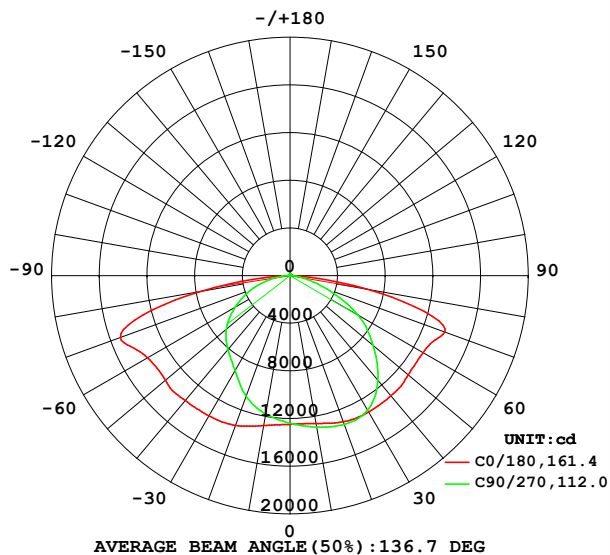
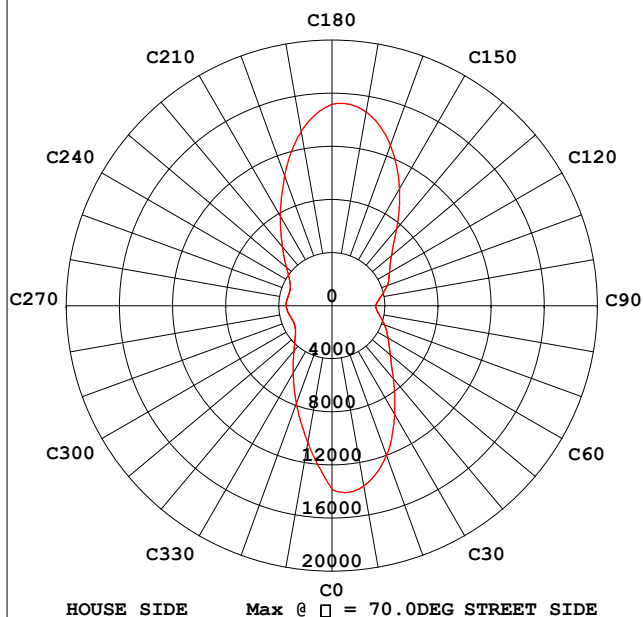


## STREETLIGHT PHOTOMETRIC TEST REPORT

|                                                                               |              |                  |
|-------------------------------------------------------------------------------|--------------|------------------|
| Test:U:277.2V I:1.070A P:294.9W PF:0.9947 Freq:59.98Hz Lamp Flux:51345.8x1 lm |              |                  |
| NAME: ASD-LSB5BHV-PRO-300BR                                                   | TYPE:        | WEIGHT:          |
| SPEC.: 300W 5000K.:                                                           | DIM.:        | SERIAL No.:      |
| MFR.: ASD Lighting Corp                                                       | SUR.:0.3*0.3 | Shielding Angle: |

| DATA OF LAMP     |         | PHOTOMETRIC DATA Eff: 174.11 lm/W |          |                                         |         |
|------------------|---------|-----------------------------------|----------|-----------------------------------------|---------|
| MODEL            |         | Imax(cd)                          | 15163    | <input type="checkbox"/> street_up(%)   | 0.4     |
| NOMINAL POWER(W) | 300     | LOR(%)                            | 100.0    | <input type="checkbox"/> street_down(%) | 54.7    |
| RATED VOLTAGE(V) | 277     | TOTAL FLUX(lm)                    | 51346    | <input type="checkbox"/> house_up(%)    | 0.5     |
| NOMINAL FLUX(lm) | 51345.8 | MAXIMUM @ (C, $\square$ )         | 180,70.0 | <input type="checkbox"/> house_down(%)  | 44.4    |
| LAMPS INSIDE     | 1       | <input type="checkbox"/> up(%)    | 0.9      | 76 FLASHAREA(m2)                        | 0.05000 |
| TEST VOLTAGE(V)  | 277     | <input type="checkbox"/> down(%)  | 99.1     | SLI                                     | 26.263  |


INTENSITY DISTRIBUTION DIAGRAM  
IN C PLANSMAX INTENSITY CONE SURFACE  
DISTRIBUTION DIAGRAM

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:27DEG  
Operators:lianghaizhu  
Test Date:2023-09-25

☐ Range: 0 - 180DEG  
☐ Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.364  
Humidity:56%  
Test Distance:6.500m [K=1.0000]  
Remarks:

STREETLIGHT ISOCANDELA DIAGRAM

|                                                                               |              |                  |
|-------------------------------------------------------------------------------|--------------|------------------|
| Test:U:277.2V I:1.070A P:294.9W PF:0.9947 Freq:59.98Hz Lamp Flux:51345.8x1 lm |              |                  |
| NAME: ASD-LSB5BHV-PRO-300BR                                                   | TYPE:        | WEIGHT:          |
| SPEC.: 300W 5000K.:                                                           | DIM.:        | SERIAL No.:      |
| MFR.: ASD Lighting Corp                                                       | SUR.:0.3*0.3 | Shielding Angle: |

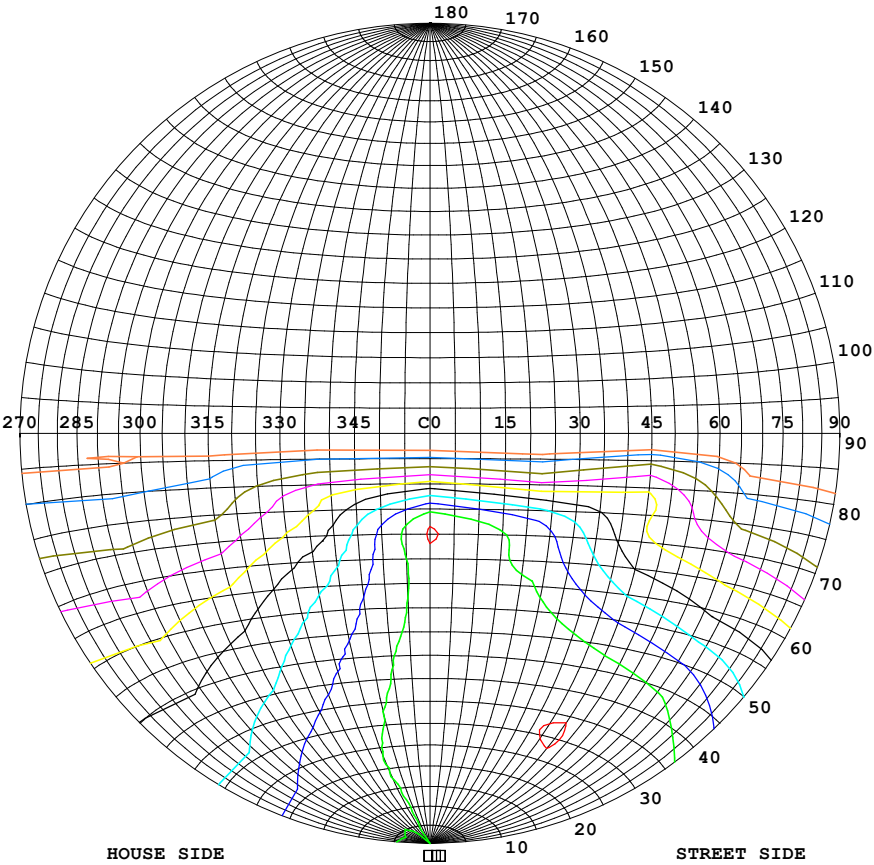



Classification:  
IES:Type VS - Medium  
CIE:Narrow - Long  
IES:Semi cut-off  
CIE:Non-cut-off  
Max.At80:148.0cd/klm  
Max.At90:2.383cd/klm  
Max.80-90:148.0cd/klm

| ISOCANDELA DIAGRAM |       |
|--------------------|-------|
| UNIT               | cd    |
| Imax=100%          | 15163 |
| 90%                | 13646 |
| 80%                | 12130 |
| 70%                | 10614 |
| 60%                | 9098  |
| 50%                | 7581  |
| 40%                | 6065  |
| 30%                | 4549  |
| 20%                | 3033  |
| 10%                | 1516  |
| 5%                 | 758   |

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:27DEG  
Operators:lianghaizhu  
Test Date:2023-09-25

☐ Range: 0 - 180DEG  
☐ Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.364  
Humidity:56%  
Test Distance:6.500m [K=1.0000]  
Remarks:

COEFFICIENT OF UTILIZATION CURVE  
AND ISOLUX DIAGRAM

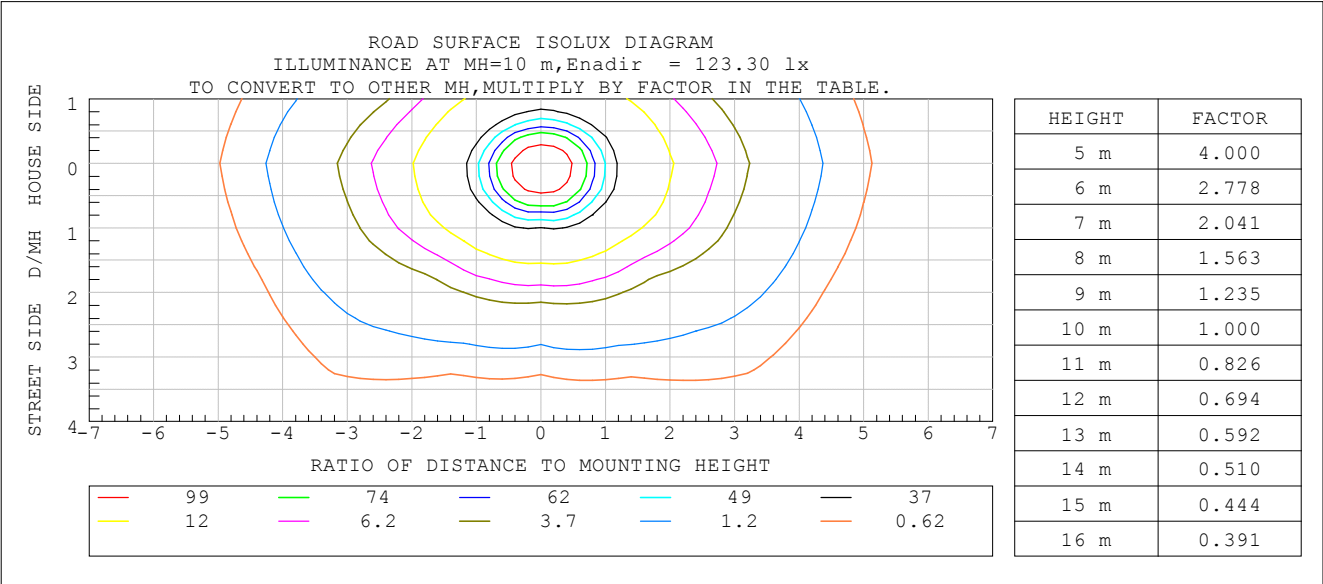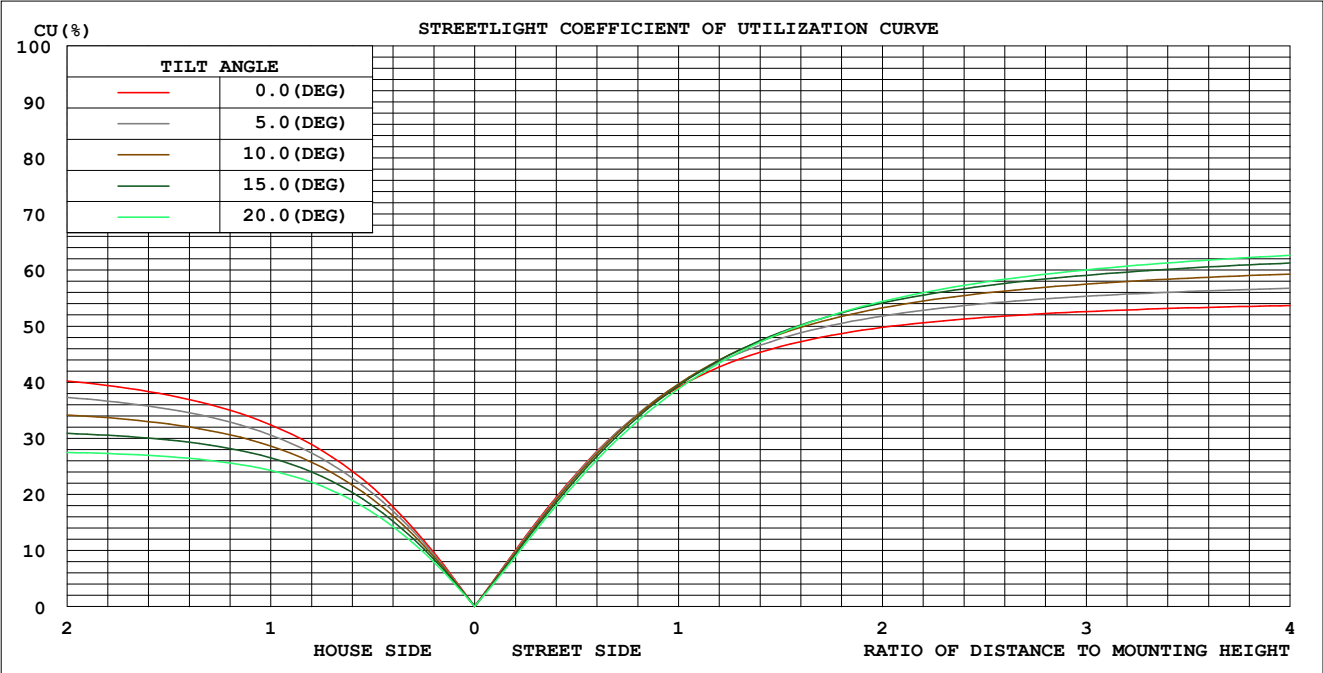

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 27DEG  
Operators: lianghaizhu  
Test Date: 2023-09-25

□ Range: 0 - 180DEG  
□ Interval: 1.0DEG  
Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.364  
Humidity: 56%  
Test Distance: 6.500m [K=1.0000]  
Remarks:

## ZONAL FLUX DIAGRAM

|                                                                               |              |                  |
|-------------------------------------------------------------------------------|--------------|------------------|
| Test:U:277.2V I:1.070A P:294.9W PF:0.9947 Freq:59.98Hz Lamp Flux:51345.8x1 lm |              |                  |
| NAME: ASD-LSB5BHV-PRO-300BR                                                   | TYPE:        | WEIGHT:          |
| SPEC.: 300W 5000K.:                                                           | DIM.:        | SERIAL No.:      |
| MFR.: ASD Lighting Corp                                                       | SUR.:0.3*0.3 | Shielding Angle: |


| °   | C0                       | C45   | C90   | C135  | C180  | C225  | C270  | C315  | °       | □ zone  | □ total | %lum, lamp |
|-----|--------------------------|-------|-------|-------|-------|-------|-------|-------|---------|---------|---------|------------|
| 10  | 1260                     | 1282  | 1291  | 1288  | 1278  | 1215  | 1178  | 1197  | 0- 10   | 1184    | 1184    | 2.31,2.31  |
| 20  | 1306                     | 1335  | 1329  | 1361  | 1337  | 1184  | 1077  | 1157  | 10- 20  | 3550    | 4734    | 9.22,9.22  |
| 30  | 1322                     | 1368  | 1303  | 1414  | 1360  | 1105  | 923.0 | 1057  | 20- 30  | 5760    | 10495   | 20.4,20.4  |
| 40  | 1317                     | 1329  | 1148  | 1393  | 1369  | 979.9 | 811.8 | 919.3 | 30- 40  | 7499    | 17994   | 35,35      |
| 50  | 1296                     | 1172  | 909.3 | 1240  | 1366  | 874.3 | 699.6 | 796.9 | 40- 50  | 8592    | 26586   | 51.8,51.8  |
| 60  | 1290                     | 900.4 | 657.8 | 950.2 | 1381  | 732.4 | 531.0 | 638.7 | 50- 60  | 8685    | 35270   | 68.7,68.7  |
| 70  | 1383                     | 635.2 | 329.2 | 656.6 | 1516  | 509.5 | 346.9 | 399.3 | 60- 70  | 7919    | 43190   | 84.1,84.1  |
| 80  | 655.8                    | 580.9 | 100.3 | 596.1 | 759.7 | 273.6 | 152.1 | 181.0 | 70- 80  | 5996    | 49186   | 95.8,95.8  |
| 90  | 5.096                    | 3.254 | 2.141 | 3.449 | 4.911 | 5.424 | 3.866 | 4.229 | 80- 90  | 1694    | 50879   | 99.1,99.1  |
| 100 | 6.174                    | 4.267 | 2.947 | 3.634 | 6.106 | 4.947 | 3.897 | 5.681 | 90-100  | 50.01   | 50929   | 99.2,99.2  |
| 110 | 7.331                    | 5.445 | 3.946 | 4.714 | 7.197 | 6.146 | 5.349 | 7.138 | 100-110 | 57.52   | 50987   | 99.3,99.3  |
| 120 | 8.308                    | 6.672 | 5.054 | 5.685 | 8.173 | 7.298 | 6.765 | 8.480 | 110-120 | 64.95   | 51052   | 99.4,99.4  |
| 130 | 9.589                    | 7.903 | 6.221 | 6.973 | 9.457 | 8.600 | 8.102 | 9.735 | 120-130 | 69.23   | 51121   | 99.6,99.6  |
| 140 | 10.86                    | 9.000 | 7.555 | 8.108 | 10.60 | 9.742 | 9.358 | 10.65 | 130-140 | 69.00   | 51190   | 99.7,99.7  |
| 150 | 11.52                    | 9.914 | 8.822 | 9.197 | 11.22 | 10.65 | 10.49 | 11.35 | 140-150 | 62.30   | 51252   | 99.8,99.8  |
| 160 | 11.87                    | 10.75 | 10.06 | 10.21 | 11.76 | 11.44 | 11.49 | 11.98 | 150-160 | 49.70   | 51302   | 99.9,99.9  |
| 170 | 12.20                    | 11.45 | 11.13 | 11.45 | 12.18 | 11.90 | 12.05 | 12.31 | 160-170 | 32.44   | 51334   | 100,100    |
| 180 | 12.29                    | 11.87 | 11.88 | 12.16 | 12.32 | 11.88 | 11.87 | 12.13 | 170-180 | 11.32   | 51346   | 100,100    |
| DEG | LUMINOUS INTENSITY:×10cd |       |       |       |       |       |       |       |         | UNIT:lm |         |            |

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:27DEG  
 Operators:lianghaizhu  
 Test Date:2023-09-25

□ Range: 0 - 180DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.364  
 Humidity:56%  
 Test Distance:6.500m [K=1.0000]  
 Remarks:

## ISOCANDELA DIAGRAM


|                                                                               |              |                  |
|-------------------------------------------------------------------------------|--------------|------------------|
| Test:U:277.2V I:1.070A P:294.9W PF:0.9947 Freq:59.98Hz Lamp Flux:51345.8x1 lm |              |                  |
| NAME: ASD-LSB5BHV-PRO-300BR                                                   | TYPE:        | WEIGHT:          |
| SPEC.: 300W 5000K.:                                                           | DIM.:        | SERIAL No.:      |
| MFR.: ASD Lighting Corp                                                       | SUR.:0.3*0.3 | Shielding Angle: |

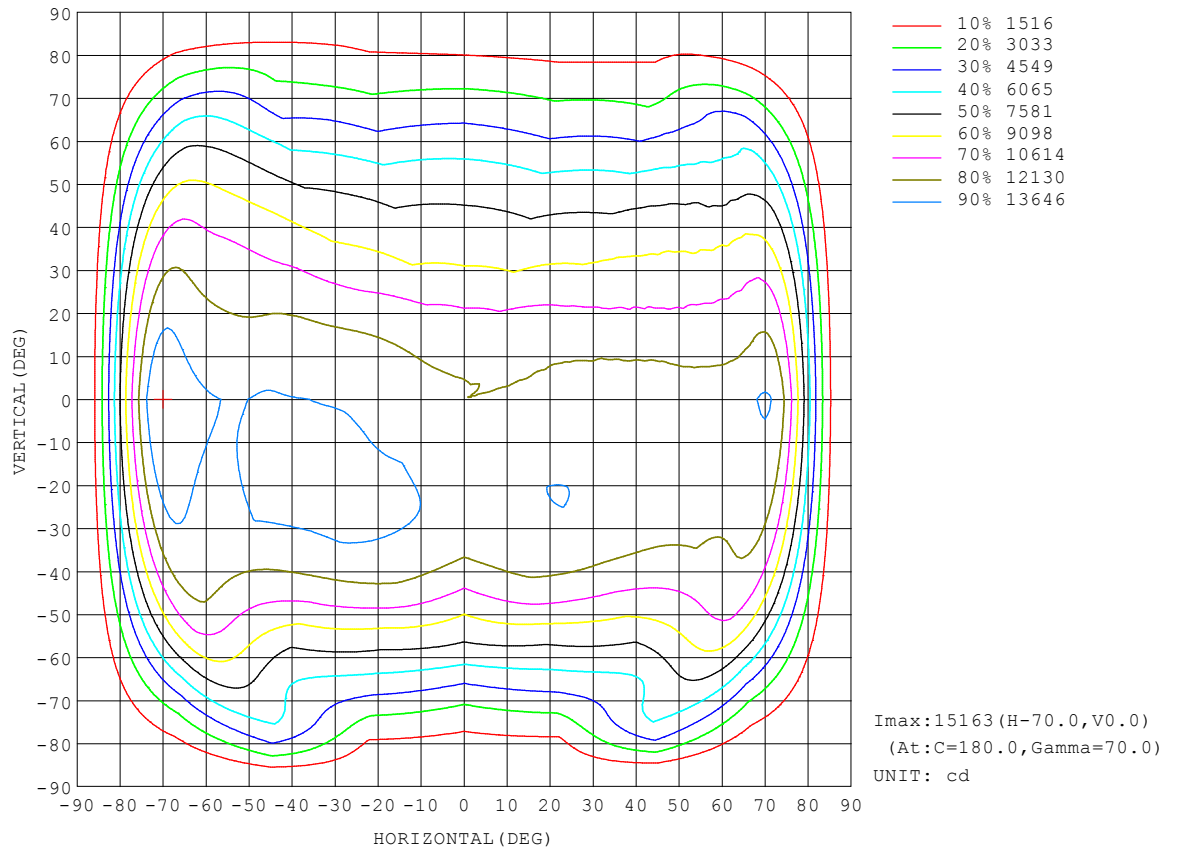

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:27DEG  
Operators:lianghaizhu  
Test Date:2023-09-25

☐ Range: 0 - 180DEG  
☐ Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.364  
Humidity:56%  
Test Distance:6.500m [K=1.0000]  
Remarks:

Planar Illuminance Curve

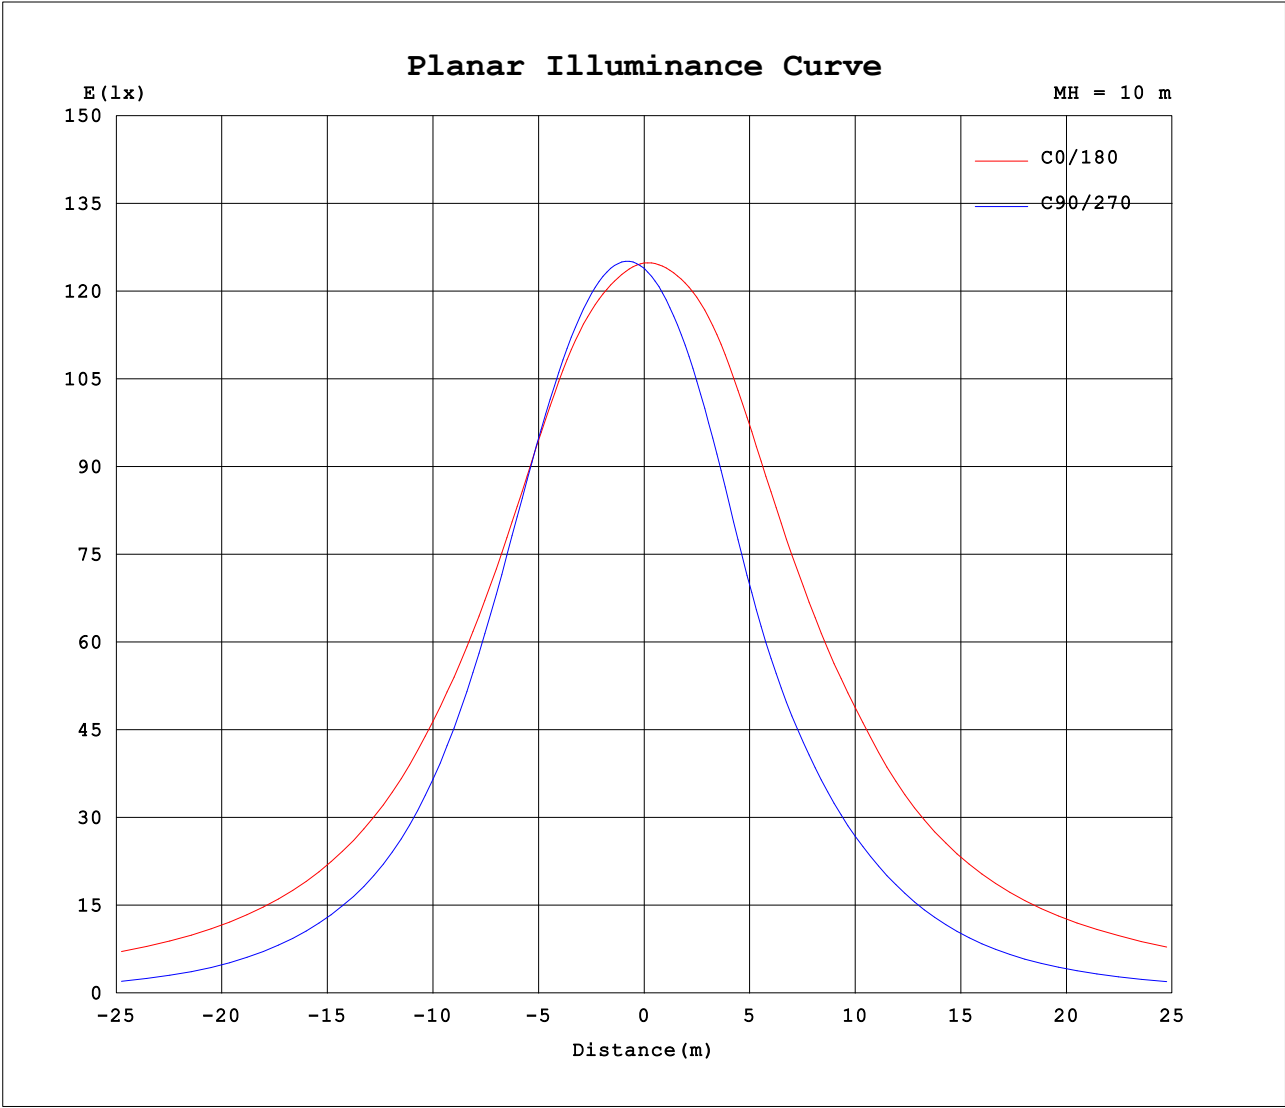


C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:27DEG  
Operators:lianghaizhu  
Test Date:2023-09-25

☐ Range: 0 - 180DEG  
☐ Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.364  
Humidity:56%  
Test Distance:6.500m [K=1.0000]  
Remarks:

## LCS REPORT

|                                                                               |              |                  |
|-------------------------------------------------------------------------------|--------------|------------------|
| Test:U:277.2V I:1.070A P:294.9W PF:0.9947 Freq:59.98Hz Lamp Flux:51345.8x1 lm |              |                  |
| NAME: ASD-LSB5BHV-PRO-300BR                                                   | TYPE:        | WEIGHT:          |
| SPEC.: 300W 5000K.:                                                           | DIM.:        | SERIAL No.:      |
| MFR.: ASD Lighting Corp                                                       | SUR.:0.3*0.3 | Shielding Angle: |

## LUMINAIRE CLASSIFICATION SYSTEM(LCS) GRAPH

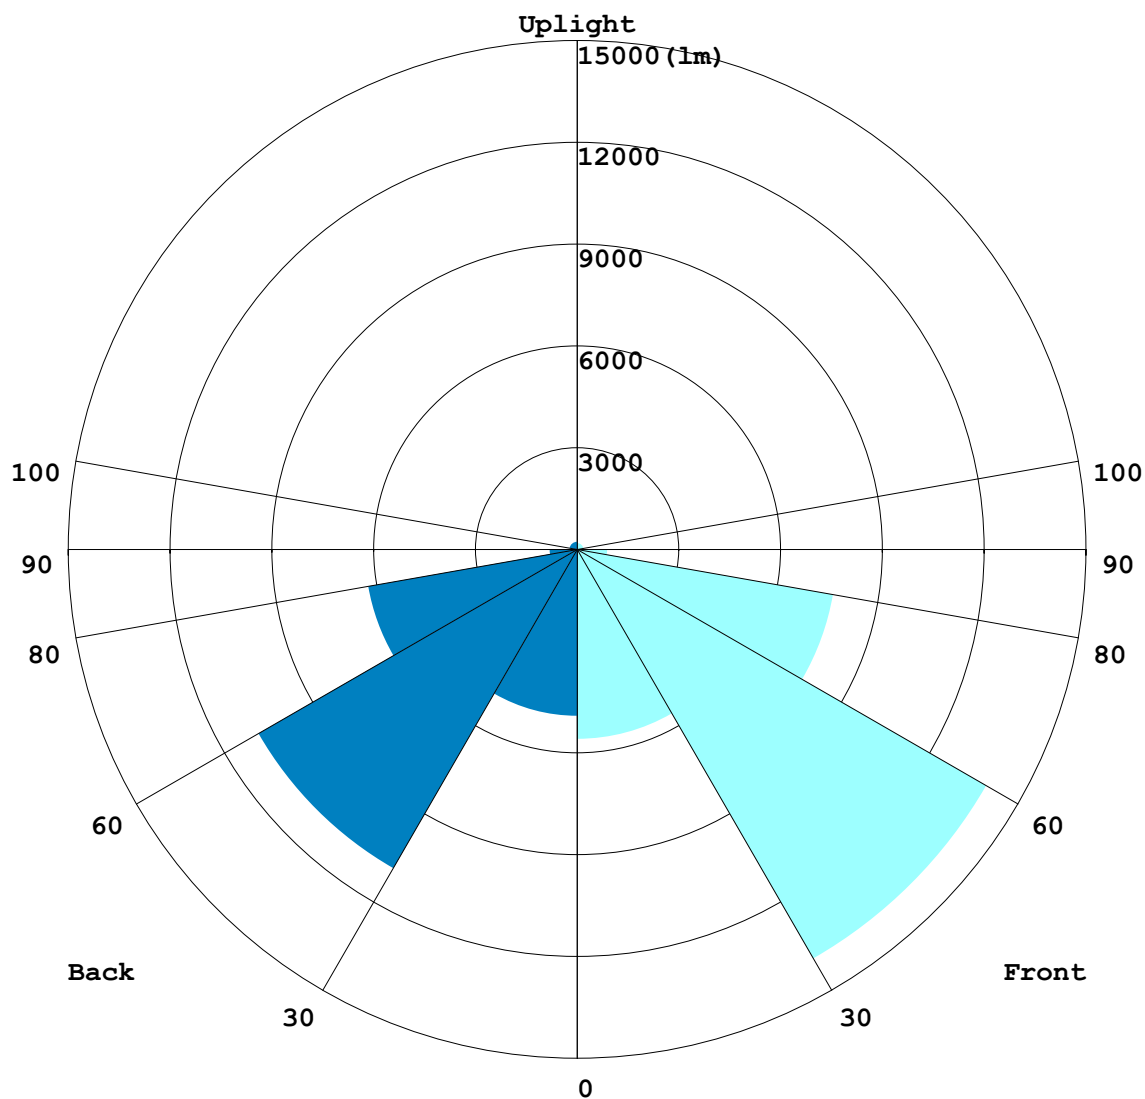

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:27DEG  
Operators:lianghaizhu  
Test Date:2023-09-25

☐ Range: 0 - 180DEG  
☐ Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.364  
Humidity:56%  
Test Distance:6.500m [K=1.0000]  
Remarks:

## BUG REPORT

|                                                                               |              |                  |
|-------------------------------------------------------------------------------|--------------|------------------|
| Test:U:277.2V I:1.070A P:294.9W PF:0.9947 Freq:59.98Hz Lamp Flux:51345.8x1 lm |              |                  |
| NAME: ASD-LSB5BHV-PRO-300BR                                                   | TYPE:        | WEIGHT:          |
| SPEC.: 300W 5000K.:                                                           | DIM.:        | SERIAL No.:      |
| MFR.: ASD Lighting Corp                                                       | SUR.:0.3*0.3 | Shielding Angle: |

## IESNA Luminaire Flux Distribution Table:

| Zone                         | Lumens | Luminaire % |
|------------------------------|--------|-------------|
| FL - Front-Low(0-30)         | 5584.8 | 10.9        |
| FM - Front-Medium(30-60)     | 13926  | 27.1        |
| FH - Front-High(60-80)       | 7664.6 | 14.9        |
| FVH - Front-Very High(80-90) | 884.64 | 1.7         |
| Total Forward Light          | 28273  | 55.1        |

|                             |        |      |
|-----------------------------|--------|------|
| BL - Back-Low(0-30)         | 4910.1 | 9.6  |
| BM - Back-Medium(30-60)     | 10849  | 21.1 |
| BH - Back-High(60-80)       | 6250.8 | 12.2 |
| BVH - Back-Very High(80-90) | 808.86 | 1.6  |
| Total Back Light            | 23072  | 44.9 |

|                            |        |     |
|----------------------------|--------|-----|
| UL - Uplight-Low(90-100)   | 50.01  | 0.1 |
| UH - Uplight-High(100-180) | 416.47 | 0.8 |
| Total Up Light             | 466.48 | 0.9 |

|                           |          |
|---------------------------|----------|
| BUG(Back,Up,Glare) Rating | B5-U3-G? |
|---------------------------|----------|

| Zone        | Downward<br>Lumens | Upward<br>Lumens | Total<br>Lumens |
|-------------|--------------------|------------------|-----------------|
| House Side  | 22819              | 253.61           | 23072           |
| Street Side | 28061              | 212.87           | 28273           |


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:27DEG  
 Operators:lianghaizhu  
 Test Date:2023-09-25

☐ Range: 0 - 180DEG  
☐ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.364  
 Humidity:56%  
 Test Distance:6.500m [K=1.0000]  
 Remarks:

ROAD ISOCANDELA REPORT

|                                                                               |              |                  |
|-------------------------------------------------------------------------------|--------------|------------------|
| Test:U:277.2V I:1.070A P:294.9W PF:0.9947 Freq:59.98Hz Lamp Flux:51345.8x1 lm |              |                  |
| NAME: ASD-LSB5BHV-PRO-300BR                                                   | TYPE:        | WEIGHT:          |
| SPEC.: 300W 5000K.:                                                           | DIM.:        | SERIAL No.:      |
| MFR.: ASD Lighting Corp                                                       | SUR.:0.3*0.3 | Shielding Angle: |

ROAD SURFACE ISOCANDELA DIAGRAM

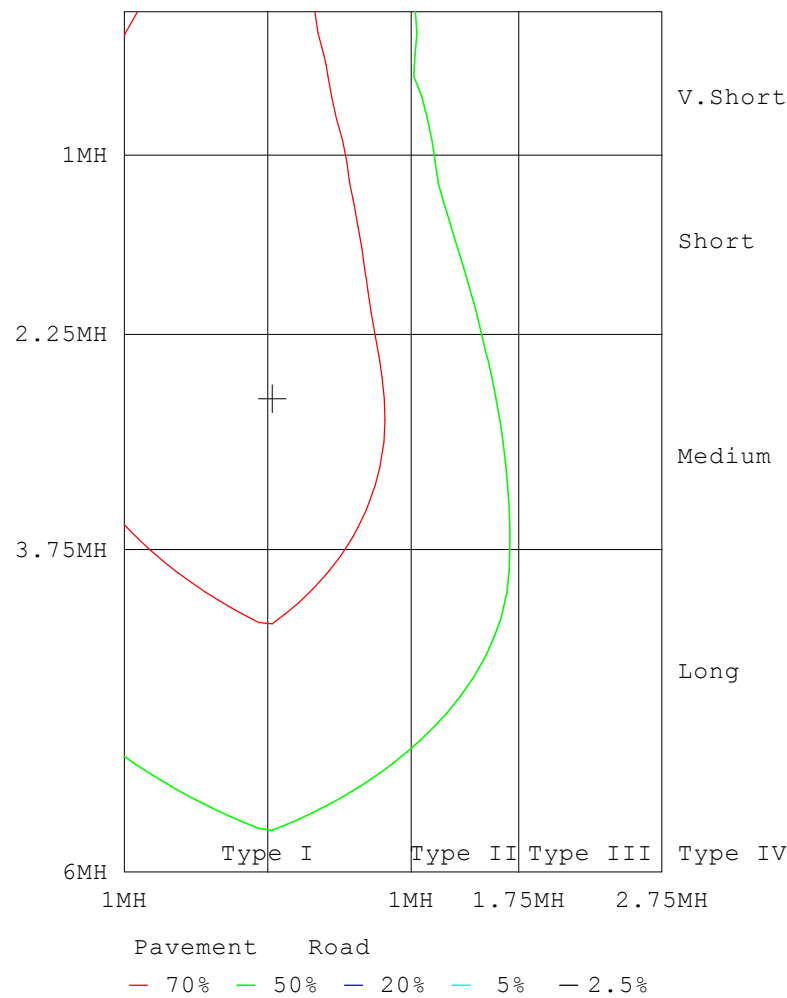

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:27DEG  
Operators:lianghaizhu  
Test Date:2023-09-25

☐ Range: 0 - 180DEG  
☐ Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.364  
Humidity:56%  
Test Distance:6.500m [K=1.0000]  
Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA

|                                                                               |              |                  |
|-------------------------------------------------------------------------------|--------------|------------------|
| Test:U:277.2V I:1.070A P:294.9W PF:0.9947 Freq:59.98Hz Lamp Flux:51345.8x1 lm |              |                  |
| NAME: ASD-LSB5BHV-PRO-300BR                                                   | TYPE:        | WEIGHT:          |
| SPEC.: 300W 5000K.:                                                           | DIM.:        | SERIAL No.:      |
| MFR.: ASD Lighting Corp                                                       | SUR.:0.3*0.3 | Shielding Angle: |

Table--1

UNIT: ×10cd

| C (DEG)<br>□ (DEG) | 0    | 22.5 | 45   | 67.5 | 90   | 112.5 | 135  | 157.5 | 180  | 202.5 | 225  | 247.5 | 270  | 292.5 | 315  | 337.5 |  |  |  |
|--------------------|------|------|------|------|------|-------|------|-------|------|-------|------|-------|------|-------|------|-------|--|--|--|
| 0                  | 1248 | 1245 | 1242 | 1241 | 1239 | 1233  | 1233 | 1208  | 1248 | 1245  | 1242 | 1241  | 1239 | 1233  | 1233 | 1208  |  |  |  |
| 5                  | 1248 | 1254 | 1260 | 1264 | 1266 | 1260  | 1258 | 1233  | 1257 | 1241  | 1227 | 1216  | 1211 | 1206  | 1213 | 1204  |  |  |  |
| 10                 | 1260 | 1274 | 1282 | 1287 | 1291 | 1288  | 1288 | 1271  | 1278 | 1247  | 1215 | 1190  | 1178 | 1177  | 1197 | 1197  |  |  |  |
| 15                 | 1283 | 1302 | 1308 | 1310 | 1313 | 1317  | 1323 | 1299  | 1309 | 1260  | 1202 | 1156  | 1136 | 1140  | 1181 | 1195  |  |  |  |
| 20                 | 1306 | 1330 | 1335 | 1328 | 1329 | 1343  | 1361 | 1340  | 1337 | 1273  | 1184 | 1108  | 1077 | 1088  | 1157 | 1198  |  |  |  |
| 25                 | 1319 | 1349 | 1358 | 1340 | 1330 | 1361  | 1394 | 1371  | 1354 | 1275  | 1153 | 1039  | 1001 | 1014  | 1117 | 1195  |  |  |  |
| 30                 | 1322 | 1357 | 1368 | 1334 | 1303 | 1361  | 1414 | 1388  | 1360 | 1264  | 1105 | 958   | 923  | 932   | 1057 | 1167  |  |  |  |
| 35                 | 1320 | 1359 | 1360 | 1310 | 1241 | 1339  | 1416 | 1400  | 1363 | 1244  | 1043 | 887   | 863  | 863   | 987  | 1140  |  |  |  |
| 40                 | 1317 | 1355 | 1329 | 1267 | 1148 | 1293  | 1393 | 1415  | 1369 | 1224  | 980  | 831   | 812  | 806   | 919  | 1102  |  |  |  |
| 45                 | 1314 | 1343 | 1266 | 1187 | 1034 | 1212  | 1335 | 1419  | 1381 | 1201  | 925  | 777   | 759  | 749   | 858  | 1066  |  |  |  |
| 50                 | 1296 | 1315 | 1172 | 1058 | 909  | 1084  | 1240 | 1403  | 1366 | 1166  | 874  | 716   | 700  | 682   | 797  | 1019  |  |  |  |
| 55                 | 1287 | 1270 | 1048 | 886  | 792  | 919   | 1112 | 1360  | 1361 | 1128  | 812  | 636   | 622  | 600   | 728  | 974   |  |  |  |
| 60                 | 1290 | 1223 | 900  | 730  | 658  | 763   | 950  | 1314  | 1381 | 1095  | 732  | 539   | 531  | 503   | 639  | 914   |  |  |  |
| 65                 | 1319 | 1179 | 754  | 594  | 490  | 621   | 785  | 1270  | 1445 | 1044  | 630  | 436   | 440  | 405   | 523  | 842   |  |  |  |
| 70                 | 1383 | 1143 | 635  | 439  | 329  | 461   | 657  | 1222  | 1516 | 968   | 509  | 341   | 347  | 315   | 399  | 729   |  |  |  |
| 75                 | 1168 | 931  | 630  | 275  | 198  | 294   | 631  | 1016  | 1274 | 835   | 378  | 257   | 245  | 234   | 278  | 626   |  |  |  |
| 80                 | 656  | 488  | 581  | 134  | 100  | 149   | 596  | 588   | 760  | 588   | 274  | 171   | 152  | 133   | 181  | 464   |  |  |  |
| 85                 | 168  | 115  | 248  | 43.0 | 27.3 | 55.2  | 300  | 186   | 230  | 233   | 152  | 101   | 67.6 | 70.5  | 104  | 149   |  |  |  |
| 90                 | 5.10 | 4.39 | 3.25 | 2.39 | 2.14 | 2.26  | 3.45 | 7.83  | 4.91 | 12.2  | 5.42 | 9.92  | 3.87 | 6.60  | 4.23 | 6.98  |  |  |  |
| 95                 | 5.56 | 4.89 | 3.76 | 2.80 | 2.51 | 2.54  | 3.54 | 8.29  | 5.47 | 5.28  | 4.35 | 3.51  | 3.23 | 3.83  | 4.96 | 7.64  |  |  |  |
| 100                | 6.17 | 5.45 | 4.27 | 3.29 | 2.95 | 2.97  | 3.63 | 6.43  | 6.11 | 5.92  | 4.95 | 4.16  | 3.90 | 4.56  | 5.68 | 8.45  |  |  |  |
| 105                | 6.80 | 6.06 | 4.84 | 3.83 | 3.43 | 3.43  | 4.08 | 5.52  | 6.71 | 6.49  | 5.55 | 4.81  | 4.61 | 5.30  | 6.41 | 9.12  |  |  |  |
| 110                | 7.33 | 6.62 | 5.45 | 4.39 | 3.95 | 3.96  | 4.71 | 5.41  | 7.20 | 7.00  | 6.15 | 5.45  | 5.35 | 6.04  | 7.14 | 9.69  |  |  |  |
| 115                | 7.80 | 7.17 | 6.05 | 4.98 | 4.51 | 4.49  | 5.14 | 5.85  | 7.66 | 7.47  | 6.70 | 6.09  | 6.07 | 6.77  | 7.82 | 10.2  |  |  |  |
| 120                | 8.31 | 7.75 | 6.67 | 5.59 | 5.05 | 5.05  | 5.69 | 6.34  | 8.17 | 7.95  | 7.30 | 6.76  | 6.76 | 7.45  | 8.48 | 10.7  |  |  |  |
| 125                | 8.92 | 8.38 | 7.29 | 6.20 | 5.64 | 5.63  | 6.37 | 6.92  | 8.77 | 8.56  | 7.94 | 7.43  | 7.44 | 8.10  | 9.12 | 10.9  |  |  |  |
| 130                | 9.59 | 9.03 | 7.90 | 6.83 | 6.22 | 6.25  | 6.97 | 7.54  | 9.46 | 9.27  | 8.60 | 8.09  | 8.10 | 8.71  | 9.74 | 11.2  |  |  |  |
| 135                | 10.3 | 9.66 | 8.49 | 7.46 | 6.86 | 6.88  | 7.60 | 8.16  | 10.1 | 9.90  | 9.22 | 8.72  | 8.74 | 9.28  | 10.2 | 11.3  |  |  |  |
| 140                | 10.9 | 10.2 | 9.00 | 8.09 | 7.56 | 7.54  | 8.11 | 8.75  | 10.6 | 10.4  | 9.74 | 9.31  | 9.36 | 9.82  | 10.7 | 11.6  |  |  |  |
| 145                | 11.3 | 10.6 | 9.47 | 8.68 | 8.19 | 8.17  | 8.67 | 9.22  | 11.0 | 10.7  | 10.2 | 9.88  | 9.94 | 10.3  | 11.0 | 11.8  |  |  |  |
| 150                | 11.5 | 10.9 | 9.91 | 9.23 | 8.82 | 8.76  | 9.20 | 9.64  | 11.2 | 11.0  | 10.6 | 10.4  | 10.5 | 10.8  | 11.3 | 12.1  |  |  |  |
| 155                | 11.7 | 11.1 | 10.3 | 9.76 | 9.42 | 9.35  | 9.69 | 10.0  | 11.5 | 11.3  | 11.1 | 10.9  | 11.0 | 11.2  | 11.7 | 12.2  |  |  |  |
| 160                | 11.9 | 11.4 | 10.7 | 10.3 | 10.1 | 9.99  | 10.2 | 10.4  | 11.8 | 11.6  | 11.4 | 11.4  | 11.5 | 11.6  | 12.0 | 12.2  |  |  |  |
| 165                | 12.0 | 11.7 | 11.1 | 10.8 | 10.6 | 10.5  | 10.7 | 10.8  | 12.0 | 11.9  | 11.7 | 11.8  | 11.9 | 11.9  | 12.2 | 12.1  |  |  |  |
| 170                | 12.2 | 11.9 | 11.4 | 11.2 | 11.1 | 11.1  | 11.5 | 11.2  | 12.2 | 12.0  | 11.9 | 11.9  | 12.0 | 12.0  | 12.3 | 12.2  |  |  |  |
| 175                | 12.3 | 12.0 | 11.7 | 11.5 | 11.6 | 11.5  | 11.9 | 11.5  | 12.3 | 12.1  | 11.9 | 11.9  | 12.0 | 12.0  | 12.3 | 12.0  |  |  |  |
| 180                | 12.3 | 12.1 | 11.9 | 11.8 | 11.9 | 11.8  | 12.2 | 12.0  | 12.3 | 12.1  | 11.9 | 11.8  | 11.9 | 11.8  | 12.1 | 11.8  |  |  |  |

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:27DEG  
Operators:lianghaizhu  
Test Date:2023-09-25

□ Range: 0 - 180DEG  
□ Interval: 1.0DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.364  
Humidity:56%  
Test Distance:6.500m [K=1.0000]  
Remarks: