
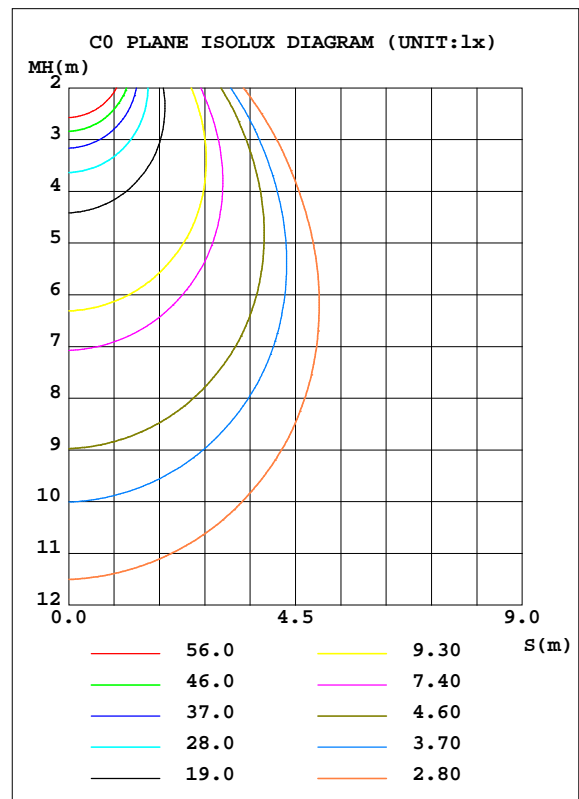


LUMINAIRE PHOTOMETRIC TEST REPORT

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.175*0.175	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
ASD LAMP-GBR-4D10CC-WH(4000K)		Imax(cd)	370.1	S/MH(C0/180)	1.24
NOMINAL POWER(W)	10	LOR(%)	100.0	S/MH(C90/270)	1.18
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	860.77	h UP, DN(C0-180)	0.4, 49.3
NOMINAL FLUX(lm)	860.767	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.4, 49.9
LAMPS INSIDE	1	h up(%)	0.9	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	h down(%)	99.1	CIBSE SHR MAX	1.30

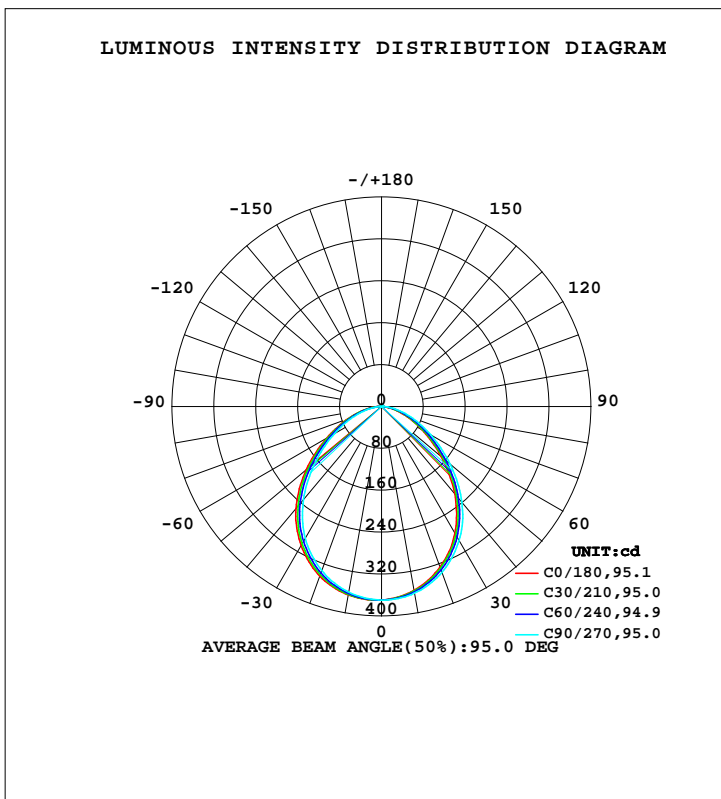

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-12-23

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.000m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	356.5	358.6	362.1	364.4	365.5	363.4	360.2	357.6	0- 10	34.87	34.87	4.05,4.05
20	326.4	330.6	337.3	342.5	344.7	340.3	333.7	329.0	10- 20	98.75	133.6	15.5,15.5
30	280.1	286.0	295.9	303.5	306.8	300.5	291.0	284.0	20- 30	145.6	279.2	32.4,32.4
40	217.6	225.5	238.9	249.1	254.2	245.0	232.0	223.6	30- 40	166.3	445.5	51.8,51.8
50	148.4	157.1	171.1	182.3	187.8	178.2	164.5	154.8	40- 50	155.9	601.3	69.9,69.9
60	89.71	96.91	108.6	117.3	121.3	114.6	104.0	94.47	50- 60	121.4	722.8	84,84
70	45.40	51.09	59.86	65.93	68.44	63.48	55.35	48.30	60- 70	79.44	802.2	93.2,93.2
80	14.20	18.24	24.32	28.13	29.20	25.47	19.46	15.21	70- 80	40.57	842.8	97.9,97.9
90	0.2468	0.2257	0.5963	0.6752	2.085	1.071	0.1667	0.1941	80- 90	10.51	853.3	99.1,99.1
100	0.5118	0.4746	0.4194	0.3723	0.3058	0.3374	0.3920	0.4356	90-100	0.3333	853.6	99.2,99.2
110	0.8531	0.8074	0.7440	0.6792	0.5933	0.6343	0.7164	0.7583	100-110	0.5887	854.2	99.2,99.2
120	1.235	1.185	1.118	1.049	0.9395	0.9830	1.086	1.126	110-120	0.8945	855.1	99.3,99.3
130	1.599	1.559	1.511	1.431	1.330	1.354	1.469	1.499	120-130	1.146	856.2	99.5,99.5
140	1.936	1.910	1.858	1.785	1.672	1.698	1.816	1.839	130-140	1.266	857.5	99.6,99.6
150	2.255	2.220	2.178	2.112	2.017	2.022	2.109	2.139	140-150	1.235	858.7	99.8,99.8
160	2.529	2.485	2.457	2.410	2.327	2.337	2.394	2.428	150-160	1.049	859.8	99.9,99.9
170	2.727	2.717	2.700	2.681	2.628	2.632	2.659	2.681	160-170	0.7197	860.5	100,100
180	2.830	2.827	2.835	2.841	2.826	2.830	2.822	2.841	170-180	0.2619	860.8	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-12-23

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.175*0.175	Shielding Angle:

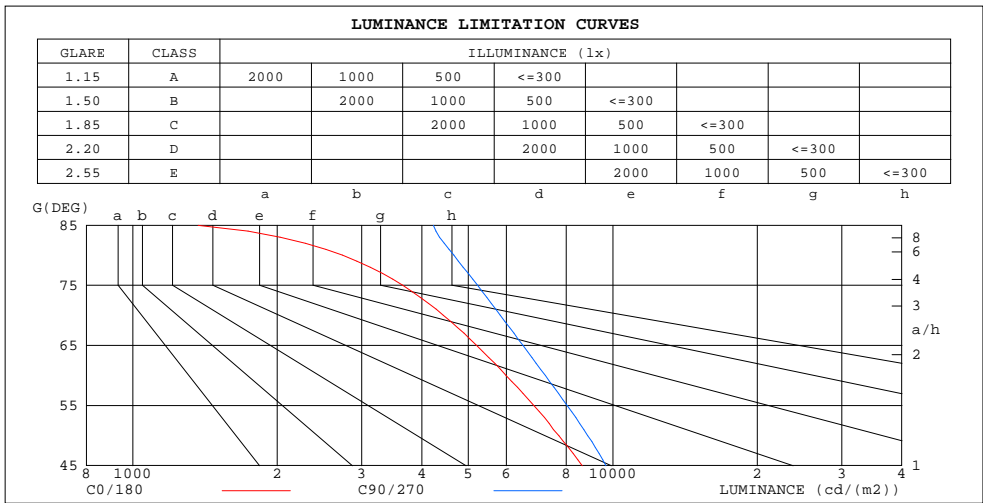

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	1368	4226
80	2733	4665
75	3652	5226
70	4437	5829
65	5204	6495
60	5996	7235
55	6849	8033
50	7716	8868
45	8640	9681


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2021-12-23

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity: 65.0%
Test Distance: 8.000m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.175*0.175	Shielding Angle:

r _{cc}	80%			70%			50%			30%			10%			0
r _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.05	1.01	.98	1.03	.99	.96	.99	.96	.93	.95	.92	.90	.91	.89	.87	.85
2.0	.93	.87	.81	.91	.85	.80	.87	.83	.78	.84	.80	.76	.81	.78	.75	.73
3.0	.82	.75	.69	.81	.74	.68	.78	.72	.67	.75	.70	.66	.72	.68	.64	.62
4.0	.74	.65	.59	.72	.65	.59	.70	.63	.58	.67	.62	.57	.65	.60	.56	.54
5.0	.66	.58	.52	.65	.57	.51	.63	.56	.51	.61	.55	.50	.59	.54	.49	.47
6.0	.60	.52	.45	.59	.51	.45	.57	.50	.45	.56	.49	.44	.54	.48	.44	.42
7.0	.55	.46	.41	.54	.46	.40	.52	.45	.40	.51	.44	.40	.49	.44	.39	.37
8.0	.50	.42	.36	.49	.42	.36	.48	.41	.36	.47	.40	.36	.46	.40	.35	.34
9.0	.46	.38	.33	.46	.38	.33	.44	.37	.33	.43	.37	.32	.42	.36	.32	.30
10.0	.43	.35	.30	.42	.35	.30	.41	.34	.30	.40	.34	.30	.39	.34	.29	.28

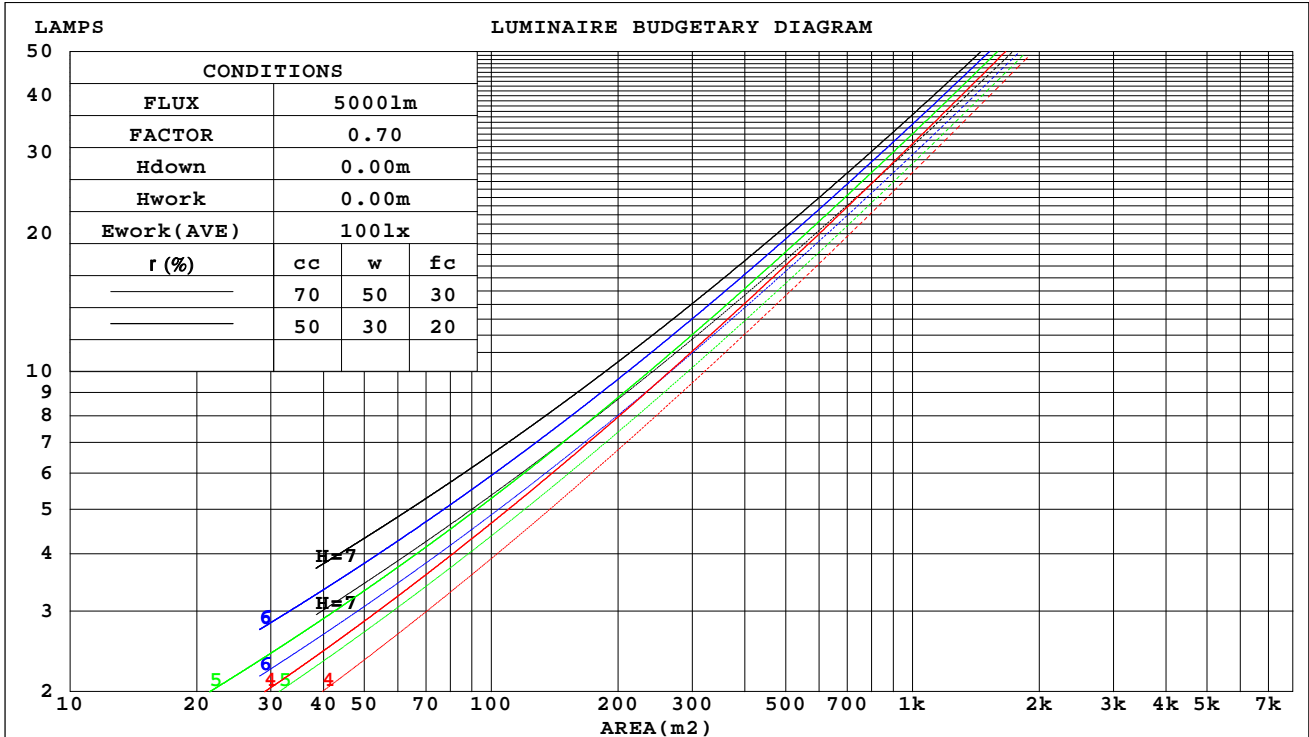

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-12-23

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.0000]
 Remarks:

WEC AND CCEC

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.175*0.175	Shielding Angle:

r _{cc}	80%			70%			50%			30%			10%			0
r _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.279	.159	.050	.272	.155	.049	.258	.148	.047	.246	.142	.045	.234	.136	.044	
2.0	.266	.146	.045	.260	.143	.044	.248	.138	.043	.237	.133	.042	.226	.128	.040	
3.0	.249	.132	.040	.243	.130	.039	.233	.126	.038	.223	.122	.037	.214	.118	.037	
4.0	.232	.120	.035	.227	.119	.035	.217	.115	.034	.209	.112	.034	.201	.109	.033	
5.0	.216	.110	.032	.211	.108	.032	.203	.106	.031	.195	.103	.031	.188	.101	.030	
6.0	.201	.101	.029	.197	.100	.029	.190	.097	.028	.183	.095	.028	.177	.093	.028	
7.0	.188	.093	.026	.185	.092	.026	.178	.090	.026	.172	.088	.026	.166	.086	.025	
8.0	.177	.086	.024	.174	.086	.024	.168	.084	.024	.162	.082	.024	.157	.081	.023	
9.0	.166	.081	.022	.164	.080	.022	.158	.078	.022	.153	.077	.022	.148	.075	.022	
10.0	.157	.075	.021	.154	.075	.021	.150	.073	.021	.145	.072	.020	.141	.071	.020	

r _{cc}	80%			70%			50%			30%			10%			0
r _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.197	.197	.197	.168	.168	.168	.115	.115	.115	.066	.066	.066	.021	.021	.021	
1.0	.185	.163	.143	.158	.140	.123	.108	.096	.085	.062	.056	.050	.020	.018	.016	
2.0	.176	.139	.108	.150	.119	.093	.103	.083	.065	.059	.048	.038	.019	.016	.012	
3.0	.167	.121	.084	.143	.104	.073	.098	.072	.051	.057	.042	.030	.018	.014	.010	
4.0	.159	.107	.068	.137	.093	.059	.094	.065	.041	.054	.038	.025	.017	.012	.008	
5.0	.152	.097	.056	.130	.084	.049	.090	.059	.035	.052	.034	.020	.017	.011	.007	
6.0	.145	.088	.048	.125	.077	.042	.086	.054	.029	.050	.032	.017	.016	.010	.006	
7.0	.138	.081	.041	.119	.071	.036	.082	.049	.026	.048	.029	.015	.015	.010	.005	
8.0	.132	.076	.037	.114	.066	.032	.079	.046	.023	.046	.027	.014	.015	.009	.004	
9.0	.126	.071	.033	.109	.061	.029	.075	.043	.020	.044	.025	.012	.014	.008	.004	
10.0	.121	.066	.030	.104	.058	.026	.072	.041	.019	.042	.024	.011	.014	.008	.004	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-12-23

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

NAME:		TYPE:					WEIGHT:				
SPEC.:		DIM.:					SERIAL No.:				
MFR.: ASD LIGHTING CORP		SUR.: 0.175*0.175					Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
x = 2H y = 2H	19.4	20.8	19.7	21.0	21.2	20.0	21.4	20.3	21.6	21.8	
3H	20.3	21.6	20.6	21.8	22.0	21.1	22.4	21.4	22.6	22.9	
4H	20.5	21.8	20.9	22.0	22.3	21.5	22.7	21.8	23.0	23.3	
6H	20.7	21.8	21.0	22.1	22.4	21.8	23.0	22.1	23.2	23.5	
8H	20.7	21.8	21.0	22.1	22.4	21.9	23.0	22.2	23.3	23.6	
12H	20.7	21.7	21.0	22.0	22.4	22.0	23.0	22.3	23.3	23.7	
4H 2H	19.8	21.1	20.1	21.3	21.6	20.3	21.6	20.7	21.8	22.1	
3H	20.9	21.9	21.2	22.2	22.6	21.6	22.7	21.9	23.0	23.3	
4H	21.3	22.2	21.6	22.6	22.9	22.1	23.1	22.5	23.4	23.8	
6H	21.5	22.3	21.9	22.7	23.1	22.5	23.4	22.9	23.8	24.1	
8H	21.5	22.3	21.9	22.7	23.1	22.7	23.5	23.1	23.9	24.3	
12H	21.5	22.3	22.0	22.7	23.1	22.8	23.5	23.2	23.9	24.3	
8H 4H	21.4	22.2	21.8	22.6	23.0	22.2	23.0	22.6	23.4	23.8	
6H	21.8	22.4	22.2	22.8	23.3	22.7	23.4	23.2	23.8	24.3	
8H	21.8	22.4	22.3	22.9	23.3	22.9	23.5	23.4	24.0	24.4	
12H	21.9	22.4	22.4	22.8	23.3	23.1	23.6	23.6	24.1	24.6	
12H 4H	21.4	22.2	21.9	22.6	23.0	22.2	22.9	22.6	23.3	23.7	
6H	21.8	22.4	22.3	22.8	23.3	22.7	23.3	23.2	23.8	24.2	
8H	21.9	22.4	22.4	22.9	23.4	23.0	23.5	23.5	23.9	24.4	
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H	+ 0.4 / - 0.4					+ 0.3 / - 0.3					
1.5H	+ 0.1 / - 0.3					+ 0.1 / - 0.2					
2.0H	+ 0.5 / - 0.6					+ 0.5 / - 0.5					

CIE Pub.117, 860.8 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.5)
 Area: 0.03 m2

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-12-23

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.175*0.175	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	62	51	44	61	50	44	60	50	44	38
0.80	72	61	54	71	60	54	69	60	53	47
1.00	80	70	63	79	69	63	76	70	62	55
1.25	87	77	71	85	76	70	82	75	69	62
1.50	91	82	76	90	81	75	87	80	74	67
2.00	97	90	84	96	89	83	92	86	82	74
2.50	101	94	89	99	93	88	95	90	86	78
3.00	104	98	93	102	96	92	98	93	89	81
4.00	108	102	98	105	101	97	101	97	94	85
5.00	110	105	102	107	103	100	103	100	97	88
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-12-23

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.000m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.175*0.175	Shielding Angle:

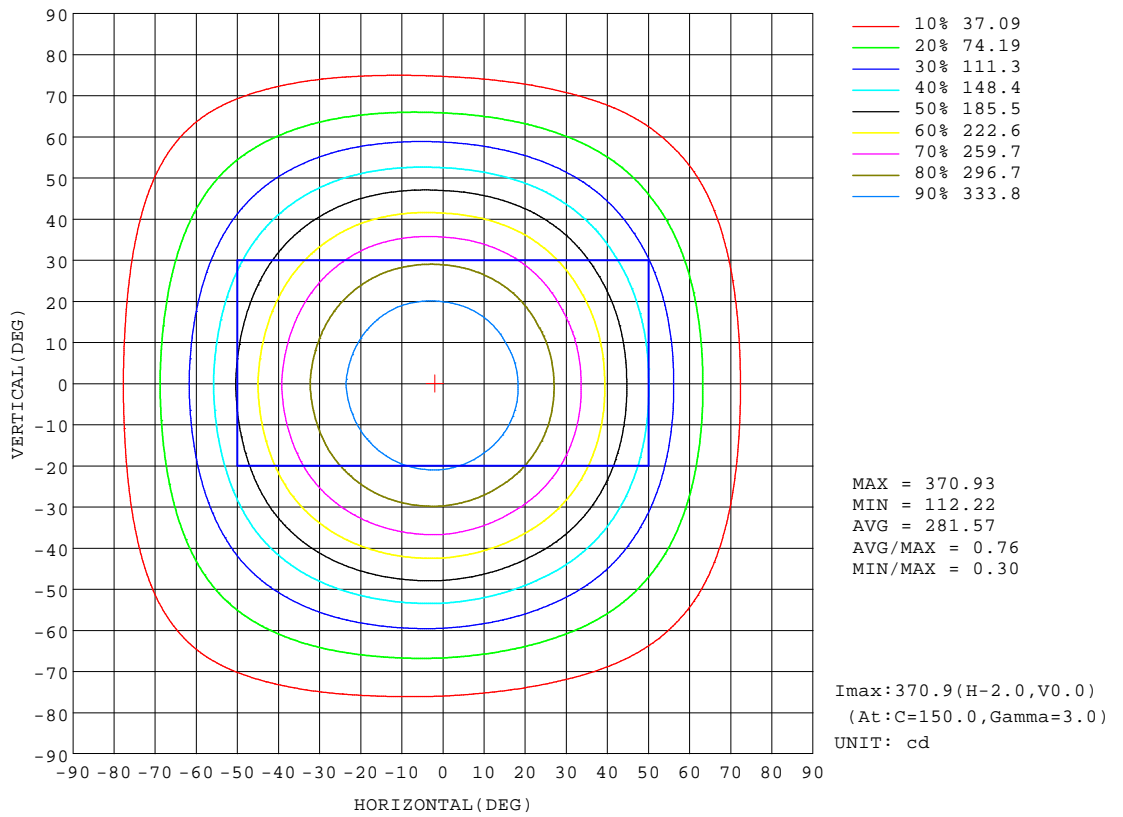


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-12-23

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.000m [K=1.0000]
 Remarks:

AAI Figure

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.175*0.175	Shielding Angle:

Flux out:572.4 lm

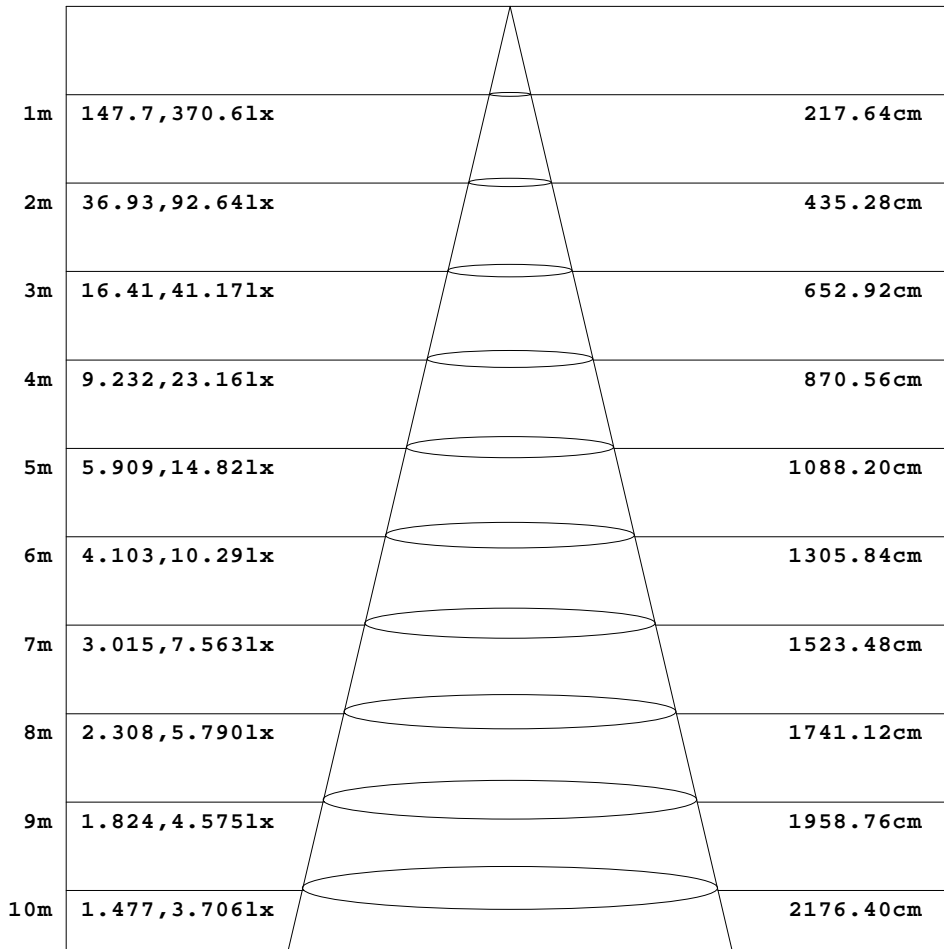

Height Eavg, Emax Angle:94.84deg Diameter


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-12-23

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.175*0.175	Shielding Angle:

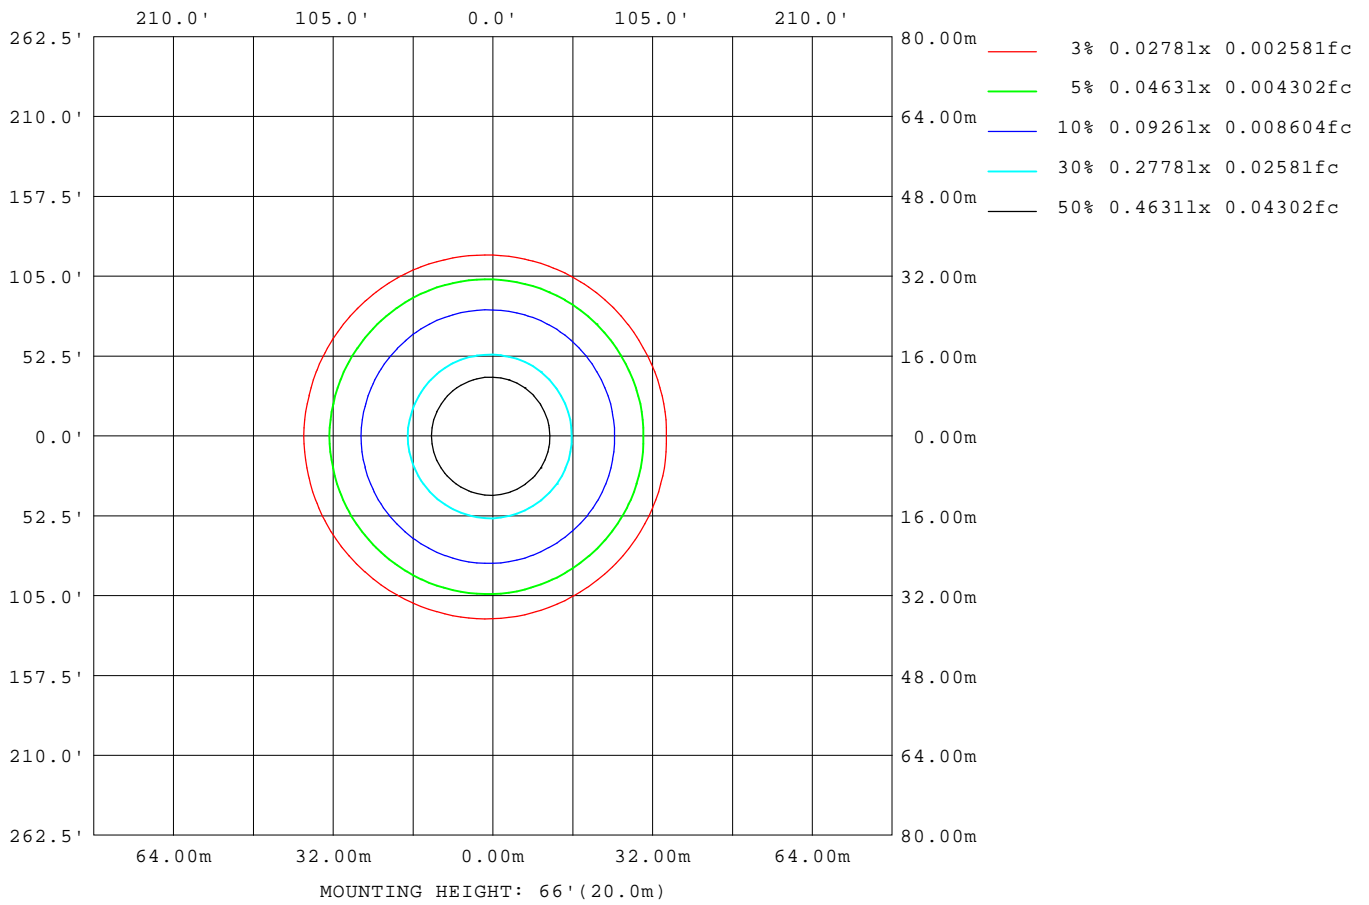

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-12-23

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.000m [K=1.0000]
 Remarks:

LED Avg.L Report

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.175*0.175	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	6261
L_0~180(75)av	4866
L_0~180(85)av	3405
L_90~270(65)av	6326
L_90~270(75)av	4922
L_90~270(85)av	3389
L_45(65)av	6288
L_45(75)av	4889
L_45(85)av	3388

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-12-23

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.000m [K=1.0000]
 Remarks:

Planar Illuminance Curve

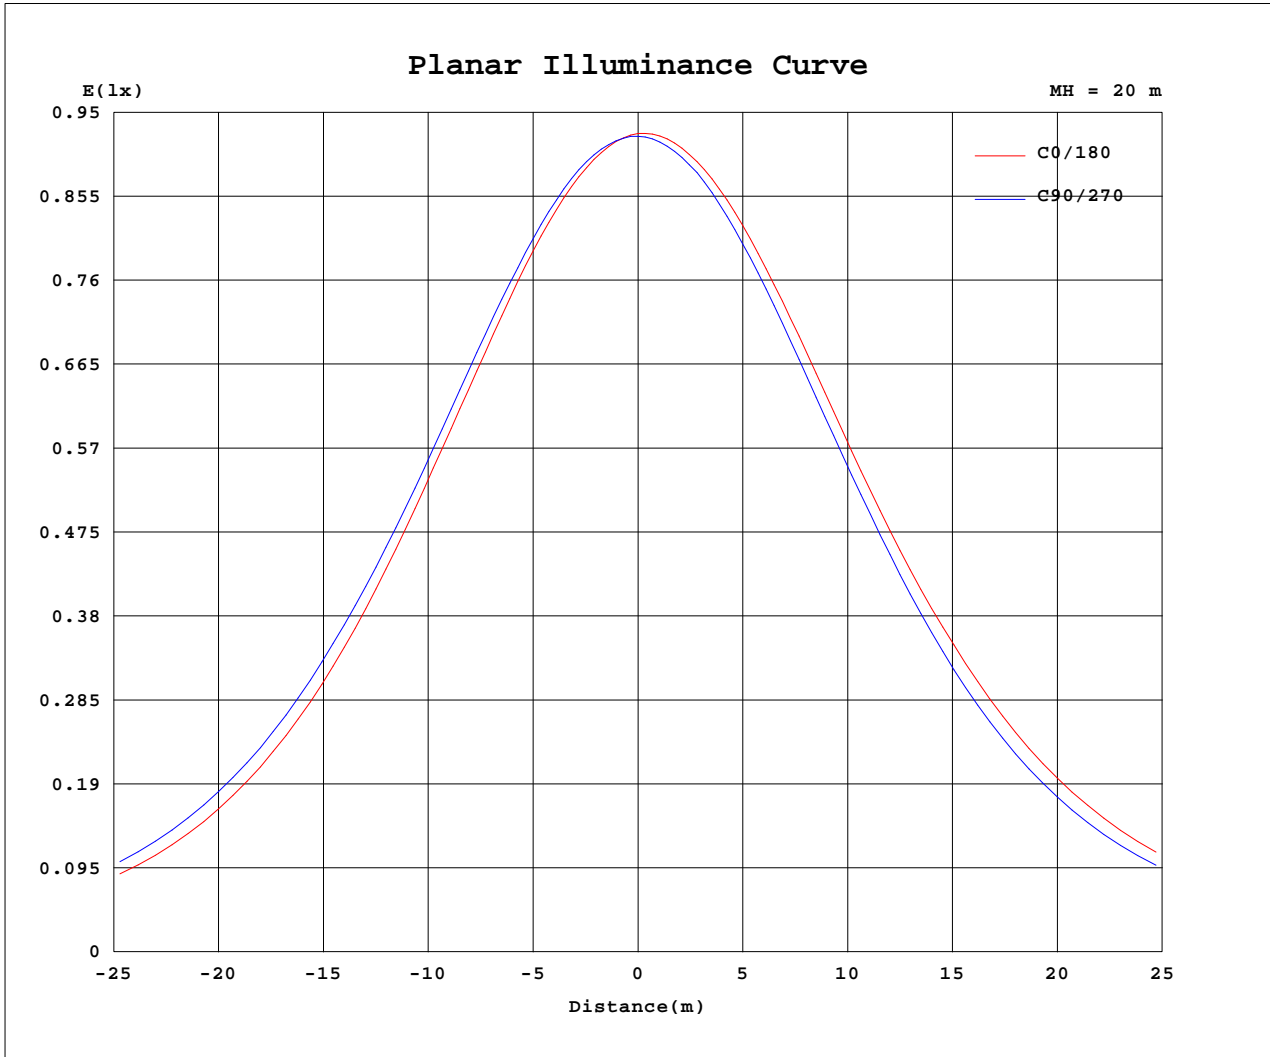

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-12-23

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.000m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.175*0.175	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	369	369	369	369	369	369	369	369	369	369	369	369							
5	365	366	367	368	369	369	369	369	368	367	366	365							
10	357	358	360	362	364	365	365	364	363	360	358	357							
15	344	346	348	352	354	357	357	355	353	349	347	345							
20	326	329	332	337	341	344	345	342	339	334	330	328							
25	305	308	312	318	323	327	328	324	320	314	310	306							
30	280	284	288	296	301	306	307	303	298	291	286	282							
35	250	255	260	270	276	281	282	278	272	263	259	252							
40	218	223	228	239	246	253	254	248	242	232	227	220							
45	183	188	194	206	213	220	222	216	209	199	193	185							
50	148	154	160	171	179	186	188	182	175	164	159	151							
55	118	122	129	138	145	152	153	148	142	133	126	120							
60	89.7	93.7	100	109	115	120	121	117	112	104	97.4	91.5							
65	65.8	69.4	75.1	82.4	87.6	91.9	93.0	89.6	85.0	78.0	72.2	67.1							
70	45.4	48.6	53.6	59.9	64.2	67.7	68.4	65.5	61.5	55.4	50.3	46.3							
75	28.3	31.1	35.3	40.6	44.2	46.9	47.3	44.7	41.2	35.8	31.7	28.6							
80	14.2	16.6	19.9	24.3	27.2	29.0	29.2	27.0	23.9	19.5	16.3	14.1							
85	3.57	5.26	7.71	11.1	13.2	14.3	14.2	12.5	9.97	6.66	4.58	3.41							
90	0.25	0.23	0.22	0.60	0.99	0.36	2.09	1.82	0.32	0.17	0.19	0.20							
95	0.37	0.34	0.32	0.29	0.26	0.24	0.20	0.22	0.23	0.27	0.30	0.32							
100	0.51	0.49	0.46	0.42	0.39	0.36	0.31	0.32	0.36	0.39	0.42	0.45							
105	0.67	0.64	0.61	0.57	0.53	0.50	0.44	0.46	0.50	0.55	0.57	0.60							
110	0.85	0.83	0.79	0.74	0.70	0.66	0.59	0.62	0.65	0.72	0.74	0.77							
115	1.04	1.01	0.98	0.92	0.87	0.84	0.76	0.77	0.83	0.90	0.93	0.95							
120	1.23	1.21	1.17	1.12	1.07	1.03	0.94	0.96	1.01	1.09	1.11	1.14							
125	1.42	1.39	1.37	1.32	1.27	1.22	1.15	1.15	1.19	1.28	1.31	1.33							
130	1.60	1.57	1.55	1.51	1.45	1.41	1.33	1.33	1.38	1.47	1.49	1.51							
135	1.77	1.74	1.72	1.69	1.62	1.58	1.51	1.51	1.54	1.65	1.66	1.67							
140	1.94	1.92	1.90	1.86	1.80	1.77	1.67	1.68	1.72	1.82	1.84	1.84							
145	2.11	2.08	2.06	2.02	1.96	1.94	1.85	1.86	1.88	1.95	1.98	2.00							
150	2.25	2.23	2.21	2.18	2.12	2.10	2.02	2.01	2.04	2.11	2.12	2.16							
155	2.40	2.38	2.34	2.31	2.26	2.25	2.18	2.17	2.18	2.25	2.27	2.31							
160	2.53	2.50	2.47	2.46	2.42	2.40	2.33	2.33	2.34	2.39	2.41	2.45							
165	2.64	2.62	2.59	2.59	2.55	2.55	2.48	2.48	2.49	2.54	2.55	2.57							
170	2.73	2.71	2.72	2.70	2.68	2.68	2.63	2.64	2.62	2.66	2.68	2.68							
175	2.79	2.80	2.82	2.78	2.79	2.79	2.75	2.75	2.75	2.76	2.78	2.78							
180	2.83	2.83	2.83	2.84	2.84	2.84	2.83	2.83	2.83	2.82	2.84	2.84							

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-12-23

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.000m [K=1.0000]
 Remarks: