
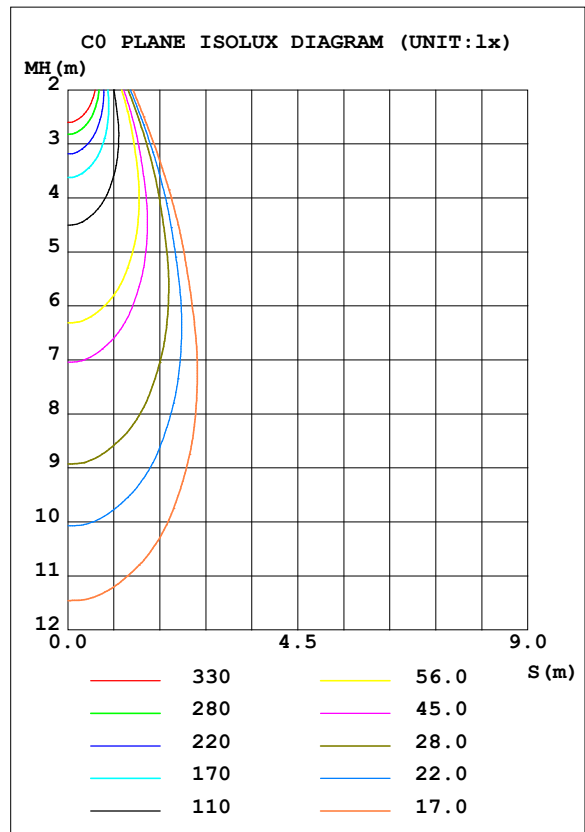


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.96V I:0.1144A P:13.523W PF:0.9468 Freq:59.98Hz Lamp Flux:1015.64x1 lm		
NAME: ASD-CD-PS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 75.10 lm/W			
MODEL		I _{max} (cd)	2232	S/MH (C0/180)	0.59
NOMINAL POWER (W)	15	LOR (%)	100.0	S/MH (C90/270)	0.57
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	1015.6	<input type="checkbox"/> UP, DN (C0-180)	0.0, 51.5
NOMINAL FLUX (lm)	1015.64	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 48.5
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	0.65

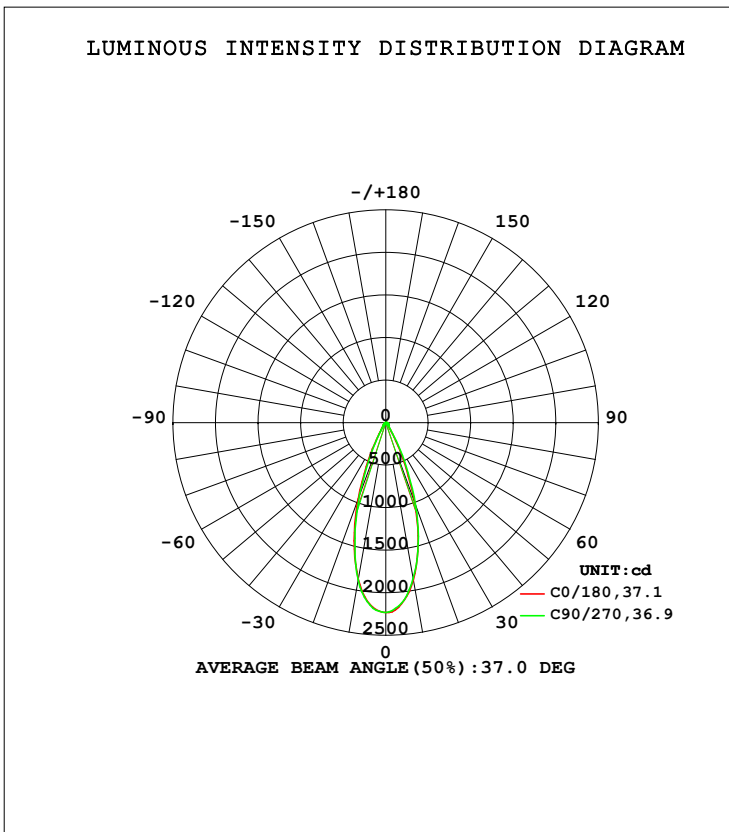

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	□ zone	□ total	%lum, lamp
10	1879	1883	1860	1863	1868	1872	1876	1883	0- 10	195.9	195.9	19.3,19.3
20	990.3	1074	1032	1033	956.0	1011	901.5	1002	10- 20	397.8	593.7	58.5,58.5
30	197.5	363.7	251.4	347.1	191.0	284.4	163.1	276.6	20- 30	260.9	854.6	84.1,84.1
40	51.27	68.19	51.24	70.20	51.67	60.84	51.79	61.48	30- 40	71.73	926.3	91.2,91.2
50	32.02	35.70	32.73	36.20	32.89	36.19	32.75	35.66	40- 50	33.81	960.1	94.5,94.5
60	23.19	21.75	23.19	22.00	23.41	22.41	23.82	22.11	50- 60	25.09	985.2	97,97
70	13.89	13.52	13.80	13.57	14.03	14.03	14.48	13.86	60- 70	18.39	1004	98.8,98.8
80	5.771	5.683	4.909	5.671	5.783	5.434	4.411	5.252	70- 80	10.25	1014	99.8,99.8
90	0.0675	0.0380	0.0434	0.0391	0.0584	0.0571	0.0577	0.0561	80- 90	1.754	1016	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.96V I:0.1144A P:13.523W PF:0.9468 Freq:59.98Hz Lamp Flux:1015.64x1 lm		
NAME: ASD-CD-PS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

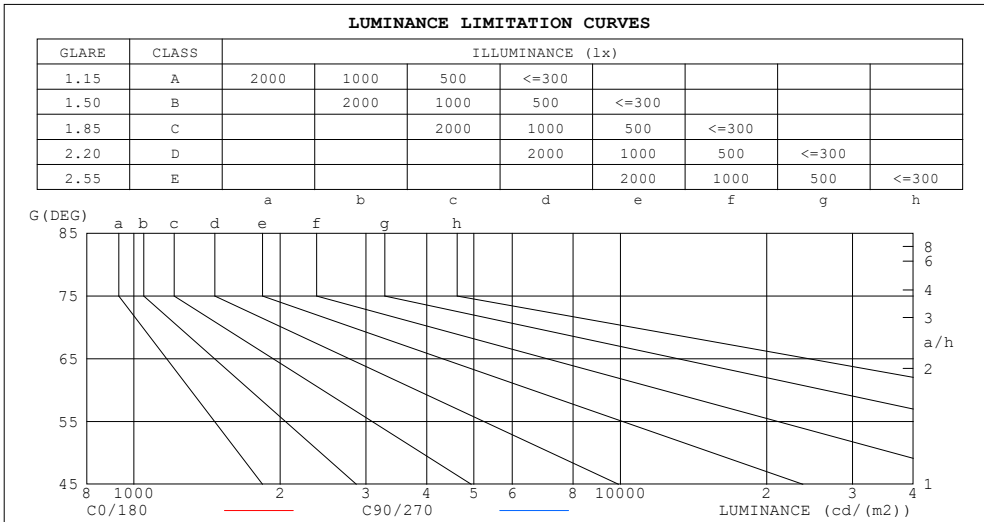

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	164	8
80	299	255
75	334	332
70	365	363
65	395	395
60	417	418
55	415	418
50	448	458
45	510	518


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.96V I:0.1144A P:13.523W PF:0.9468 Freq:59.98Hz Lamp Flux:1015.64x1 lm		
NAME: ASD-CD-PS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.05	1.03	1.02	1.01	.00	.99	.98	.97	.96	.94
2.0	1.04	1.00	.97	1.02	.99	.96	.99	.96	.94	.96	.94	.92	.93	.92	.90	.88
3.0	.98	.93	.90	.97	.92	.89	.94	.90	.88	.92	.89	.86	.89	.87	.85	.83
4.0	.93	.88	.84	.91	.87	.83	.89	.85	.82	.87	.84	.81	.86	.83	.80	.79
5.0	.88	.83	.79	.87	.82	.78	.85	.81	.78	.84	.80	.77	.82	.79	.76	.75
6.0	.84	.78	.74	.83	.78	.74	.81	.77	.74	.80	.76	.73	.79	.75	.73	.71
7.0	.80	.74	.71	.79	.74	.70	.78	.73	.70	.77	.73	.70	.76	.72	.69	.68
8.0	.76	.71	.67	.76	.71	.67	.75	.70	.67	.74	.70	.67	.73	.69	.66	.65
9.0	.73	.68	.64	.73	.68	.64	.72	.67	.64	.71	.67	.64	.70	.66	.64	.62
10.0	.70	.65	.62	.70	.65	.62	.69	.64	.61	.68	.64	.61	.67	.64	.61	.60

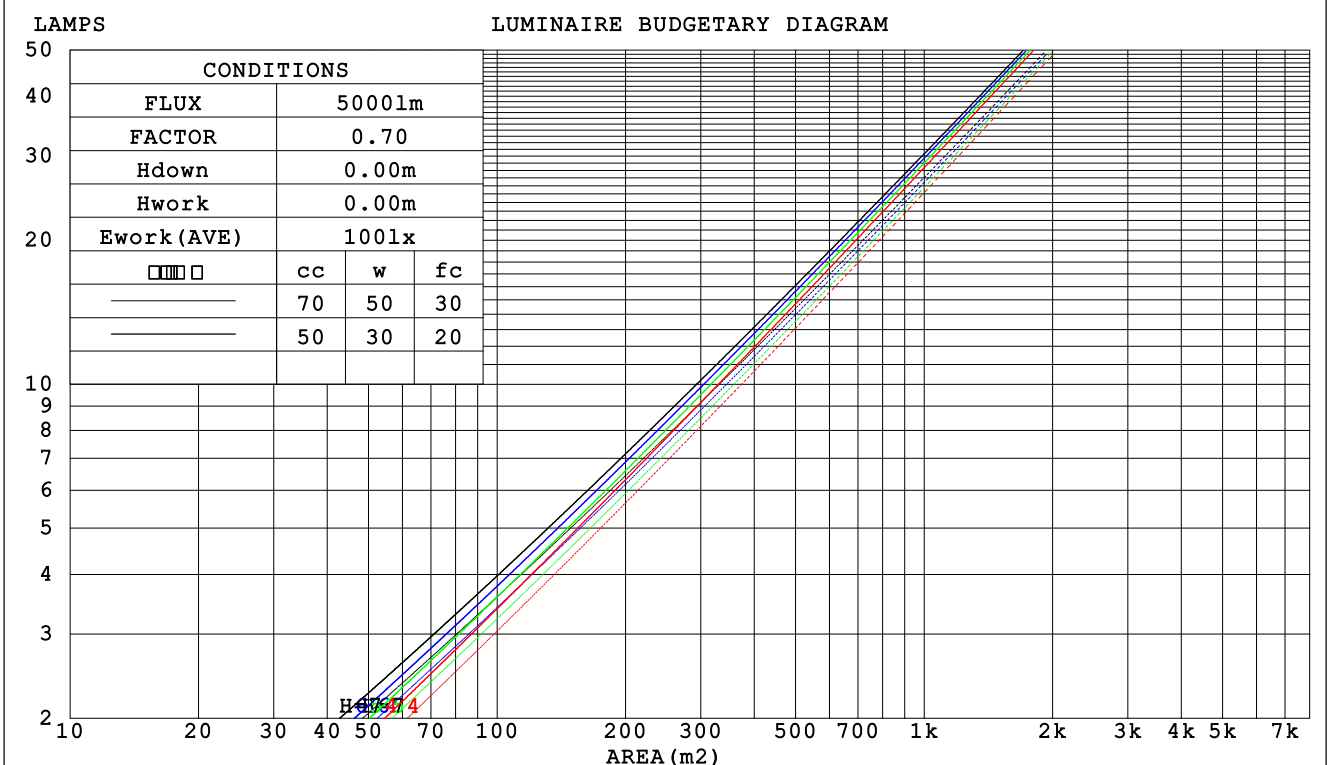

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.96V I:0.1144A P:13.523W PF:0.9468 Freq:59.98Hz Lamp Flux:1015.64x1 lm		
NAME: ASD-CD-PS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients (WEC)			
0.0						
1.0	.171 .097 .031	.164 .094 .030	.152 .087 .028	.140 .081 .026	.129 .075 .024	
2.0	.161 .088 .027	.155 .085 .026	.145 .080 .025	.135 .076 .024	.126 .071 .022	
3.0	.151 .080 .024	.146 .078 .024	.137 .074 .023	.129 .071 .022	.121 .067 .021	
4.0	.142 .074 .022	.138 .072 .021	.130 .069 .021	.123 .066 .020	.116 .063 .019	
5.0	.134 .068 .020	.130 .067 .019	.124 .064 .019	.117 .062 .018	.112 .060 .018	
6.0	.126 .063 .018	.123 .062 .018	.118 .060 .018	.112 .058 .017	.107 .056 .017	
7.0	.120 .059 .017	.117 .058 .017	.112 .057 .016	.108 .055 .016	.103 .054 .016	
8.0	.114 .056 .016	.112 .055 .016	.107 .054 .015	.103 .052 .015	.099 .051 .015	
9.0	.109 .053 .015	.107 .052 .015	.103 .051 .014	.099 .050 .014	.096 .049 .014	
10.0	.104 .050 .014	.102 .049 .014	.099 .048 .014	.095 .047 .013	.092 .046 .013	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients (CCEC)			
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.171 .157 .145	.146 .135 .125	.100 .093 .087	.058 .054 .050	.018 .017 .016	
2.0	.155 .133 .114	.133 .114 .098	.091 .079 .069	.052 .046 .040	.017 .015 .013	
3.0	.142 .113 .091	.121 .098 .079	.083 .068 .055	.048 .040 .033	.015 .013 .011	
4.0	.130 .099 .074	.112 .085 .065	.077 .059 .045	.044 .035 .027	.014 .011 .009	
5.0	.121 .087 .062	.104 .075 .054	.071 .052 .038	.041 .031 .022	.013 .010 .007	
6.0	.113 .077 .052	.097 .067 .045	.067 .047 .032	.039 .028 .019	.013 .009 .006	
7.0	.106 .069 .044	.091 .060 .038	.063 .042 .027	.036 .025 .016	.012 .008 .005	
8.0	.099 .063 .038	.086 .055 .033	.059 .038 .023	.034 .023 .014	.011 .007 .005	
9.0	.094 .058 .033	.081 .050 .029	.056 .035 .020	.033 .021 .012	.011 .007 .004	
10.0	.089 .053 .029	.077 .046 .025	.053 .032 .018	.031 .019 .011	.010 .006 .004	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.96V I:0.1144A P:13.523W PF:0.9468 Freq:59.98Hz Lamp Flux:1015.64x1 lm										
NAME: ASD-CD-PS-2D15AC-WH					TYPE:			WEIGHT:		
SPEC.:3500K 90					DIM.:			SERIAL No.:		
MFR.: ASD Lighting Corp					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	4.4	5.2	4.6	5.4	5.5	4.7	5.5	4.9	5.7	5.9
3H	5.5	6.3	5.8	6.5	6.7	5.8	6.5	6.0	6.7	6.9
4H	6.0	6.8	6.3	7.0	7.2	6.2	6.9	6.5	7.2	7.4
6H	6.4	7.1	6.7	7.3	7.5	6.5	7.2	6.8	7.4	7.7
8H	6.4	7.1	6.7	7.4	7.6	6.5	7.2	6.8	7.4	7.7
12H	6.4	7.1	6.8	7.4	7.6	6.5	7.1	6.8	7.4	7.7
4H 2H	4.8	5.6	5.1	5.8	6.0	5.1	5.8	5.3	6.0	6.3
3H	6.2	6.8	6.5	7.1	7.4	6.3	7.0	6.7	7.3	7.5
4H	6.8	7.4	7.1	7.7	8.0	6.9	7.5	7.3	7.8	8.1
6H	7.2	7.8	7.6	8.1	8.4	7.3	7.8	7.7	8.2	8.5
8H	7.3	7.8	7.7	8.2	8.6	7.4	7.8	7.7	8.2	8.6
12H	7.4	7.8	7.8	8.2	8.6	7.3	7.8	7.7	8.1	8.5
8H 4H	7.0	7.5	7.4	7.8	8.2	7.1	7.6	7.5	7.9	8.3
6H	7.6	8.0	8.0	8.4	8.8	7.6	8.0	8.0	8.4	8.8
8H	7.7	8.1	8.2	8.5	8.9	7.7	8.0	8.1	8.4	8.9
12H	7.8	8.1	8.3	8.6	9.0	7.6	7.9	8.1	8.4	8.8
12H 4H	7.0	7.4	7.4	7.8	8.2	7.1	7.5	7.5	7.9	8.3
6H	7.6	7.9	8.0	8.3	8.8	7.6	8.0	8.1	8.4	8.8
8H	7.8	8.1	8.2	8.5	9.0	7.7	8.0	8.2	8.4	8.9
Variations with the observer position at spacings:										
S = 1.0H	+ 0.3 / - 0.4					+ 0.3 / - 0.4				
1.5H	+ 0.2 / - 0.4					+ 0.3 / - 0.4				
2.0H	+ 0.3 / - 0.3					+ 0.3 / - 0.3				

CIE Pub.117, 1016 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 0.1)
 Area: 0.111111 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.96V I:0.1144A P:13.523W PF:0.9468 Freq:59.98Hz Lamp Flux:1015.64x1 lm		
NAME: ASD-CD-PS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	86	80	76	86	79	76	85	79	75	72
0.80	94	87	84	93	87	83	92	87	83	79
1.00	98	92	88	97	92	88	96	92	88	83
1.25	102	97	93	101	96	93	99	95	92	87
1.50	105	100	96	104	99	96	101	98	95	90
2.00	108	103	100	106	102	99	104	100	98	92
2.50	110	106	102	108	104	101	105	102	100	94
3.00	111	108	105	109	106	104	106	103	101	95
4.00	113	110	108	111	109	107	108	106	104	97
5.00	115	112	110	113	111	109	109	107	106	98
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.96V I:0.1144A P:13.523W PF:0.9468 Freq:59.98Hz Lamp Flux:1015.64x1 lm		
NAME: ASD-CD-PS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

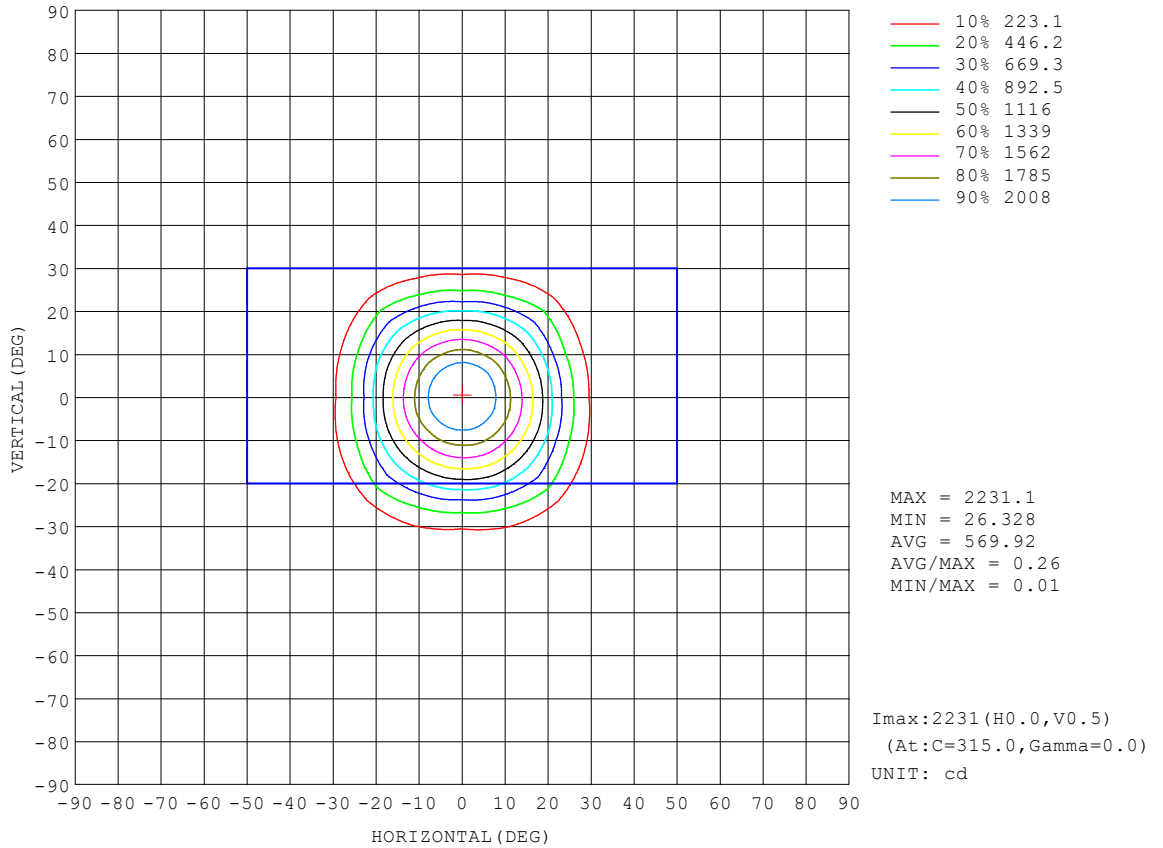


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

AAI Figure

Test:U:119.96V I:0.1144A P:13.523W PF:0.9468 Freq:59.98Hz Lamp Flux:1015.64x1 lm		
NAME: ASD-CD-PS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

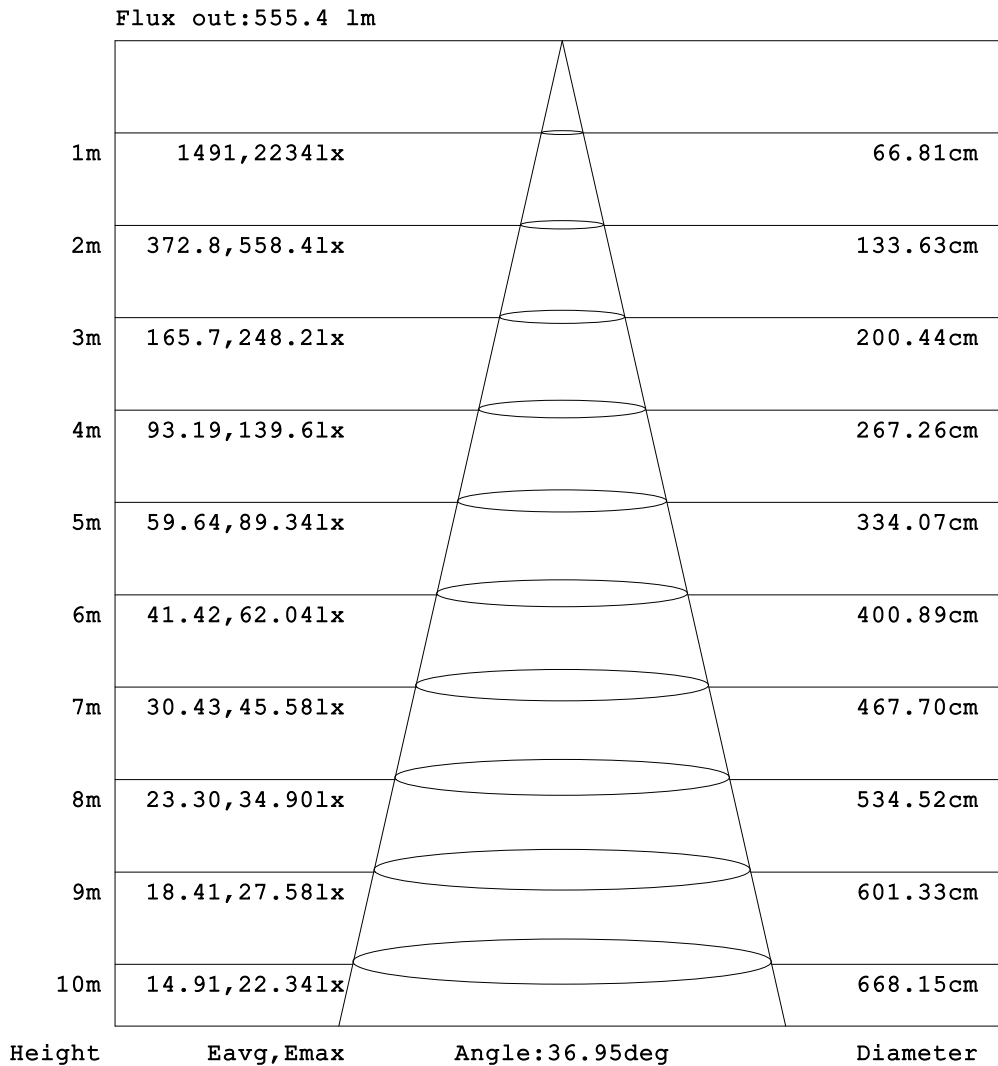


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.96V I:0.1144A P:13.523W PF:0.9468 Freq:59.98Hz Lamp Flux:1015.64x1 lm		
NAME: ASD-CD-PS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

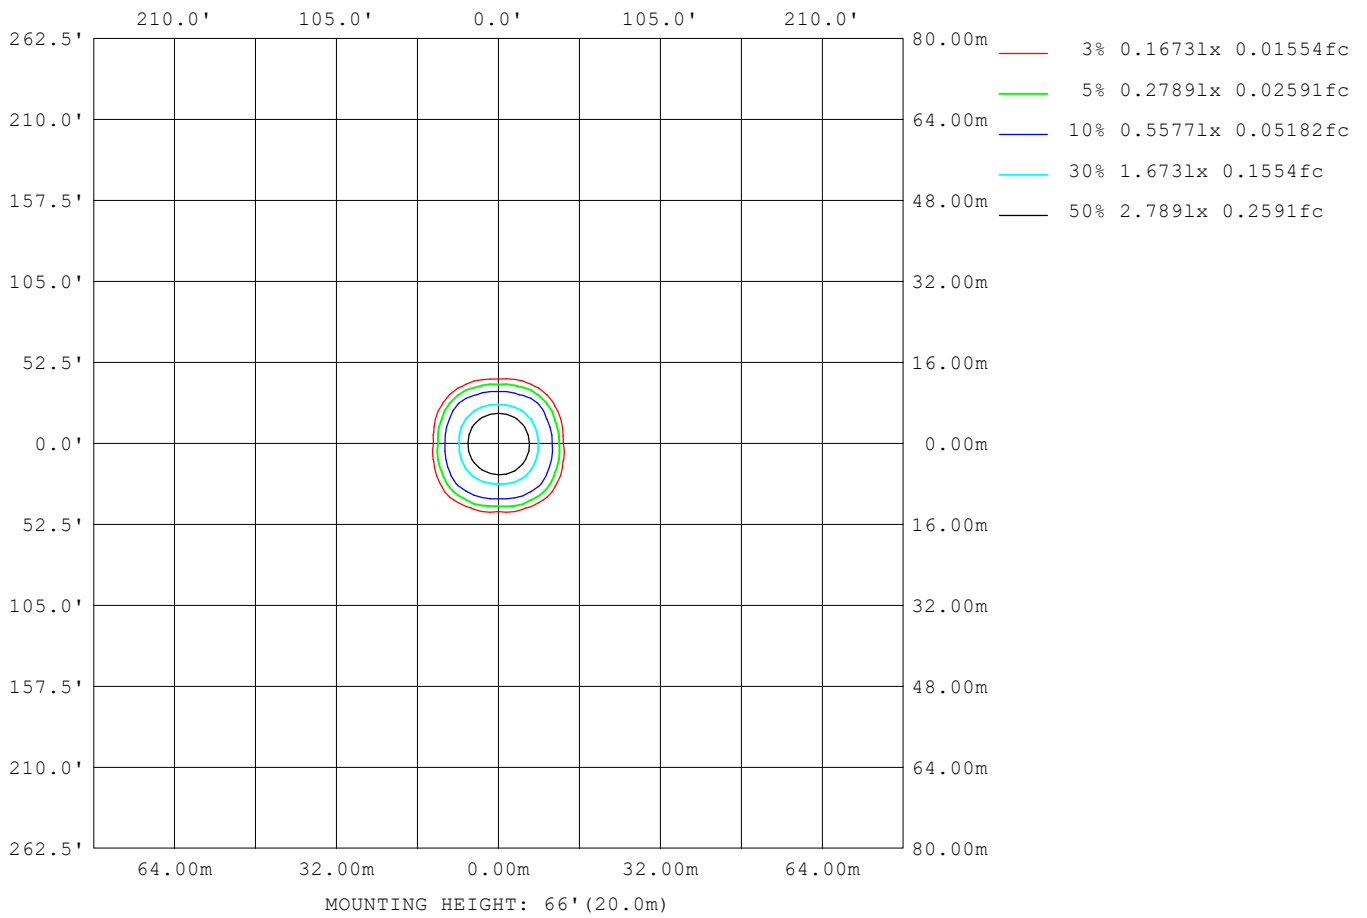

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:119.96V I:0.1144A P:13.523W PF:0.9468 Freq:59.98Hz Lamp Flux:1015.64x1 lm		
NAME: ASD-CD-PS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	398
L_0~180 (75) av	335
L_0~180 (85) av	173
L_90~270 (65) av	402
L_90~270 (75) av	340
L_90~270 (85) av	8
L_45 (65) av	381
L_45 (75) av	334
L_45 (85) av	61

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

Planar Illuminance Curve

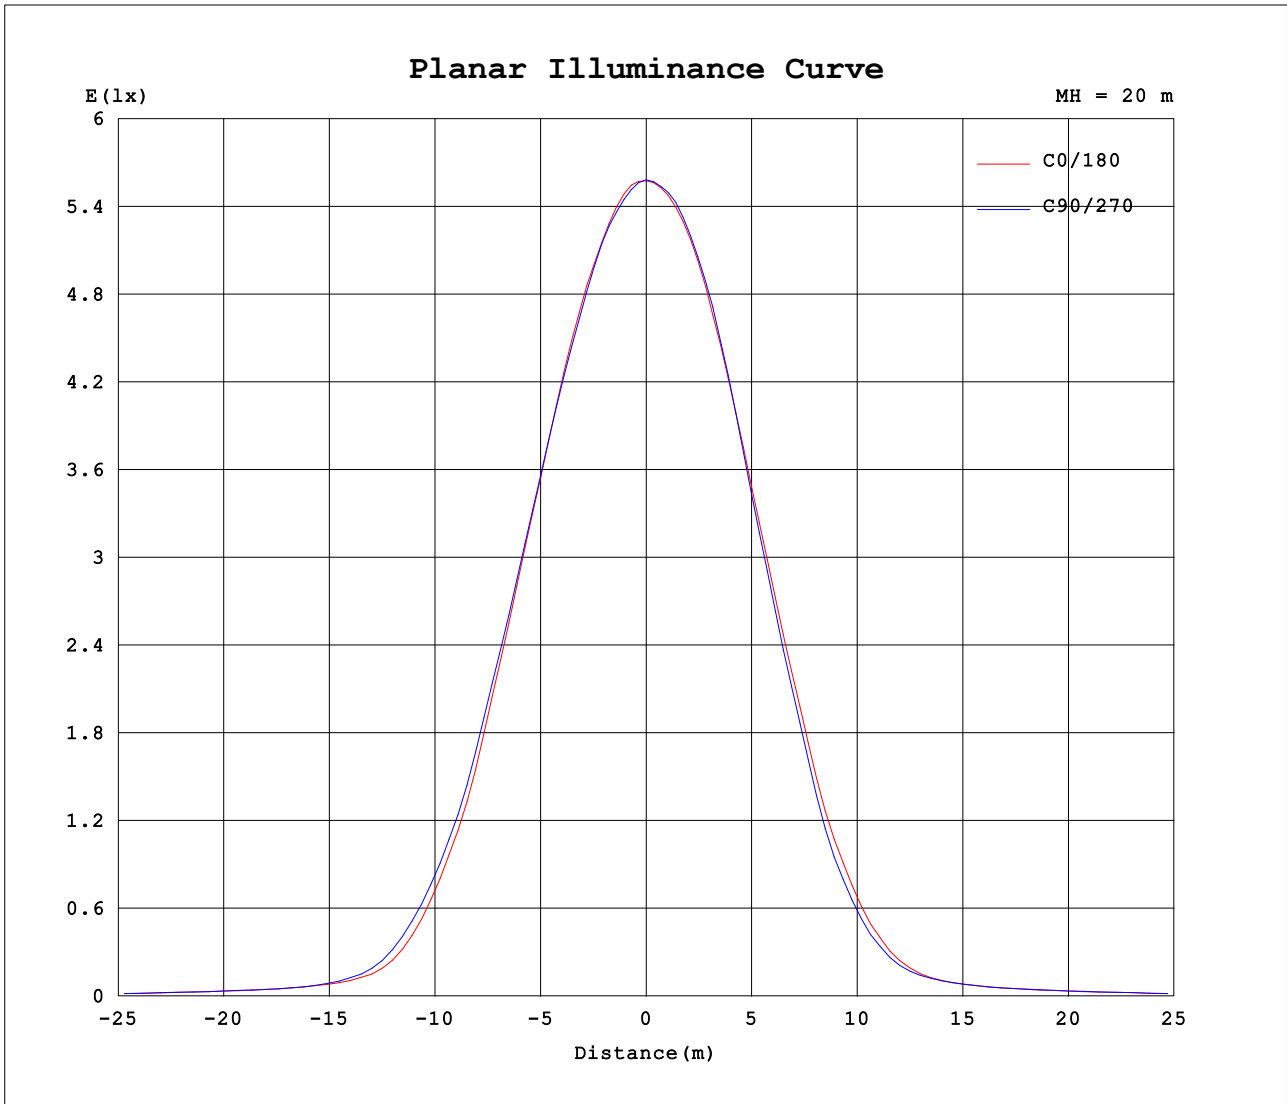

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.96V I:0.1144A P:13.523W PF:0.9468 Freq:59.98Hz Lamp Flux:1015.64x1 lm		
NAME: ASD-CD-PS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	2232	2232	2232	2232	2232	2232	2232	2232	2232	2232	2232	2232	2232	2232	2232	2232			
5	2140	2136	2127	2128	2130	2133	2137	2144	2145	2147	2152	2155	2155	2154	2153	2142			
10	1879	1887	1883	1877	1860	1867	1863	1878	1868	1863	1872	1864	1876	1875	1883	1873			
15	1471	1493	1500	1503	1479	1473	1460	1452	1440	1441	1453	1423	1408	1420	1448	1447			
20	990	1043	1074	1072	1032	1030	1033	998	956	992	1011	950	901	947	1002	982			
25	521	576	695	631	576	609	666	557	491	543	613	494	429	486	604	515			
30	198	262	364	311	251	301	347	259	191	232	284	202	163	205	277	220			
35	78.4	95.1	139	113	93.1	115	137	96.0	79.0	91.3	105	86.4	77.3	88.2	104	86.4			
40	51.3	55.5	68.2	57.2	51.2	58.3	70.2	56.6	51.7	55.1	60.8	54.9	51.8	56.2	61.5	54.9			
45	40.1	42.5	45.8	42.8	40.7	43.2	46.9	43.0	40.9	42.9	45.3	43.4	41.4	43.5	45.4	42.3			
50	32.0	34.6	35.7	35.0	32.7	35.4	36.2	35.3	32.9	35.1	36.2	35.0	32.7	34.8	35.7	34.2			
55	26.4	27.6	27.9	27.8	26.6	28.0	28.4	28.1	27.0	28.1	28.4	28.3	27.3	28.1	27.8	27.5			
60	23.2	23.1	21.7	23.2	23.2	23.3	22.0	23.3	23.4	23.4	22.4	23.8	23.8	23.6	22.1	23.2			
65	18.6	18.7	17.6	18.8	18.5	18.8	17.7	18.9	18.8	18.9	18.2	19.3	19.2	19.1	18.0	18.7			
70	13.9	14.0	13.5	14.1	13.8	14.0	13.6	14.1	14.0	14.1	14.0	14.5	14.5	14.4	13.9	14.0			
75	9.62	9.70	9.47	9.70	9.55	9.68	9.47	9.73	9.65	9.78	9.80	10.0	10.0	9.94	9.70	9.67			
80	5.77	5.81	5.68	5.28	4.91	5.27	5.67	5.82	5.78	5.83	5.43	4.65	4.41	4.54	5.25	5.78			
85	1.59	2.13	0.85	0.11	0.07	0.10	0.83	2.12	1.76	1.70	0.46	0.07	0.07	0.06	0.21	1.55			
90	0.07	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks: