
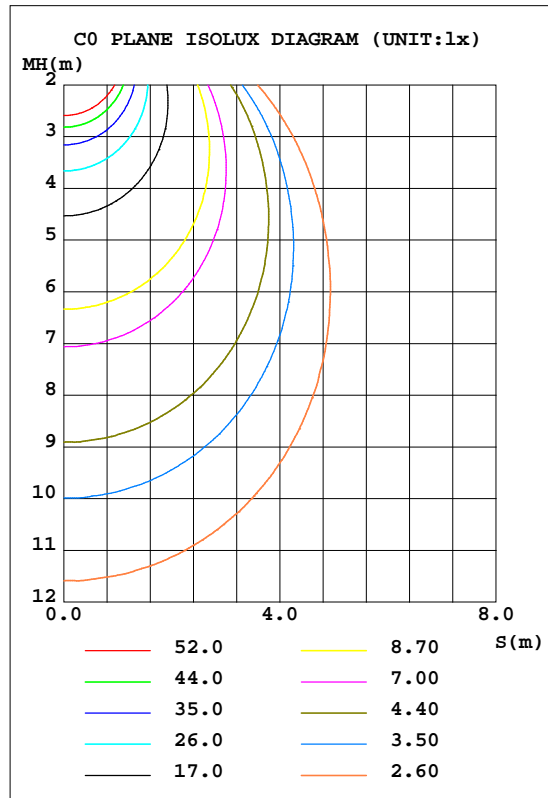


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.00V I:0.0765A P:8.0100W PF:0.8541 Freq:60.00Hz Lamp Flux:702.3x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MOBESD-LRKR-4D9AC-WH(4000K)		Imax(cd)	349.1	S/MH(C0/180)	1.10
NOMINAL POWER(W)	8.6	LOR(%)	100.0	S/MH(C90/270)	1.11
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	702.30	h UP, DN(C0-180)	0.2,49.5
NOMINAL FLUX(lm)	702.3	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.2,50.1
LAMPS INSIDE	1	h up(%)	0.4	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	h down(%)	99.6	CIBSE SHR MAX	1.25

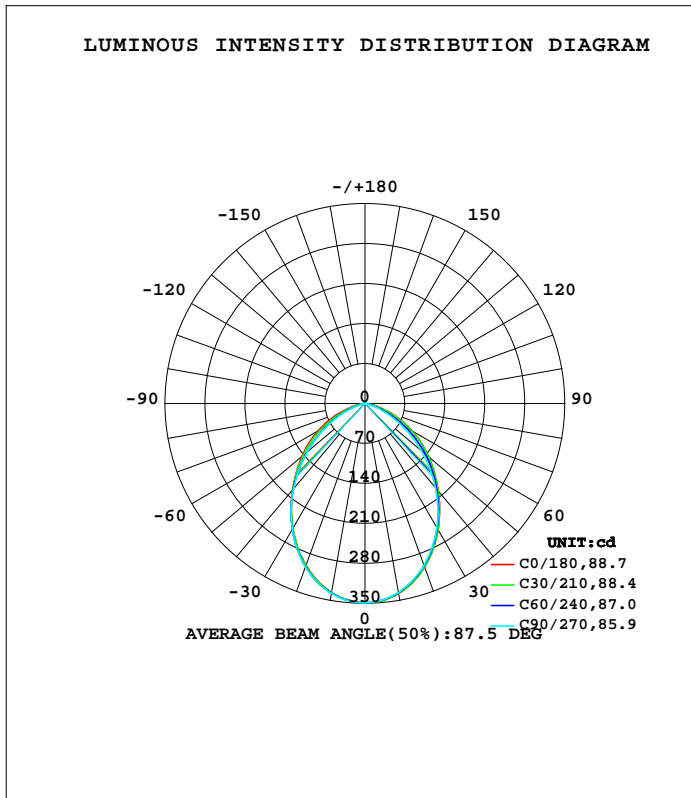

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-08-06

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.1034]  
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	338.0	337.1	336.2	335.5	336.3	337.0	337.6	338.8	0- 10	32.74	32.74	4.66,4.66
20	304.9	303.5	301.6	301.0	301.6	303.3	304.6	306.2	10- 20	90.71	123.4	17.6,17.6
30	256.0	254.0	251.7	251.0	252.9	253.8	254.8	256.6	20- 30	128.7	252.2	35.9,35.9
40	199.8	197.4	191.8	193.3	197.4	195.9	194.7	200.2	30- 40	140.9	393.1	56,56
50	145.8	141.6	128.7	134.5	144.2	137.0	131.7	144.4	40- 50	129.0	522.1	74.3,74.3
60	94.65	86.49	69.84	78.71	94.10	81.15	72.77	89.56	50- 60	99.05	621.1	88.4,88.4
70	45.20	36.09	24.20	31.12	44.43	33.02	26.04	38.27	60- 70	57.50	678.6	96.6,96.6
80	8.837	5.575	3.367	4.695	6.328	5.314	3.731	5.784	70- 80	18.75	697.4	99.3,99.3
90	0.0793	0.0551	0.0196	0.0649	0.0454	0.0554	0.0392	0.0391	80- 90	1.819	699.2	99.6,99.6
100	0.1101	0.1038	0.0974	0.1265	0.1428	0.0941	0.0453	0.0616	90-100	0.0709	699.3	99.6,99.6
110	0.2398	0.2464	0.2272	0.2822	0.2790	0.2433	0.2008	0.1881	100-110	0.1761	699.5	99.6,99.6
120	0.4342	0.4345	0.4347	0.4768	0.4476	0.4410	0.3760	0.3664	110-120	0.3267	699.8	99.6,99.6
130	0.6419	0.6259	0.6552	0.6811	0.6617	0.6195	0.5965	0.5417	120-130	0.4711	700.3	99.7,99.7
140	0.8040	0.8139	0.8434	0.8659	0.8108	0.8075	0.7910	0.7266	130-140	0.5536	700.8	99.8,99.8
150	0.9596	0.9826	1.012	1.028	0.9730	0.9633	0.9403	0.8952	140-150	0.5581	701.4	99.9,99.9
160	1.102	1.110	1.161	1.138	1.141	1.132	1.070	1.057	150-160	0.4808	701.8	99.9,99.9
170	1.199	1.236	1.278	1.239	1.271	1.261	1.187	1.194	160-170	0.3309	702.2	100,100
180	1.329	1.333	1.355	1.320	1.342	1.343	1.317	1.301	170-180	0.1216	702.3	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm			

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-08-06

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.1034]  
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.00V I:0.0765A P:8.0100W PF:0.8541 Freq:60.00Hz Lamp Flux:702.3x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

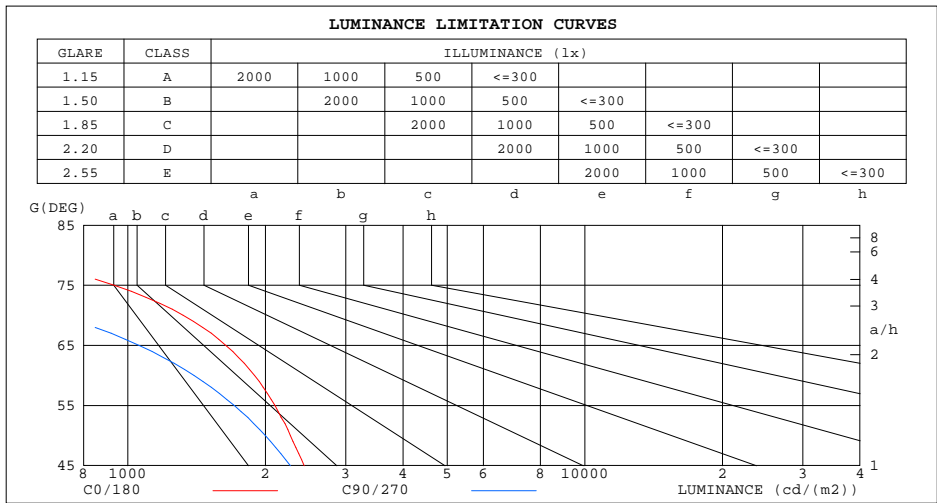

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	151	74
80	509	194
75	933	399
70	1322	708
65	1638	1058
60	1893	1397
55	2099	1711
50	2269	2002
45	2432	2268


C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-08-06

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.1034]  
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.00V I:0.0765A P:8.0100W PF:0.8541 Freq:60.00Hz Lamp Flux:702.3x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

r <sub>cc</sub>	80%			70%			50%			30%			10%			0
r <sub>w</sub>	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r <sub>fc</sub>	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.07	1.03	.00	1.04	1.01	.98	1.00	.98	.95	.96	.94	.92	.93	.91	.89	.87
2.0	.95	.89	.84	.93	.88	.83	.90	.85	.81	.86	.83	.79	.83	.80	.78	.76
3.0	.85	.78	.72	.83	.77	.71	.80	.75	.70	.78	.73	.69	.75	.71	.68	.66
4.0	.76	.68	.62	.75	.67	.62	.72	.66	.61	.70	.65	.60	.68	.63	.59	.57
5.0	.69	.61	.55	.68	.60	.54	.66	.59	.54	.64	.58	.53	.62	.57	.53	.51
6.0	.62	.54	.48	.61	.54	.48	.60	.53	.48	.58	.52	.47	.56	.51	.47	.45
7.0	.57	.49	.43	.56	.49	.43	.55	.48	.43	.53	.47	.42	.52	.46	.42	.40
8.0	.52	.44	.39	.52	.44	.39	.50	.44	.39	.49	.43	.38	.48	.42	.38	.36
9.0	.48	.41	.35	.48	.40	.35	.47	.40	.35	.45	.39	.35	.44	.39	.35	.33
10.0	.45	.37	.32	.44	.37	.32	.43	.37	.32	.42	.36	.32	.41	.36	.32	.30

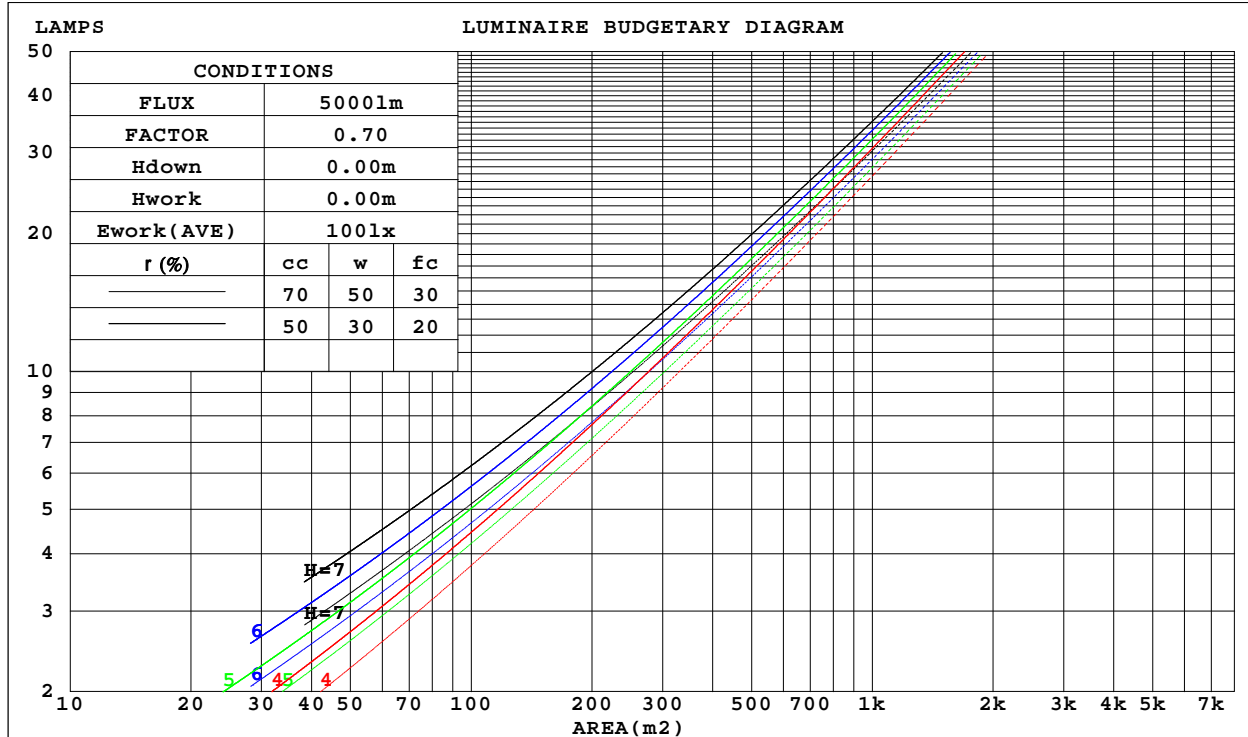

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-08-06

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.1034]  
 Remarks:

WEC AND CCEC

Test:U:120.00V I:0.0765A P:8.0100W PF:0.8541 Freq:60.00Hz Lamp Flux:702.3x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.254	.144	.046	.247	.141	.045	.234	.134	.043	.222	.128	.041	.210	.122	.039	
2.0	.247	.136	.042	.241	.133	.041	.230	.128	.040	.219	.123	.038	.209	.118	.037	
3.0	.235	.125	.037	.229	.123	.037	.219	.119	.036	.210	.115	.035	.201	.111	.034	
4.0	.221	.115	.034	.216	.113	.033	.207	.110	.033	.199	.107	.032	.191	.104	.032	
5.0	.207	.105	.031	.203	.104	.030	.195	.101	.030	.187	.099	.029	.180	.096	.029	
6.0	.194	.097	.028	.190	.096	.028	.183	.094	.027	.177	.092	.027	.170	.090	.027	
7.0	.182	.090	.026	.179	.089	.025	.173	.087	.025	.167	.086	.025	.161	.084	.025	
8.0	.172	.084	.024	.169	.083	.023	.163	.081	.023	.158	.080	.023	.153	.078	.023	
9.0	.162	.078	.022	.159	.078	.022	.154	.076	.022	.149	.075	.021	.145	.074	.021	
10.0	.153	.073	.020	.151	.073	.020	.146	.072	.020	.142	.070	.020	.138	.069	.020	

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.194	.194	.194	.166	.166	.166	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.180	.160	.142	.154	.137	.122	.105	.094	.085	.061	.055	.049	.019	.018	.016	
2.0	.170	.136	.107	.145	.117	.092	.100	.081	.064	.057	.047	.038	.018	.015	.012	
3.0	.161	.117	.083	.138	.101	.072	.095	.070	.050	.055	.041	.030	.018	.013	.010	
4.0	.153	.104	.066	.131	.090	.057	.090	.062	.040	.052	.037	.024	.017	.012	.008	
5.0	.146	.093	.054	.125	.081	.047	.086	.056	.033	.050	.033	.020	.016	.011	.006	
6.0	.139	.085	.045	.120	.073	.040	.082	.051	.028	.048	.030	.017	.015	.010	.005	
7.0	.133	.078	.039	.114	.067	.034	.079	.047	.024	.046	.028	.014	.015	.009	.005	
8.0	.127	.072	.034	.109	.062	.030	.075	.044	.021	.044	.026	.013	.014	.008	.004	
9.0	.121	.067	.030	.104	.058	.026	.072	.041	.019	.042	.024	.011	.014	.008	.004	
10.0	.116	.062	.027	.100	.054	.024	.069	.038	.017	.040	.023	.010	.013	.007	.003	

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-08-06

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.1034]  
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.00V I:0.0765A P:8.0100W PF:0.8541 Freq:60.00Hz Lamp Flux:702.3x1 lm										
NAME: LED DOWNLIGHT					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: ASD LIGHTING CORP					SUR.: 0.1*0.1			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	14.5	16.0	14.9	16.3	16.6	12.6	14.1	13.0	14.4	14.7
3H	15.7	17.0	16.0	17.3	17.7	13.2	14.6	13.6	14.9	15.3
4H	15.9	17.1	16.3	17.5	17.9	13.3	14.5	13.7	14.9	15.3
6H	16.0	17.1	16.4	17.5	17.9	13.3	14.4	13.7	14.8	15.2
8H	16.0	17.0	16.4	17.4	17.8	13.2	14.3	13.7	14.7	15.1
12H	15.9	16.9	16.4	17.3	17.8	13.2	14.2	13.7	14.6	15.1
4H 2H	14.8	16.0	15.2	16.4	16.8	13.1	14.3	13.5	14.7	15.1
3H	16.1	17.1	16.5	17.5	17.9	13.8	14.8	14.2	15.2	15.6
4H	16.4	17.3	16.9	17.7	18.2	13.9	14.8	14.3	15.2	15.6
6H	16.5	17.3	17.0	17.8	18.2	13.8	14.6	14.3	15.1	15.6
8H	16.5	17.2	17.0	17.7	18.2	13.8	14.5	14.3	15.0	15.5
12H	16.5	17.1	17.0	17.6	18.1	13.8	14.4	14.3	14.9	15.4
8H 4H	16.4	17.1	16.9	17.6	18.1	13.9	14.6	14.4	15.1	15.6
6H	16.5	17.1	17.0	17.6	18.1	13.9	14.5	14.4	15.0	15.5
8H	16.5	17.0	17.0	17.5	18.0	13.9	14.4	14.4	14.9	15.4
12H	16.5	16.9	17.0	17.4	18.0	13.8	14.3	14.4	14.8	15.4
12H 4H	16.4	17.0	16.9	17.5	18.0	13.9	14.5	14.4	15.0	15.5
6H	16.5	17.0	17.0	17.5	18.0	13.9	14.4	14.4	14.9	15.4
8H	16.5	16.9	17.0	17.4	18.0	13.8	14.3	14.4	14.8	15.4
CIE190: 2010										

CIE190: 2010  
Area: 0.1 m2

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-08-06

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
Humidity:65.0%  
Test Distance:8.700m [K=1.1034]  
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.00V I:0.0765A P:8.0100W PF:0.8541 Freq:60.00Hz Lamp Flux:702.3x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	64	53	47	63	53	47	62	53	47	41
0.80	74	64	57	73	63	57	71	63	57	50
1.00	82	73	66	81	72	66	79	73	65	59
1.25	89	80	74	88	79	74	85	78	73	66
1.50	93	85	79	92	84	79	89	83	78	71
2.00	99	92	87	98	91	86	94	89	85	78
2.50	103	96	91	101	95	90	97	92	88	81
3.00	106	100	95	103	98	94	100	95	92	84
4.00	109	104	100	107	102	99	102	99	96	88
5.00	111	107	104	108	105	102	104	101	99	90
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2022-08-06

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity: 65.0%  
 Test Distance: 8.700m [K=1.1034]  
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.00V I:0.0765A P:8.0100W PF:0.8541 Freq:60.00Hz Lamp Flux:702.3x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

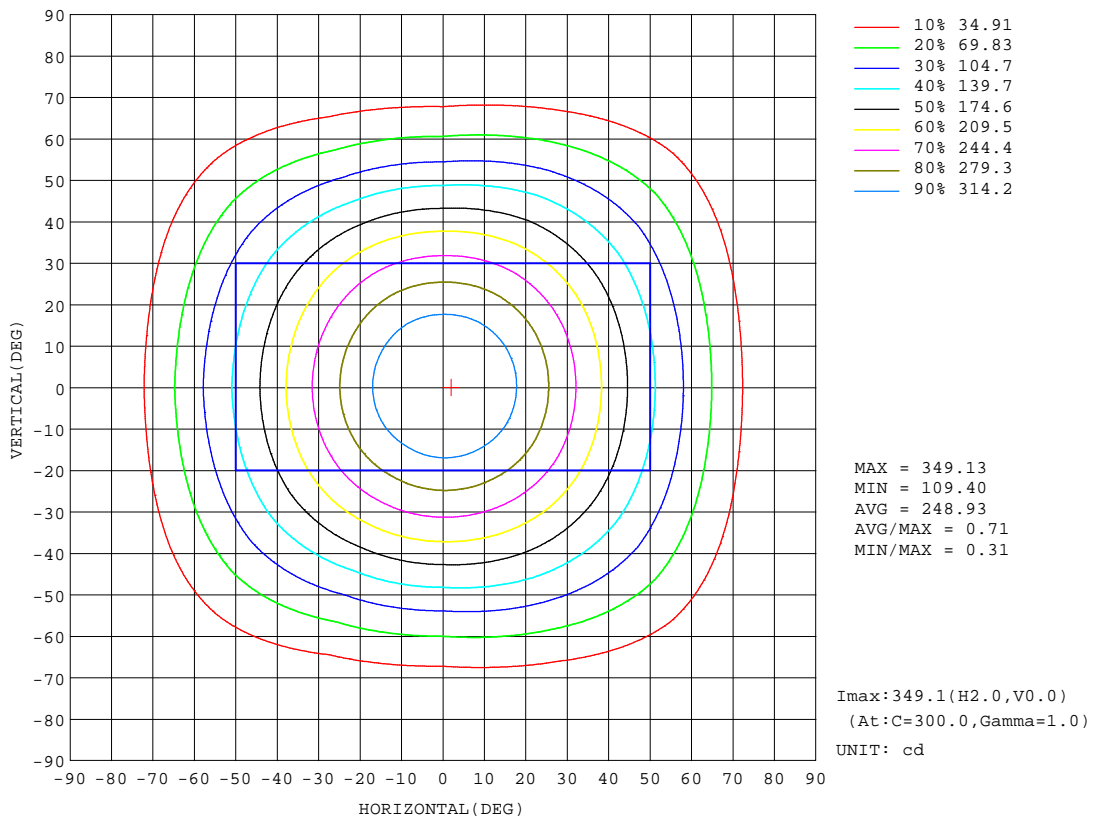

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-08-06


g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.1034]  
 Remarks:



AAI Figure

Test:U:120.00V I:0.0765A P:8.0100W PF:0.8541 Freq:60.00Hz Lamp Flux:702.3x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

Flux out:434.0 lm

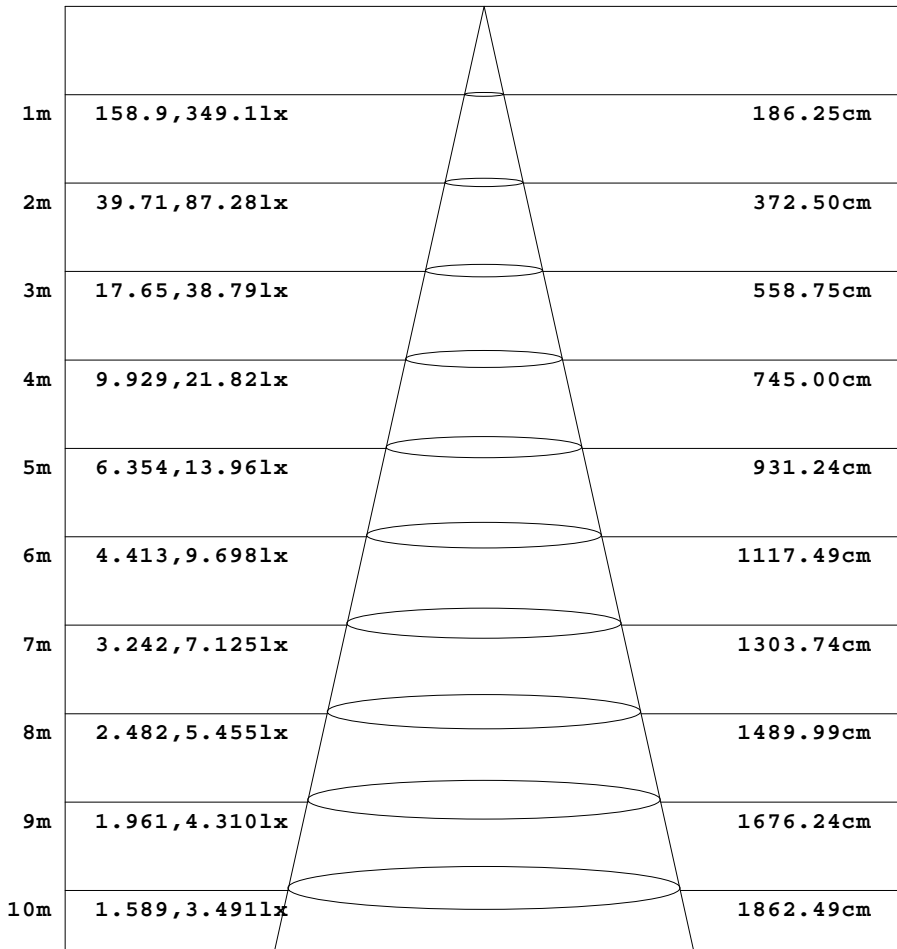

Height Eavg, Emax Angle:85.92deg Diameter


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-08-06

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.1034]  
 Remarks:

ISOLUX DIAGRAM

Test:U:120.00V I:0.0765A P:8.0100W PF:0.8541 Freq:60.00Hz Lamp Flux:702.3x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

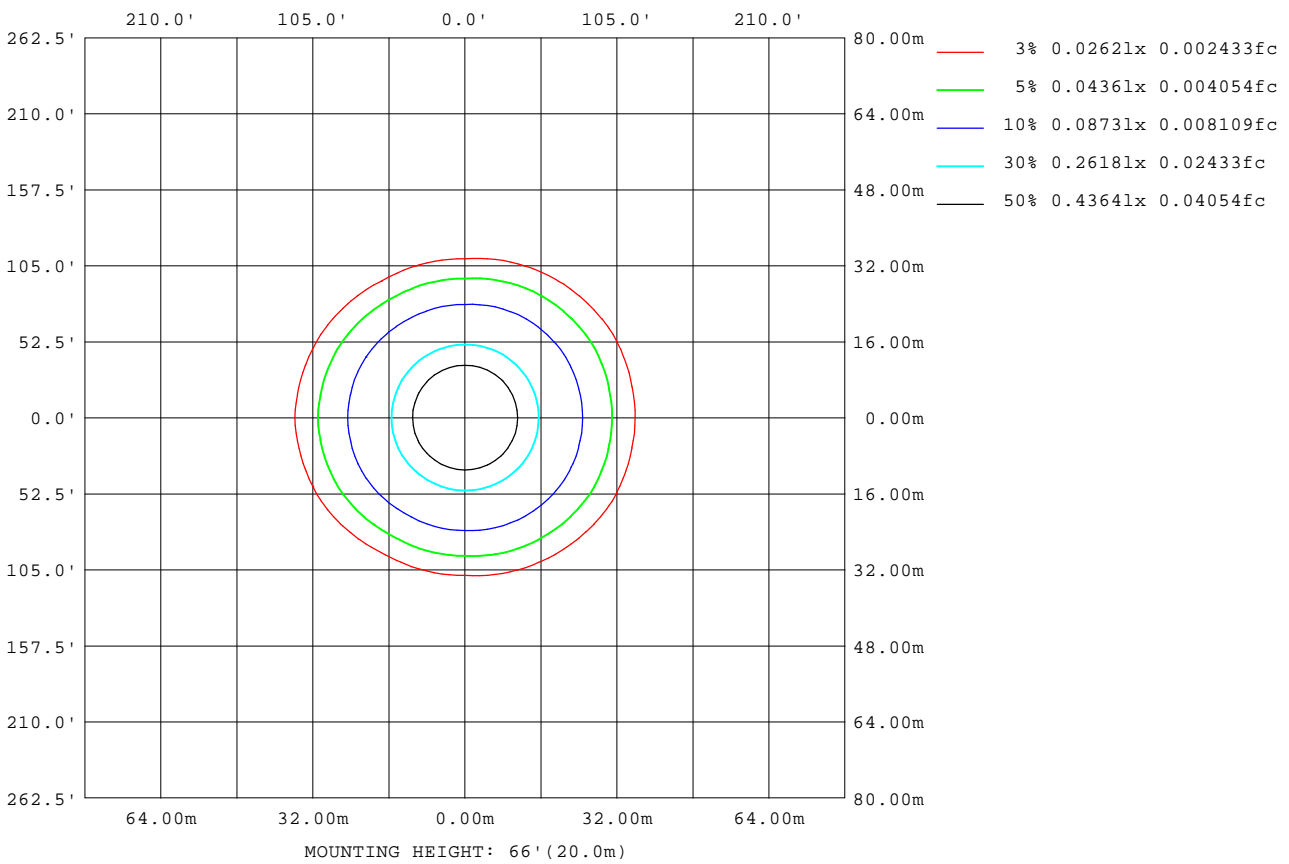

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2022-08-06

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity: 65.0%  
 Test Distance: 8.700m [K=1.1034]  
 Remarks:

## LED Avg.L Report

Test:U:120.00V I:0.0765A P:8.0100W PF:0.8541 Freq:60.00Hz Lamp Flux:702.3x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	1630
L_0~180(75)av	920
L_0~180(85)av	157
L_90~270(65)av	1089
L_90~270(75)av	417
L_90~270(85)av	87
L_45(65)av	1372
L_45(75)av	626
L_45(85)av	150

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-08-06

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
Humidity:65.0%  
Test Distance:8.700m [K=1.1034]  
Remarks:

Planar Illuminance Curve

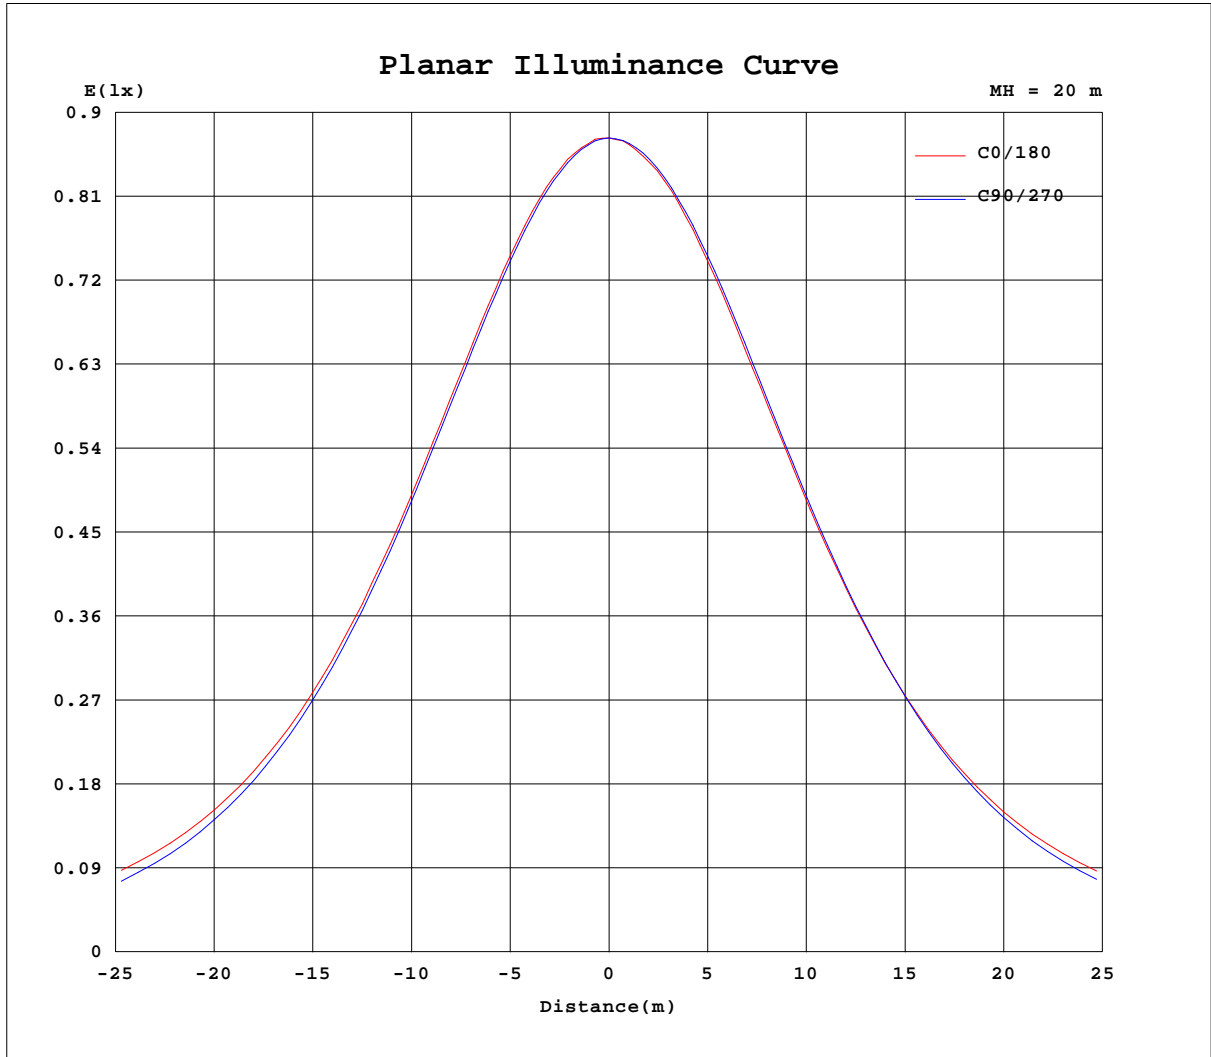

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2022-08-06

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity: 65.0%  
 Test Distance: 8.700m [K=1.1034]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.00V I:0.0765A P:8.0100W PF:0.8541 Freq:60.00Hz Lamp Flux:702.3x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	349	349	349	349	349	349	349	349	349	349	349	349						
5	346	346	346	345	345	345	345	346	346	346	347	347						
10	338	338	336	336	335	336	336	336	338	338	339	339						
15	324	324	322	321	320	321	322	322	324	324	325	325						
20	305	304	303	302	301	301	302	303	304	305	306	306						
25	282	282	279	278	277	278	279	279	281	281	283	283						
30	256	255	253	252	250	252	253	253	255	255	256	257						
35	228	228	225	223	222	224	225	225	226	226	228	229						
40	200	199	196	192	191	196	197	197	195	195	200	201						
45	172	171	167	160	160	168	170	169	164	163	171	173						
50	146	145	138	129	129	140	144	141	133	132	142	147						
55	120	119	109	98.1	98.8	113	119	114	103	101	113	121						
60	94.7	92.7	80.3	69.8	70.9	86.5	94.1	87.4	74.9	72.8	84.6	94.5						
65	69.2	66.4	53.7	44.7	46.0	60.6	68.6	61.6	49.5	47.3	57.7	68.0						
70	45.2	41.7	30.4	24.2	25.2	37.0	44.4	38.0	28.1	26.0	33.6	43.0						
75	24.1	20.9	13.3	10.3	10.8	18.0	23.5	18.7	12.6	11.3	14.8	21.5						
80	8.84	7.06	4.09	3.37	3.40	5.99	6.33	6.47	4.15	3.73	4.68	6.89						
85	1.32	1.82	0.91	0.64	0.65	1.45	1.42	1.63	1.02	0.87	1.10	1.65						
90	0.08	0.05	0.06	0.02	0.05	0.08	0.05	0.07	0.05	0.04	0.02	0.06						
95	0.07	0.08	0.05	0.06	0.05	0.12	0.08	0.05	0.08	0.03	0.05	0.03						
100	0.11	0.14	0.07	0.10	0.08	0.17	0.14	0.06	0.13	0.05	0.08	0.05						
105	0.19	0.20	0.13	0.17	0.15	0.24	0.21	0.13	0.21	0.11	0.14	0.10						
110	0.24	0.27	0.22	0.23	0.24	0.32	0.28	0.21	0.28	0.20	0.21	0.16						
115	0.32	0.36	0.30	0.33	0.34	0.42	0.36	0.29	0.39	0.29	0.29	0.24						
120	0.43	0.45	0.41	0.43	0.43	0.52	0.45	0.38	0.50	0.38	0.39	0.34						
125	0.56	0.53	0.52	0.54	0.54	0.62	0.55	0.48	0.58	0.50	0.47	0.42						
130	0.64	0.62	0.63	0.66	0.64	0.72	0.66	0.58	0.66	0.60	0.58	0.51						
135	0.73	0.73	0.73	0.76	0.73	0.82	0.74	0.66	0.76	0.69	0.68	0.60						
140	0.80	0.80	0.83	0.84	0.83	0.90	0.81	0.76	0.86	0.79	0.77	0.68						
145	0.89	0.90	0.92	0.95	0.91	0.99	0.89	0.84	0.95	0.88	0.87	0.77						
150	0.96	0.98	0.99	1.01	0.99	1.06	0.97	0.92	1.01	0.94	0.94	0.85						
155	1.04	1.08	1.04	1.11	1.04	1.12	1.06	0.99	1.10	1.01	1.02	0.92						
160	1.10	1.14	1.08	1.16	1.11	1.17	1.14	1.09	1.17	1.07	1.12	1.00						
165	1.16	1.20	1.15	1.22	1.16	1.21	1.22	1.16	1.25	1.13	1.19	1.08						
170	1.20	1.26	1.21	1.28	1.21	1.27	1.27	1.23	1.29	1.19	1.25	1.14						
175	1.26	1.31	1.28	1.33	1.28	1.31	1.33	1.31	1.33	1.27	1.32	1.22						
180	1.33	1.34	1.33	1.36	1.32	1.32	1.34	1.34	1.34	1.32	1.32	1.28						

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-08-06

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.1034]  
 Remarks: