
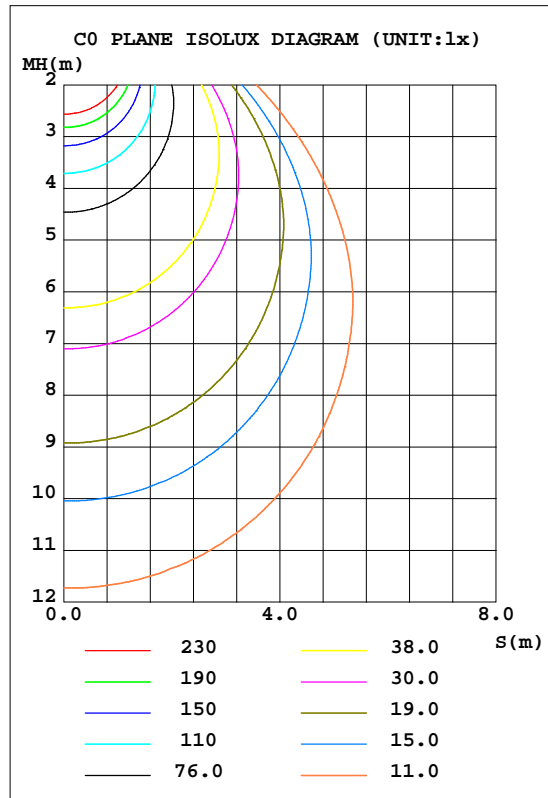


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.01V I:0.3400A P:40.400W PF:0.9911 Freq:60.00Hz Lamp Flux:3250.39x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 80.46 lm/W			
MODEL	AM0EEDL7-8DA40AC(40W 5000K)	I _{max} (cd)	1513	S/MH(C0/180)	1.15
NOMINAL POWER(W)	40	LOR(%)	100.0	S/MH(C90/270)	1.18
RATED VOLTAGE(V)	120-277	TOTAL FLUX(lm)	3250.4	h UP, DN(C0-180)	0.2,50.0
NOMINAL FLUX(lm)	3250.39	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.2,49.5
LAMPS INSIDE	1	h up(%)	0.4	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	h down(%)	99.6	CIBSE SHR MAX	1.30

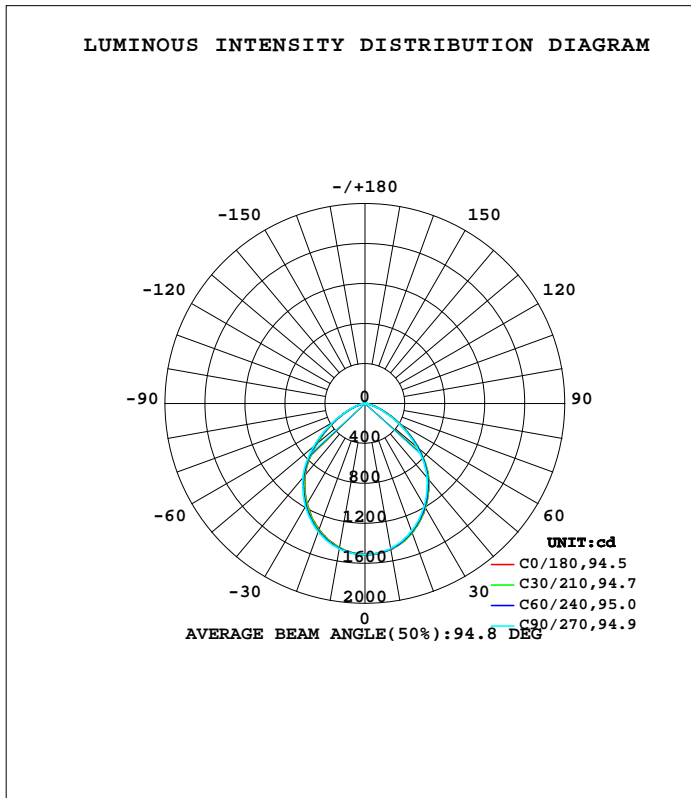

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-12-05

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.1322]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	1481	1480	1473	1464	1464	1470	1476	1483	0- 10	142.5	142.5	4.38,4.38
20	1378	1372	1360	1343	1343	1354	1367	1378	10- 20	401.9	544.4	16.7,16.7
30	1208	1202	1186	1160	1158	1172	1191	1208	20- 30	589.2	1134	34.9,34.9
40	992.6	985.7	967.9	935.3	932.1	947.7	966.5	987.4	30- 40	674.2	1808	55.6,55.6
50	707.9	701.7	680.3	640.8	630.1	646.7	671.9	700.6	40- 50	635.0	2443	75.2,75.2
60	396.8	393.1	373.6	339.9	334.4	345.0	361.9	387.3	50- 60	460.0	2903	89.3,89.3
70	157.7	153.2	139.7	125.1	124.1	129.1	137.8	151.4	60- 70	241.1	3144	96.7,96.7
80	35.32	34.07	30.41	29.04	28.98	28.99	30.66	33.51	70- 80	78.00	3222	99.1,99.1
90	0.7286	0.1909	0.0958	0.1572	0.1367	0.2787	0.1864	0.1867	80- 90	14.14	3236	99.6,99.6
100	0.4089	0.5187	0.4855	0.5770	0.5464	0.5837	0.4846	0.4477	90-100	0.3273	3236	99.6,99.6
110	0.9953	1.154	1.299	1.267	1.270	1.318	1.161	1.042	100-110	0.8810	3237	99.6,99.6
120	1.841	2.031	2.357	2.110	2.143	2.226	2.069	1.854	110-120	1.605	3239	99.6,99.6
130	2.674	2.966	3.293	2.957	3.003	3.158	2.882	2.681	120-130	2.246	3241	99.7,99.7
140	3.390	3.755	4.126	3.688	3.713	3.854	3.674	3.463	130-140	2.574	3244	99.8,99.8
150	3.711	4.318	4.509	4.289	4.231	4.496	4.331	3.961	140-150	2.501	3246	99.9,99.9
160	4.421	4.714	5.117	4.924	4.920	5.267	5.082	4.611	150-160	2.101	3248	99.9,99.9
170	4.987	5.417	5.540	5.215	5.615	5.881	5.820	5.331	160-170	1.466	3250	100,100
180	5.957	5.943	5.731	5.618	5.984	6.134	6.175	5.819	170-180	0.5368	3250	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-12-05

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.700m [K=1.1322]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.01V I:0.3400A P:40.400W PF:0.9911 Freq:60.00Hz Lamp Flux:3250.39x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

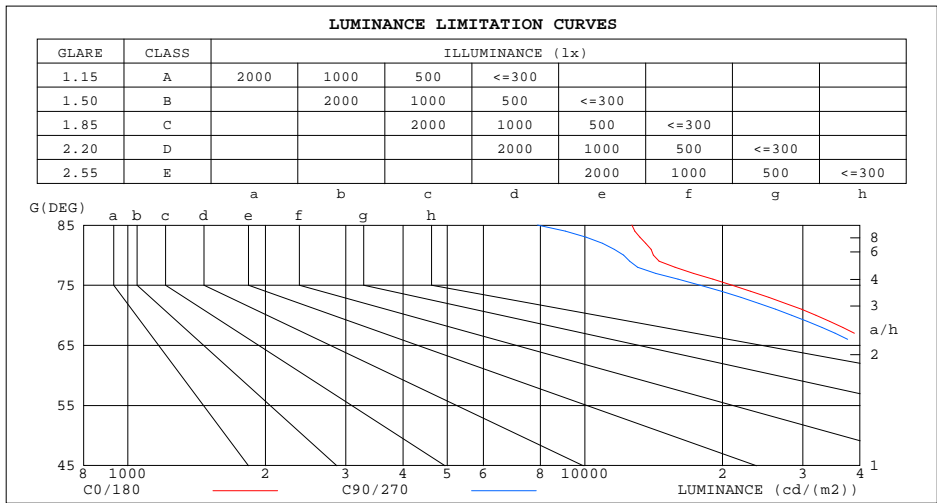

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	12683	7877
80	14134	12156
75	20992	17887
70	32036	28362
65	43501	40002
60	55155	51870
55	66472	63151
50	76539	73463
45	84481	81880


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-12-05

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.1322]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.01V I:0.3400A P:40.400W PF:0.9911 Freq:60.00Hz Lamp Flux:3250.39x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

r _{cc}	80%			70%			50%			30%			10%			0
r _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.07	1.03	.00	1.04	1.01	.98	1.00	.98	.95	.96	.94	.92	.93	.91	.89	.87
2.0	.95	.89	.84	.93	.88	.83	.90	.85	.81	.86	.83	.79	.83	.80	.78	.76
3.0	.85	.78	.72	.83	.77	.71	.80	.75	.70	.78	.73	.69	.75	.71	.68	.66
4.0	.76	.68	.62	.75	.67	.62	.72	.66	.61	.70	.65	.60	.68	.63	.59	.57
5.0	.69	.61	.55	.68	.60	.54	.65	.59	.54	.64	.58	.53	.62	.57	.52	.50
6.0	.62	.54	.48	.61	.54	.48	.60	.53	.48	.58	.52	.47	.56	.51	.47	.45
7.0	.57	.49	.43	.56	.48	.43	.54	.48	.43	.53	.47	.42	.52	.46	.42	.40
8.0	.52	.44	.39	.51	.44	.39	.50	.43	.38	.49	.43	.38	.48	.42	.38	.36
9.0	.48	.40	.35	.47	.40	.35	.46	.40	.35	.45	.39	.35	.44	.39	.34	.33
10.0	.44	.37	.32	.44	.37	.32	.43	.36	.32	.42	.36	.32	.41	.36	.31	.30

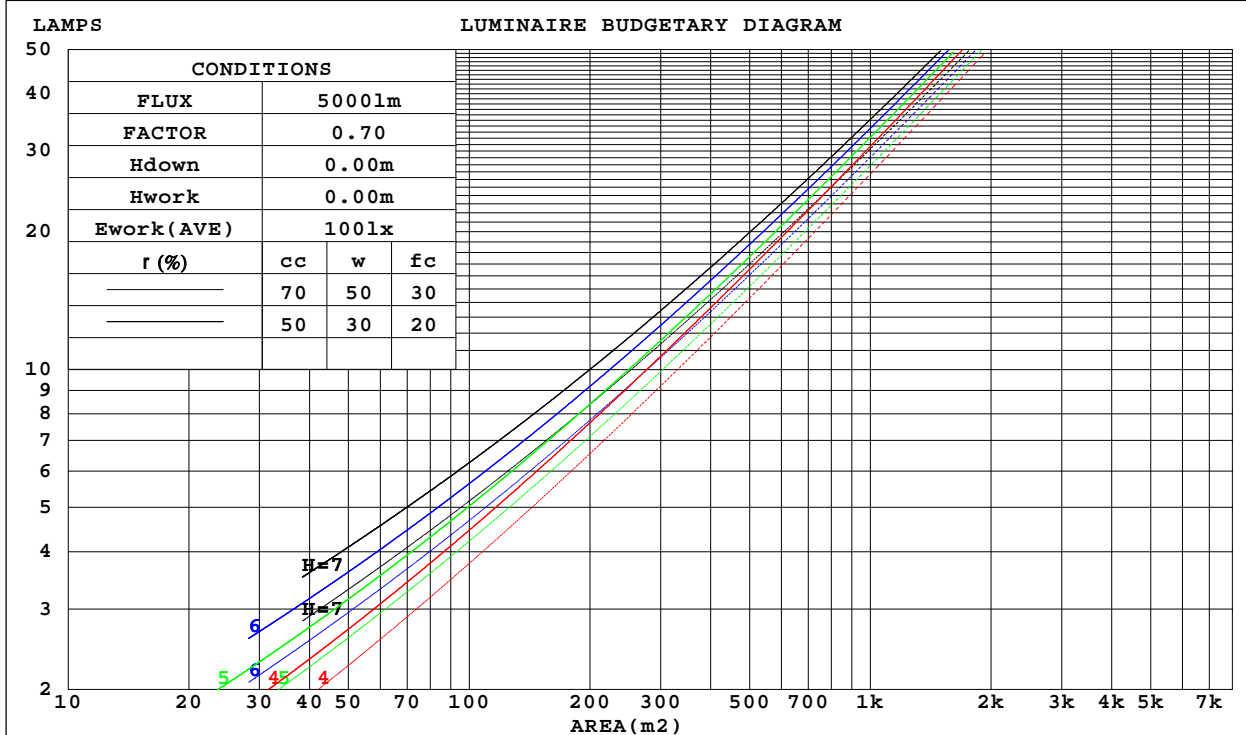

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-12-05

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.1322]
 Remarks:

WEC AND CCEC

Test:U:120.01V I:0.3400A P:40.400W PF:0.9911 Freq:60.00Hz Lamp Flux:3250.39x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.254	.144	.046	.247	.141	.045	.234	.134	.043	.222	.128	.041	.210	.122	.039	
2.0	.247	.135	.042	.241	.133	.041	.229	.128	.040	.219	.123	.038	.209	.118	.037	
3.0	.234	.125	.037	.229	.123	.037	.219	.119	.036	.209	.115	.035	.201	.111	.034	
4.0	.221	.115	.034	.216	.113	.033	.207	.110	.033	.199	.107	.032	.191	.104	.032	
5.0	.207	.106	.031	.203	.104	.030	.195	.102	.030	.188	.099	.029	.181	.097	.029	
6.0	.195	.098	.028	.191	.096	.028	.184	.094	.027	.177	.092	.027	.171	.090	.027	
7.0	.183	.090	.026	.180	.089	.026	.173	.088	.025	.167	.086	.025	.162	.084	.025	
8.0	.172	.084	.024	.169	.083	.024	.164	.082	.023	.158	.080	.023	.153	.079	.023	
9.0	.163	.079	.022	.160	.078	.022	.155	.077	.022	.150	.075	.022	.145	.074	.021	
10.0	.154	.074	.020	.151	.073	.020	.147	.072	.020	.142	.071	.020	.138	.070	.020	

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.194	.194	.194	.166	.166	.166	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.180	.160	.142	.154	.137	.122	.105	.094	.085	.061	.055	.049	.019	.018	.016	
2.0	.170	.136	.107	.145	.117	.092	.100	.081	.064	.057	.047	.038	.018	.015	.012	
3.0	.161	.117	.083	.138	.101	.072	.095	.070	.050	.055	.041	.030	.018	.013	.010	
4.0	.153	.104	.066	.131	.090	.057	.090	.062	.040	.052	.037	.024	.017	.012	.008	
5.0	.146	.093	.054	.125	.081	.047	.086	.056	.033	.050	.033	.020	.016	.011	.006	
6.0	.139	.085	.045	.120	.073	.039	.083	.051	.028	.048	.030	.017	.015	.010	.005	
7.0	.133	.078	.039	.114	.067	.034	.079	.047	.024	.046	.028	.014	.015	.009	.005	
8.0	.127	.072	.034	.109	.062	.030	.076	.044	.021	.044	.026	.012	.014	.008	.004	
9.0	.121	.067	.030	.105	.058	.026	.072	.041	.019	.042	.024	.011	.014	.008	.004	
10.0	.116	.063	.027	.100	.054	.024	.069	.038	.017	.040	.023	.010	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-12-05

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.1322]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.01V I:0.3400A P:40.400W PF:0.9911 Freq:60.00Hz Lamp Flux:3250.39x1 lm										
NAME:					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: ASD LIGHTNG CORP					SUR.: 0.12*0.12			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	26.2	27.7	26.6	28.0	28.3	25.5	26.9	25.8	27.2	27.6
3H	27.0	28.3	27.4	28.6	29.0	26.2	27.5	26.6	27.8	28.2
4H	27.1	28.4	27.5	28.7	29.1	26.3	27.5	26.7	27.9	28.3
6H	27.2	28.3	27.6	28.7	29.1	26.3	27.4	26.7	27.8	28.2
8H	27.2	28.2	27.6	28.6	29.1	26.3	27.4	26.7	27.8	28.2
12H	27.2	28.2	27.6	28.6	29.0	26.3	27.3	26.7	27.7	28.1
4H 2H	26.5	27.7	26.9	28.1	28.5	25.7	26.9	26.1	27.3	27.7
3H	27.4	28.4	27.8	28.8	29.3	26.5	27.5	26.9	27.9	28.4
4H	27.6	28.5	28.1	28.9	29.4	26.7	27.6	27.1	28.0	28.5
6H	27.7	28.5	28.2	28.9	29.4	26.7	27.5	27.2	28.0	28.4
8H	27.7	28.4	28.2	28.9	29.4	26.7	27.5	27.2	27.9	28.4
12H	27.7	28.3	28.2	28.8	29.3	26.7	27.4	27.2	27.9	28.3
8H 4H	27.6	28.3	28.1	28.8	29.3	26.7	27.4	27.1	27.8	28.3
6H	27.7	28.3	28.2	28.8	29.3	26.7	27.3	27.2	27.8	28.3
8H	27.7	28.3	28.3	28.8	29.3	26.7	27.3	27.3	27.8	28.3
12H	27.8	28.2	28.3	28.7	29.3	26.7	27.2	27.3	27.7	28.3
12H 4H	27.6	28.2	28.1	28.7	29.2	26.6	27.3	27.1	27.8	28.3
6H	27.7	28.2	28.2	28.7	29.3	26.7	27.2	27.2	27.7	28.3
8H	27.7	28.2	28.3	28.7	29.3	26.7	27.2	27.3	27.7	28.3
CIE190: 2010										

CIE190: 2010
Area: 0.0144 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-12-05

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.700m [K=1.1322]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.01V I:0.3400A P:40.400W PF:0.9911 Freq:60.00Hz Lamp Flux:3250.39x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	63	53	47	63	53	47	62	52	46	40
0.80	74	64	57	73	63	57	71	62	56	50
1.00	82	73	66	81	72	66	79	73	65	59
1.25	89	80	74	88	79	74	85	78	73	66
1.50	94	85	79	92	84	79	89	83	78	71
2.00	100	93	87	98	91	86	95	89	85	78
2.50	103	96	91	101	95	90	97	92	88	81
3.00	106	100	95	103	98	94	100	95	92	84
4.00	109	104	100	106	102	99	102	99	96	88
5.00	111	107	103	108	105	102	104	101	99	90
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-12-05

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=1.1322]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.01V I:0.3400A P:40.400W PF:0.9911 Freq:60.00Hz Lamp Flux:3250.39x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

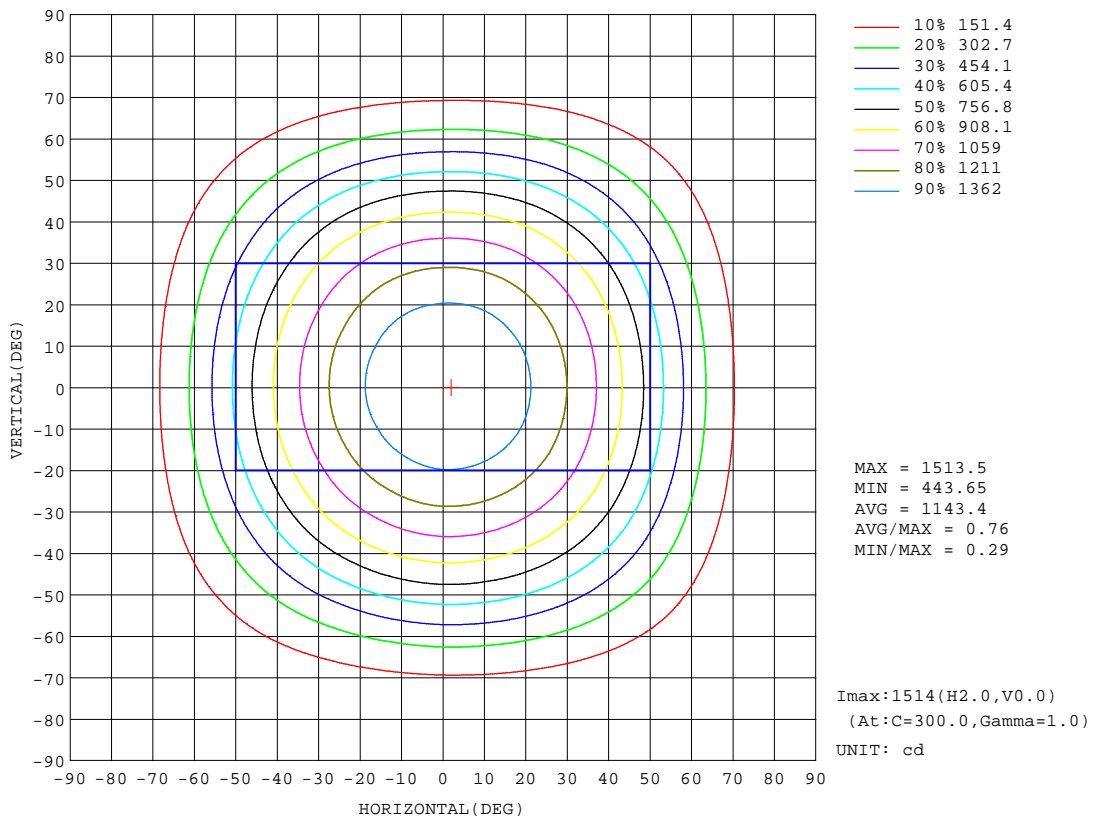


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-12-05

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.1322]
 Remarks:

AAI Figure

Test:U:120.01V I:0.3400A P:40.400W PF:0.9911 Freq:60.00Hz Lamp Flux:3250.39x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

Flux out:2326 lm

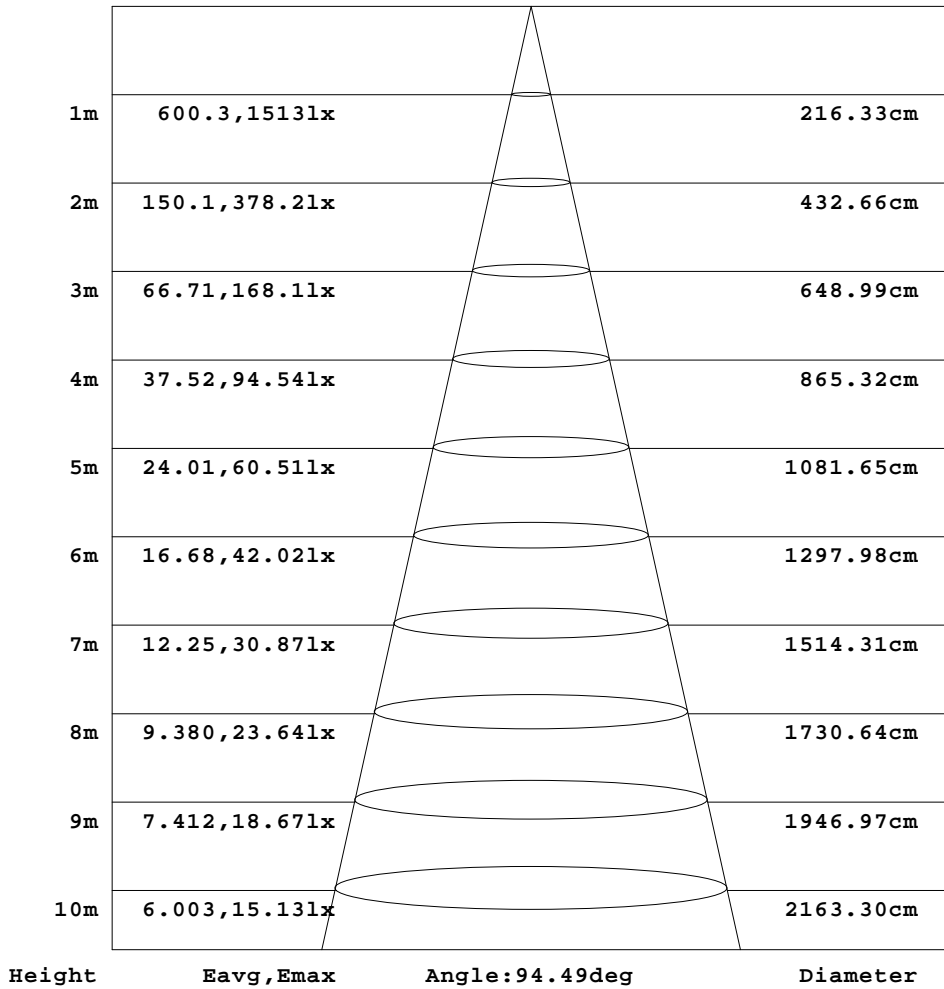


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-12-05

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.1322]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.01V I:0.3400A P:40.400W PF:0.9911 Freq:60.00Hz Lamp Flux:3250.39x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

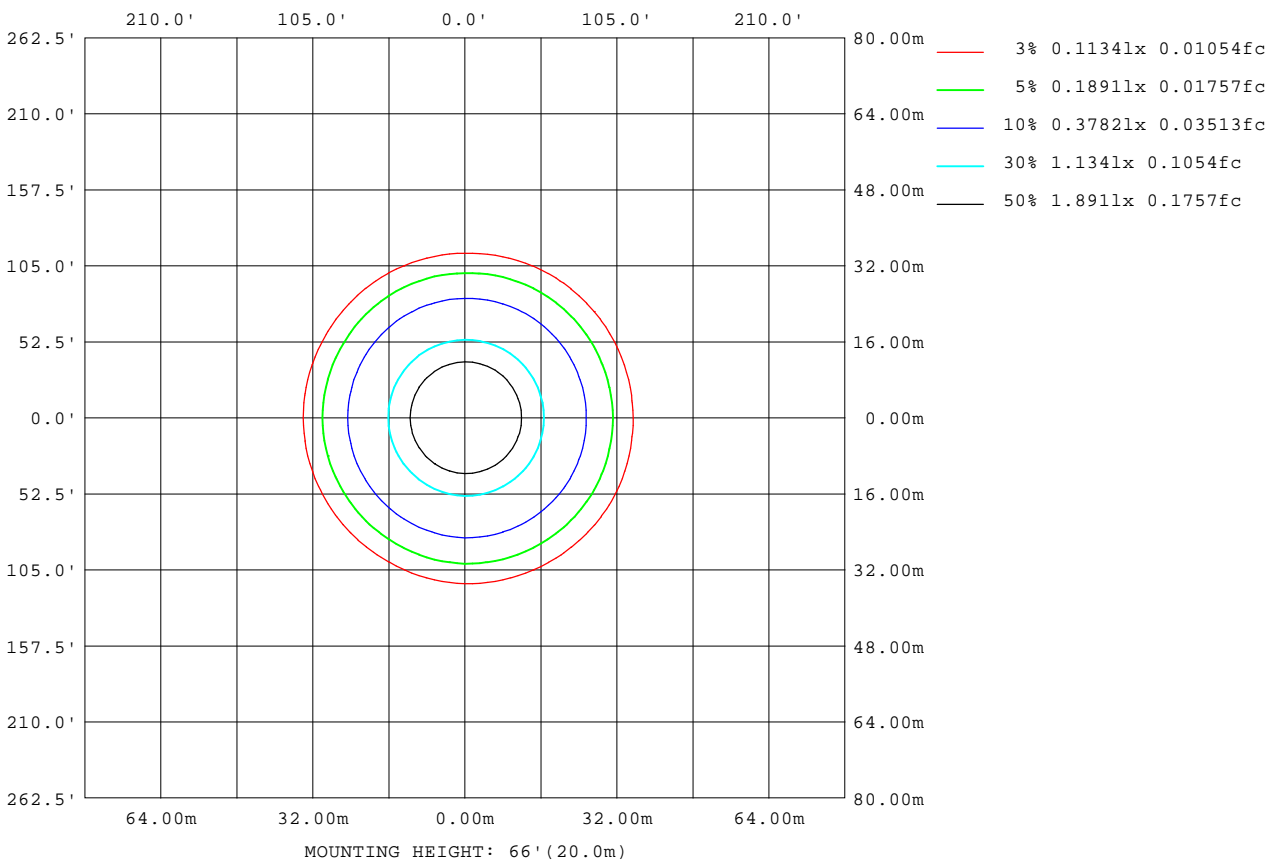

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-12-05

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=1.1322]
 Remarks:

LED Avg.L Report

Test:U:120.01V I:0.3400A P:40.400W PF:0.9911 Freq:60.00Hz Lamp Flux:3250.39x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	39516
L_0~180(75)av	18582
L_0~180(85)av	10895
L_90~270(65)av	39400
L_90~270(75)av	18097
L_90~270(85)av	8170
L_45(65)av	39411
L_45(75)av	18405
L_45(85)av	9329

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-12-05

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.700m [K=1.1322]
Remarks:

Planar Illuminance Curve

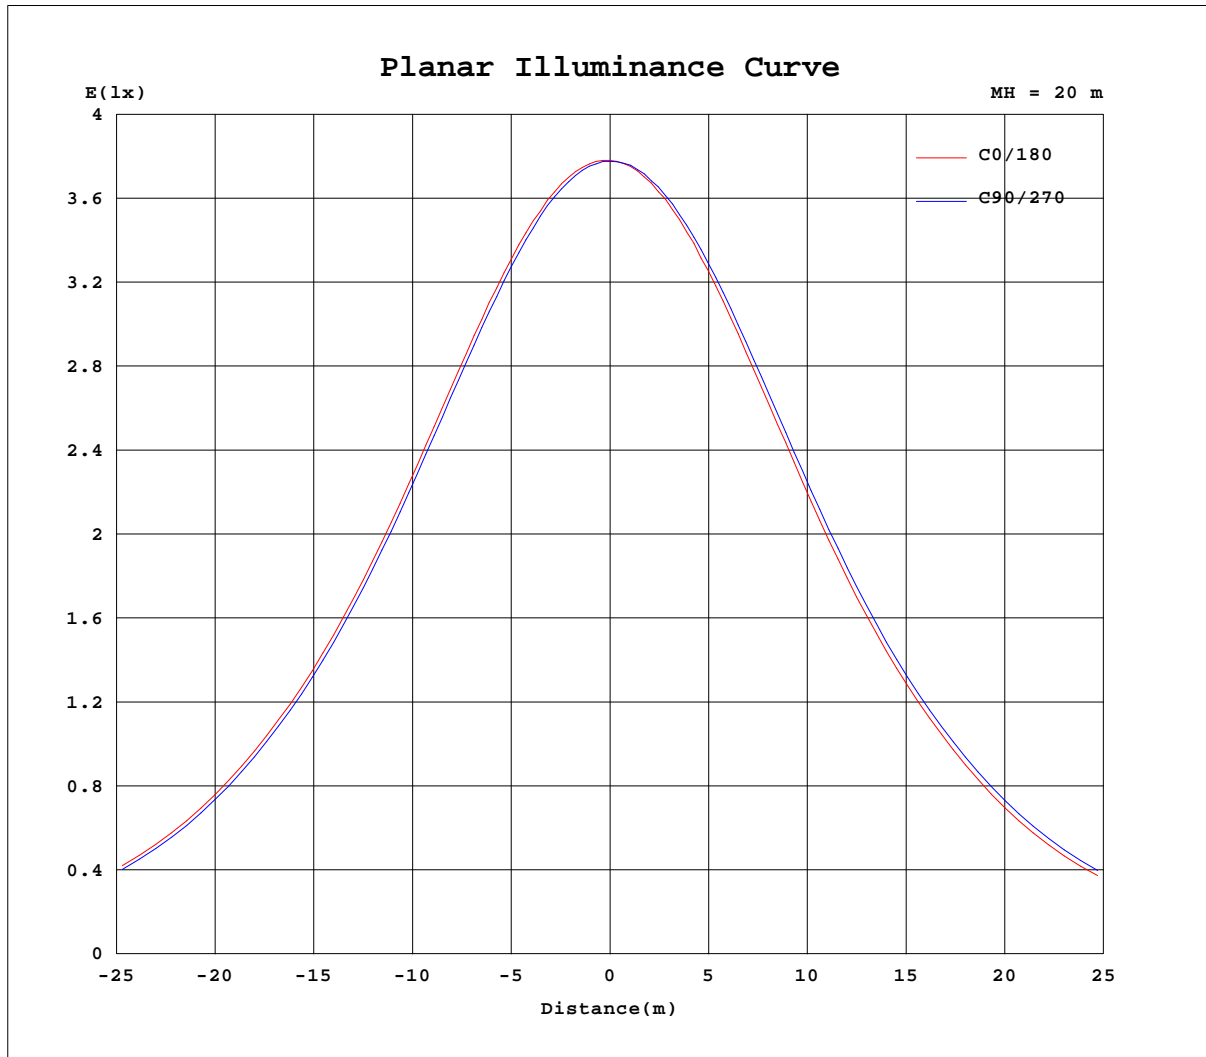

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-12-05

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=1.1322]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.01V I:0.3400A P:40.400W PF:0.9911 Freq:60.00Hz Lamp Flux:3250.39x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	1512	1512	1512	1512	1512	1512	1512	1512	1512	1512	1512	1512						
5	1507	1506	1505	1501	1498	1496	1497	1497	1502	1504	1507	1506						
10	1481	1481	1479	1473	1465	1462	1464	1466	1473	1476	1483	1484						
15	1441	1440	1432	1425	1415	1410	1412	1415	1425	1432	1439	1441						
20	1378	1377	1367	1360	1346	1340	1343	1348	1360	1367	1378	1378						
25	1302	1299	1289	1280	1262	1255	1258	1263	1277	1285	1299	1303						
30	1208	1207	1196	1186	1166	1154	1158	1165	1180	1191	1206	1210						
35	1105	1103	1091	1081	1058	1046	1049	1056	1073	1082	1099	1105						
40	993	992	980	968	943	928	932	939	956	966	984	991						
45	860	859	845	834	804	787	788	795	816	829	850	859						
50	708	709	694	680	649	632	630	636	658	672	695	706						
55	549	550	536	522	492	476	476	479	499	511	535	545						
60	397	401	385	374	345	334	334	337	353	362	383	392						
65	265	268	254	244	223	215	216	218	230	236	253	259						
70	158	158	148	140	127	123	124	125	133	138	149	154						
75	78.2	78.3	71.7	66.7	61.3	59.9	60.3	60.9	65.3	68.2	74.3	76.7						
80	35.3	35.5	32.7	30.4	28.9	29.2	29.0	27.7	30.2	30.7	33.4	33.6						
85	15.9	15.8	11.9	9.89	9.34	11.1	11.4	8.96	11.1	10.6	13.1	12.6						
90	0.73	0.22	0.16	0.10	0.12	0.19	0.14	0.39	0.17	0.19	0.12	0.25						
95	0.22	0.27	0.28	0.24	0.24	0.36	0.30	0.33	0.34	0.25	0.25	0.20						
100	0.41	0.51	0.53	0.49	0.51	0.64	0.55	0.59	0.58	0.48	0.49	0.41						
105	0.67	0.80	0.87	0.85	0.87	0.96	0.86	0.94	0.88	0.78	0.79	0.64						
110	1.00	1.09	1.22	1.30	1.24	1.29	1.27	1.36	1.27	1.16	1.15	0.93						
115	1.40	1.44	1.67	1.82	1.68	1.67	1.70	1.84	1.72	1.59	1.54	1.34						
120	1.84	1.84	2.22	2.36	2.12	2.10	2.14	2.30	2.15	2.07	1.94	1.77						
125	2.26	2.23	2.72	2.86	2.53	2.52	2.57	2.80	2.58	2.48	2.35	2.22						
130	2.67	2.59	3.34	3.29	2.96	2.96	3.00	3.30	3.02	2.88	2.81	2.55						
135	3.03	2.93	3.85	3.74	3.34	3.31	3.36	3.60	3.40	3.31	3.34	2.86						
140	3.39	3.28	4.23	4.13	3.72	3.65	3.71	4.00	3.71	3.67	3.71	3.22						
145	3.58	3.65	4.45	4.35	4.00	4.02	4.00	4.40	4.00	4.04	4.04	3.55						
150	3.71	3.95	4.69	4.51	4.25	4.33	4.23	4.74	4.25	4.33	4.15	3.78						
155	4.02	4.19	4.80	4.86	4.61	4.75	4.56	5.11	4.67	4.73	4.48	4.04						
160	4.42	4.46	4.96	5.12	4.84	5.01	4.92	5.44	5.09	5.08	4.93	4.29						
165	4.79	4.77	5.28	5.34	5.05	5.22	5.30	5.81	5.44	5.53	5.42	4.70						
170	4.99	5.08	5.76	5.54	4.96	5.47	5.62	6.15	5.61	5.82	5.65	5.01						
175	5.54	5.41	6.14	5.67	5.21	5.68	5.74	6.24	5.83	6.06	5.98	5.33						
180	5.96	5.88	6.01	5.73	5.52	5.72	5.98	6.21	6.06	6.18	5.97	5.67						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-12-05

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.1322]
 Remarks: