
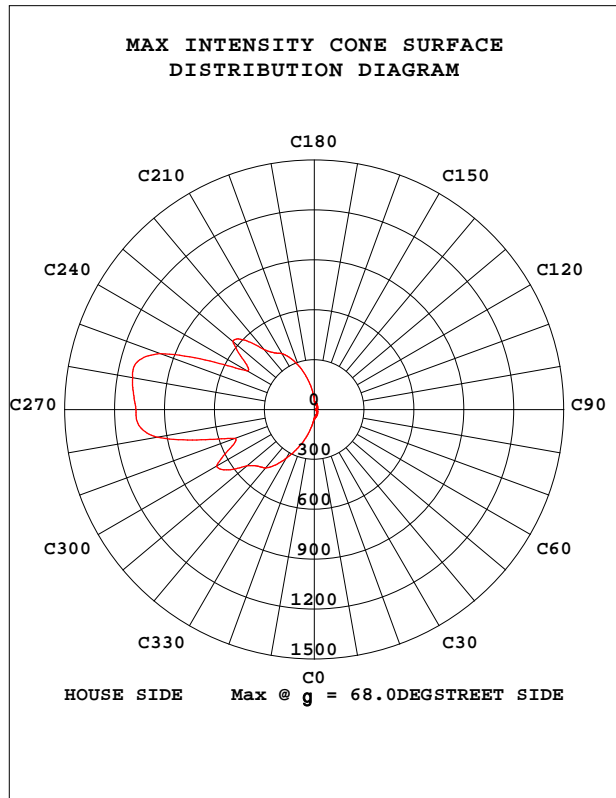


STREETLIGHT PHOTOMETRIC TEST REPORT

Test:U:120.22V I:0.1012A P:11.964W PF:0.9833 Freq:59.98Hz Lamp Flux:1573.91x1 lm		
NAME: ASD-LSWP01-13DCC-PC(3000K)	TYPE: LED wall pack	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 131.56 lm/W			
MSDELSWP01-13DCC-PC(3000K)		Imax(cd)	1109	h street_up(%)	1.1
NOMINAL POWER(W)	13	LOR(%)	100.0	h street_down(%)	8.4
RATED VOLTAGE(V)	110-277	TOTAL FLUX(lm)	1574	h house_up(%)	5.8
NOMINAL FLUX(lm)	1573.91	MAXIMUM @(C,g)	260,68.0	h house_down(%)	84.7
LAMPS INSIDE	1	h up(%)	6.9	76 FLASHAREA(m2)	0.00100
TEST VOLTAGE(V)	120.0	h down(%)	93.1	SLI	15.405

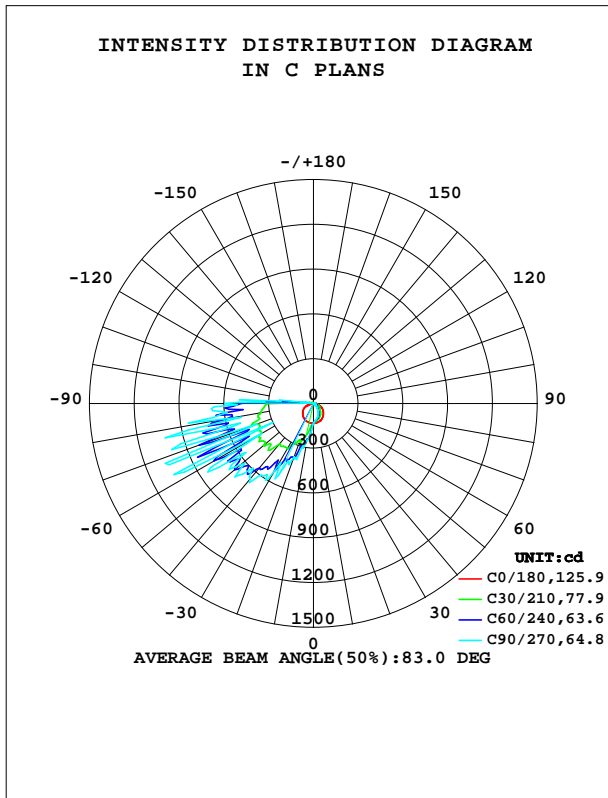


C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-05-13

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.0000]
 Remarks:

STREETLIGHT ISOCANDELA DIAGRAM

Test:U:120.22V I:0.1012A P:11.964W PF:0.9833 Freq:59.98Hz Lamp Flux:1573.91x1 lm		
NAME: ASD-LSWP01-13DCC-PC(3000K)	TYPE: LED wall pack	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

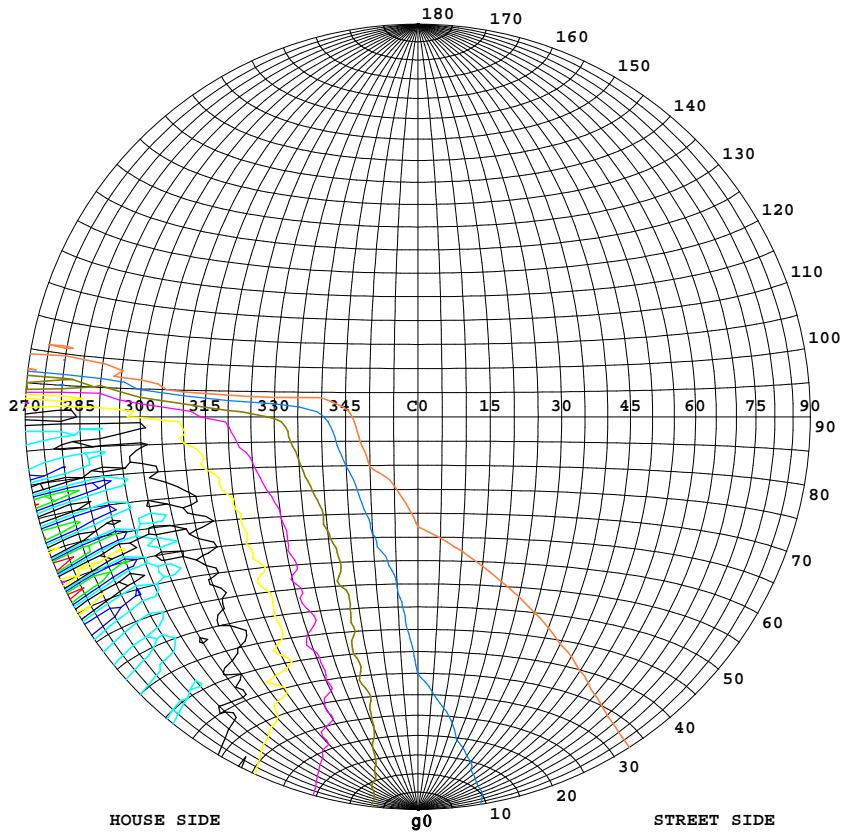

Classification:



IES:Type V - Very Short
 CIE:Narrow - Intermediate
 IES:None cut-off
 CIE:Non-cut-off
 Max.At80:405.5cd/klm
 Max.At90:393.7cd/klm
 Max.80-90:543.4cd/klm

ISOCANDELA DIAGRAM	
UNIT	cd
Imax=100%	1109
90%	998
80%	887
70%	776
60%	665
50%	555
40%	444
30%	333
20%	222
10%	111
5%	55

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-05-13

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.0000]
 Remarks:

COEFFICIENT OF UTILIZATION CURVE
AND ISOLUX DIAGRAM

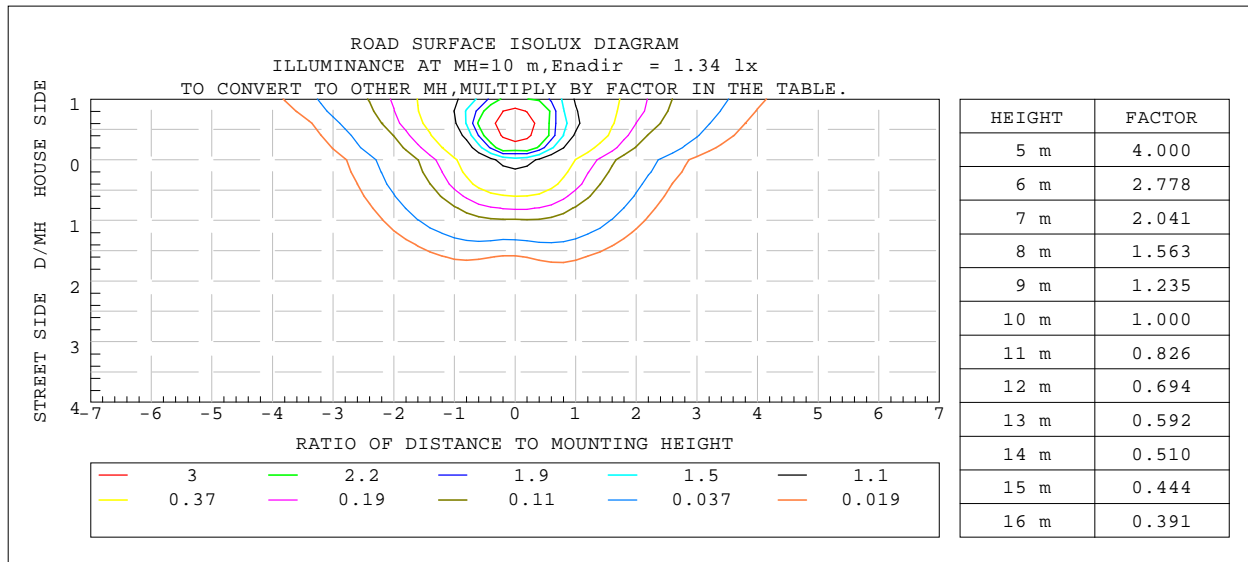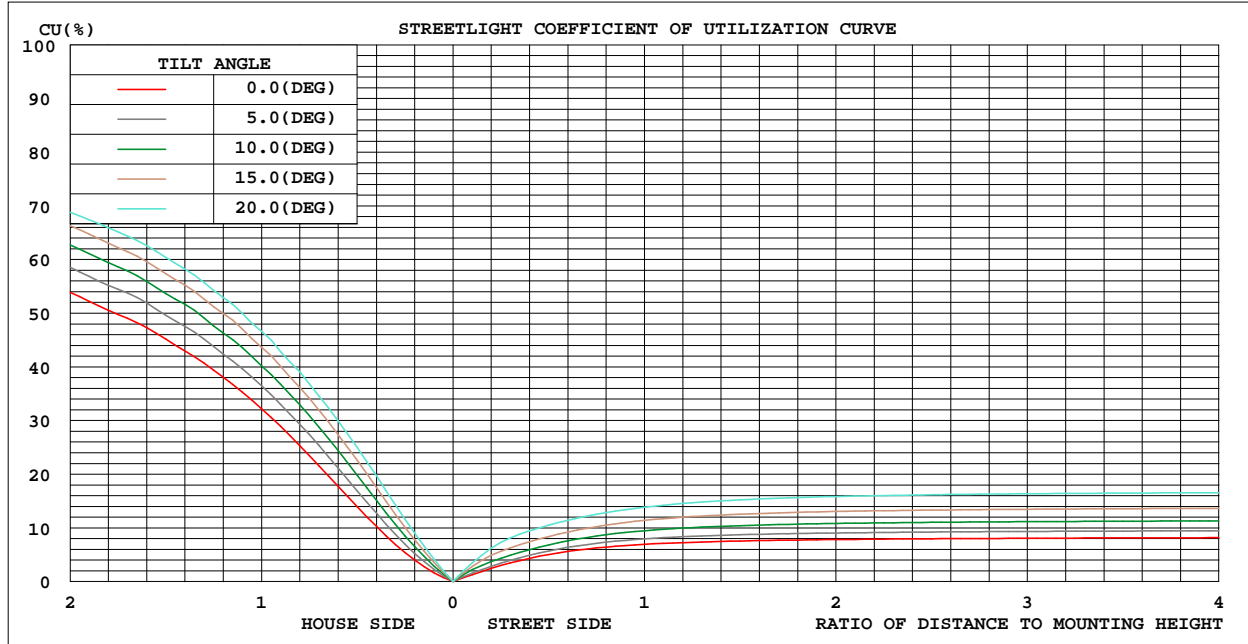

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2021-05-13

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity: 65.0%
Test Distance: 8.000m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

Test:U:120.22V I:0.1012A P:11.964W PF:0.9833 Freq:59.98Hz Lamp Flux:1573.91x1 lm		
NAME: ASD-LSWP01-13DCC-PC(3000K)	TYPE: LED wall pack	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	132.2	114.3	110.1	115.3	132.6	224.7	253.4	223.6	0- 10	14.47	14.47	0.92,0.92
20	126.1	100.8	91.48	101.1	129.3	328.4	379.8	310.4	10- 20	52.65	67.12	4.26,4.26
30	117.7	81.22	61.18	84.33	121.2	409.0	514.0	386.4	20- 30	100.2	167.3	10.6,10.6
40	103.5	59.39	39.46	61.42	110.2	466.3	658.6	508.2	30- 40	152.7	320.1	20.3,20.3
50	87.65	42.01	19.58	42.80	95.07	546.3	639.9	510.7	40- 50	198.3	518.4	32.9,32.9
60	69.92	28.45	11.57	28.86	76.98	501.9	399.9	539.4	50- 60	229.7	748.1	47.5,47.5
70	49.11	18.94	8.004	18.36	54.60	505.2	402.1	545.5	60- 70	247.1	995.2	63.2,63.2
80	26.34	12.16	5.292	11.21	29.57	508.3	581.8	437.6	70- 80	251.6	1247	79.2,79.2
90	9.292	7.626	4.266	7.951	13.98	362.4	594.2	323.4	80- 90	219.0	1466	93.1,93.1
100	5.685	6.526	5.776	6.739	8.124	30.87	25.92	27.29	90-100	76.77	1543	98,98
110	6.708	7.767	6.055	7.864	7.140	10.95	4.056	19.13	100-110	12.29	1555	98.8,98.8
120	5.572	6.821	5.969	6.897	5.990	3.997	1.397	4.706	110-120	6.421	1561	99.2,99.2
130	5.440	5.012	5.320	4.949	7.148	3.447	2.037	5.544	120-130	4.889	1566	99.5,99.5
140	5.200	3.836	4.422	3.963	4.195	3.208	3.565	2.890	130-140	3.776	1570	99.7,99.7
150	2.928	3.137	3.638	3.196	2.770	2.256	3.481	1.253	140-150	2.039	1572	99.9,99.9
160	2.257	3.022	3.025	2.844	2.285	1.501	1.383	1.317	150-160	1.078	1573	99.9,99.9
170	2.603	2.545	2.493	2.602	2.572	2.000	1.671	1.954	160-170	0.6192	1574	100,100
180	2.374	2.594	2.462	2.444	2.374	2.596	2.480	2.449	170-180	0.2232	1574	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-05-13

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM


Test:U:120.22V I:0.1012A P:11.964W PF:0.9833 Freq:59.98Hz Lamp Flux:1573.91x1 lm		
NAME: ASD-LSWP01-13DCC-PC(3000K)	TYPE: LED wall pack	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

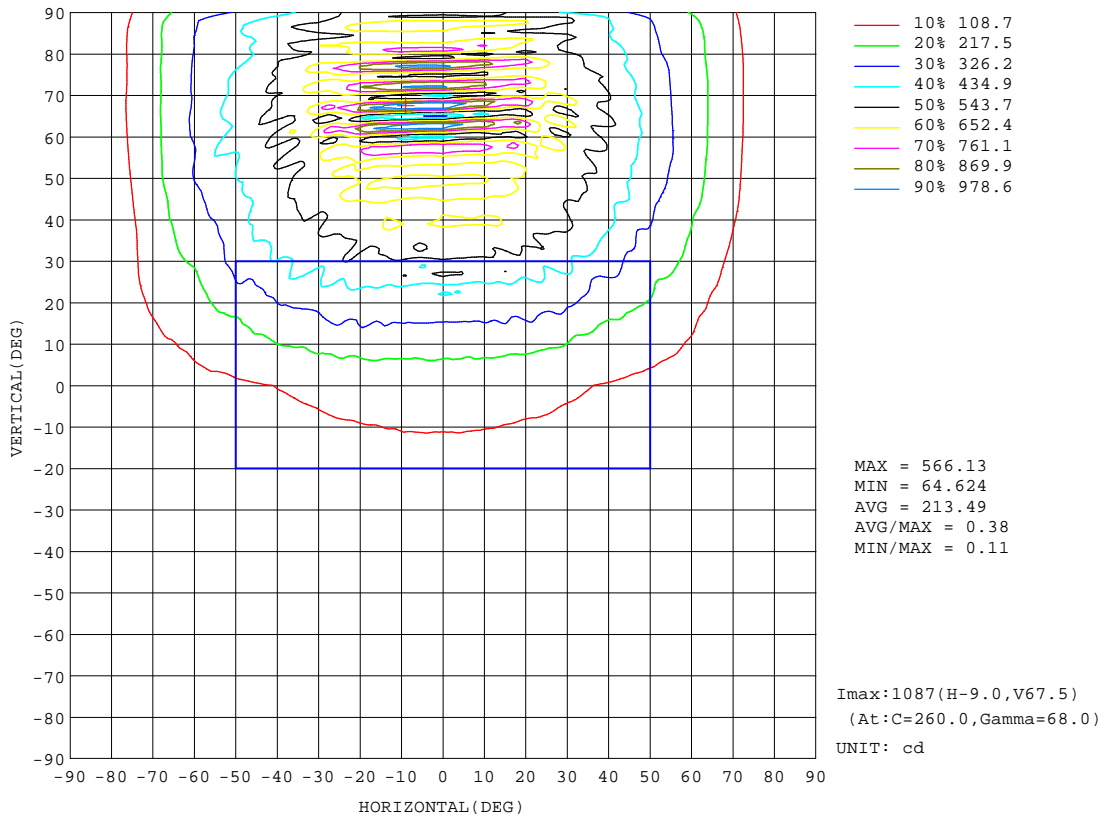

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-05-13

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.0000]
 Remarks:

Planar Illuminance Curve

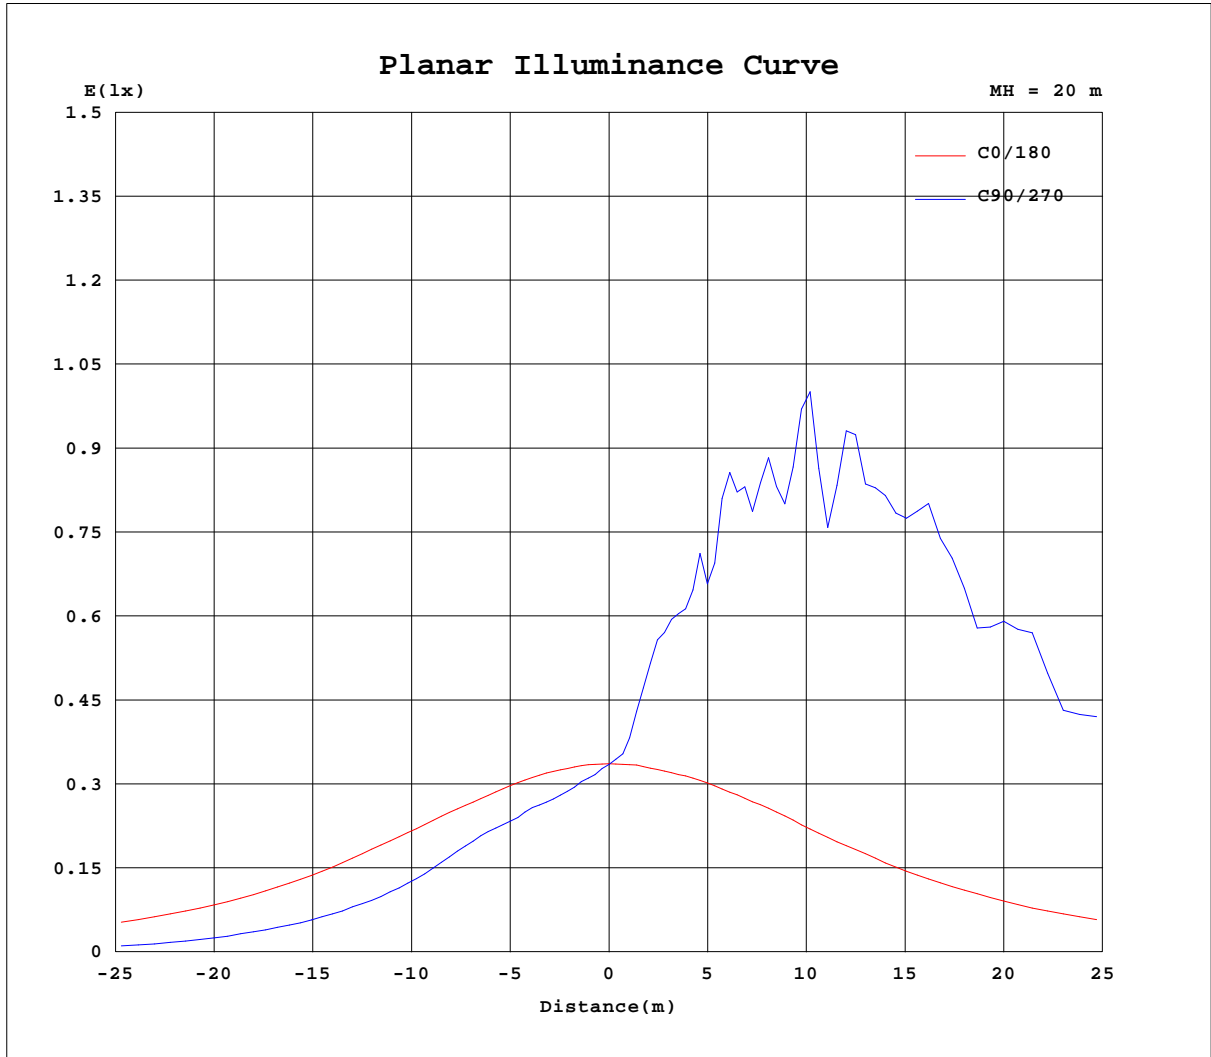


C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-05-13

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.000m [K=1.0000]
 Remarks:

LCS REPORT

Test:U:120.22V I:0.1012A P:11.964W PF:0.9833 Freq:59.98Hz Lamp Flux:1573.91x1 lm		
NAME: ASD-LSWP01-13DCC-PC(3000K)	TYPE: LED wall pack	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

LUMINAIRE CLASSIFICATION SYSTEM(LCS) GRAPH

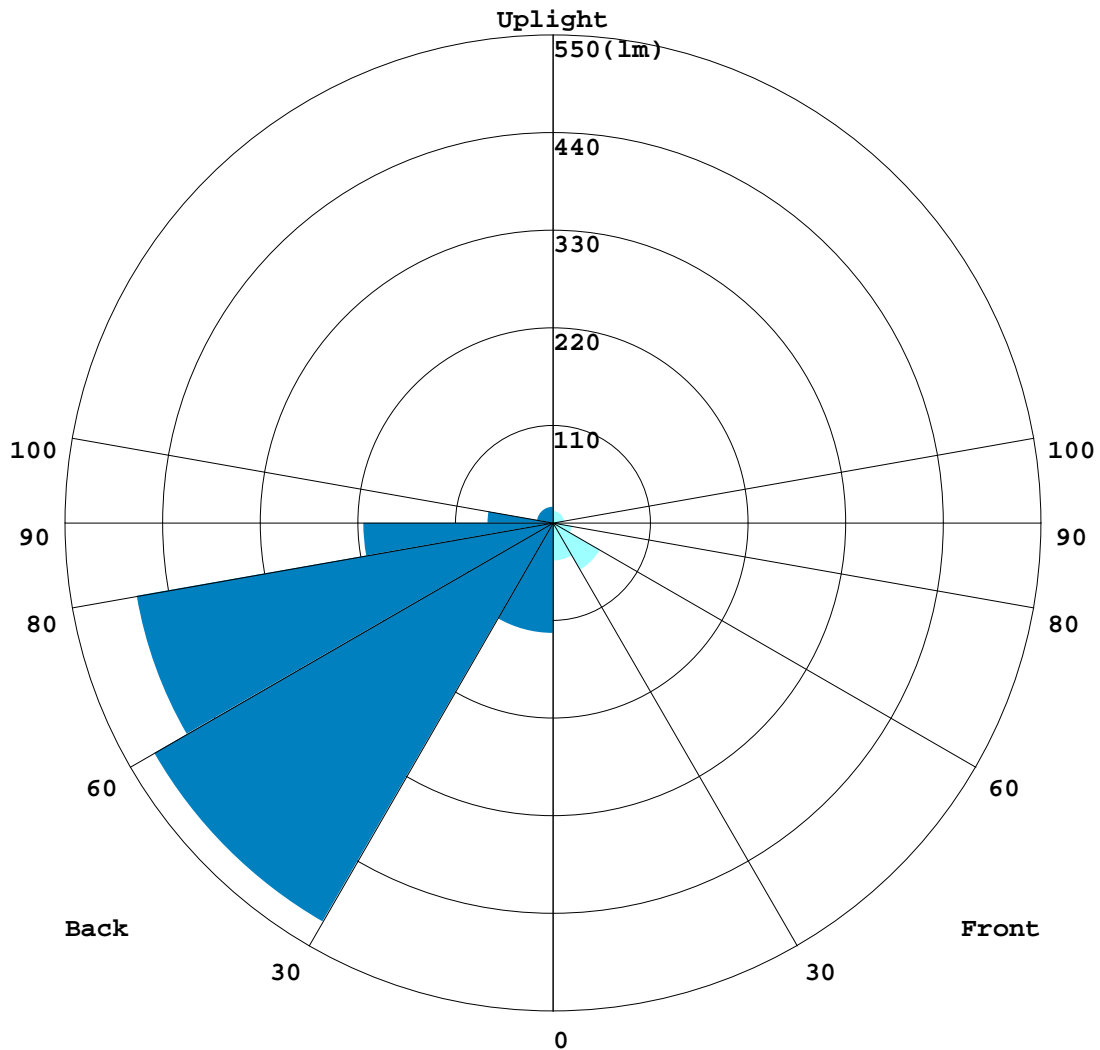

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-05-13

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.0000]
 Remarks:

BUG REPORT

Test:U:120.22V I:0.1012A P:11.964W PF:0.9833 Freq:59.98Hz Lamp Flux:1573.91x1 lm		
NAME: ASD-LSWP01-13DCC-PC(3000K)	TYPE: LED wall pack	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

IESNA Luminaire Flux Distribution Table:

Zone	Lumens	Luminaire %
FL - Front-Low(0-30)	42.991	2.7
FM - Front-Medium(30-60)	61.637	3.9
FH - Front-High(60-80)	22.405	1.4
FVH - Front-Very High(80-90)	5.315	0.3
Total Forward Light	149.01	9.5

BL - Back-Low(0-30)	124.32	7.9
BM - Back-Medium(30-60)	519.1	33.0
BH - Back-High(60-80)	476.34	30.3
BVH - Back-Very High(80-90)	213.68	13.6
Total Back Light	1424.9	90.5

UL - Uplight-Low(90-100)	76.775	4.9
UH - Uplight-High(100-180)	31.338	2.0
Total Up Light	108.11	6.9

BUG(Back,Up,Glare) Rating	B1-U3-G2
---------------------------	----------

Zone	Downward Lumens	Upward Lumens	Total Lumens
House Side	1333.5	91.457	1424.9
Street Side	132.35	16.657	149.01


C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-05-13

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.000m [K=1.0000]
Remarks:

ROAD ISOCANDELA REPORT

Test:U:120.22V I:0.1012A P:11.964W PF:0.9833 Freq:59.98Hz Lamp Flux:1573.91x1 lm		
NAME: ASD-LSWP01-13DCC-PC(3000K)	TYPE: LED wall pack	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

ROAD SURFACE ISOCANDELA DIAGRAM

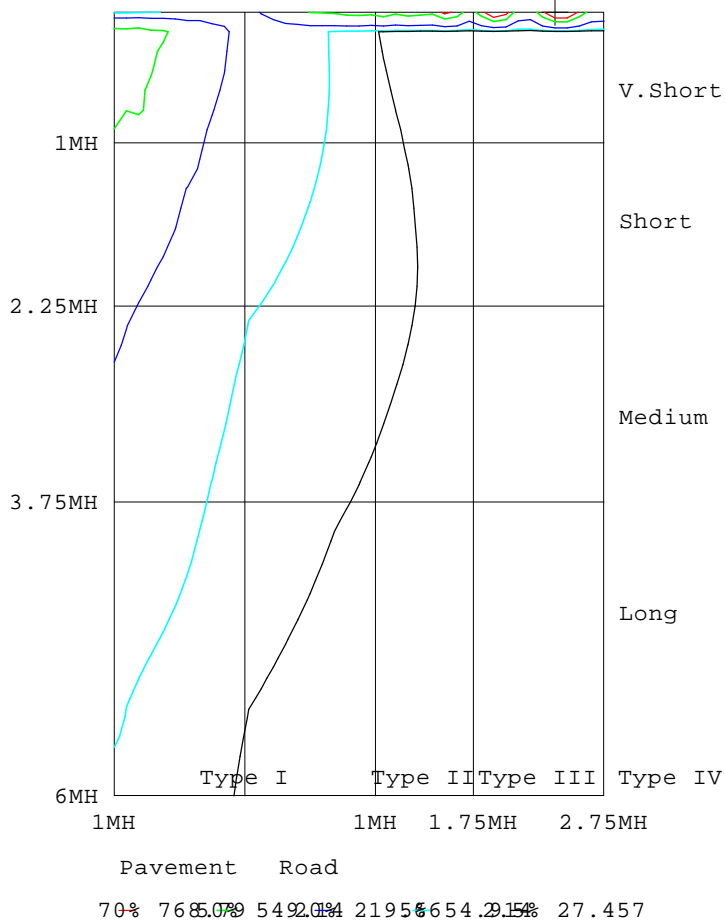

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-05-13

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.000m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.22V I:0.1012A P:11.964W PF:0.9833 Freq:59.98Hz Lamp Flux:1573.91x1 lm		
NAME: ASD-LSWP01-13DCC-PC(3000K)	TYPE: LED wall pack	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180
0	134	134	134	134	134	134	134	134	134	134	134	134	134	134	134	134	134	134	134
5	134	130	128	126	125	123	122	121	120	119	120	121	122	124	125	126	129	132	134
10	132	126	123	118	115	113	112	111	111	110	110	111	112	114	117	120	124	129	133
15	129	122	116	112	110	107	104	103	102	101	102	102	104	108	110	113	119	125	132
20	126	117	110	107	102	99.4	96.3	93.3	92.0	91.5	92.0	94.2	97.4	99.6	103	107	112	121	129
25	122	113	106	99.2	95.8	89.4	83.8	78.8	75.8	75.3	76.7	80.8	86.2	91.2	96.9	101	107	116	126
30	118	106	97.7	93.6	85.7	76.7	69.3	65.2	62.0	61.2	62.6	66.1	71.4	80.4	88.3	93.9	100	109	121
35	111	98.4	91.1	85.1	74.3	65.4	58.3	53.1	50.2	49.7	50.9	54.7	59.8	67.7	77.1	86.3	91.9	102	116
40	103	91.8	83.6	74.3	63.8	55.0	48.7	43.1	40.2	39.5	40.9	44.3	50.0	56.8	66.0	76.5	84.2	93.4	110
45	95.2	83.1	75.4	64.5	54.1	46.2	39.6	33.9	29.8	29.0	31.0	35.6	40.7	47.2	55.9	65.8	76.2	84.7	103
50	87.6	74.8	66.1	55.4	45.9	38.1	31.2	25.0	20.6	19.6	21.9	26.7	32.4	39.1	46.6	56.0	67.1	75.6	95.1
55	78.6	66.9	57.2	47.2	38.3	30.9	24.4	18.5	14.4	13.8	15.6	20.2	25.5	31.6	39.0	47.4	58.1	67.4	87.2
60	69.9	58.7	48.9	39.9	31.8	25.1	20.1	15.3	11.9	11.6	12.8	16.8	21.0	25.5	32.2	39.4	48.8	58.0	77.0
65	60.2	49.5	40.2	33.0	25.8	20.6	17.5	13.1	10.1	9.75	10.7	14.5	17.8	20.5	25.8	31.7	39.2	48.4	66.1
70	49.1	39.1	31.8	26.1	20.6	17.2	15.1	11.1	8.48	8.00	8.93	12.3	15.0	16.6	20.1	24.6	30.0	37.9	54.6
75	37.3	29.3	23.9	19.8	16.3	14.1	12.9	9.57	6.82	6.30	7.39	10.5	12.3	13.4	15.3	18.0	21.7	27.8	41.3
80	26.3	20.2	16.6	14.4	12.6	11.7	11.3	8.55	5.96	5.29	6.47	9.32	10.7	11.0	11.4	12.6	14.4	18.4	29.6
85	16.6	12.6	10.9	10.4	10.2	10.4	10.9	7.92	5.65	4.88	6.05	9.03	10.3	9.73	9.11	8.93	9.33	11.6	19.8
90	9.29	7.67	7.00	7.43	7.51	7.74	6.42	5.95	4.66	4.27	5.14	6.65	7.60	8.16	7.74	7.09	7.17	8.65	14.0
95	6.77	6.18	5.87	5.95	5.59	5.35	5.44	5.22	4.95	4.81	4.98	5.72	5.21	5.70	6.29	5.87	6.05	6.99	10.3
100	5.68	5.66	5.72	5.59	6.17	6.88	6.51	6.03	6.08	5.78	5.93	5.91	6.61	7.09	6.39	6.27	6.12	6.51	8.12
105	6.02	5.55	5.59	6.13	7.12	9.13	6.76	6.16	6.17	5.98	6.07	6.17	7.13	8.21	6.54	6.06	5.87	6.08	7.26
110	6.71	6.11	6.11	6.83	7.60	7.94	6.44	6.07	6.16	6.05	6.09	6.07	6.48	8.49	7.24	6.40	5.70	5.76	7.14
115	6.31	6.03	6.32	6.75	7.54	7.28	6.07	5.95	6.10	6.04	6.04	5.85	6.06	7.68	7.34	6.57	6.30	5.89	6.50
120	5.57	5.67	6.10	6.53	7.32	6.32	5.72	5.87	6.01	5.97	5.98	5.75	5.72	6.45	7.34	6.41	6.17	5.79	5.99
125	5.49	5.54	5.85	6.25	6.46	5.50	5.25	5.75	5.87	5.84	5.91	5.58	5.26	5.47	6.49	6.30	5.95	5.80	6.61
130	5.44	5.44	5.73	6.11	5.14	4.89	4.60	5.28	5.38	5.32	5.42	5.09	4.73	4.82	5.08	6.03	5.94	5.66	7.15
135	5.55	5.29	5.31	4.88	4.39	4.26	4.19	4.63	4.78	4.85	4.67	4.40	4.19	4.31	4.29	4.59	5.29	5.86	7.47
140	5.20	4.22	3.99	3.90	3.98	3.69	3.91	4.14	4.33	4.42	4.27	4.07	3.84	4.08	3.85	3.77	3.81	3.71	4.19
145	3.27	3.44	3.51	3.72	3.16	3.34	3.78	3.92	3.91	3.98	3.92	3.96	3.62	3.27	3.75	3.57	3.38	3.12	2.93
150	2.93	2.94	2.46	2.93	3.15	3.12	3.36	3.53	3.60	3.64	3.61	3.46	3.23	3.24	3.15	2.77	3.06	2.93	2.77
155	2.14	2.37	2.40	2.61	2.98	3.11	3.11	3.28	3.31	3.32	3.32	3.17	3.20	3.15	2.96	2.44	2.23	2.18	2.02
160	2.26	2.55	2.57	2.66	2.99	3.05	3.01	2.98	3.00	3.02	3.03	3.03	3.09	3.05	2.63	2.43	2.50	2.45	2.28
165	2.53	2.76	2.94	2.88	2.96	2.94	2.82	2.74	2.76	2.77	2.75	2.76	2.80	2.84	2.76	2.90	2.84	2.60	2.54
170	2.60	2.64	2.55	2.58	2.59	2.50	2.51	2.51	2.50	2.49	2.47	2.44	2.38	2.57	2.63	2.57	2.60	2.50	2.57
175	2.55	2.48	2.39	2.32	2.34	2.33	2.31	2.29	2.26	2.28	2.29	2.28	2.24	2.25	2.27	2.28	2.25	2.39	2.47
180	2.37	2.33	2.32	2.37	2.55	2.64	2.59	2.58	2.60	2.46	2.53	2.50	2.48	2.46	2.43	2.41	2.38	2.39	2.37

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-05-13

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.22V I:0.1012A P:11.964W PF:0.9833 Freq:59.98Hz Lamp Flux:1573.91x1 lm		
NAME: ASD-LSWP01-13DCC-PC(3000K)	TYPE: LED wall pack	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

Table--2

UNIT: cd

C(DEG) g (DEG)	190	200	210	220	230	240	250	260	270	280	290	300	310	320	330	340	350		
0	134	134	134	134	134	134	134	134	134	134	134	134	134	134	134	134	134		
5	137	139	148	158	174	184	191	192	191	186	184	178	169	156	146	139	137		
10	140	161	193	219	231	241	273	296	253	287	271	239	229	219	191	157	137		
15	152	199	235	276	278	304	296	309	309	305	297	303	273	267	233	187	141		
20	167	231	266	307	350	385	386	384	380	396	382	407	319	302	265	211	147		
25	186	261	287	378	374	428	418	434	466	440	396	424	384	339	287	227	154		
30	193	259	352	384	434	524	450	457	514	476	464	513	393	380	294	250	158		
35	199	249	351	424	451	537	580	549	594	590	545	516	503	396	333	232	161		
40	199	307	358	425	508	562	687	620	659	676	646	565	545	471	342	230	161		
45	190	291	424	467	590	629	628	619	669	634	606	604	547	479	326	252	151		
50	186	295	439	538	554	690	626	596	640	615	704	579	543	478	359	250	147		
55	176	326	445	529	563	682	603	542	591	571	711	595	562	490	352	233	142		
60	171	292	405	478	525	770	558	376	400	498	780	586	569	510	351	246	128		
65	154	279	413	486	497	856	552	317	300	544	915	478	618	455	340	227	114		
70	149	271	412	509	501	815	555	427	402	530	892	500	637	454	332	216	96.2		
75	133	250	375	523	543	765	544	512	507	515	771	556	576	424	307	193	77.3		
80	95.1	222	356	468	549	593	570	604	582	485	638	589	490	385	288	166	54.0		
85	77.6	201	335	411	463	473	555	614	620	537	559	575	444	349	262	144	33.2		
90	55.6	160	290	331	394	491	587	620	594	603	490	423	364	283	212	116	21.9		
95	29.2	49.9	39.1	58.5	71.4	221	210	272	223	104	244	96.0	29.3	33.9	15.5	36.4	11.0		
100	13.9	17.2	5.80	29.9	31.8	29.4	51.6	29.3	25.9	28.9	27.6	39.1	30.8	23.8	2.51	23.1	6.84		
105	13.0	29.6	22.8	5.05	20.7	10.7	2.86	4.40	4.28	5.12	3.91	9.40	7.32	18.0	42.9	26.1	10.3		
110	11.9	19.7	18.3	19.9	1.99	3.63	4.10	3.98	4.06	4.24	4.77	2.50	3.84	34.4	28.4	16.4	9.54		
115	8.93	9.71	8.87	7.52	3.69	1.99	1.40	1.05	0.97	1.21	1.68	3.73	3.10	13.5	11.2	9.99	7.57		
120	7.37	8.70	7.38	4.60	3.39	2.31	1.77	1.48	1.40	1.58	1.91	3.34	2.50	6.91	8.08	7.48	5.86		
125	9.01	11.4	10.7	3.87	3.06	2.51	2.03	1.72	1.61	1.80	2.10	2.82	2.94	7.09	8.08	7.34	5.85		
130	10.9	14.3	12.4	3.68	3.22	2.87	2.62	2.14	2.04	2.25	2.53	2.91	3.64	7.44	10.9	7.84	6.32		
135	9.19	8.59	5.55	3.30	3.57	3.51	3.20	2.95	2.84	3.05	3.04	3.32	3.21	5.08	8.79	8.35	6.38		
140	3.70	2.83	2.46	3.20	3.21	3.58	3.70	3.58	3.57	3.61	3.47	3.22	2.89	2.89	3.05	4.08	5.05		
145	2.75	2.31	2.46	2.40	2.88	3.44	3.61	3.47	3.55	3.48	3.37	3.03	2.45	1.32	2.13	2.48	2.79		
150	2.64	2.28	1.32	2.21	2.30	3.14	3.41	3.35	3.48	3.30	3.17	2.76	0.97	1.53	1.12	2.03	2.45		
155	1.73	1.52	1.43	1.40	2.70	1.10	1.19	1.90	2.10	1.72	0.92	1.70	1.15	1.14	1.20	1.35	1.56		
160	1.81	1.67	1.56	1.52	1.48	1.38	1.10	1.47	1.38	1.21	0.93	1.20	1.28	1.35	1.40	1.46	1.84		
165	2.07	1.84	1.78	1.69	1.47	1.38	1.29	1.19	1.13	1.14	1.20	1.26	1.48	1.60	1.72	1.77	2.24		
170	2.45	2.14	2.28	2.07	1.93	1.87	1.81	1.66	1.67	1.59	1.70	1.74	1.82	2.09	2.19	2.43	2.56		
175	2.42	2.48	2.64	2.62	2.58	2.55	2.42	2.34	2.53	2.45	2.36	2.35	2.34	2.35	2.36	2.43	2.47		
180	2.34	2.32	2.37	2.55	2.64	2.59	2.59	2.60	2.48	2.53	2.50	2.48	2.46	2.44	2.42	2.38	2.39		

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-05-13

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.0000]
 Remarks: