
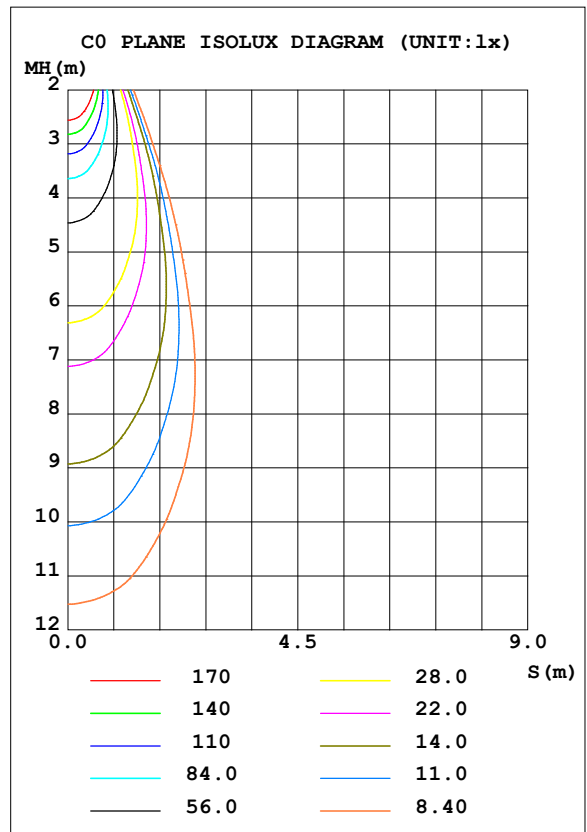


**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:119.99V I:0.0963A P:7.9332W PF:0.9370 Freq:59.98Hz Lamp Flux:504.748x1 lm		
NAME: ASD-CD-PS-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 63.62 lm/W			
MODEL		Imax (cd)	1108	S/MH (C0/180)	0.59
NOMINAL POWER (W)	8	LOR (%)	100.0	S/MH (C90/270)	0.58
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	504.75	<input type="checkbox"/> UP, DN (C0-180)	0.0, 52.7
NOMINAL FLUX (lm)	504.748	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 47.3
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	0.65

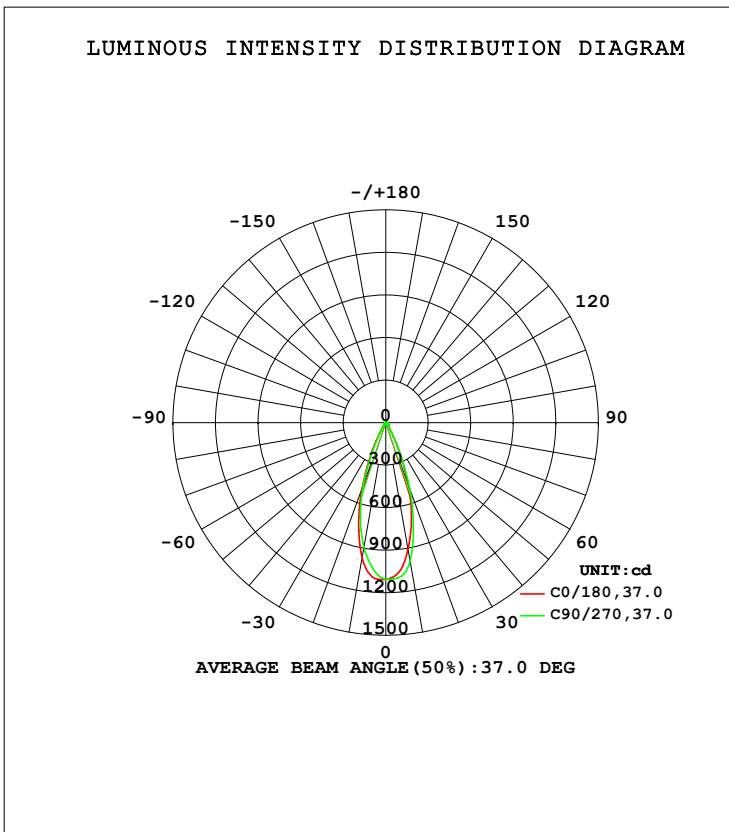

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2021-11-26

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity: 65.0%  
 Test Distance: 3.080m [K=1.0000]  
 Remarks:

**ZONAL FLUX DIAGRAM**

ZONAL FLUX DIAGRAM:

mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	□ zone	□ total	%lum, lamp
10	908.4	932.9	990.8	985.5	967.6	918.8	894.8	902.5	0- 10	97.96	97.96	19.4,19.4
20	463.7	505.8	496.4	602.2	492.4	492.6	462.0	408.8	10- 20	197.3	295.3	58.5,58.5
30	93.45	147.4	96.70	222.5	101.0	150.8	88.52	111.8	20- 30	129.0	424.3	84.1,84.1
40	25.98	31.64	25.38	37.40	26.54	32.44	25.34	28.87	30- 40	35.72	460.1	91.1,91.1
50	16.32	17.95	16.15	18.03	16.47	18.03	16.23	17.89	40- 50	16.94	477.0	94.5,94.5
60	11.77	10.90	11.44	10.86	11.65	10.86	11.55	11.02	50- 60	12.49	489.5	97,97
70	7.202	6.843	6.855	6.683	6.839	6.664	6.879	6.920	60- 70	9.103	498.6	98.8,98.8
80	3.026	2.902	2.761	2.765	2.780	2.723	2.811	2.905	70- 80	5.087	503.7	99.8,99.8
90	0.0188	0.0160	0.0181	0.0111	0.0288	0.0240	0.0264	0.0238	80- 90	1.063	504.7	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-11-26

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**LUMINANCE LIMITATION CURVES**

Test:U:119.99V I:0.0963A P:7.9332W PF:0.9370 Freq:59.98Hz Lamp Flux:504.748x1 lm		
NAME: ASD-CD-PS-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:



LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	93	8
80	158	143
75	176	164
70	191	180
65	205	195
60	214	206
55	213	206
50	231	226
45	263	257


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-11-26

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM**

Test:U:119.99V I:0.0963A P:7.9332W PF:0.9370 Freq:59.98Hz Lamp Flux:504.748x1 lm		
NAME: ASD-CD-PS-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.05	1.03	1.02	1.01	.00	.99	.98	.97	.96	.94
2.0	1.04	1.00	.97	1.02	.99	.96	.99	.96	.94	.96	.94	.92	.93	.92	.90	.88
3.0	.98	.93	.90	.97	.92	.89	.94	.90	.88	.92	.89	.86	.89	.87	.85	.83
4.0	.93	.88	.84	.91	.87	.83	.89	.85	.82	.87	.84	.81	.86	.83	.80	.79
5.0	.88	.83	.79	.87	.82	.78	.85	.81	.78	.84	.80	.77	.82	.79	.76	.75
6.0	.84	.78	.74	.83	.78	.74	.81	.77	.74	.80	.76	.73	.79	.75	.73	.71
7.0	.80	.74	.71	.79	.74	.70	.78	.73	.70	.77	.73	.70	.76	.72	.69	.68
8.0	.76	.71	.67	.76	.71	.67	.75	.70	.67	.74	.70	.67	.73	.69	.66	.65
9.0	.73	.68	.64	.73	.68	.64	.72	.67	.64	.71	.67	.64	.70	.66	.64	.62
10.0	.70	.65	.62	.70	.65	.62	.69	.64	.61	.68	.64	.61	.68	.64	.61	.60

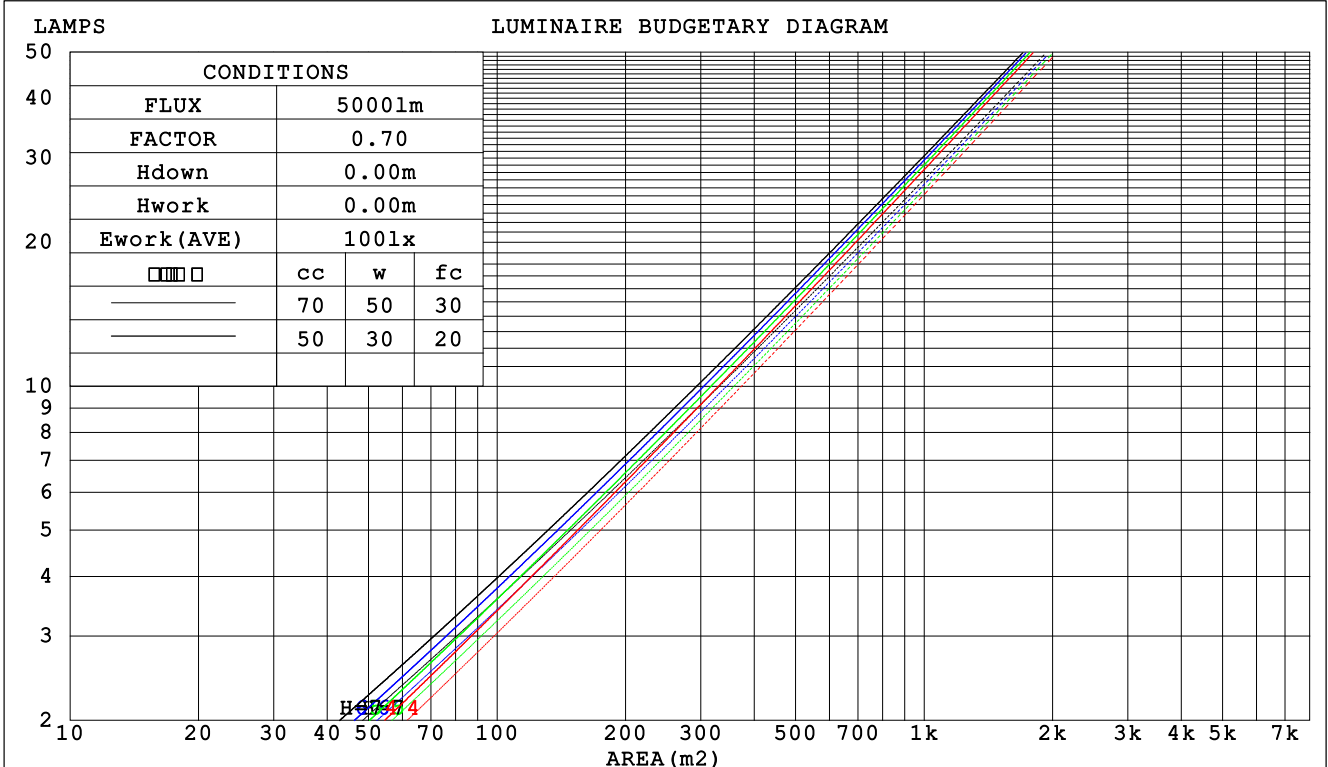

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-11-26

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

WEC AND CCEC

Test:U:119.99V I:0.0963A P:7.9332W PF:0.9370 Freq:59.98Hz Lamp Flux:504.748x1 lm		
NAME: ASD-CD-PS-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients (WEC)			
0.0						
1.0	.171 .097 .031	.165 .094 .030	.152 .087 .028	.140 .081 .026	.130 .075 .024	
2.0	.161 .088 .027	.155 .086 .026	.145 .081 .025	.135 .076 .024	.126 .071 .022	
3.0	.151 .080 .024	.146 .078 .024	.137 .074 .023	.129 .071 .022	.121 .067 .021	
4.0	.142 .074 .022	.138 .072 .021	.130 .069 .021	.123 .066 .020	.116 .063 .019	
5.0	.134 .068 .020	.130 .067 .019	.124 .064 .019	.117 .062 .018	.112 .060 .018	
6.0	.126 .063 .018	.123 .062 .018	.118 .060 .018	.112 .058 .017	.107 .056 .017	
7.0	.120 .059 .017	.117 .058 .017	.112 .057 .016	.108 .055 .016	.103 .054 .016	
8.0	.114 .056 .016	.112 .055 .016	.107 .054 .015	.103 .052 .015	.099 .051 .015	
9.0	.109 .053 .015	.107 .052 .015	.103 .051 .014	.099 .050 .014	.096 .049 .014	
10.0	.104 .050 .014	.102 .049 .014	.099 .048 .014	.095 .047 .013	.092 .046 .013	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients (CCEC)			
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.171 .157 .145	.146 .135 .125	.100 .093 .087	.058 .054 .050	.018 .017 .016	
2.0	.155 .133 .114	.133 .114 .098	.091 .079 .069	.052 .046 .040	.017 .015 .013	
3.0	.142 .113 .091	.121 .098 .079	.083 .068 .055	.048 .040 .033	.015 .013 .011	
4.0	.130 .099 .074	.112 .085 .065	.077 .059 .045	.044 .035 .027	.014 .011 .009	
5.0	.121 .087 .062	.104 .075 .054	.071 .052 .038	.041 .031 .022	.013 .010 .007	
6.0	.113 .077 .052	.097 .067 .045	.067 .047 .032	.039 .028 .019	.013 .009 .006	
7.0	.106 .069 .044	.091 .060 .038	.063 .042 .027	.036 .025 .016	.012 .008 .005	
8.0	.099 .063 .038	.086 .055 .033	.059 .038 .023	.034 .023 .014	.011 .007 .005	
9.0	.094 .058 .033	.081 .050 .029	.056 .035 .020	.033 .021 .012	.011 .007 .004	
10.0	.089 .053 .029	.077 .046 .025	.053 .032 .018	.031 .019 .011	.010 .006 .004	

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-11-26

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**UGR(Unified Glare Rating) Table**

Test:U:119.99V I:0.0963A P:7.9332W PF:0.9370 Freq:59.98Hz Lamp Flux:504.748x1 lm										
NAME: ASD-CD-PS-2D8AC-WH					TYPE:			WEIGHT:		
SPEC.:2700K 90					DIM.:			SERIAL No.:		
MFR.: ASD Lighting Corp					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	4.5	5.3	4.7	5.5	5.7	4.4	5.3	4.6	5.4	5.6
3H	5.7	6.5	6.0	6.7	6.9	5.6	6.3	5.8	6.5	6.7
4H	6.2	7.0	6.5	7.2	7.4	6.0	6.8	6.3	7.0	7.2
6H	6.6	7.3	6.9	7.5	7.8	6.4	7.1	6.7	7.3	7.5
8H	6.7	7.4	7.0	7.6	7.9	6.4	7.1	6.7	7.3	7.6
12H	6.7	7.3	7.0	7.6	7.9	6.4	7.0	6.7	7.3	7.6
4H 2H	4.9	5.7	5.2	5.9	6.1	4.9	5.6	5.1	5.8	6.0
3H	6.3	7.0	6.7	7.3	7.5	6.2	6.9	6.5	7.1	7.4
4H	7.0	7.6	7.3	7.9	8.2	6.8	7.4	7.1	7.7	8.0
6H	7.5	8.0	7.8	8.3	8.7	7.3	7.8	7.6	8.1	8.5
8H	7.6	8.1	8.0	8.4	8.8	7.3	7.8	7.7	8.2	8.5
12H	7.6	8.1	8.1	8.5	8.9	7.3	7.8	7.7	8.1	8.5
8H 4H	7.2	7.7	7.6	8.0	8.4	7.0	7.5	7.4	7.9	8.2
6H	7.8	8.2	8.2	8.6	9.0	7.6	8.0	8.0	8.4	8.8
8H	8.0	8.4	8.4	8.8	9.2	7.7	8.1	8.1	8.5	8.9
12H	8.1	8.4	8.6	8.8	9.3	7.7	8.0	8.1	8.4	8.9
12H 4H	7.2	7.6	7.6	8.0	8.4	7.0	7.5	7.4	7.8	8.2
6H	7.8	8.2	8.3	8.6	9.0	7.6	8.0	8.1	8.4	8.8
8H	8.0	8.4	8.5	8.8	9.3	7.8	8.1	8.2	8.5	9.0
Variations with the observer position at spacings:										
S = 1.0H	+ 0.3 / - 0.4					+ 0.3 / - 0.4				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				
2.0H	+ 0.3 / - 0.2					+ 0.3 / - 0.4				

CIE Pub.117, 504.7 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -2.4)  
 Area: 0.111111 m2

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-11-26

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**UTILIZATION FACTORS TABLE**

Test:U:119.99V I:0.0963A P:7.9332W PF:0.9370 Freq:59.98Hz Lamp Flux:504.748x1 lm		
NAME: ASD-CD-PS-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	86	80	76	86	79	76	85	79	75	72
0.80	94	87	84	93	87	83	92	86	83	79
1.00	98	92	88	97	92	88	96	92	87	83
1.25	102	97	93	101	96	93	99	95	92	87
1.50	105	100	96	104	99	96	101	98	95	90
2.00	108	103	100	106	102	99	103	100	98	92
2.50	110	105	102	108	104	101	105	102	100	93
3.00	111	108	105	109	106	104	106	103	101	95
4.00	113	110	108	111	109	107	108	106	104	97
5.00	115	112	110	113	110	109	109	107	106	98
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-11-26

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**ISOCANDELA DIAGRAM**

Test:U:119.99V I:0.0963A P:7.9332W PF:0.9370 Freq:59.98Hz Lamp Flux:504.748x1 lm		
NAME: ASD-CD-PS-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

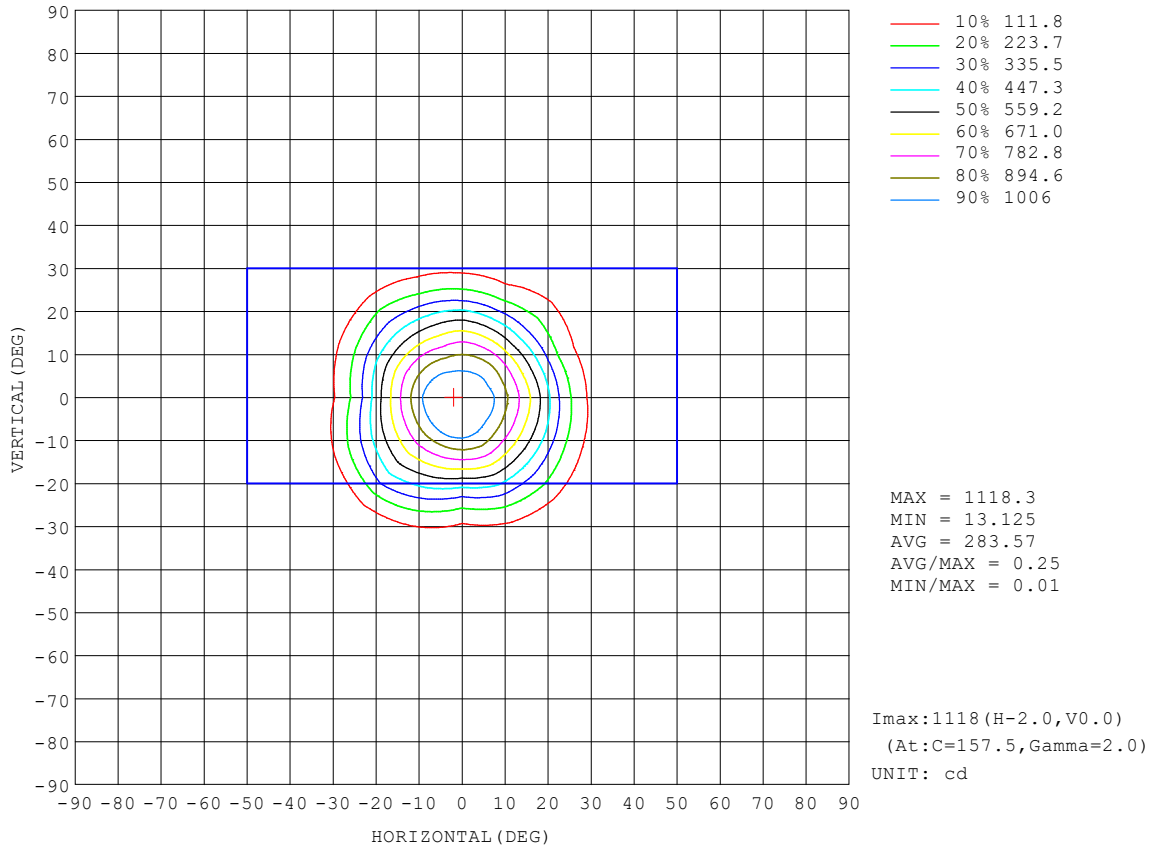


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-11-26

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:



**AAI Figure**

Test:U:119.99V I:0.0963A P:7.9332W PF:0.9370 Freq:59.98Hz Lamp Flux:504.748x1 lm		
NAME: ASD-CD-PS-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

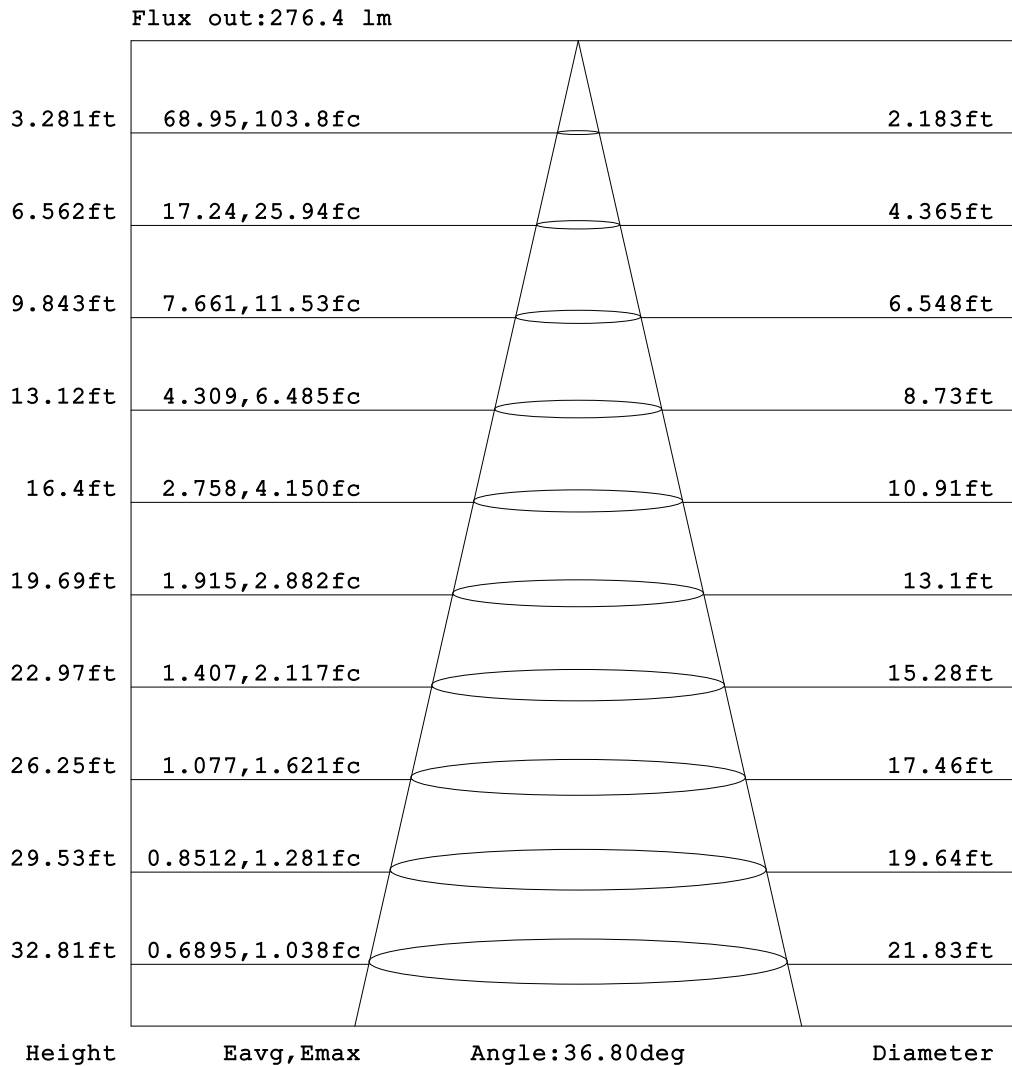


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-11-26

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**ISOLUX DIAGRAM**

Test:U:119.99V I:0.0963A P:7.9332W PF:0.9370 Freq:59.98Hz Lamp Flux:504.748x1 lm		
NAME: ASD-CD-PS-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

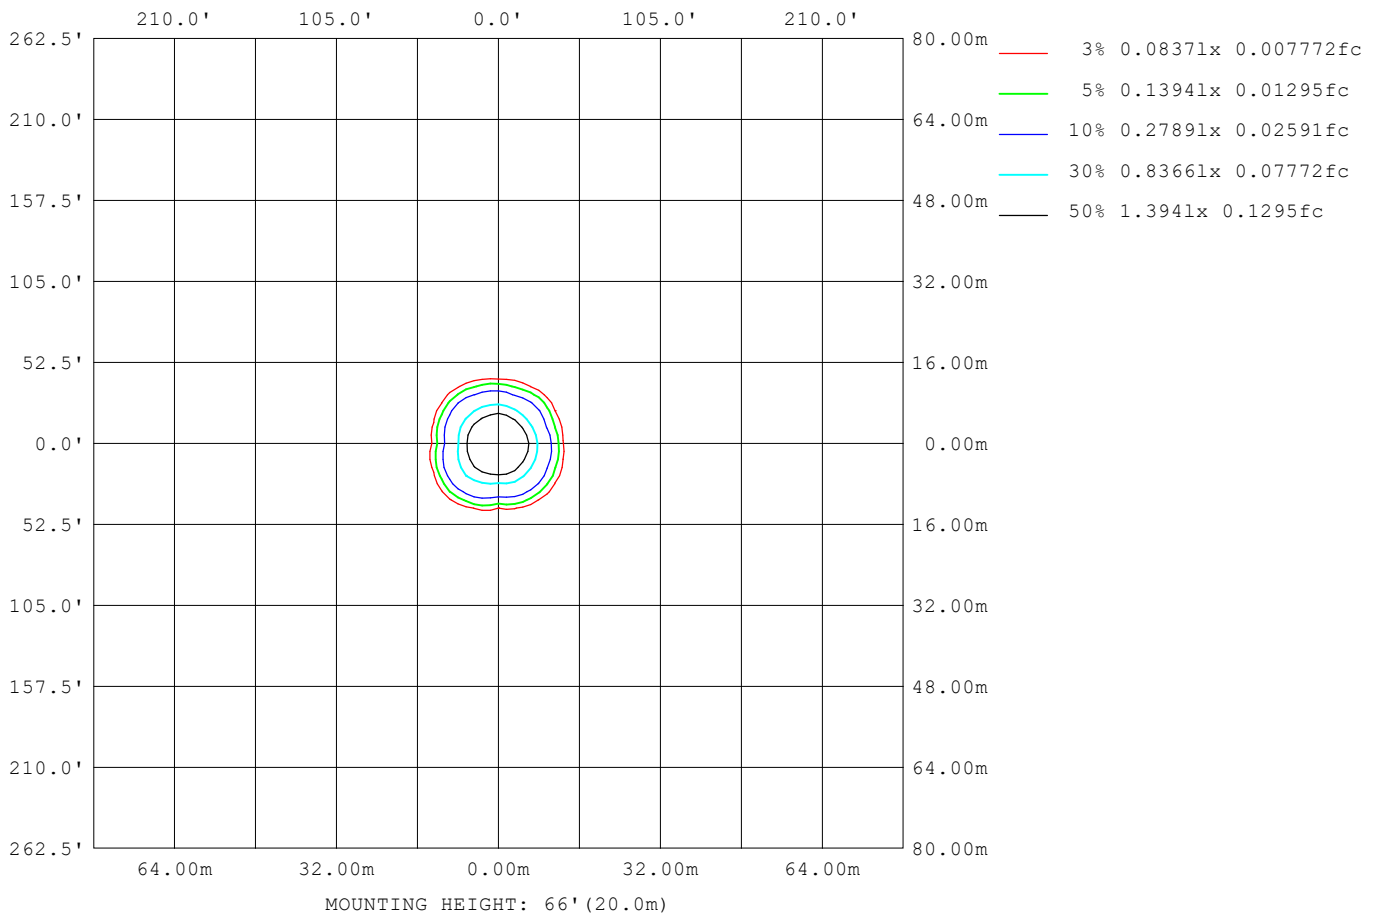

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-11-26

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**LED Avg.L Report**

Test:U:119.99V I:0.0963A P:7.9332W PF:0.9370 Freq:59.98Hz Lamp Flux:504.748x1 lm		
NAME: ASD-CD-PS-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	200
L_0~180 (75) av	169
L_0~180 (85) av	93
L_90~270 (65) av	196
L_90~270 (75) av	164
L_90~270 (85) av	28
L_45 (65) av	188
L_45 (75) av	164
L_45 (85) av	65

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-11-26

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**Planar Illuminance Curve**

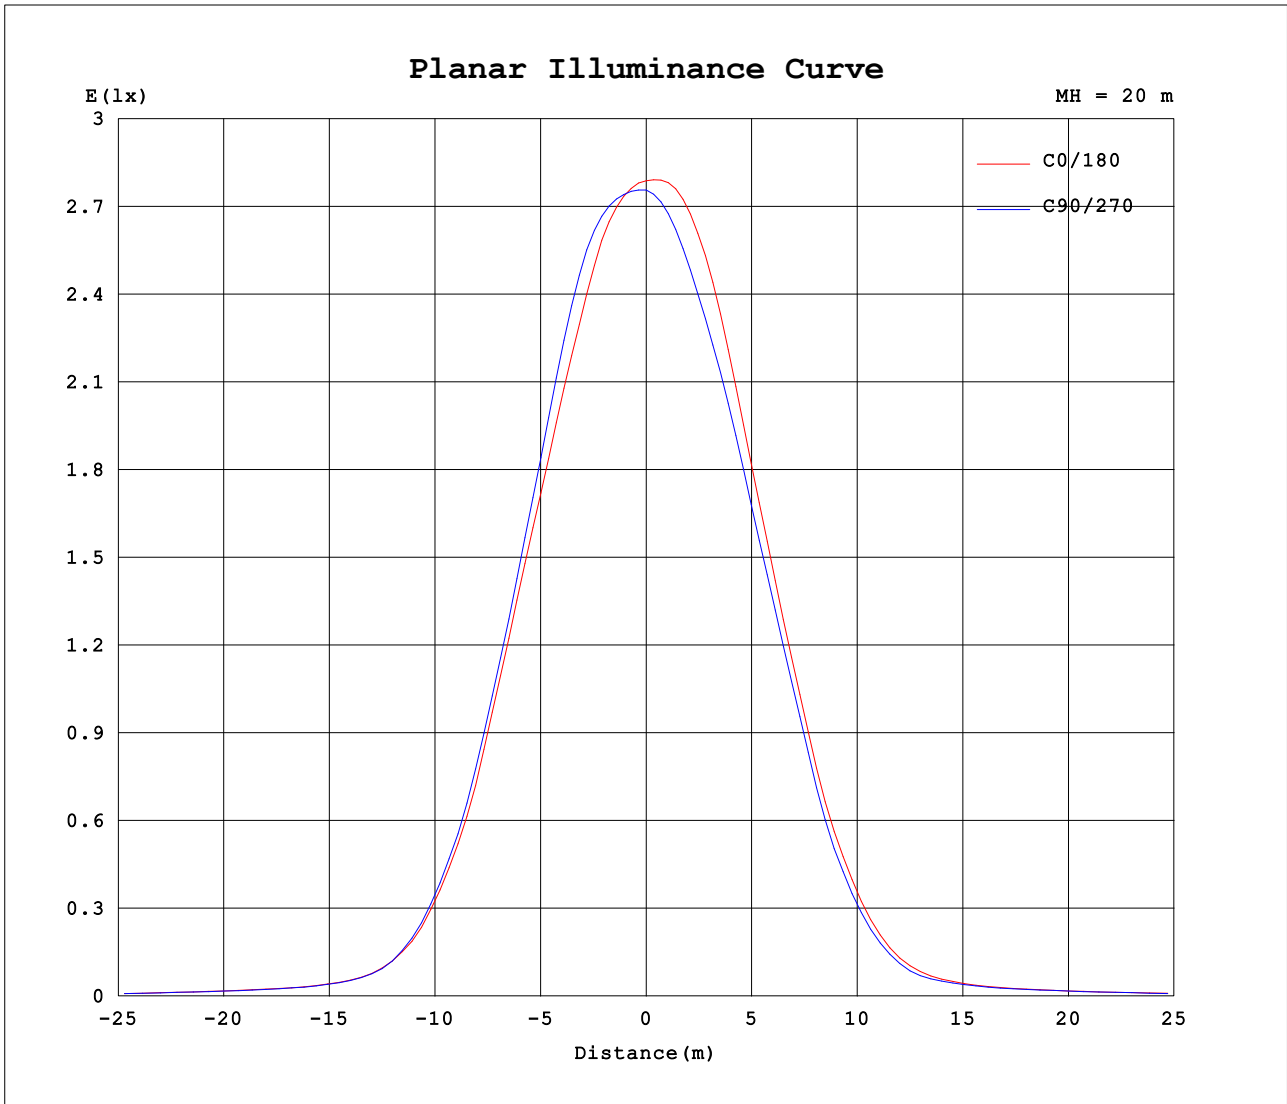

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2021-11-26

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity: 65.0%  
 Test Distance: 3.080m [K=1.0000]  
 Remarks:

**LUMINOUS DISTRIBUTION INTENSITY DATA**

Test:U:119.99V I:0.0963A P:7.9332W PF:0.9370 Freq:59.98Hz Lamp Flux:504.748x1 lm		
NAME: ASD-CD-PS-2D8AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1105	1105	1105	1105	1105	1105	1105	1105	1105	1105	1105	1105	1105	1105	1105	1105			
5	1061	1065	1067	1081	1095	1101	1098	1100	1092	1076	1061	1043	1036	1038	1048	1054			
10	908	913	933	972	991	992	986	980	968	946	919	890	895	894	903	901			
15	704	707	726	768	758	770	786	765	742	743	711	683	694	670	658	674			
20	464	489	506	532	496	552	602	562	492	512	493	470	462	424	409	424			
25	234	266	308	310	253	345	424	359	254	297	307	256	229	200	231	199			
30	93.4	115	147	137	96.7	165	222	182	101	136	151	107	88.5	82.7	112	86.8			
35	40.0	47.4	57.7	47.6	39.5	53.2	85.0	59.2	42.4	49.3	58.0	43.6	37.6	39.8	44.7	40.5			
40	26.0	28.1	31.6	27.6	25.4	28.4	37.4	30.0	26.5	28.5	32.4	27.6	25.3	26.6	28.9	27.2			
45	20.5	21.8	22.6	21.5	20.2	21.5	24.0	21.7	20.7	21.5	23.0	21.7	20.5	21.4	21.9	21.3			
50	16.3	17.6	18.0	17.5	16.2	17.6	18.0	17.7	16.5	17.4	18.0	17.4	16.2	17.4	17.9	17.3			
55	13.4	14.0	13.9	13.9	13.1	13.9	14.2	14.1	13.5	13.9	13.9	13.8	13.3	13.8	14.0	13.8			
60	11.8	11.7	10.9	11.6	11.4	11.5	10.9	11.6	11.6	11.6	10.9	11.4	11.5	11.6	11.0	11.6			
65	9.54	9.55	8.87	9.39	9.19	9.32	8.75	9.32	9.22	9.24	8.73	9.21	9.22	9.35	8.96	9.49			
70	7.20	7.21	6.84	7.02	6.85	6.95	6.68	6.93	6.84	6.85	6.66	6.86	6.88	7.01	6.92	7.17			
75	5.02	5.02	4.80	4.85	4.72	4.77	4.64	4.75	4.68	4.68	4.61	4.70	4.72	4.83	4.85	4.98			
80	3.03	3.04	2.90	2.91	2.76	2.81	2.76	2.82	2.78	2.76	2.72	2.77	2.81	2.87	2.90	2.98			
85	0.89	1.25	0.62	0.21	0.08	0.15	0.53	1.11	0.91	1.06	0.72	0.49	0.46	0.42	0.66	1.15			
90	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.03	0.02	0.02	0.02	0.03	0.02	0.02	0.03			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-11-26

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks: