
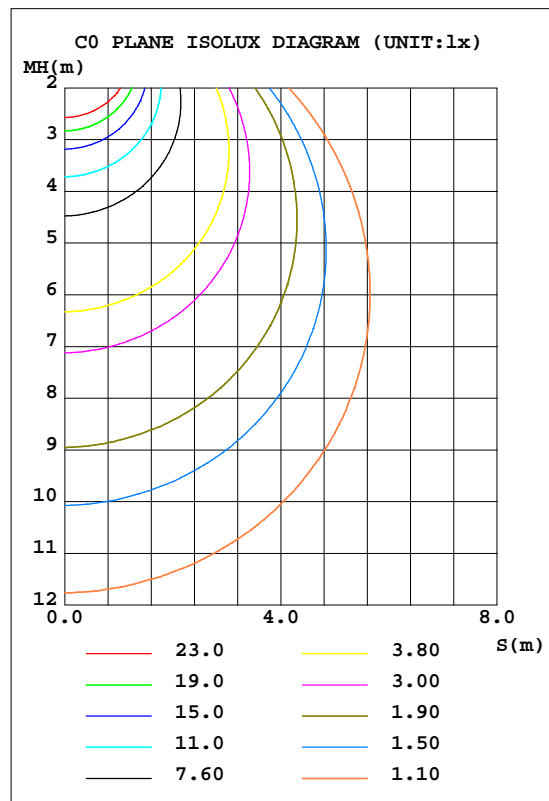


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.97V I:0.0545A P:6.1800W PF:0.9378 Freq:60.00Hz Lamp Flux:436.158x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi$ 0.06	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 70.58 lm/W			
MODEL	ASD-JBR-3D6AC(5000K)	I <sub>max</sub> (cd)	152.3	S/MH(C0/180)	1.29
NOMINAL POWER(W)	6	LOR(%)	100.0	S/MH(C90/270)	1.27
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	436.16	h UP, DN(C0-180)	0.2,49.1
NOMINAL FLUX(lm)	436.158	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.2,50.6
LAMPS INSIDE	1	h up(%)	0.3	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	h down(%)	99.7	CIBSE SHR MAX	1.35

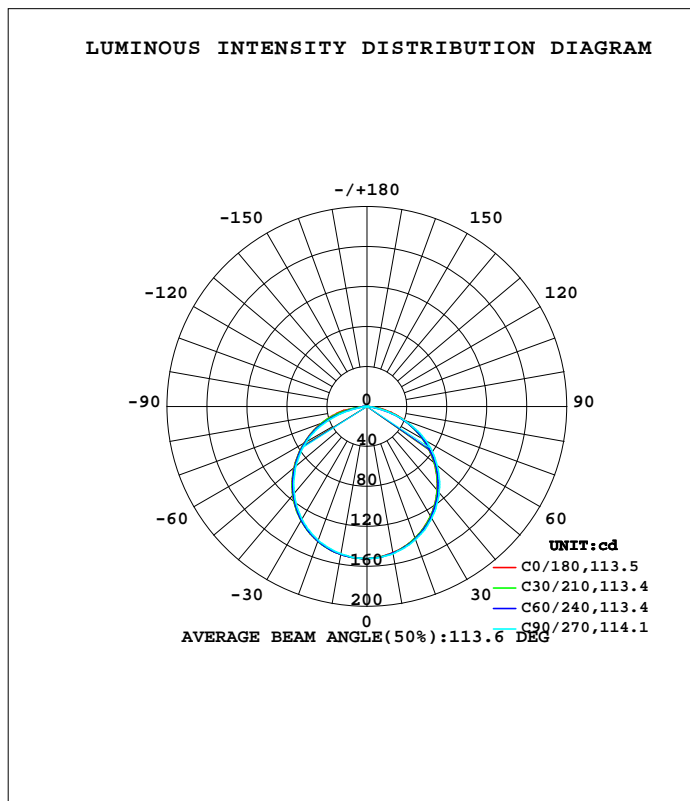

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-23

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=1.1860]  
 Remarks:

## ZONAL FLUX DIAGRAM

## ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	148.5	149.0	149.6	150.2	150.4	150.3	149.6	149.2	0- 10	14.40	14.40	3.3,3.3
20	140.3	140.7	141.8	143.0	143.6	143.5	142.6	141.2	10- 20	41.35	55.75	12.8,12.8
30	127.0	127.6	129.4	131.1	131.8	131.7	130.1	128.4	20- 30	62.90	118.7	27.2,27.2
40	109.2	110.1	112.5	114.6	115.5	115.2	113.4	111.0	30- 40	76.12	194.8	44.7,44.7
50	87.88	88.73	91.81	94.36	95.52	94.74	92.87	89.98	40- 50	79.23	274.0	62.8,62.8
60	64.02	64.30	68.11	71.30	72.49	71.54	69.62	66.58	50- 60	71.93	345.9	79.3,79.3
70	39.41	37.70	38.51	44.97	47.95	45.70	41.68	41.68	60- 70	55.09	401.0	91.9,91.9
80	16.03	10.47	7.286	14.38	23.75	15.68	8.640	12.97	70- 80	29.54	430.6	98.7,98.7
90	0.0293	0.0187	0	0.3571	0.0146	0.4894	0.0085	0.0516	80- 90	4.109	434.7	99.7,99.7
100	0.0073	0.0403	0.0368	0.0366	0.0952	0.0403	0.0073	0.0476	90-100	0.0611	434.7	99.7,99.7
110	0.1170	0.1428	0.1465	0.1062	0.1976	0.1246	0.1245	0.1612	100-110	0.0890	434.8	99.7,99.7
120	0.2191	0.2452	0.2491	0.1867	0.2856	0.2371	0.2402	0.2709	110-120	0.1846	435.0	99.7,99.7
130	0.2634	0.3185	0.3223	0.2757	0.3805	0.3113	0.3076	0.3149	120-130	0.2482	435.2	99.8,99.8
140	0.3293	0.3727	0.3882	0.3222	0.4423	0.3829	0.3683	0.3881	130-140	0.2636	435.5	99.9,99.9
150	0.3806	0.4284	0.4543	0.3944	0.4611	0.4444	0.3984	0.4320	140-150	0.2499	435.8	99.9,99.9
160	0.4346	0.4803	0.5054	0.4437	0.5123	0.4944	0.4266	0.4771	150-160	0.2074	436.0	100,100
170	0.4829	0.5178	0.5421	0.4940	0.5278	0.5437	0.4703	0.5152	160-170	0.1397	436.1	100,100
180	0.5415	0.5492	0.5640	0.5272	0.5342	0.5639	0.5347	0.5491	170-180	0.0499	436.2	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-6-23

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
Humidity:65.0%  
Test Distance:8.600m [K=1.1860]  
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.97V I:0.0545A P:6.1800W PF:0.9378 Freq:60.00Hz Lamp Flux:436.158x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi$ 0.06	Shielding Angle:

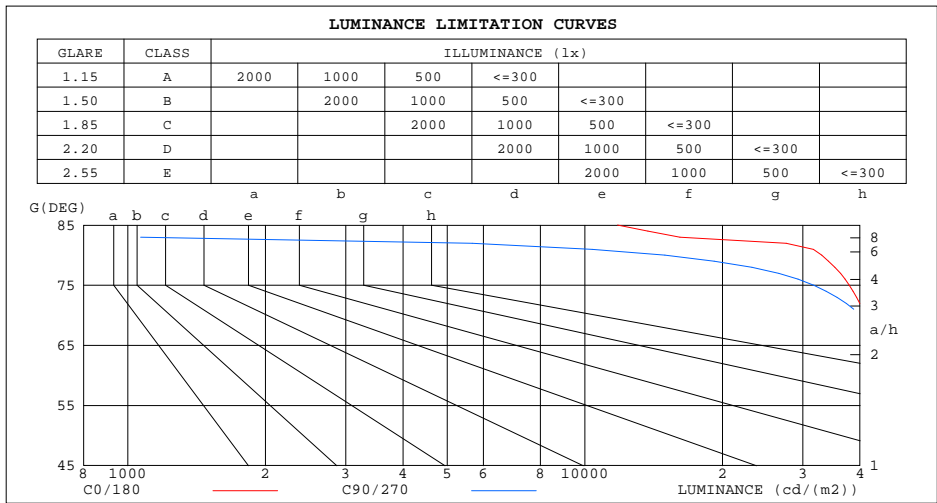

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	11788	571
80	32997	14981
75	37906	31683
70	41175	40195
65	43757	45539
60	45759	48631
55	47449	50060
50	48857	50991
45	50006	51757


C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-23

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=1.1860]  
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.97V I:0.0545A P:6.1800W PF:0.9378 Freq:60.00Hz Lamp Flux:436.158x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.06$	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	1.00	.96	1.02	.98	.95	.98	.95	.92	.94	.91	.89	.90	.88	.86	.84
2.0	.91	.84	.78	.89	.83	.77	.85	.80	.76	.82	.78	.74	.79	.75	.72	.70
3.0	.80	.72	.65	.78	.71	.64	.75	.69	.63	.72	.67	.62	.70	.65	.61	.59
4.0	.71	.62	.55	.69	.61	.55	.67	.59	.54	.64	.58	.53	.62	.57	.52	.50
5.0	.63	.54	.47	.62	.53	.47	.60	.52	.46	.58	.51	.46	.56	.50	.45	.43
6.0	.57	.48	.41	.56	.47	.41	.54	.46	.41	.52	.45	.40	.50	.44	.40	.38
7.0	.51	.42	.36	.50	.42	.36	.49	.41	.36	.47	.41	.36	.46	.40	.35	.33
8.0	.47	.38	.32	.46	.38	.32	.45	.37	.32	.43	.37	.32	.42	.36	.32	.30
9.0	.43	.35	.29	.42	.34	.29	.41	.34	.29	.40	.33	.29	.39	.33	.28	.27
10.0	.40	.32	.26	.39	.31	.26	.38	.31	.26	.37	.31	.26	.36	.30	.26	.24

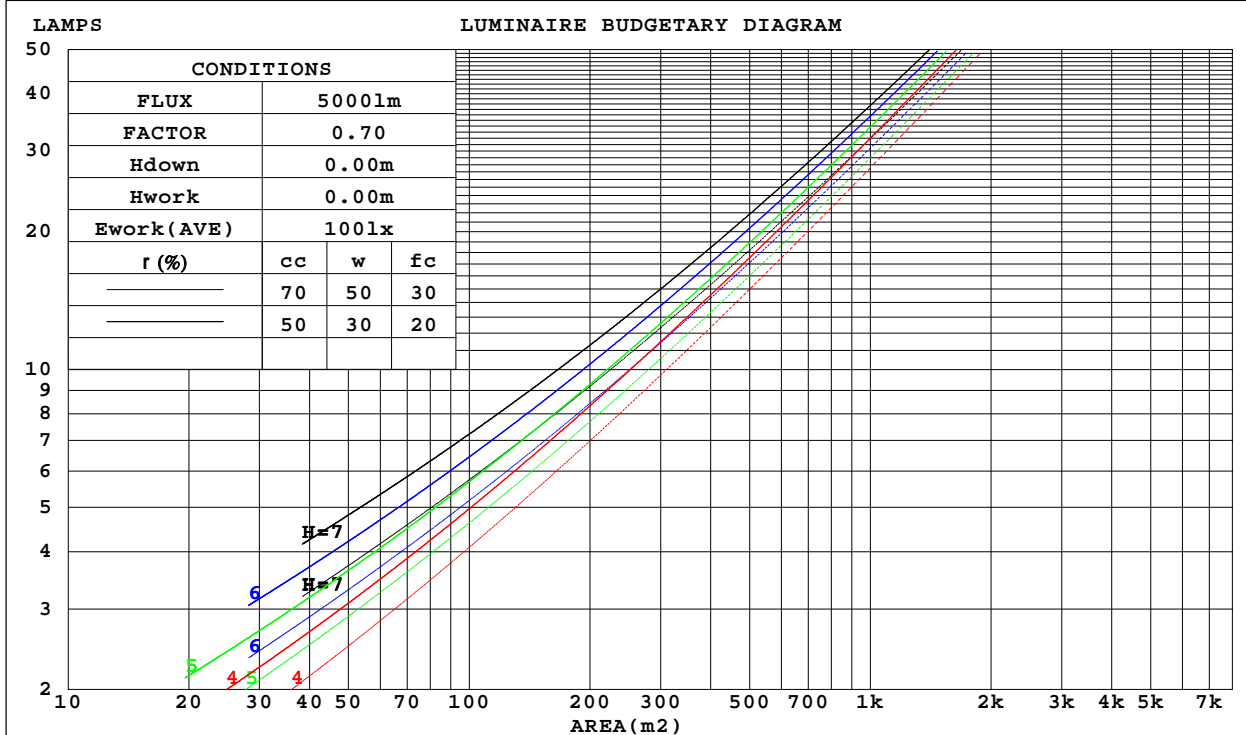

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-23

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=1.1860]  
 Remarks:

WEC AND CCEC

Test:U:120.97V I:0.0545A P:6.1800W PF:0.9378 Freq:60.00Hz Lamp Flux:436.158x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: φ0.06	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.300	.171	.054	.293	.167	.053	.280	.160	.051	.267	.154	.049	.256	.148	.048	
2.0	.287	.157	.048	.281	.155	.048	.269	.149	.046	.258	.145	.045	.248	.140	.044	
3.0	.267	.142	.043	.262	.140	.042	.251	.136	.041	.242	.132	.041	.233	.129	.040	
4.0	.247	.129	.038	.243	.127	.038	.233	.124	.037	.225	.121	.036	.217	.118	.036	
5.0	.229	.117	.034	.225	.115	.034	.217	.113	.033	.209	.110	.033	.202	.108	.032	
6.0	.213	.107	.031	.209	.106	.030	.202	.103	.030	.195	.101	.030	.188	.099	.029	
7.0	.198	.098	.028	.195	.097	.028	.188	.095	.027	.182	.093	.027	.176	.092	.027	
8.0	.185	.091	.025	.182	.090	.025	.176	.088	.025	.171	.086	.025	.166	.085	.025	
9.0	.174	.084	.023	.171	.083	.023	.166	.082	.023	.161	.081	.023	.156	.079	.023	
10.0	.163	.078	.022	.161	.078	.022	.156	.076	.022	.152	.075	.021	.147	.074	.021	

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.193	.193	.193	.165	.165	.165	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.182	.159	.138	.156	.136	.119	.107	.094	.082	.061	.054	.048	.020	.017	.015	
2.0	.174	.135	.101	.149	.116	.088	.102	.080	.061	.059	.047	.036	.019	.015	.012	
3.0	.167	.117	.077	.143	.101	.067	.098	.070	.047	.057	.041	.028	.018	.013	.009	
4.0	.159	.104	.061	.137	.090	.053	.094	.062	.037	.054	.037	.022	.017	.012	.007	
5.0	.152	.093	.050	.130	.081	.044	.090	.056	.031	.052	.033	.018	.017	.011	.006	
6.0	.145	.085	.042	.124	.073	.037	.086	.051	.026	.050	.030	.015	.016	.010	.005	
7.0	.138	.078	.036	.119	.068	.031	.082	.047	.022	.048	.028	.013	.015	.009	.004	
8.0	.131	.072	.031	.113	.063	.027	.078	.044	.019	.046	.026	.012	.015	.009	.004	
9.0	.125	.067	.028	.108	.058	.024	.075	.041	.017	.044	.024	.010	.014	.008	.003	
10.0	.120	.063	.025	.103	.055	.022	.072	.038	.016	.042	.023	.009	.014	.007	.003	

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-23

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=1.1860]  
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.97V I:0.0545A P:6.1800W PF:0.9378 Freq:60.00Hz Lamp Flux:436.158x1 lm										
NAME:					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: ASD LIGHTNG CORP					SUR.: φ0.06			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	25.4	27.0	25.8	27.3	27.7	25.9	27.6	26.3	27.9	28.2
3H	27.1	28.6	27.5	28.9	29.3	27.6	29.0	28.0	29.4	29.7
4H	27.8	29.2	28.2	29.5	29.9	28.0	29.4	28.4	29.8	30.2
6H	28.2	29.5	28.6	29.9	30.3	28.2	29.5	28.6	29.8	30.2
8H	28.3	29.6	28.8	29.9	30.4	28.2	29.4	28.6	29.8	30.2
12H	28.3	29.5	28.8	29.9	30.3	28.1	29.3	28.6	29.7	30.1
4H 2H	26.0	27.4	26.4	27.8	28.1	26.6	28.0	27.0	28.4	28.8
3H	27.9	29.1	28.4	29.5	29.9	28.5	29.6	28.9	30.1	30.5
4H	28.7	29.7	29.1	30.2	30.6	29.1	30.1	29.5	30.5	31.0
6H	29.2	30.1	29.7	30.6	31.0	29.3	30.2	29.7	30.6	31.1
8H	29.4	30.2	29.8	30.7	31.1	29.2	30.1	29.7	30.5	31.0
12H	29.4	30.1	29.9	30.6	31.1	29.2	30.0	29.7	30.5	30.9
8H 4H	28.9	29.7	29.4	30.2	30.7	29.4	30.2	29.9	30.7	31.2
6H	29.5	30.2	30.0	30.7	31.2	29.7	30.4	30.2	30.9	31.3
8H	29.7	30.3	30.2	30.8	31.3	29.6	30.3	30.1	30.8	31.3
12H	29.7	30.3	30.2	30.8	31.3	29.6	30.2	30.1	30.7	31.2
12H 4H	28.9	29.7	29.4	30.1	30.6	29.4	30.2	29.9	30.7	31.2
6H	29.5	30.1	30.0	30.6	31.2	29.7	30.3	30.2	30.8	31.4
8H	29.7	30.2	30.2	30.7	31.3	29.7	30.2	30.2	30.7	31.3
CIE190: 2010										

CIE190: 2010  
 Area: 0.0028 m2

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-23

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=1.1860]  
 Remarks:

## UTILIZATION FACTORS TABLE

Test:U:120.97V I:0.0545A P:6.1800W PF:0.9378 Freq:60.00Hz Lamp Flux:436.158x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.06$	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	46	39	57	46	39	56	45	39	32
0.80	68	56	49	67	56	48	65	55	48	41
1.00	76	65	58	75	64	57	73	66	57	50
1.25	83	73	66	82	72	65	79	71	64	57
1.50	88	78	72	87	78	71	84	76	70	62
2.00	95	87	80	93	86	80	90	83	78	70
2.50	99	92	86	97	90	85	93	87	83	74
3.00	103	96	90	100	94	89	96	91	87	79
4.00	107	101	96	104	99	95	100	96	92	83
5.00	109	104	100	106	102	99	102	99	96	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 2022-6-23

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
Humidity: 65.0%  
Test Distance: 8.600m [K=1.1860]  
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.97V I:0.0545A P:6.1800W PF:0.9378 Freq:60.00Hz Lamp Flux:436.158x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi$ 0.06	Shielding Angle:

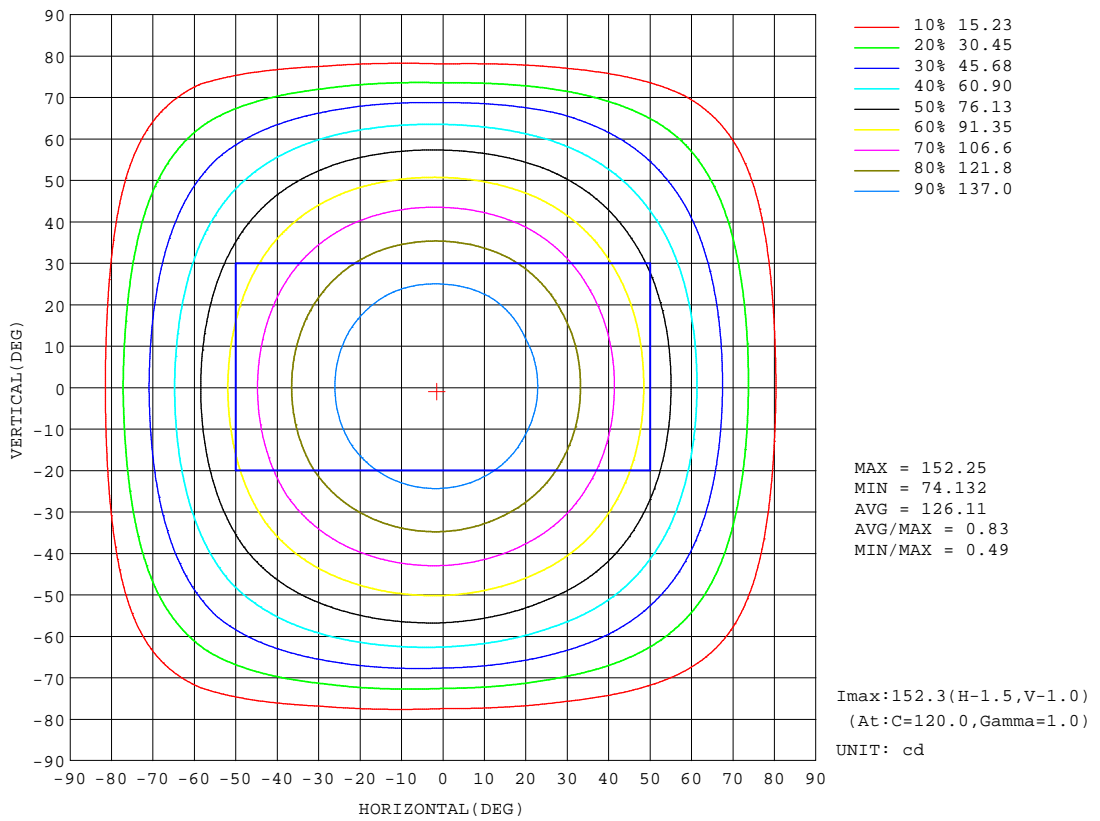

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-23


g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=1.1860]  
 Remarks:



AAI Figure

Test:U:120.97V I:0.0545A P:6.1800W PF:0.9378 Freq:60.00Hz Lamp Flux:436.158x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi$ 0.06	Shielding Angle:

Flux out:325.7 lm

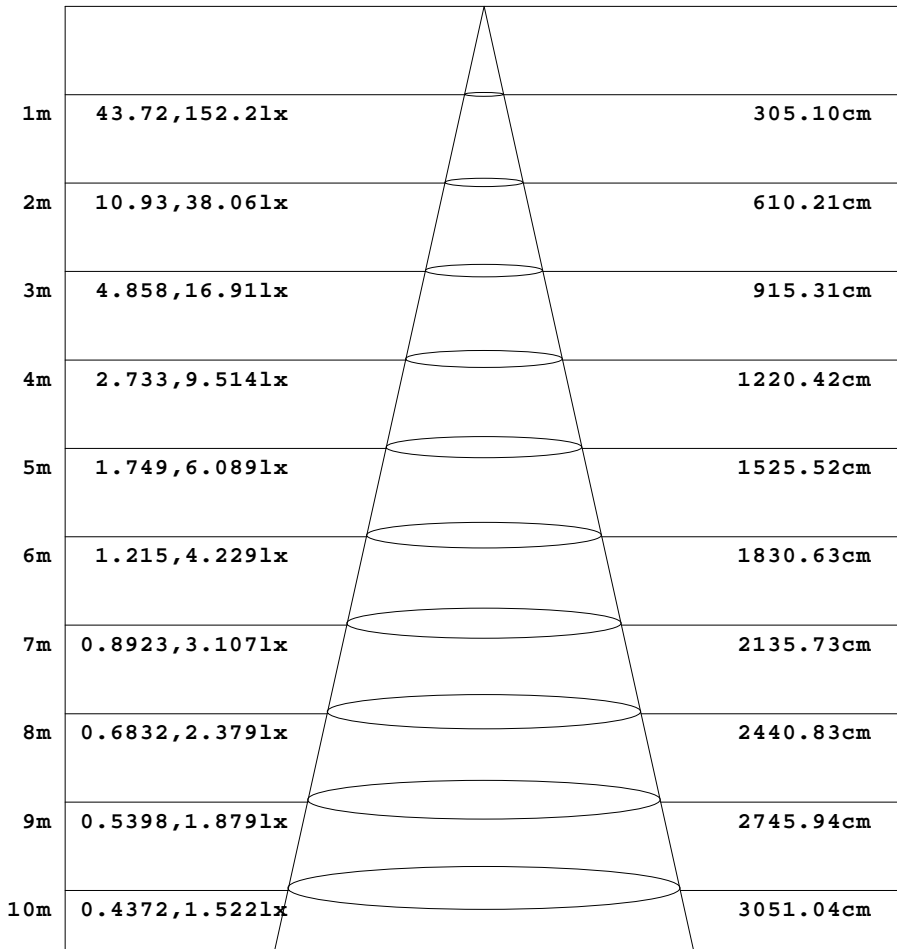

Height                      Eavg, Emax                      Angle:113.51deg                      Diameter


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-23

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=1.1860]  
 Remarks:

ISOLUX DIAGRAM

Test:U:120.97V I:0.0545A P:6.1800W PF:0.9378 Freq:60.00Hz Lamp Flux:436.158x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.06$	Shielding Angle:

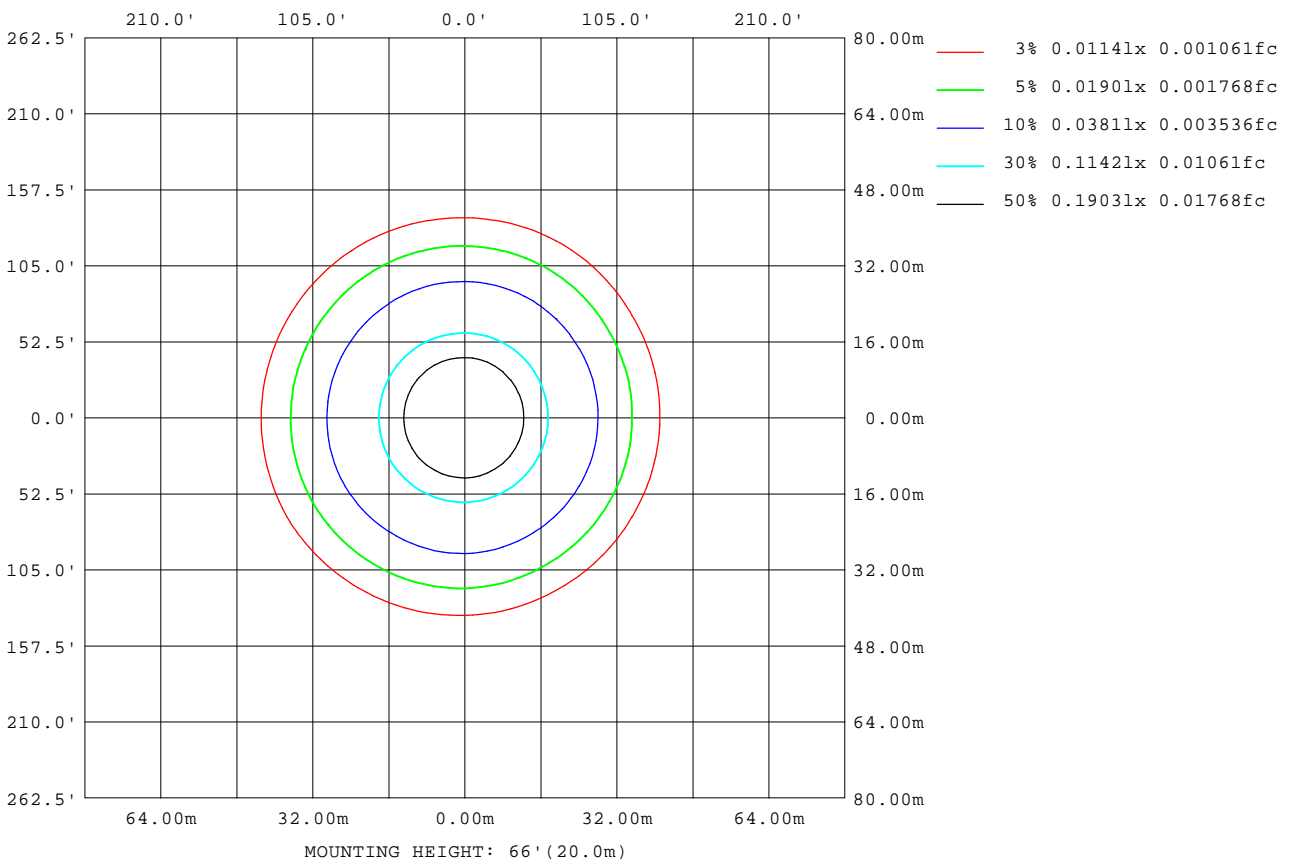

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2022-6-23

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity: 65.0%  
 Test Distance: 8.600m [K=1.1860]  
 Remarks:

## LED Avg.L Report

Test:U:120.97V I:0.0545A P:6.1800W PF:0.9378 Freq:60.00Hz Lamp Flux:436.158x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi$ 0.06	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	47341
L_0~180(75)av	43572
L_0~180(85)av	14053
L_90~270(65)av	46723
L_90~270(75)av	33374
L_90~270(85)av	4982
L_45(65)av	47253
L_45(75)av	38991
L_45(85)av	7075

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-6-23

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
Humidity:65.0%  
Test Distance:8.600m [K=1.1860]  
Remarks:

Planar Illuminance Curve

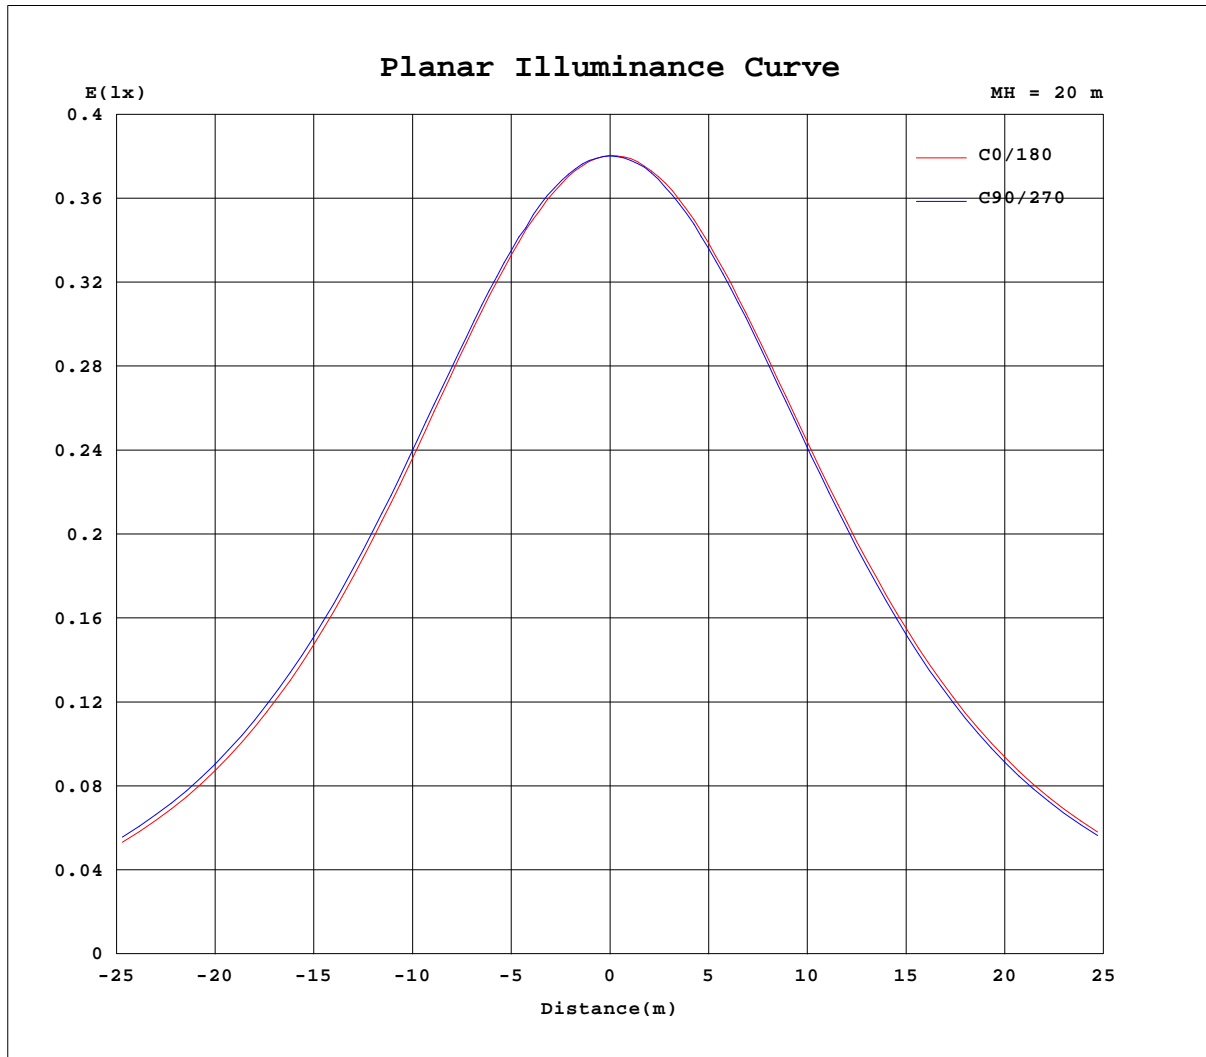

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2022-6-23

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity: 65.0%  
 Test Distance: 8.600m [K=1.1860]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.97V I:0.0545A P:6.1800W PF:0.9378 Freq:60.00Hz Lamp Flux:436.158x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: φ0.06	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	152	152	152	152	152	152	152	152	152	152	152	152						
5	151	151	151	151	152	152	152	152	152	152	152	151						
10	148	149	149	150	150	150	150	150	150	150	150	149						
15	145	145	146	146	147	148	148	148	147	147	146	145						
20	140	140	141	142	143	143	144	144	143	143	142	140						
25	134	134	135	136	137	138	138	138	138	137	136	135						
30	127	127	128	129	130	132	132	132	131	130	129	128						
35	119	119	120	121	123	124	124	124	124	122	121	119						
40	109	109	111	113	114	115	116	116	115	113	112	110						
45	98.9	99.2	100	103	104	106	106	106	105	103	102	99.7						
50	87.9	88.1	89.4	91.8	93.3	95.4	95.5	95.1	94.3	92.9	91.3	88.7						
55	76.2	76.3	77.3	80.4	82.0	84.2	84.3	83.8	83.1	81.5	79.9	77.1						
60	64.0	63.8	64.8	68.1	70.2	72.4	72.5	72.0	71.1	69.6	68.0	65.2						
65	51.7	51.0	51.6	53.9	57.0	60.3	60.3	59.7	58.6	56.7	55.9	52.9						
70	39.4	37.9	37.5	38.5	42.3	47.7	48.0	47.3	44.1	41.7	42.8	40.6						
75	27.5	24.9	23.0	23.0	26.7	33.3	35.7	33.7	28.4	25.4	27.2	28.5						
80	16.0	12.6	8.31	7.29	10.7	18.0	23.8	19.1	12.3	8.64	11.2	14.8						
85	2.88	1.42	0.16	0.14	0.10	3.33	3.98	5.29	1.16	2.29	0.50	2.39						
90	0.03	0.00	0.04	0.00	0.01	0.70	0.01	0.98	0.00	0.01	0.01	0.10						
95	0.01	0.02	0.01	0.07	0.34	0.00	0.05	0.01	0.04	0.01	0.04	0.01						
100	0.01	0.07	0.01	0.04	0.01	0.06	0.10	0.01	0.07	0.01	0.08	0.01						
105	0.05	0.12	0.04	0.10	0.04	0.09	0.14	0.04	0.10	0.07	0.12	0.06						
110	0.12	0.18	0.11	0.15	0.07	0.14	0.20	0.10	0.15	0.12	0.20	0.12						
115	0.15	0.22	0.15	0.21	0.13	0.19	0.25	0.15	0.21	0.17	0.24	0.16						
120	0.22	0.27	0.22	0.25	0.15	0.22	0.29	0.23	0.25	0.24	0.29	0.26						
125	0.25	0.30	0.26	0.30	0.22	0.27	0.34	0.25	0.31	0.26	0.33	0.26						
130	0.26	0.34	0.30	0.32	0.24	0.31	0.38	0.28	0.34	0.31	0.35	0.28						
135	0.29	0.36	0.33	0.35	0.26	0.33	0.42	0.31	0.37	0.35	0.40	0.31						
140	0.33	0.39	0.35	0.39	0.29	0.35	0.44	0.34	0.42	0.37	0.42	0.36						
145	0.37	0.42	0.36	0.41	0.36	0.39	0.45	0.37	0.44	0.38	0.44	0.38						
150	0.38	0.45	0.40	0.45	0.38	0.41	0.46	0.42	0.47	0.40	0.47	0.40						
155	0.41	0.47	0.43	0.48	0.40	0.44	0.50	0.44	0.50	0.41	0.50	0.42						
160	0.43	0.50	0.46	0.51	0.42	0.47	0.51	0.48	0.51	0.43	0.52	0.44						
165	0.46	0.51	0.48	0.53	0.45	0.51	0.52	0.49	0.54	0.44	0.54	0.45						
170	0.48	0.53	0.51	0.54	0.47	0.52	0.53	0.53	0.56	0.47	0.56	0.47						
175	0.50	0.54	0.51	0.56	0.48	0.53	0.53	0.53	0.56	0.50	0.57	0.49						
180	0.54	0.57	0.53	0.56	0.53	0.53	0.53	0.56	0.56	0.53	0.58	0.52						

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-23

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.600m [K=1.1860]  
 Remarks: