
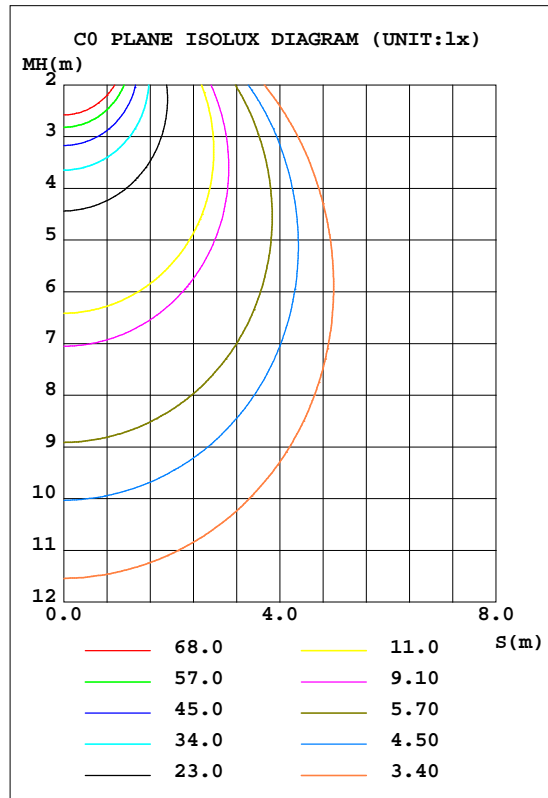


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.97V I:0.1071A P:11.090W PF:0.8449 Freq:60.00Hz Lamp Flux:992.147x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 89.46 lm/W			
MODEL: LRKR-6D12AC-WH(3500K)		I <sub>max</sub> (cd)	453.4	S/MH(C0/180)	1.15
NOMINAL POWER(W)	12	LOR(%)	100.0	S/MH(C90/270)	1.13
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	992.15	h UP, DN(C0-180)	0.2, 49.8
NOMINAL FLUX(lm)	992.147	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.2, 49.8
LAMPS INSIDE	1	h up(%)	0.4	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	h down(%)	99.6	CIBSE SHR MAX	1.30

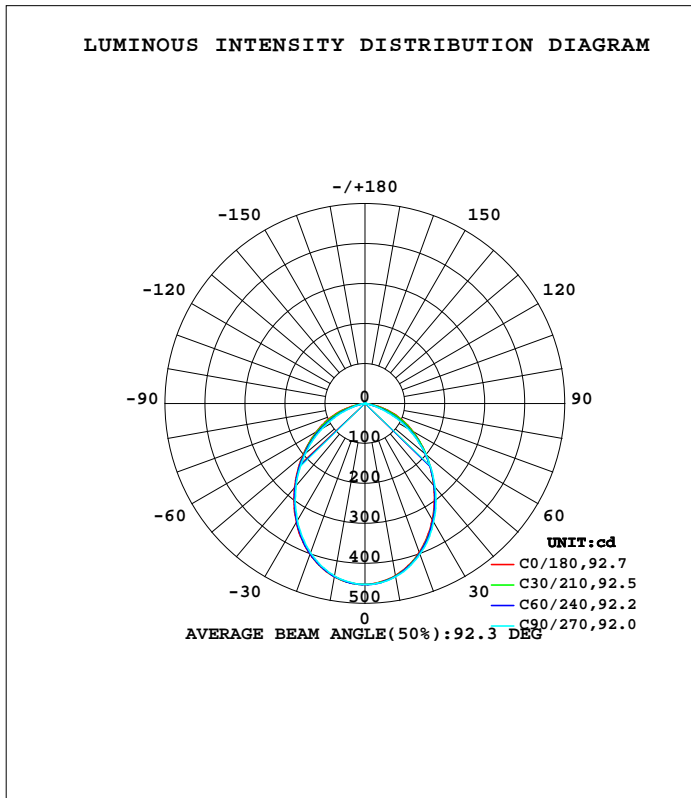

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2022-08-05

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity: 65.0%  
 Test Distance: 8.700m [K=1.0920]  
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	437.1	438.9	440.0	440.6	440.5	439.6	437.9	437.9	0- 10	42.57	42.57	4.29,4.29
20	396.1	399.3	401.3	402.1	401.6	400.2	397.6	397.7	10- 20	118.8	161.4	16.3,16.3
30	336.7	339.5	343.6	343.8	343.7	341.3	338.3	338.6	20- 30	171.1	332.5	33.5,33.5
40	267.8	269.9	273.0	274.0	274.0	271.5	268.2	269.6	30- 40	191.5	524.0	52.8,52.8
50	199.2	199.0	198.4	201.9	203.8	200.1	194.9	199.3	40- 50	181.4	705.4	71.1,71.1
60	137.2	130.6	122.3	131.7	139.5	131.7	121.5	131.5	50- 60	147.6	853.0	86,86
70	78.47	64.27	49.99	63.27	79.01	64.96	50.39	64.89	60- 70	96.36	949.4	95.7,95.7
80	15.47	9.970	4.881	9.177	14.83	9.587	4.694	9.554	70- 80	36.43	985.8	99.4,99.4
90	0.0149	0.0097	0	0.0002	0.0128	0.0068	0.0002	0.0065	80- 90	2.606	988.4	99.6,99.6
100	0.0948	0.1016	0.0635	0.0921	0.1653	0.0698	0.0317	0.0794	90-100	0.0287	988.4	99.6,99.6
110	0.2663	0.3112	0.2731	0.3145	0.3749	0.2574	0.2094	0.2732	100-110	0.1911	988.6	99.6,99.6
120	0.5136	0.5622	0.5526	0.5812	0.6161	0.4733	0.4125	0.5051	110-120	0.4008	989.0	99.7,99.7
130	0.7677	0.7877	0.8700	0.8450	0.8764	0.7211	0.7043	0.7021	120-130	0.5846	989.6	99.7,99.7
140	0.9521	0.9910	1.111	1.118	1.098	0.9212	0.9140	0.9149	130-140	0.6882	990.3	99.8,99.8
150	1.136	1.178	1.378	1.337	1.295	1.058	1.117	1.118	140-150	0.6875	991.0	99.9,99.9
160	1.333	1.344	1.549	1.490	1.473	1.271	1.295	1.363	150-160	0.5957	991.6	99.9,99.9
170	1.562	1.617	1.651	1.611	1.594	1.496	1.453	1.461	160-170	0.4118	992.0	100,100
180	1.682	1.788	1.739	1.782	1.695	1.677	1.581	1.687	170-180	0.1540	992.1	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm			

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-08-05

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0920]  
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.97V I:0.1071A P:11.090W PF:0.8449 Freq:60.00Hz Lamp Flux:992.147x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

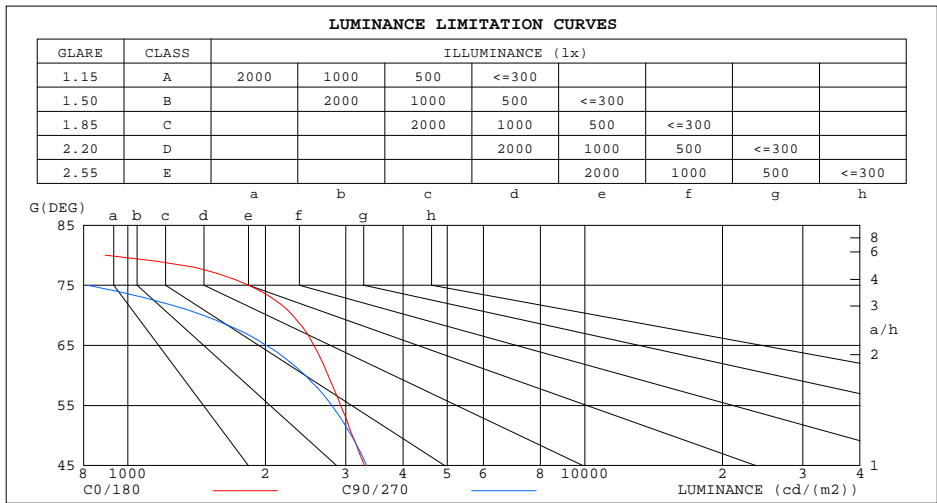

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	169	129
80	891	281
75	1839	816
70	2295	1462
65	2554	2012
60	2745	2447
55	2924	2797
50	3100	3089
45	3298	3337


C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-08-05

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0920]  
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.97V I:0.1071A P:11.090W PF:0.8449 Freq:60.00Hz Lamp Flux:992.147x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.06	1.02	.99	1.04	1.01	.97	.90	.97	.94	.96	.93	.91	.92	.90	.89	.87
2.0	.94	.88	.83	.92	.86	.82	.88	.84	.80	.85	.81	.78	.82	.79	.76	.74
3.0	.83	.76	.70	.82	.75	.69	.79	.73	.68	.76	.71	.67	.74	.69	.66	.64
4.0	.75	.67	.60	.73	.66	.60	.71	.64	.59	.68	.63	.58	.66	.61	.57	.55
5.0	.67	.59	.53	.66	.58	.52	.64	.57	.52	.62	.56	.51	.60	.55	.51	.49
6.0	.61	.52	.46	.60	.52	.46	.58	.51	.46	.56	.50	.45	.55	.49	.45	.43
7.0	.55	.47	.41	.55	.47	.41	.53	.46	.41	.52	.45	.41	.50	.45	.40	.38
8.0	.51	.43	.37	.50	.42	.37	.49	.42	.37	.48	.41	.37	.46	.41	.36	.35
9.0	.47	.39	.34	.46	.39	.34	.45	.38	.33	.44	.38	.33	.43	.37	.33	.31
10.0	.43	.36	.31	.43	.36	.31	.42	.35	.30	.41	.35	.30	.40	.34	.30	.29

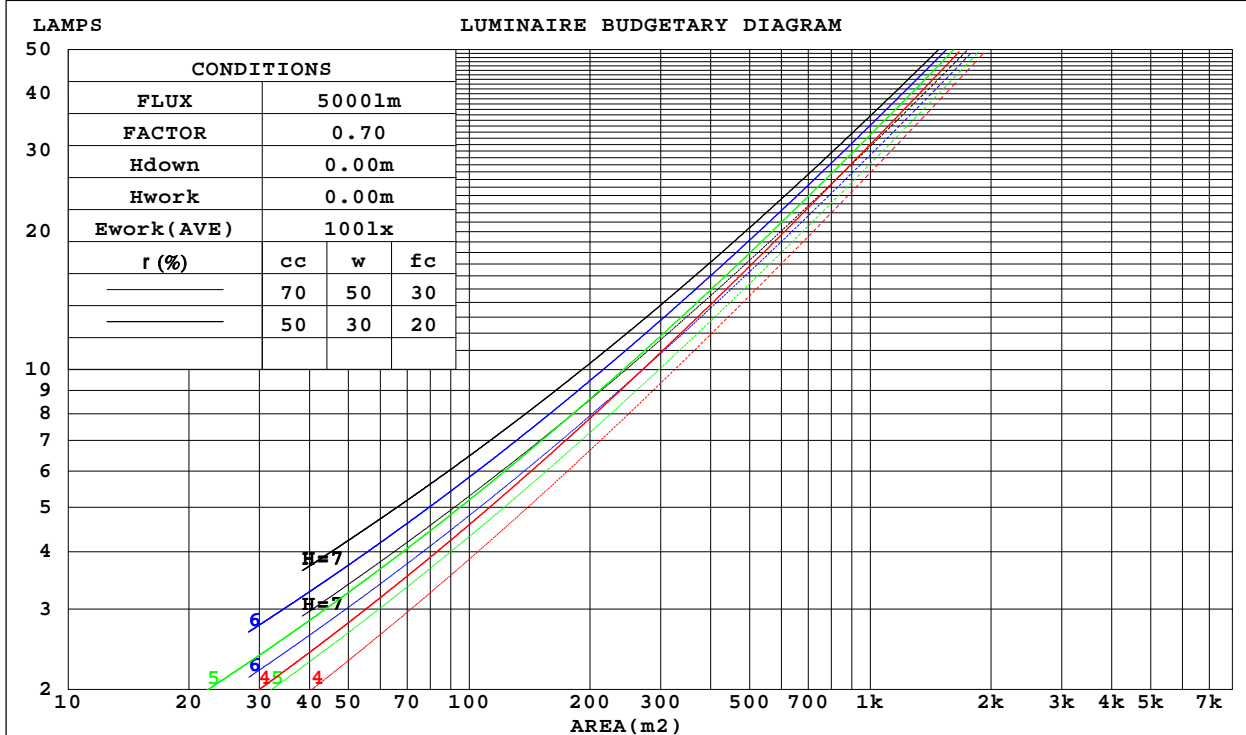

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-08-05

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0920]  
 Remarks:

WEC AND CCEC

Test:U:119.97V I:0.1071A P:11.090W PF:0.8449 Freq:60.00Hz Lamp Flux:992.147x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.265	.151	.048	.258	.147	.047	.245	.140	.045	.232	.134	.043	.221	.128	.041	
2.0	.258	.141	.043	.251	.138	.043	.240	.133	.041	.229	.129	.040	.219	.124	.039	
3.0	.243	.129	.039	.238	.127	.038	.228	.123	.037	.218	.120	.037	.209	.116	.036	
4.0	.228	.118	.035	.223	.117	.035	.214	.114	.034	.206	.110	.033	.198	.107	.033	
5.0	.213	.109	.031	.209	.107	.031	.201	.105	.031	.193	.102	.030	.186	.100	.030	
6.0	.199	.100	.029	.196	.099	.028	.188	.097	.028	.182	.094	.028	.175	.092	.027	
7.0	.187	.092	.026	.183	.091	.026	.177	.090	.026	.171	.088	.026	.165	.086	.025	
8.0	.176	.086	.024	.173	.085	.024	.167	.083	.024	.161	.082	.024	.156	.080	.023	
9.0	.165	.080	.022	.163	.079	.022	.157	.078	.022	.153	.076	.022	.148	.075	.022	
10.0	.156	.075	.021	.154	.074	.021	.149	.073	.021	.145	.072	.020	.140	.071	.020	

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.193	.193	.193	.165	.165	.165	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.180	.159	.141	.154	.137	.121	.105	.094	.084	.061	.054	.049	.019	.018	.016	
2.0	.171	.135	.105	.146	.116	.091	.100	.080	.063	.058	.047	.037	.019	.015	.012	
3.0	.162	.117	.081	.139	.101	.070	.096	.070	.049	.055	.041	.029	.018	.013	.010	
4.0	.155	.103	.064	.133	.089	.056	.091	.062	.039	.053	.036	.023	.017	.012	.008	
5.0	.147	.093	.053	.126	.080	.046	.087	.056	.032	.050	.033	.019	.016	.011	.006	
6.0	.140	.084	.044	.121	.073	.038	.083	.051	.027	.048	.030	.016	.016	.010	.005	
7.0	.134	.077	.038	.115	.067	.033	.080	.047	.023	.046	.028	.014	.015	.009	.005	
8.0	.128	.072	.033	.110	.062	.029	.076	.044	.020	.044	.026	.012	.014	.008	.004	
9.0	.122	.067	.029	.105	.058	.025	.073	.041	.018	.042	.024	.011	.014	.008	.004	
10.0	.117	.062	.026	.101	.054	.023	.070	.038	.016	.041	.023	.010	.013	.007	.003	

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-08-05

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0920]  
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.97V I:0.1071A P:11.090W PF:0.8449 Freq:60.00Hz Lamp Flux:992.147x1 lm										
NAME: LED DOWNLIGHT					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: ASD LIGHTING CORP					SUR.: 0.1*0.1			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	15.7	17.2	16.0	17.5	17.8	15.2	16.7	15.6	17.0	17.4
3H	17.2	18.6	17.6	18.9	19.3	16.1	17.5	16.5	17.8	18.2
4H	17.7	19.0	18.1	19.3	19.7	16.2	17.5	16.6	17.8	18.2
6H	17.8	19.0	18.3	19.4	19.8	16.2	17.4	16.6	17.7	18.1
8H	17.8	18.9	18.3	19.3	19.8	16.1	17.3	16.6	17.7	18.1
12H	17.8	18.9	18.2	19.3	19.7	16.1	17.2	16.6	17.6	18.0
4H 2H	16.1	17.4	16.5	17.7	18.1	15.7	17.0	16.1	17.3	17.7
3H	17.8	18.9	18.3	19.3	19.7	16.7	17.8	17.2	18.2	18.6
4H	18.4	19.3	18.8	19.7	20.2	16.9	17.8	17.3	18.2	18.7
6H	18.6	19.4	19.1	19.9	20.3	16.9	17.7	17.3	18.1	18.6
8H	18.6	19.3	19.0	19.8	20.3	16.8	17.6	17.3	18.0	18.5
12H	18.5	19.2	19.0	19.7	20.2	16.8	17.5	17.3	18.0	18.4
8H 4H	18.4	19.2	18.9	19.6	20.1	17.0	17.8	17.5	18.2	18.7
6H	18.6	19.3	19.1	19.8	20.3	17.0	17.6	17.5	18.1	18.6
8H	18.6	19.2	19.1	19.7	20.2	16.9	17.5	17.5	18.0	18.5
12H	18.6	19.1	19.1	19.6	20.2	16.9	17.4	17.4	17.9	18.5
12H 4H	18.4	19.1	18.9	19.5	20.0	17.0	17.7	17.5	18.1	18.6
6H	18.6	19.2	19.1	19.6	20.2	17.0	17.5	17.5	18.0	18.5
8H	18.6	19.1	19.1	19.6	20.2	16.9	17.4	17.4	17.9	18.5
CIE190: 2010										

CIE190: 2010  
Area: 0.1 m2

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-08-05

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
Humidity:65.0%  
Test Distance:8.700m [K=1.0920]  
Remarks:

## UTILIZATION FACTORS TABLE

Test:U:119.97V I:0.1071A P:11.090W PF:0.8449 Freq:60.00Hz Lamp Flux:992.147x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	62	51	45	61	51	45	60	51	45	39
0.80	72	62	55	71	61	55	70	60	54	48
1.00	81	71	64	79	70	64	77	71	63	57
1.25	87	78	72	86	77	71	83	76	70	64
1.50	92	83	77	90	82	77	88	81	76	69
2.00	98	91	85	97	90	84	93	88	83	76
2.50	102	95	90	100	94	89	96	91	87	79
3.00	105	99	94	103	97	93	99	94	91	83
4.00	108	103	99	106	102	98	102	98	95	87
5.00	110	106	103	108	104	101	104	101	98	89
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2022-08-05

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity: 65.0%  
 Test Distance: 8.700m [K=1.0920]  
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.97V I:0.1071A P:11.090W PF:0.8449 Freq:60.00Hz Lamp Flux:992.147x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

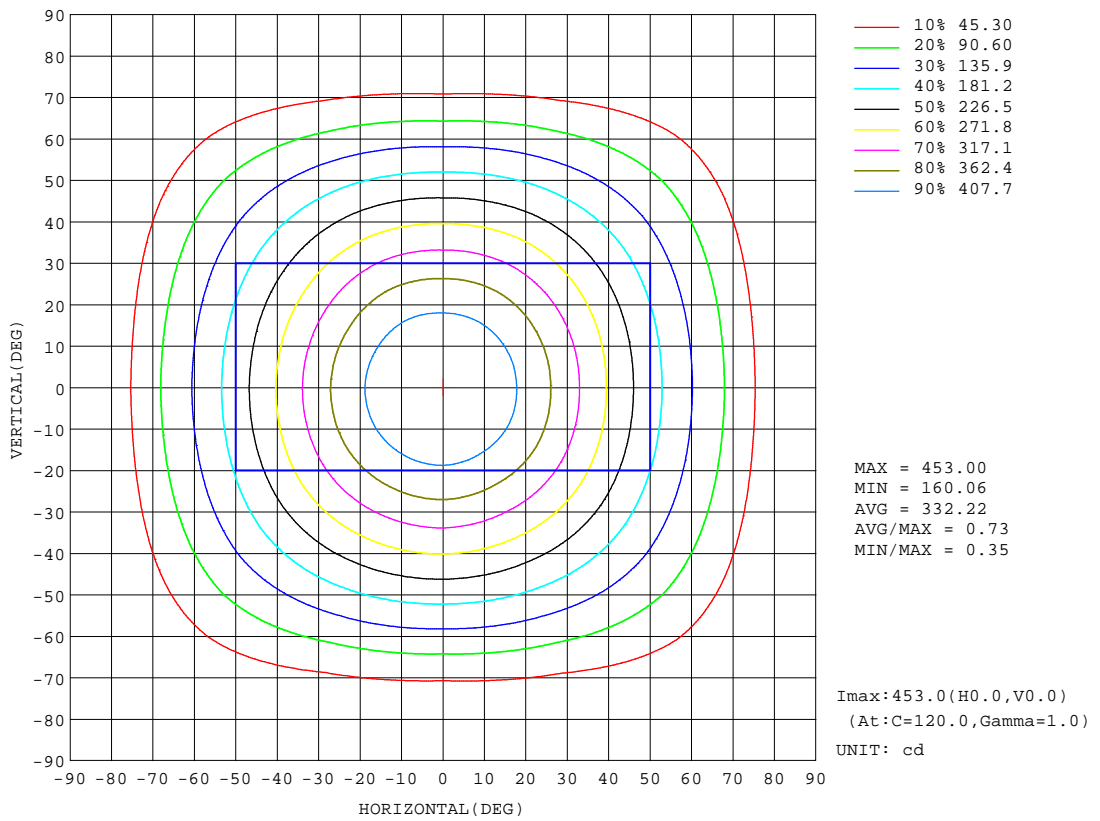

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-08-05


g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0920]  
 Remarks:



AAI Figure

Test:U:119.97V I:0.1071A P:11.090W PF:0.8449 Freq:60.00Hz Lamp Flux:992.147x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

Flux out:635.8 lm

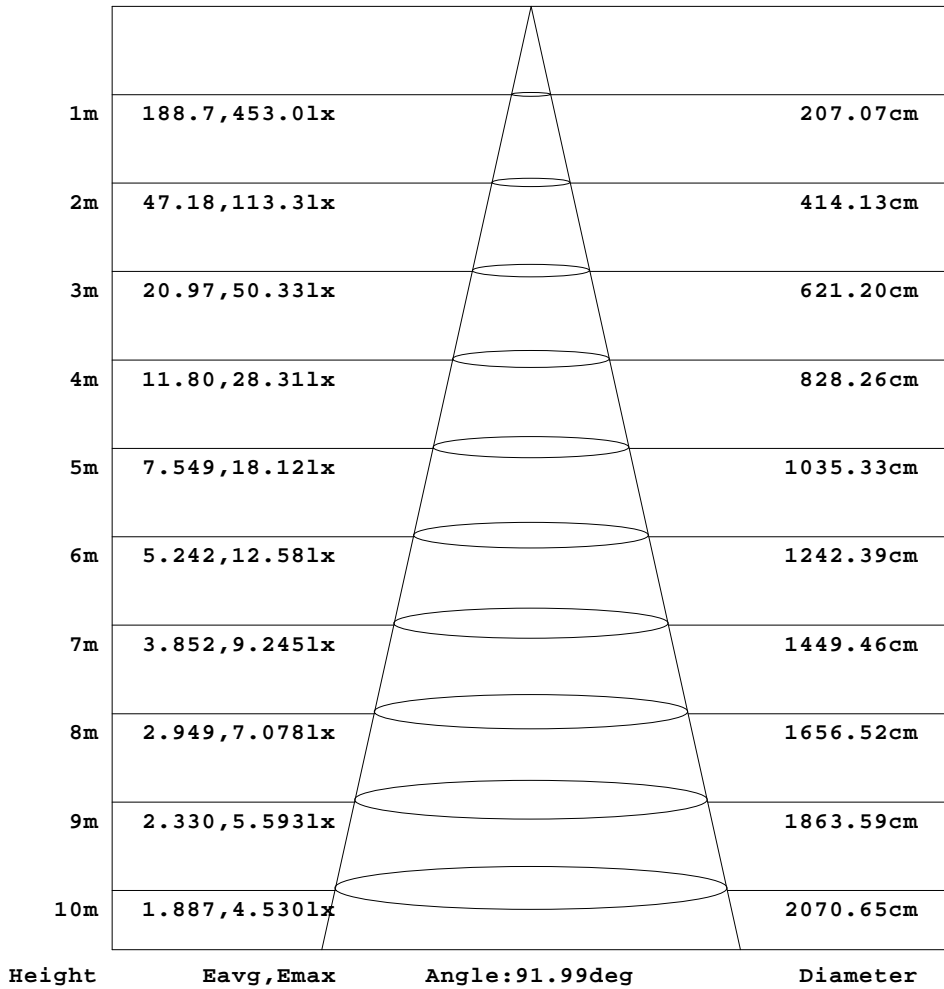


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-08-05

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0920]  
 Remarks:

ISOLUX DIAGRAM

Test:U:119.97V I:0.1071A P:11.090W PF:0.8449 Freq:60.00Hz Lamp Flux:992.147x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

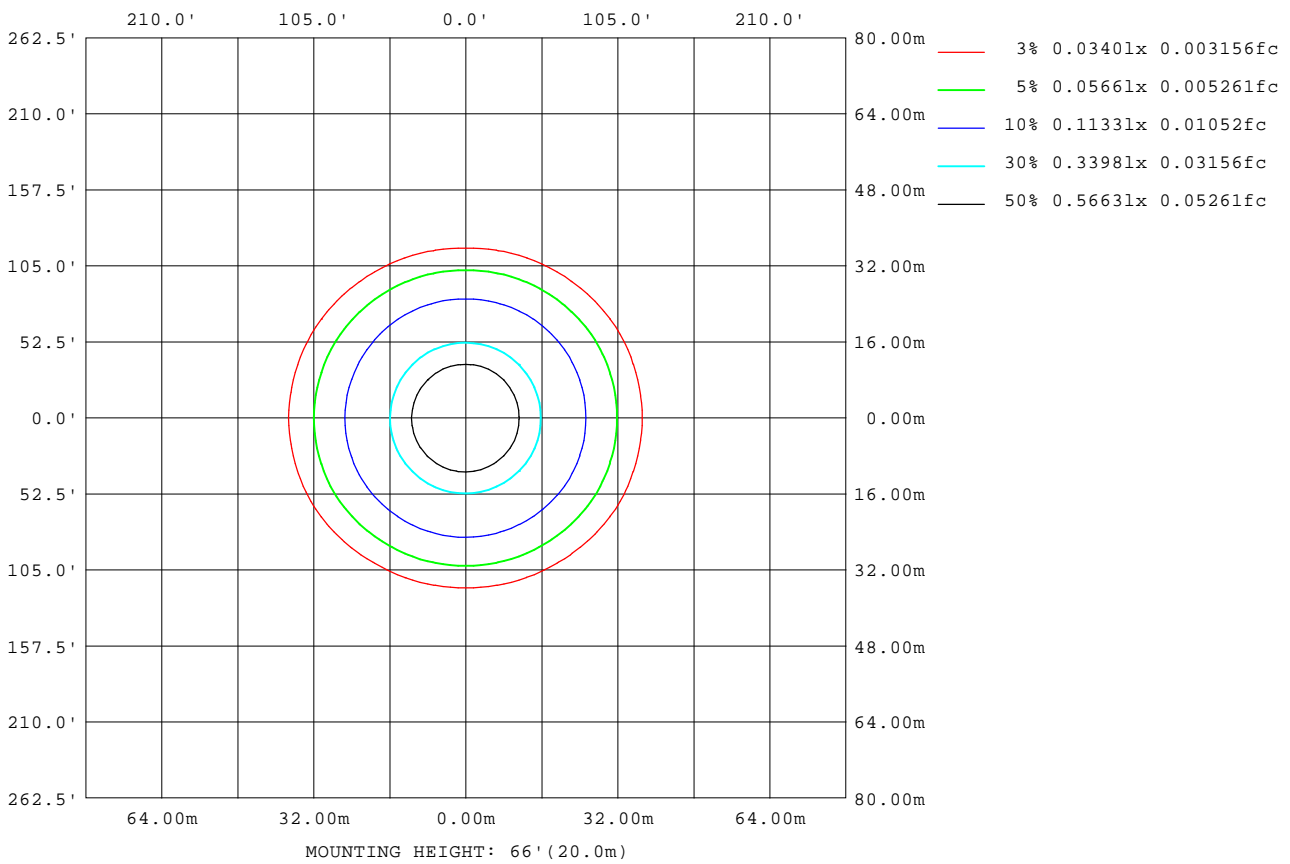

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2022-08-05

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity: 65.0%  
 Test Distance: 8.700m [K=1.0920]  
 Remarks:

## LED Avg.L Report

Test:U:119.97V I:0.1071A P:11.090W PF:0.8449 Freq:60.00Hz Lamp Flux:992.147x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	2573
L_0~180(75)av	1835
L_0~180(85)av	166
L_90~270(65)av	2013
L_90~270(75)av	811
L_90~270(85)av	131
L_45(65)av	2314
L_45(75)av	1267
L_45(85)av	156

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2022-08-05

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
Humidity:65.0%  
Test Distance:8.700m [K=1.0920]  
Remarks:

Planar Illuminance Curve

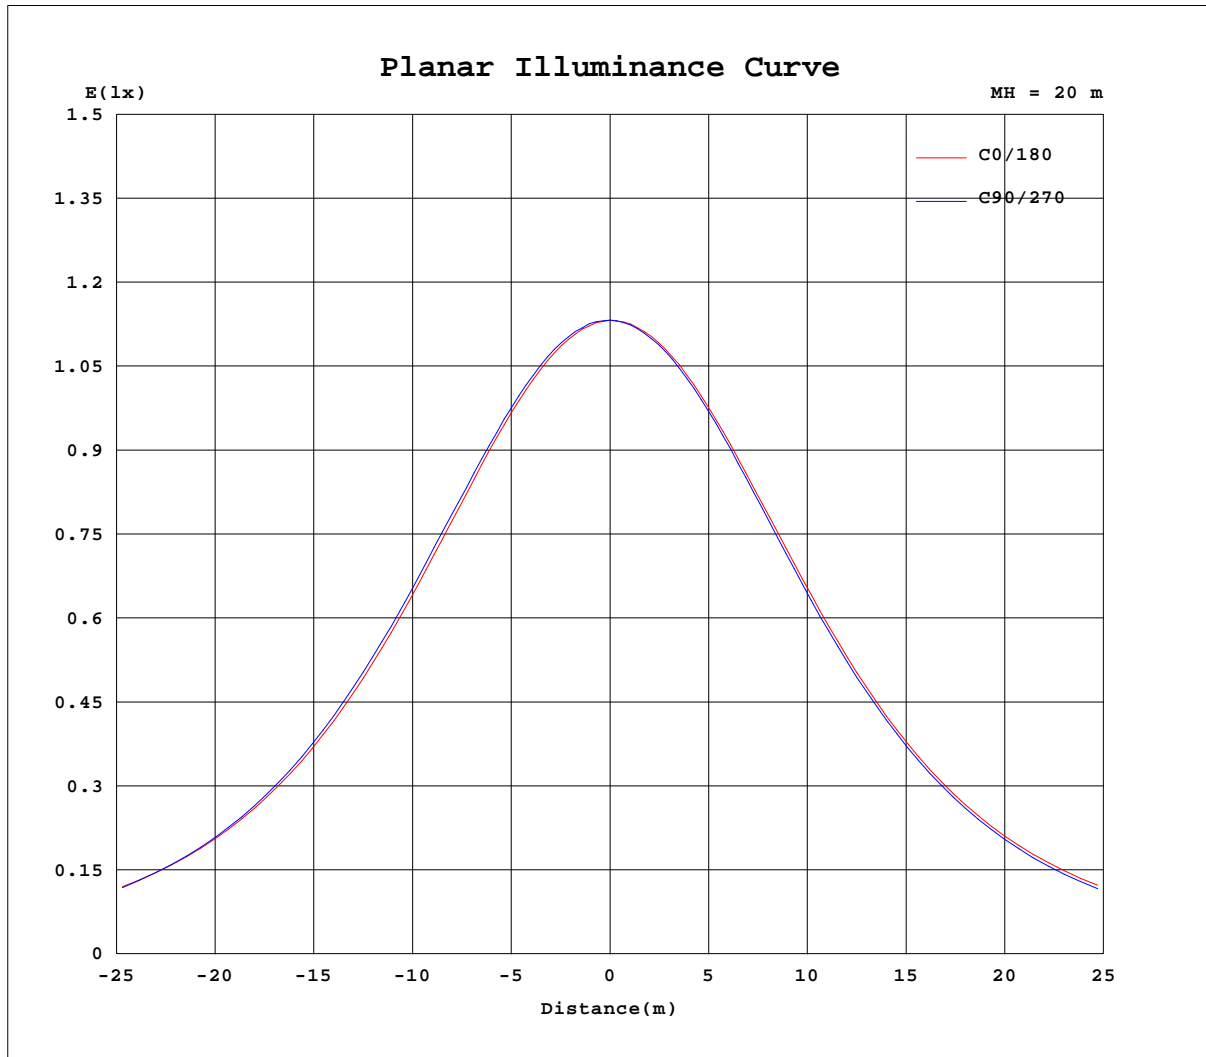

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2022-08-05

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity: 65.0%  
 Test Distance: 8.700m [K=1.0920]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.97V I:0.1071A P:11.090W PF:0.8449 Freq:60.00Hz Lamp Flux:992.147x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	453	453	453	453	453	453	453	453	453	453	453	453						
5	448	449	450	450	451	450	450	449	450	448	449	449						
10	437	439	439	440	441	440	440	440	440	438	438	438						
15	420	421	422	424	424	424	424	422	423	421	421	420						
20	396	399	399	401	402	402	402	400	400	398	398	397						
25	368	371	372	375	375	375	375	372	373	370	371	369						
30	337	339	340	344	343	344	344	341	342	338	340	338						
35	303	305	305	309	309	310	309	307	307	304	306	303						
40	268	270	270	273	273	275	274	271	272	268	270	269						
45	233	235	233	236	237	239	238	236	235	232	234	234						
50	199	200	197	198	200	204	204	201	199	195	199	200						
55	168	167	162	160	163	170	171	168	163	158	163	167						
60	137	135	126	122	126	137	140	136	128	121	127	136						
65	108	104	90.3	85.0	89.8	105	110	104	92.2	85.2	92.1	104						
70	78.5	72.9	55.6	50.0	54.6	71.9	79.0	72.3	57.6	50.4	57.4	72.4						
75	47.6	41.4	25.1	21.1	24.1	39.8	47.4	40.4	26.3	20.9	26.0	40.6						
80	15.5	13.8	6.10	4.88	5.55	12.8	14.8	12.8	6.33	4.69	6.09	13.0						
85	1.47	1.63	1.19	1.13	1.16	1.49	1.43	1.40	1.24	1.15	1.22	1.49						
90	0.01	0.00	0.02	0.00	0.00	0.00	0.01	0.01	0.00	0.00	0.00	0.01						
95	0.00	0.03	0.01	0.00	0.00	0.04	0.08	0.00	0.01	0.00	0.03	0.00						
100	0.09	0.10	0.10	0.06	0.06	0.12	0.17	0.06	0.08	0.03	0.10	0.06						
105	0.16	0.20	0.19	0.16	0.17	0.21	0.26	0.16	0.18	0.12	0.18	0.15						
110	0.27	0.31	0.32	0.27	0.30	0.33	0.37	0.24	0.27	0.21	0.28	0.27						
115	0.37	0.43	0.45	0.41	0.44	0.46	0.50	0.34	0.40	0.30	0.39	0.38						
120	0.51	0.55	0.57	0.55	0.58	0.58	0.62	0.44	0.51	0.41	0.52	0.49						
125	0.62	0.68	0.70	0.73	0.73	0.70	0.76	0.58	0.62	0.55	0.63	0.58						
130	0.77	0.77	0.81	0.87	0.85	0.84	0.88	0.70	0.74	0.70	0.73	0.67						
135	0.88	0.87	0.92	0.97	0.99	0.99	1.00	0.83	0.85	0.84	0.80	0.79						
140	0.95	0.95	1.04	1.11	1.11	1.12	1.10	0.89	0.95	0.91	0.92	0.91						
145	1.04	1.04	1.11	1.28	1.21	1.23	1.19	0.93	1.06	1.02	1.05	0.99						
150	1.14	1.16	1.20	1.38	1.32	1.36	1.30	0.95	1.16	1.12	1.14	1.09						
155	1.23	1.24	1.30	1.48	1.35	1.47	1.39	1.11	1.26	1.25	1.24	1.24						
160	1.33	1.31	1.37	1.55	1.42	1.56	1.47	1.17	1.37	1.30	1.35	1.38						
165	1.44	1.42	1.49	1.59	1.47	1.61	1.55	1.28	1.47	1.33	1.37	1.47						
170	1.56	1.63	1.60	1.65	1.55	1.67	1.59	1.45	1.54	1.45	1.38	1.54						
175	1.64	1.70	1.64	1.72	1.63	1.70	1.76	1.63	1.66	1.59	1.40	1.59						
180	1.68	1.70	1.88	1.74	1.84	1.72	1.69	1.65	1.70	1.58	1.53	1.85						

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-08-05

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0920]  
 Remarks: