
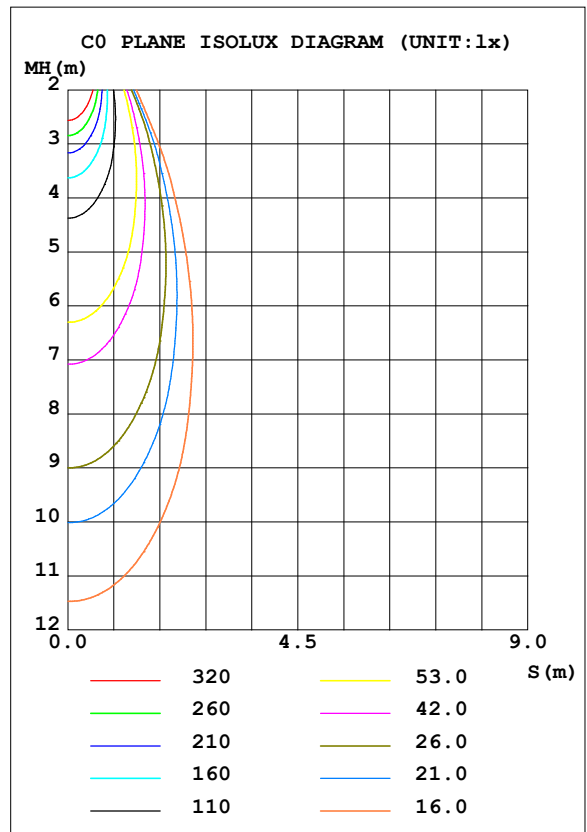


**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:120.02V I:0.1092A P:12.909W PF:0.9480 Freq:59.98Hz Lamp Flux:989.277x1 lm		
NAME: ASD-CD-TS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 76.64 lm/W			
MODEL		I <sub>max</sub> (cd)	2078	S/MH (C0/180)	0.64
NOMINAL POWER (W)	15	LOR (%)	100.0	S/MH (C90/270)	0.59
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	989.28	<input type="checkbox"/> UP, DN (C0-180)	0.0, 52.0
NOMINAL FLUX (lm)	989.277	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 48.0
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	0.65

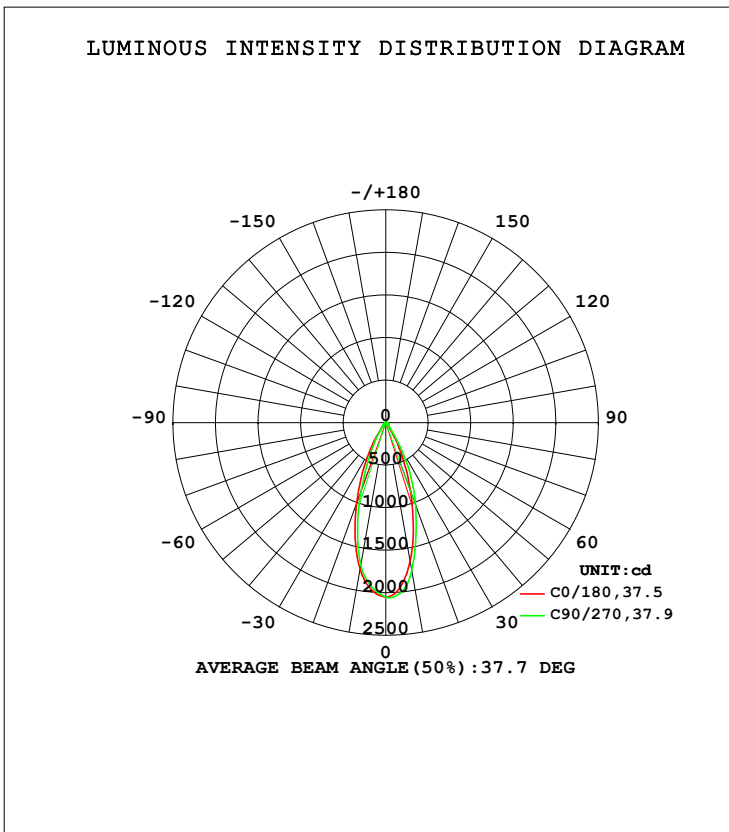

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2021-09-28

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity: 65.0%  
 Test Distance: 3.080m [K=1.0000]  
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	□ zone	□ total	%lum, lamp
10	1652	1825	1762	1838	1748	1608	1702	1621	0- 10	179.9	179.9	18.2,18.2
20	848.1	1080	1025	1098	1007	846.1	848.9	868.3	10- 20	367.3	547.2	55.3,55.3
30	250.6	397.1	389.9	402.8	363.8	254.0	266.8	249.4	20- 30	271.8	819.0	82.8,82.8
40	56.43	69.54	73.20	74.07	67.92	55.60	62.59	59.24	30- 40	91.09	910.1	92,92
50	32.56	36.29	33.80	36.17	35.04	33.03	35.74	33.88	40- 50	36.18	946.3	95.7,95.7
60	17.12	19.20	17.87	19.27	18.50	17.34	18.82	18.19	50- 60	22.90	969.2	98,98
70	9.022	9.730	9.053	9.790	9.379	8.422	8.717	9.511	60- 70	13.38	982.6	99.3,99.3
80	3.042	2.633	1.854	2.787	3.224	2.163	1.875	2.415	70- 80	5.946	988.5	99.9,99.9
90	0.0296	0.0212	0.0305	0.0249	0.0348	0.0352	0.0342	0.0368	80- 90	0.7437	989.3	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-09-28

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**LUMINANCE LIMITATION CURVES**

Test:U:120.02V I:0.1092A P:12.909W PF:0.9480 Freq:59.98Hz Lamp Flux:989.277x1 lm		
NAME: ASD-CD-TS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

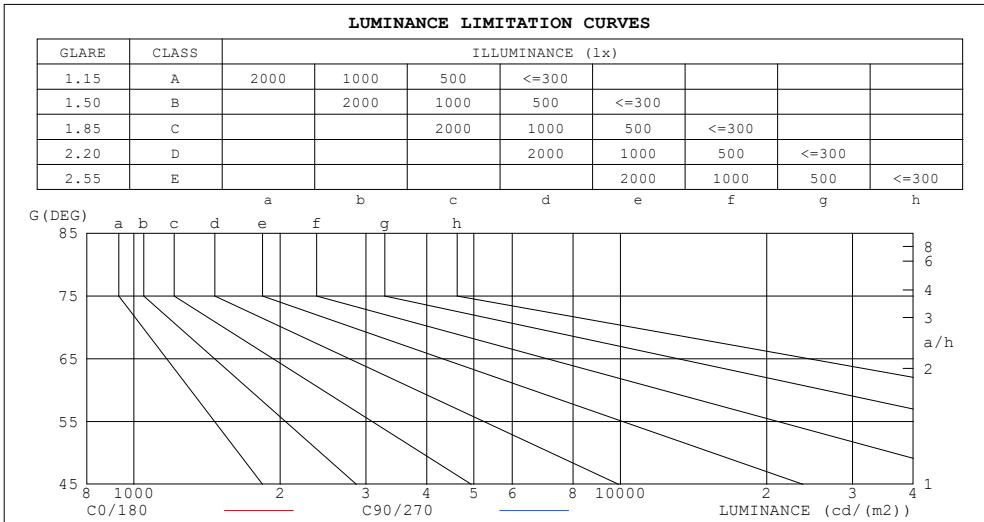

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	27	9
80	162	96
75	205	175
70	244	237
65	281	281
60	316	320
55	370	380
50	468	471
45	546	580


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-09-28

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM**

Test:U:120.02V I:0.1092A P:12.909W PF:0.9480 Freq:59.98Hz Lamp Flux:989.277x1 lm		
NAME: ASD-CD-TS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.05	1.03	1.02	1.01	1.00	.99	.98	.97	.96	.94
2.0	1.04	1.00	.97	1.02	.99	.96	.99	.96	.94	.96	.94	.92	.94	.92	.90	.89
3.0	.98	.93	.90	.97	.92	.89	.94	.91	.88	.92	.89	.86	.89	.87	.85	.83
4.0	.92	.87	.84	.91	.87	.83	.89	.85	.82	.87	.84	.81	.85	.83	.80	.79
5.0	.88	.82	.78	.87	.82	.78	.85	.81	.77	.83	.80	.77	.82	.79	.76	.75
6.0	.83	.78	.74	.82	.77	.74	.81	.76	.73	.80	.76	.73	.78	.75	.72	.71
7.0	.79	.74	.70	.79	.73	.70	.77	.73	.69	.76	.72	.69	.75	.71	.69	.67
8.0	.76	.70	.67	.75	.70	.66	.74	.69	.66	.73	.69	.66	.72	.68	.66	.64
9.0	.72	.67	.63	.72	.67	.63	.71	.66	.63	.70	.66	.63	.69	.65	.63	.61
10.0	.69	.64	.61	.69	.64	.61	.68	.63	.60	.67	.63	.60	.67	.63	.60	.59

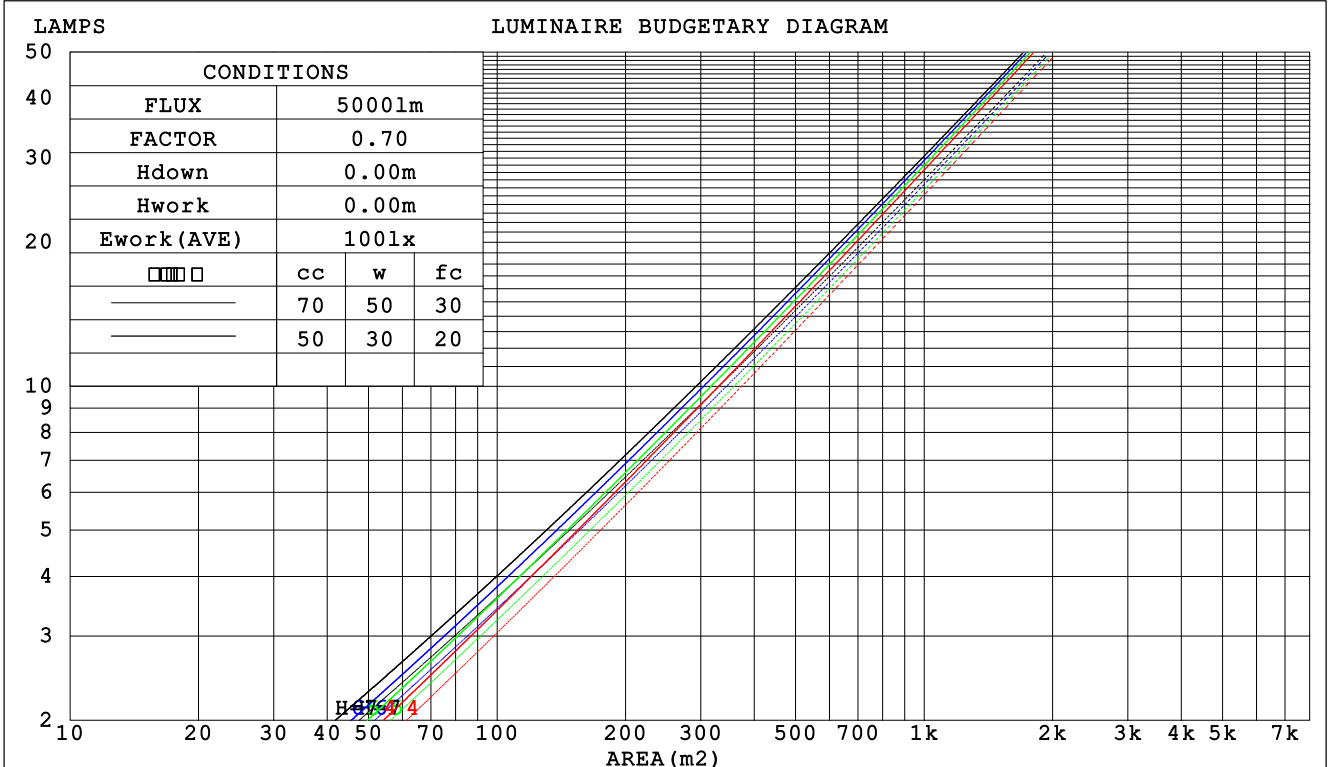

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-09-28

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

WEC AND CCEC

Test:U:120.02V I:0.1092A P:12.909W PF:0.9480 Freq:59.98Hz Lamp Flux:989.277x1 lm		
NAME: ASD-CD-TS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients (WEC)			
0.0						
1.0	.169 .096 .030	.162 .093 .029	.150 .086 .027	.138 .080 .026	.128 .074 .024	
2.0	.160 .088 .027	.154 .085 .026	.144 .080 .025	.134 .075 .024	.125 .071 .022	
3.0	.151 .080 .024	.146 .078 .024	.137 .074 .023	.129 .071 .022	.121 .067 .021	
4.0	.142 .074 .022	.138 .072 .021	.131 .069 .021	.123 .066 .020	.117 .064 .019	
5.0	.135 .069 .020	.131 .067 .020	.124 .065 .019	.118 .062 .019	.113 .060 .018	
6.0	.128 .064 .018	.125 .063 .018	.119 .061 .018	.114 .059 .017	.108 .057 .017	
7.0	.121 .060 .017	.119 .059 .017	.114 .058 .017	.109 .056 .016	.105 .054 .016	
8.0	.116 .057 .016	.114 .056 .016	.109 .054 .016	.105 .053 .015	.101 .052 .015	
9.0	.111 .054 .015	.109 .053 .015	.105 .052 .015	.101 .051 .014	.097 .049 .014	
10.0	.106 .051 .014	.104 .050 .014	.101 .049 .014	.097 .048 .014	.094 .047 .014	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients (CCEC)			
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.171 .157 .146	.146 .135 .125	.100 .093 .087	.057 .054 .050	.018 .017 .016	
2.0	.155 .133 .114	.132 .114 .099	.091 .079 .069	.052 .046 .040	.017 .015 .013	
3.0	.142 .113 .091	.121 .098 .079	.083 .068 .055	.048 .040 .033	.015 .013 .011	
4.0	.130 .099 .074	.112 .085 .064	.077 .059 .045	.045 .035 .027	.014 .011 .009	
5.0	.121 .087 .061	.104 .075 .053	.072 .052 .038	.042 .031 .022	.013 .010 .007	
6.0	.113 .077 .052	.097 .067 .045	.067 .047 .032	.039 .028 .019	.013 .009 .006	
7.0	.106 .069 .044	.091 .060 .038	.063 .042 .027	.037 .025 .016	.012 .008 .005	
8.0	.100 .063 .038	.086 .055 .033	.060 .038 .023	.035 .023 .014	.011 .007 .005	
9.0	.095 .058 .033	.082 .050 .028	.057 .035 .020	.033 .021 .012	.011 .007 .004	
10.0	.090 .053 .029	.078 .046 .025	.054 .033 .018	.031 .019 .011	.010 .006 .004	

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-09-28

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**UGR(Unified Glare Rating) Table**

Test:U:120.02V I:0.1092A P:12.909W PF:0.9480 Freq:59.98Hz Lamp Flux:989.277x1 lm										
NAME: ASD-CD-TS-2D15AC-WH					TYPE:			WEIGHT:		
SPEC.:5000K 90					DIM.:			SERIAL No.:		
MFR.: ASD Lighting Corp					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	4.1	4.9	4.3	5.1	5.2	5.9	6.7	6.1	6.9	7.1
3H	4.7	5.4	4.9	5.6	5.8	6.2	7.0	6.5	7.2	7.4
4H	4.9	5.6	5.1	5.8	6.1	6.3	7.0	6.6	7.3	7.5
6H	5.0	5.7	5.3	5.9	6.2	6.3	7.0	6.6	7.2	7.5
8H	5.0	5.7	5.3	5.9	6.2	6.2	6.9	6.5	7.2	7.4
12H	4.9	5.6	5.3	5.9	6.1	6.2	6.9	6.5	7.1	7.4
4H 2H	4.3	5.1	4.6	5.3	5.5	6.0	6.7	6.2	6.9	7.1
3H	5.1	5.7	5.4	6.0	6.3	6.4	7.1	6.7	7.3	7.6
4H	5.4	6.0	5.7	6.3	6.6	6.6	7.2	6.9	7.5	7.8
6H	5.6	6.1	5.9	6.4	6.8	6.6	7.1	7.0	7.4	7.8
8H	5.6	6.1	6.0	6.4	6.8	6.5	7.0	6.9	7.4	7.7
12H	5.5	6.0	5.9	6.3	6.7	6.5	6.9	6.9	7.3	7.7
8H 4H	5.4	5.9	5.8	6.3	6.6	6.6	7.0	6.9	7.4	7.8
6H	5.7	6.1	6.1	6.5	6.9	6.6	7.0	7.0	7.4	7.8
8H	5.7	6.1	6.2	6.5	6.9	6.6	6.9	7.0	7.3	7.8
12H	5.7	6.0	6.1	6.4	6.9	6.5	6.8	7.0	7.3	7.7
12H 4H	5.4	5.8	5.8	6.2	6.6	6.5	7.0	6.9	7.3	7.7
6H	5.7	6.0	6.1	6.4	6.9	6.6	6.9	7.0	7.3	7.8
8H	5.7	6.0	6.1	6.4	6.9	6.5	6.8	7.0	7.3	7.8
Variations with the observer position at spacings:										
S = 1.0H	+ 0.6 / - 0.8					+ 1.0 / - 1.4				
1.5H	+ 0.5 / - 0.4					+ 1.6 / - 1.0				
2.0H	+ 1.0 / - 0.8					+ 1.2 / - 1.2				

CIE Pub.117, 989.3 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.0)  
 Area: 0.111111 m2

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-09-28

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**UTILIZATION FACTORS TABLE**

Test:U:120.02V I:0.1092A P:12.909W PF:0.9480 Freq:59.98Hz Lamp Flux:989.277x1 lm		
NAME: ASD-CD-TS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	87	80	76	86	80	76	85	80	76	72
0.80	94	88	84	93	88	84	92	87	84	80
1.00	99	93	89	98	92	89	96	92	88	84
1.25	103	97	94	101	97	93	100	95	92	88
1.50	105	100	97	104	100	96	102	98	95	91
2.00	108	104	101	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	111	108	105	110	107	104	106	104	102	95
4.00	114	111	108	112	109	107	108	106	104	97
5.00	115	113	111	113	111	109	109	107	106	98
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-09-28

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**ISOCANDELA DIAGRAM**

Test:U:120.02V I:0.1092A P:12.909W PF:0.9480 Freq:59.98Hz Lamp Flux:989.277x1 lm		
NAME: ASD-CD-TS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

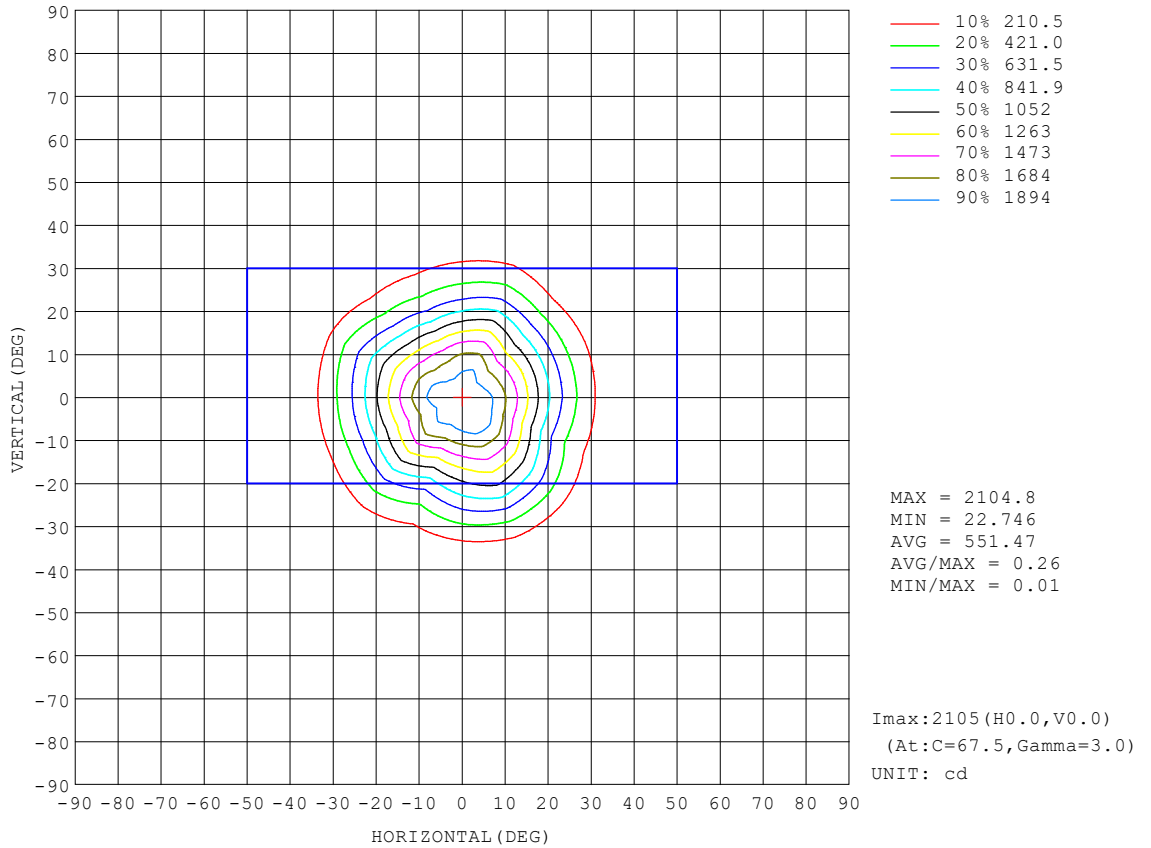


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-09-28

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:



**AAI Figure**

Test:U:120.02V I:0.1092A P:12.909W PF:0.9480 Freq:59.98Hz Lamp Flux:989.277x1 lm		
NAME: ASD-CD-TS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

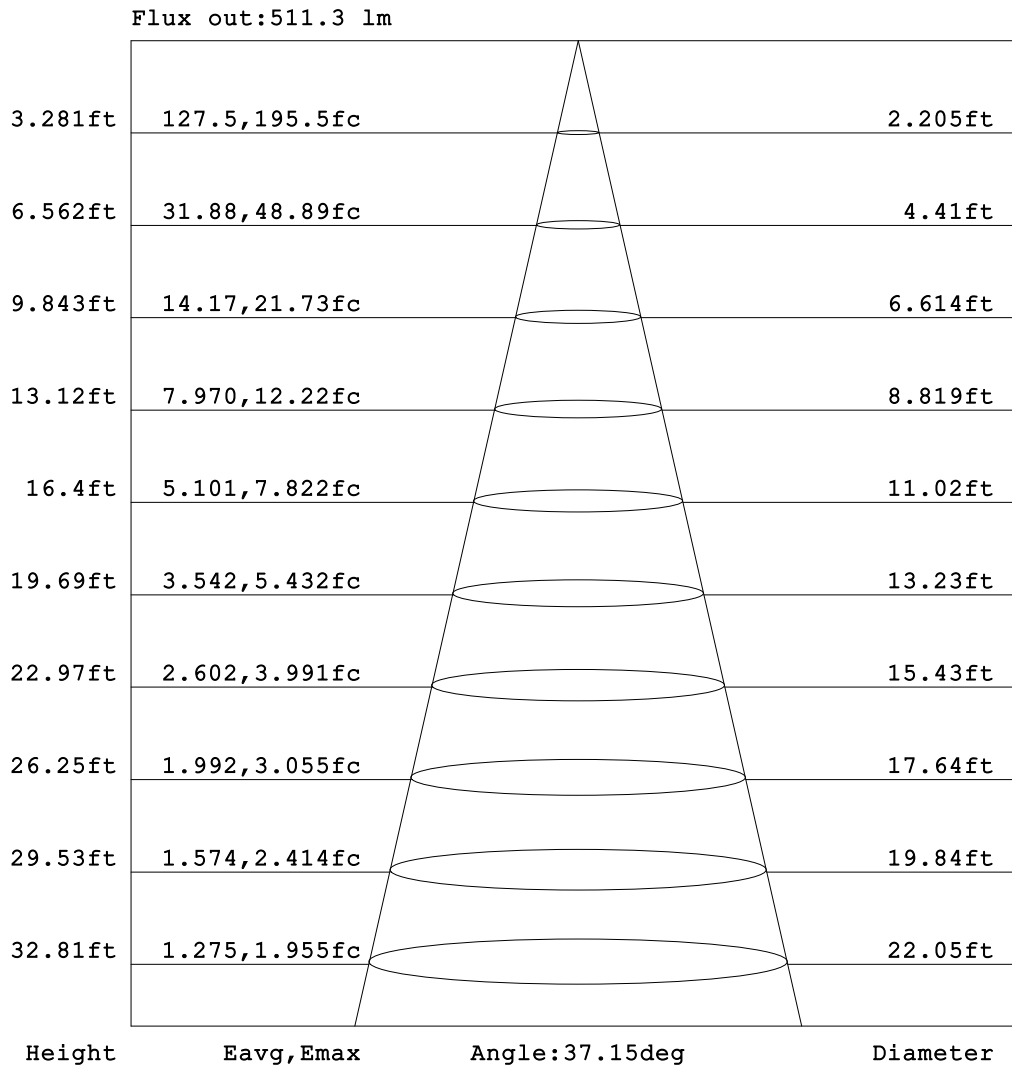


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-09-28

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**ISOLUX DIAGRAM**

Test:U:120.02V I:0.1092A P:12.909W PF:0.9480 Freq:59.98Hz Lamp Flux:989.277x1 lm		
NAME: ASD-CD-TS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

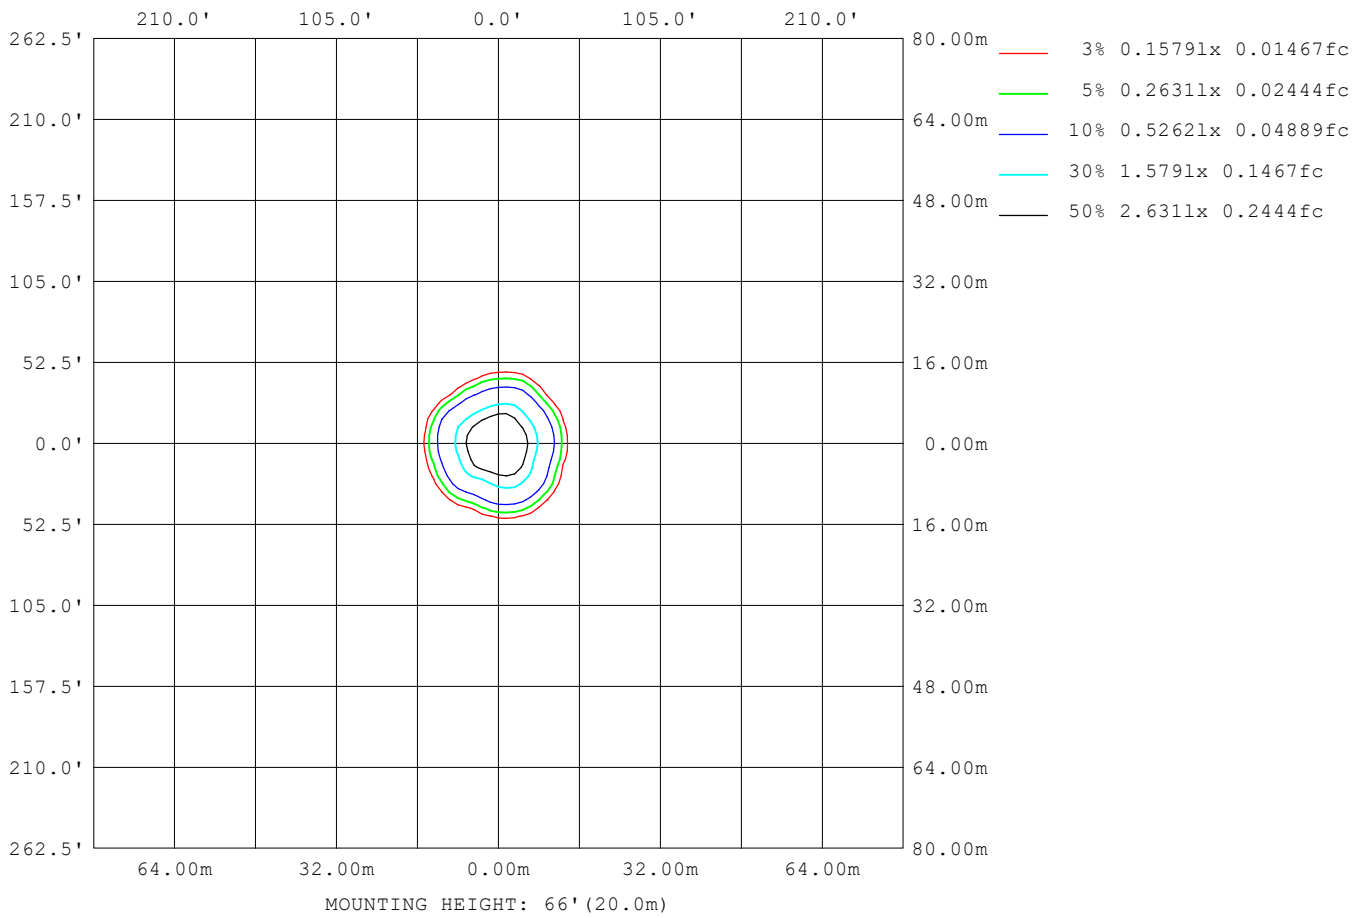

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-09-28

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**LED Avg.L Report**

Test:U:120.02V I:0.1092A P:12.909W PF:0.9480 Freq:59.98Hz Lamp Flux:989.277x1 lm		
NAME: ASD-CD-TS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	281
L_0~180 (75) av	203
L_0~180 (85) av	38
L_90~270 (65) av	284
L_90~270 (75) av	173
L_90~270 (85) av	9
L_45 (65) av	289
L_45 (75) av	196
L_45 (85) av	26

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-09-28

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**Planar Illuminance Curve**

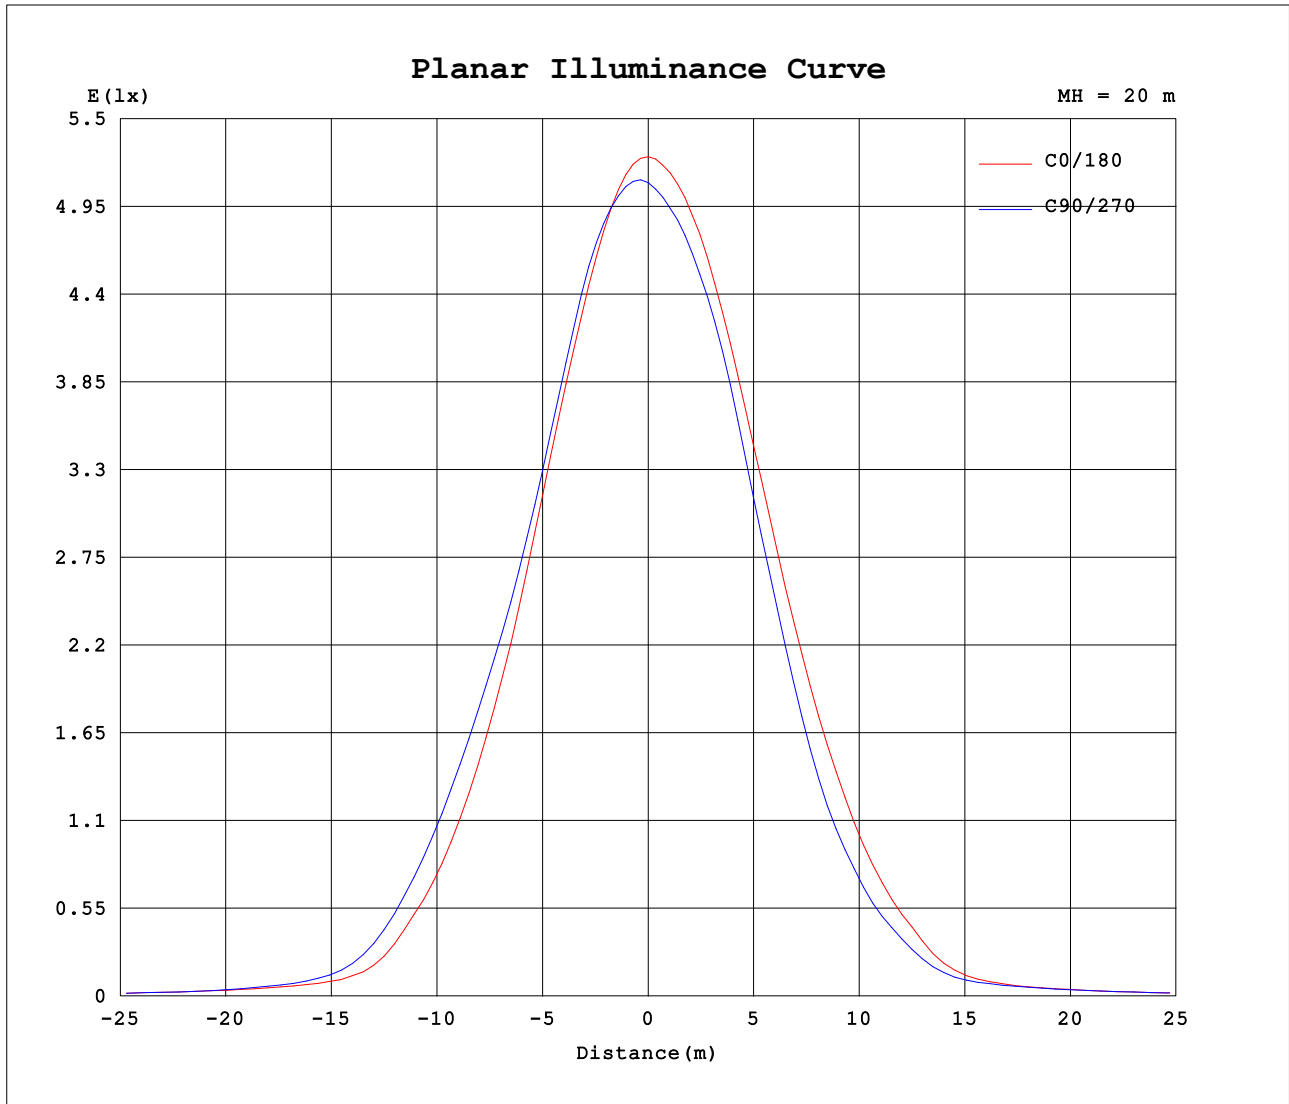

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-09-28

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.02V I:0.1092A P:12.909W PF:0.9480 Freq:59.98Hz Lamp Flux:989.277x1 lm		
NAME: ASD-CD-TS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	2049	2049	2049	2049	2049	2049	2049	2049	2049	2049	2049	2049	2049	2049	2049	2049			
5	1946	1974	2053	2057	2009	1973	2029	1988	1972	1952	1887	1888	1938	1970	1924	1959			
10	1652	1669	1825	1851	1762	1709	1838	1749	1748	1701	1608	1617	1702	1745	1621	1671			
15	1258	1245	1464	1517	1375	1275	1502	1399	1401	1359	1249	1202	1291	1392	1248	1293			
20	848	810	1080	1187	1025	853	1098	1006	1007	1013	846	759	849	990	868	877			
25	506	459	723	842	701	506	711	652	651	685	492	432	496	599	518	516			
30	251	240	397	469	390	267	403	366	364	399	254	226	267	324	249	267			
35	91.3	88.2	155	191	150	106	171	145	147	148	89.5	89.3	109	132	94.3	100			
40	56.4	55.2	69.5	81.8	73.2	60.5	74.1	68.8	67.9	65.3	55.6	56.6	62.6	68.6	59.2	61.2			
45	41.8	41.8	49.3	52.1	45.7	41.1	49.6	47.8	47.2	48.3	42.7	43.1	46.9	49.8	43.6	45.6			
50	32.6	32.8	36.3	36.4	33.8	32.0	36.2	35.3	35.0	35.4	33.0	33.5	35.7	37.2	33.9	35.3			
55	23.0	23.2	27.0	27.0	24.4	22.8	26.8	25.7	25.9	26.0	23.4	23.7	26.1	27.7	24.2	25.3			
60	17.1	17.2	19.2	19.5	17.9	17.0	19.3	18.6	18.5	18.6	17.3	17.6	18.8	19.7	18.2	18.7			
65	12.8	12.9	14.0	14.3	13.2	12.5	14.1	13.7	13.5	13.6	12.6	12.6	13.4	14.1	13.6	14.0			
70	9.02	8.94	9.73	9.75	9.05	8.64	9.79	9.52	9.38	9.32	8.42	8.28	8.72	9.34	9.51	9.88			
75	5.74	5.64	5.93	5.66	5.06	4.98	5.97	6.06	5.96	5.75	4.96	4.68	4.89	5.33	5.64	6.30			
80	3.04	2.92	2.63	2.25	1.85	1.94	2.79	3.19	3.22	2.88	2.16	1.83	1.87	2.13	2.41	3.17			
85	0.25	0.56	0.17	0.10	0.09	0.10	0.40	0.88	0.49	0.70	0.23	0.10	0.08	0.08	0.20	0.60			
90	0.03	0.03	0.02	0.02	0.03	0.03	0.02	0.03	0.03	0.04	0.04	0.04	0.03	0.03	0.04	0.04			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2021-09-28

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity: 65.0%  
 Test Distance: 3.080m [K=1.0000]  
 Remarks: