


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.15V I:0.1260A P:14.890W PF:0.9834 Freq:59.98Hz Lamp Flux:1095.67x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.14*0.14	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 73.58 lm/W			
MODELASD	JBS-6D15AC(5000K)	I _{max} (cd)	373.5	S/MH(C0/180)	1.26
NOMINAL POWER(W)	15	LOR(%)	100.0	S/MH(C90/270)	1.28
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	1095.7	h UP, DN(C0-180)	0.2, 49.6
NOMINAL FLUX(lm)	1095.67	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.2, 50.0
LAMPS INSIDE	1	h up(%)	0.4	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	h down(%)	99.6	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

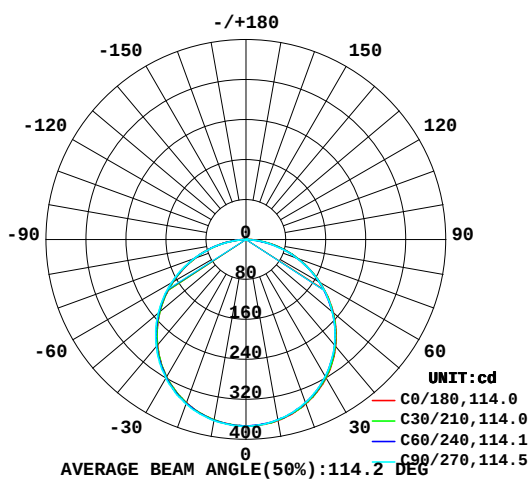

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

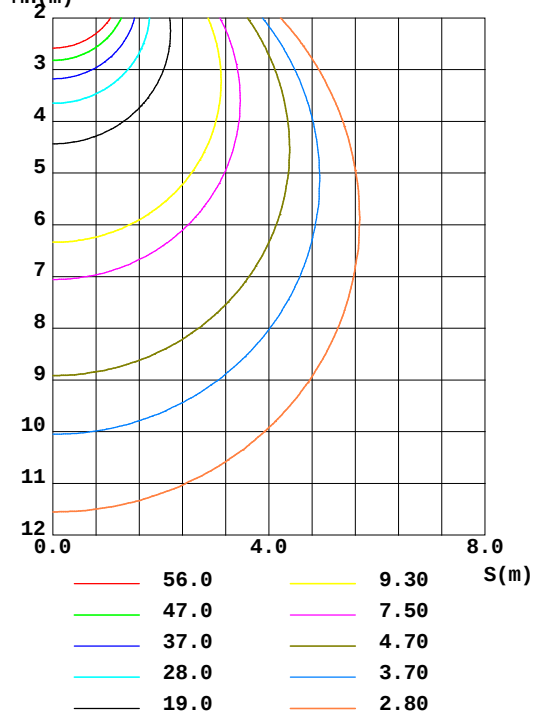

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-7

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=1.1233]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum, lamp
10	367.7	366.8	366.4	366.0	366.8	366.9	368.2	368.3	0- 10	35.32	35.32	3.22,3.22
20	349.9	348.4	347.6	346.5	347.5	348.9	350.3	350.5	10- 20	101.5	136.8	12.5,12.5
30	320.4	318.2	316.9	315.7	317.5	318.4	320.2	321.1	20- 30	154.4	291.2	26.6,26.6
40	278.9	277.0	275.8	274.2	275.8	276.9	279.2	280.1	30- 40	187.1	478.4	43.7,43.7
50	228.3	226.5	225.6	223.8	224.9	226.3	229.2	229.6	40- 50	195.1	673.4	61.5,61.5
60	170.5	169.2	169.1	166.8	167.3	169.1	171.9	172.1	50- 60	177.6	851.0	77.7,77.7
70	109.1	108.4	107.5	106.4	107.1	108.4	109.4	110.5	60- 70	137.7	988.7	90.2,90.2
80	47.44	47.21	44.01	45.75	46.61	46.69	45.47	47.88	70- 80	81.77	1070	97.7,97.7
90	0.1486	0.0954	0.0789	0.1085	0.1446	0.2263	0.1645	0.1748	80- 90	20.40	1091	99.6,99.6
100	0.2296	0.2362	0.2629	0.2531	0.3612	0.3281	0.3135	0.3154	90-100	0.2245	1091	99.6,99.6
110	0.4656	0.4659	0.4866	0.4797	0.6435	0.5710	0.5322	0.5618	100-110	0.4195	1091	99.6,99.6
120	0.7871	0.7154	0.7035	0.7129	0.9257	0.8137	0.7754	0.7983	110-120	0.6422	1092	99.7,99.7
130	1.174	0.9449	0.9270	0.9068	1.155	1.034	1.064	1.045	120-130	0.8039	1093	99.7,99.7
140	1.057	0.9980	1.032	1.025	1.221	1.168	1.321	1.137	130-140	0.8241	1094	99.8,99.8
150	1.155	1.182	1.282	1.193	1.332	1.299	1.524	1.255	140-150	0.7391	1094	99.9,99.9
160	1.312	1.309	1.374	1.363	1.464	1.408	1.415	1.383	150-160	0.6161	1095	99.9,99.9
170	1.463	1.483	1.512	1.505	1.588	1.611	1.813	1.626	160-170	0.4141	1096	100,100
180	1.595	1.591	1.591	1.584	1.601	1.601	1.597	1.580	170-180	0.1501	1096	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-7

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1233]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.15V I:0.1260A P:14.890W PF:0.9834 Freq:59.98Hz Lamp Flux:1095.67x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.14*0.14	Shielding Angle:

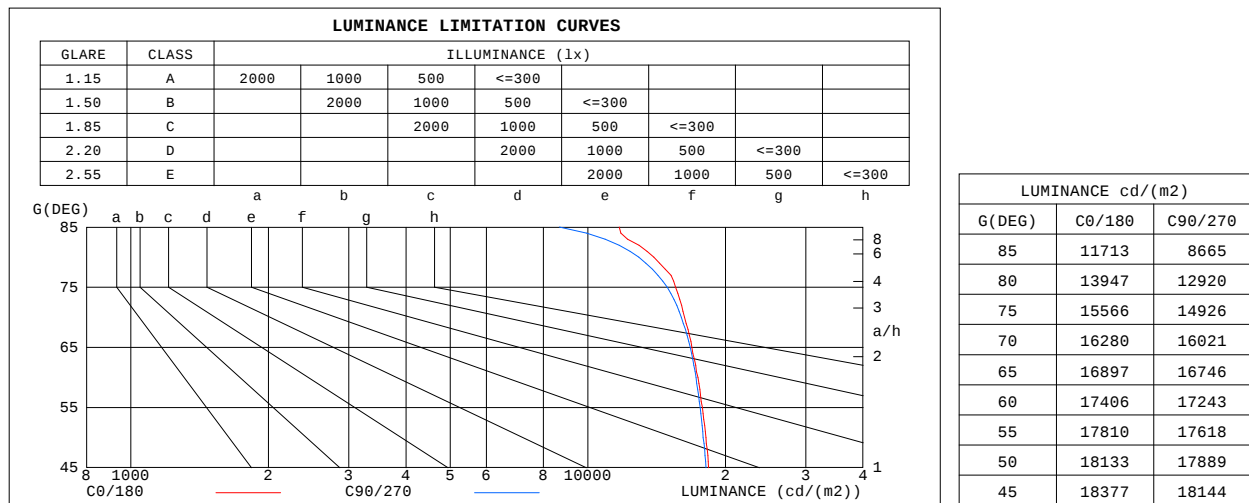


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-6-7

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.00.426
Humidity: 65.0%
Test Distance: 8.600m [K=1.1233]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.15V I:0.1260A P:14.890W PF:0.9834 Freq:59.98Hz Lamp Flux:1095.67x1 lm															
NAME:								TYPE:				WEIGHT:			
SPEC.:								DIM.:				SERIAL No.:			
MFR.: ASD LIGHTNG CORP								SUR.: 0.14*0.14				Shielding Angle:			

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.99	.95	1.01	.97	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.90	.83	.77	.88	.82	.76	.84	.79	.74	.81	.77	.73	.78	.74	.71	.69
3.0	.79	.71	.64	.77	.70	.63	.74	.68	.62	.71	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.54	.68	.60	.54	.66	.59	.53	.63	.57	.52	.61	.56	.51	.49
5.0	.62	.53	.46	.61	.53	.46	.59	.51	.46	.57	.50	.45	.55	.49	.44	.42
6.0	.56	.47	.40	.55	.46	.40	.53	.46	.40	.51	.45	.39	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.41	.35	.48	.41	.35	.47	.40	.35	.45	.39	.35	.33
8.0	.46	.38	.32	.46	.37	.32	.44	.37	.31	.43	.36	.31	.42	.36	.31	.29
9.0	.42	.34	.29	.42	.34	.28	.41	.33	.28	.39	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.30	.26	.37	.30	.25	.36	.30	.25	.24

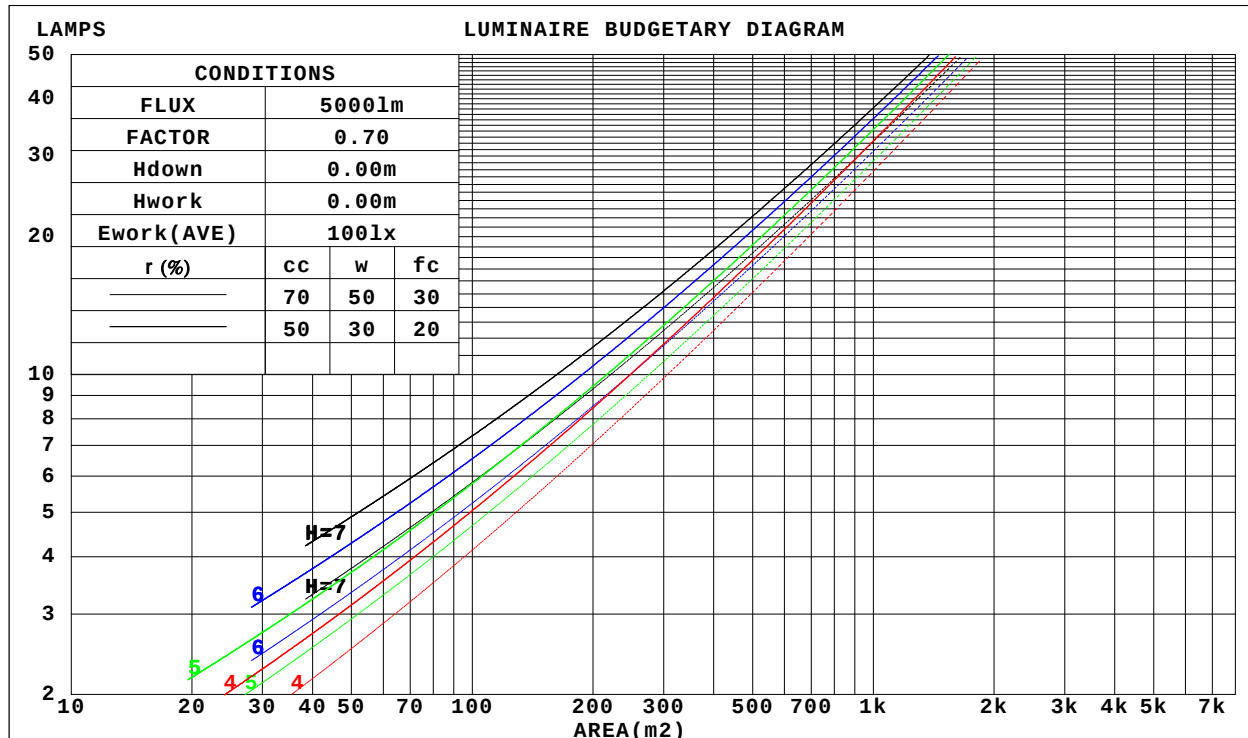

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-6-7

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.00.426
Humidity: 65.0%
Test Distance: 8.600m [K=1.1233]
Remarks:

WEC AND CCEC

Test:U:120.15V I:0.1260A P:14.890W PF:0.9834 Freq:59.98Hz Lamp Flux:1095.67x1 lm					
NAME:			TYPE:		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.: ASD LIGHTNG CORP			SUR.: 0.14*0.14		Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)															
0.0																
1.0	.313	.178	.056	.306	.174	.055	.292	.168	.054	.280	.161	.052	.268	.156	.050	
2.0	.294	.161	.050	.288	.159	.049	.276	.154	.048	.265	.149	.047	.255	.144	.045	
3.0	.272	.145	.043	.267	.143	.043	.256	.139	.042	.246	.135	.041	.237	.131	.041	
4.0	.251	.130	.038	.246	.129	.038	.237	.125	.037	.228	.122	.037	.220	.119	.036	
5.0	.232	.118	.034	.227	.117	.034	.219	.114	.034	.211	.111	.033	.204	.109	.033	
6.0	.215	.108	.031	.211	.107	.031	.203	.104	.030	.196	.102	.030	.190	.100	.030	
7.0	.200	.099	.028	.196	.098	.028	.190	.096	.028	.183	.094	.027	.178	.092	.027	
8.0	.187	.091	.026	.183	.090	.026	.177	.089	.025	.172	.087	.025	.167	.085	.025	
9.0	.175	.085	.024	.172	.084	.024	.167	.082	.023	.161	.081	.023	.157	.080	.023	
10.0	.164	.079	.022	.162	.078	.022	.157	.077	.022	.152	.076	.021	.148	.074	.021	

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)															
0.0	.194	.194	.194	.166	.166	.166	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.184	.159	.138	.157	.137	.118	.108	.094	.082	.062	.054	.048	.020	.018	.015	
2.0	.176	.135	.101	.151	.116	.087	.103	.081	.061	.060	.047	.036	.019	.015	.012	
3.0	.168	.118	.077	.144	.102	.067	.099	.071	.047	.057	.041	.028	.018	.013	.009	
4.0	.161	.104	.061	.138	.090	.053	.095	.063	.038	.055	.037	.022	.018	.012	.007	
5.0	.153	.094	.050	.132	.081	.044	.091	.057	.031	.053	.033	.018	.017	.011	.006	
6.0	.146	.086	.042	.126	.074	.037	.087	.052	.026	.050	.031	.016	.016	.010	.005	
7.0	.139	.079	.037	.120	.068	.032	.083	.048	.023	.048	.028	.013	.016	.009	.004	
8.0	.133	.073	.032	.114	.063	.028	.079	.045	.020	.046	.026	.012	.015	.009	.004	
9.0	.127	.068	.029	.109	.059	.025	.076	.042	.018	.044	.025	.011	.014	.008	.004	
10.0	.121	.064	.026	.104	.055	.023	.072	.039	.016	.042	.023	.010	.014	.008	.003	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-7

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1233]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.15V I:0.1260A P:14.890W PF:0.9834 Freq:59.98Hz Lamp Flux:1095.67x1 lm											
NAME:					TYPE:			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:			
MFR.: ASD LIGHTNG CORP					SUR.: 0.14*0.14			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise				Viewed endwise					
x = 2H y = 2H	2H	22.2	23.8	22.5	24.1	24.5	22.1	23.7	22.4	24.0	24.4
	3H	24.1	25.6	24.5	25.9	26.3	24.0	25.4	24.3	25.8	26.2
	4H	24.8	26.2	25.2	26.6	27.0	24.7	26.1	25.1	26.4	26.8
	6H	25.4	26.7	25.8	27.1	27.5	25.2	26.5	25.6	26.8	27.2
	8H	25.6	26.8	26.0	27.2	27.6	25.3	26.5	25.7	26.9	27.3
	12H	25.7	26.9	26.1	27.2	27.7	25.4	26.6	25.8	26.9	27.4
4H	2H	22.8	24.2	23.2	24.6	25.0	22.7	24.1	23.1	24.5	24.9
	3H	25.0	26.1	25.4	26.5	27.0	24.8	26.0	25.2	26.4	26.8
	4H	25.8	26.9	26.3	27.3	27.8	25.7	26.7	26.1	27.1	27.6
	6H	26.5	27.5	27.0	27.9	28.4	26.3	27.2	26.7	27.7	28.1
	8H	26.8	27.6	27.2	28.1	28.6	26.5	27.3	26.9	27.8	28.3
	12H	26.9	27.7	27.4	28.2	28.7	26.6	27.3	27.0	27.8	28.3
8H	4H	26.2	27.1	26.6	27.5	28.0	26.0	26.9	26.5	27.3	27.8
	6H	27.0	27.7	27.5	28.2	28.7	26.7	27.4	27.2	27.9	28.4
	8H	27.3	28.0	27.8	28.5	29.0	27.0	27.6	27.5	28.1	28.6
	12H	27.6	28.1	28.1	28.6	29.2	27.1	27.7	27.6	28.2	28.8
12H	4H	26.2	27.0	26.7	27.5	28.0	26.0	26.8	26.5	27.3	27.8
	6H	27.1	27.7	27.6	28.2	28.8	26.8	27.5	27.3	27.9	28.5
	8H	27.4	28.0	28.0	28.5	29.1	27.1	27.7	27.6	28.2	28.7
CIE190: 2010											

CIE190: 2010
Area: 0.0196 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-6-7

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.600m [K=1.1233]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.15V I:0.1260A P:14.890W PF:0.9834 Freq:59.98Hz Lamp Flux:1095.67x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.14*0.14	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	45	38	56	45	38	55	45	38	31
0.80	67	55	48	66	55	48	64	54	47	40
1.00	75	64	57	74	64	57	72	65	56	49
1.25	83	72	65	81	71	64	78	70	63	56
1.50	88	78	70	86	77	70	83	75	69	61
2.00	95	86	79	93	85	78	89	82	77	69
2.50	98	91	84	96	89	84	92	86	82	73
3.00	102	95	89	100	93	88	96	90	86	77
4.00	106	100	95	104	98	94	99	95	91	82
5.00	108	104	99	106	102	98	101	98	95	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-7

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=1.1233]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.15V I:0.1260A P:14.890W PF:0.9834 Freq:59.98Hz Lamp Flux:1095.67x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.14*0.14	Shielding Angle:

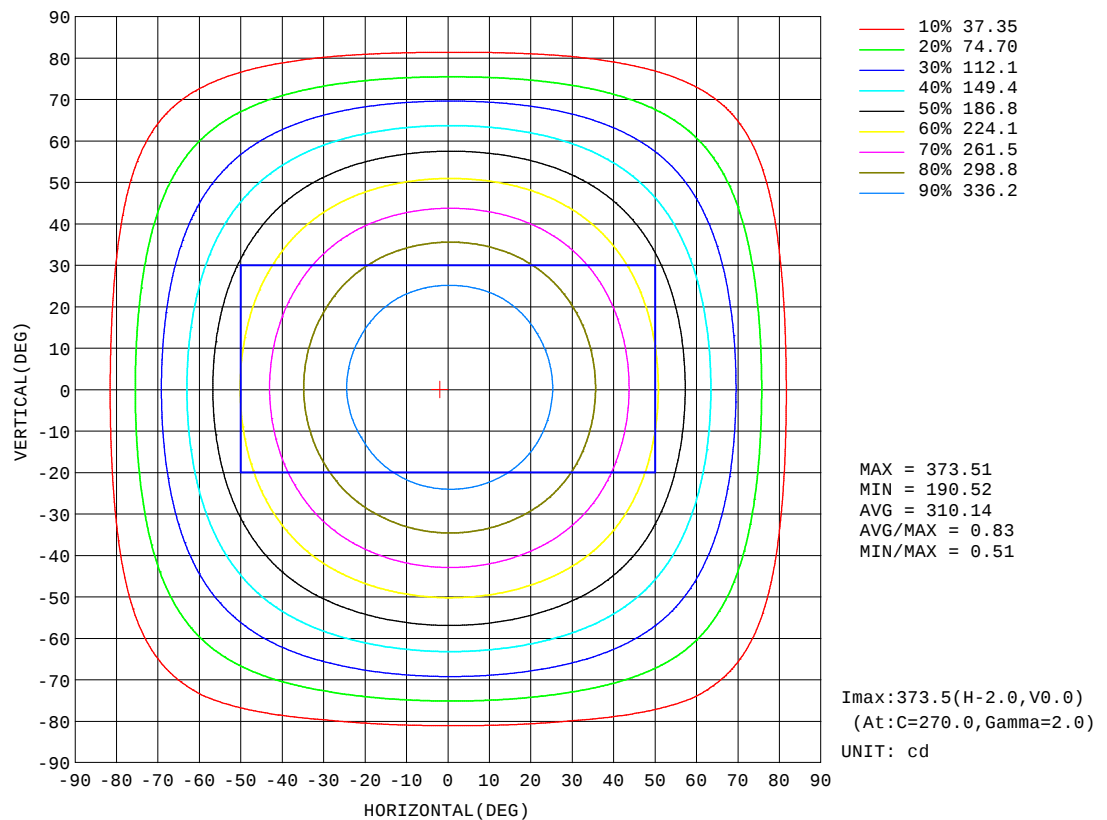


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-6-7

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.00.426
Humidity: 65.0%
Test Distance: 8.600m [K=1.1233]
Remarks:

AAI Figure

Test:U:120.15V I:0.1260A P:14.890W PF:0.9834 Freq:59.98Hz Lamp Flux:1095.67x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.14*0.14	Shielding Angle:

Flux out:818.0 lm

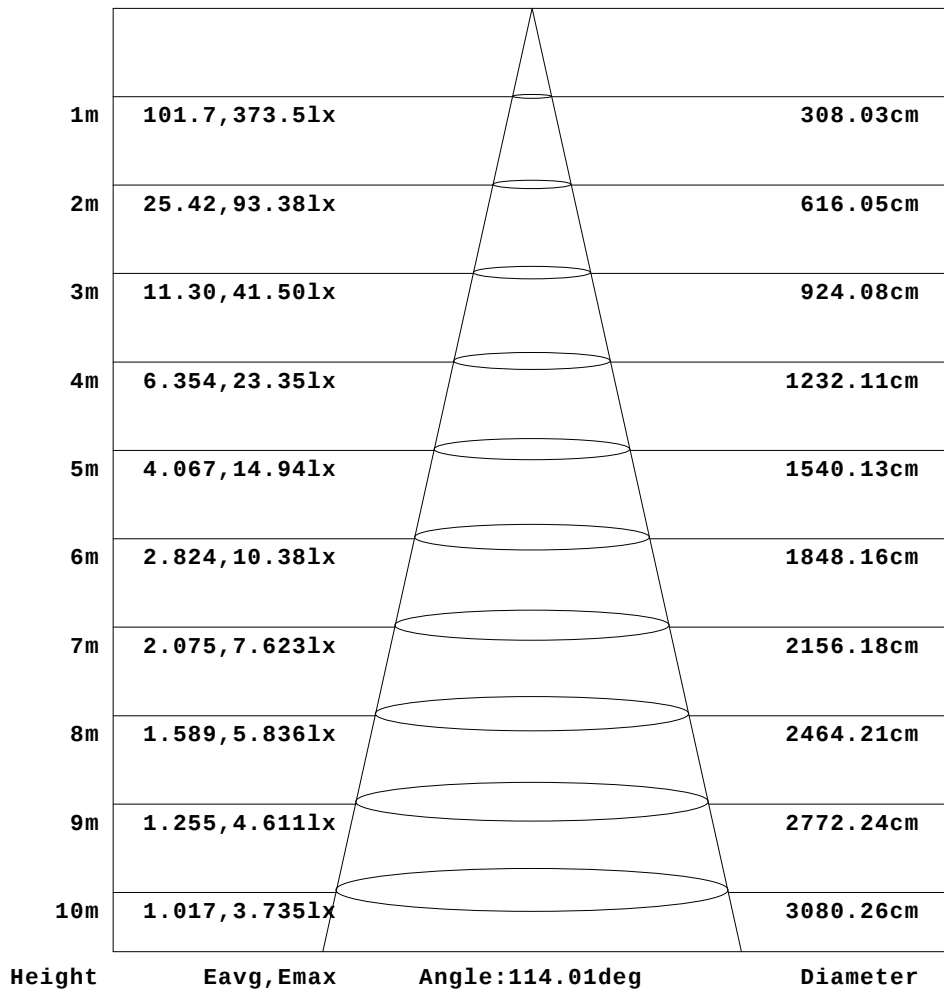


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-7

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1233]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.15V I:0.1260A P:14.890W PF:0.9834 Freq:59.98Hz Lamp Flux:1095.67x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.14*0.14	Shielding Angle:

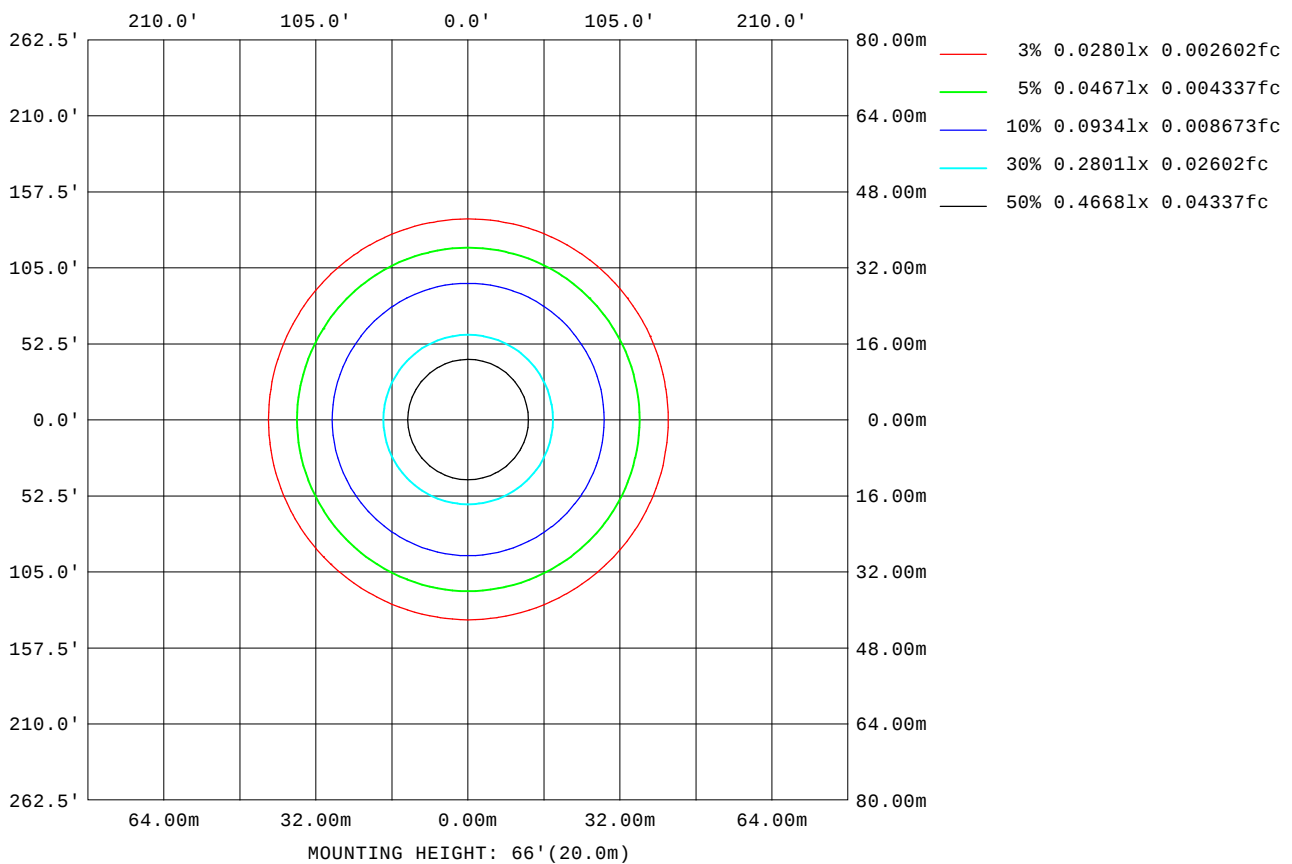

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-6-7

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.00.426
Humidity: 65.0%
Test Distance: 8.600m [K=1.1233]
Remarks:

LED Avg.L Report

Test:U:120.15V I:0.1260A P:14.890W PF:0.9834 Freq:59.98Hz Lamp Flux:1095.67x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.14*0.14	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	16730
L_0~180(75)av	15412
L_0~180(85)av	11207
L_90~270(65)av	16900
L_90~270(75)av	15099
L_90~270(85)av	8890
L_45(65)av	16795
L_45(75)av	15312
L_45(85)av	9969

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-6-7

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.600m [K=1.1233]
Remarks:

Planar Illuminance Curve

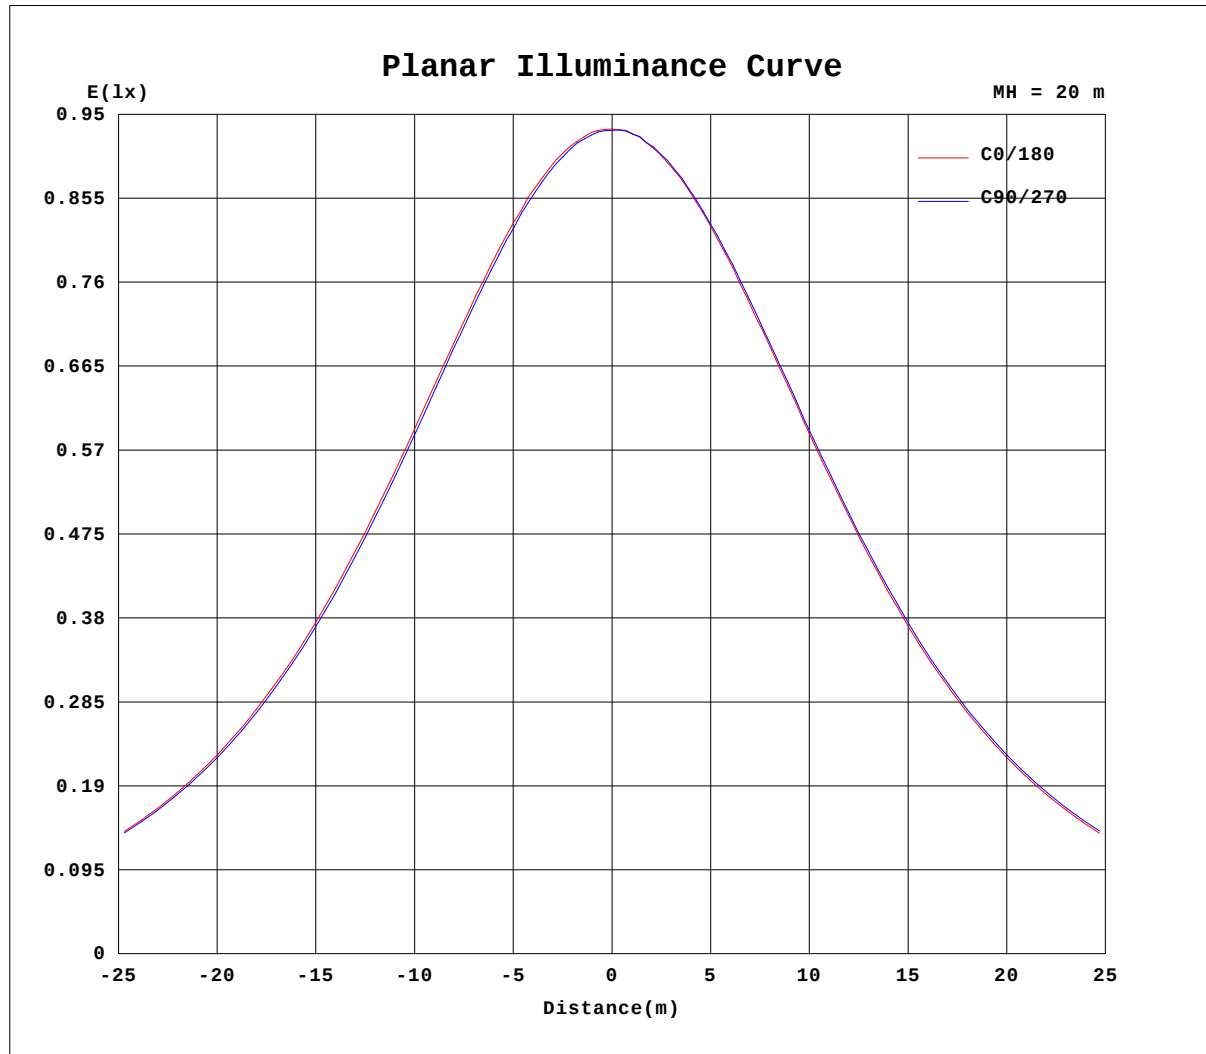

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-6-7

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.00.426
Humidity: 65.0%
Test Distance: 8.600m [K=1.1233]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.15V I:0.1260A P:14.890W PF:0.9834 Freq:59.98Hz Lamp Flux:1095.67x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.14*0.14	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	373	373	373	373	373	373	373	373	373	373	373	373						
5	372	372	371	372	371	371	371	371	372	372	372	372						
10	368	367	366	366	366	366	367	367	367	368	368	368						
15	361	360	359	359	358	358	359	359	360	361	361	361						
20	350	349	348	348	347	346	348	348	349	350	351	350						
25	337	336	334	333	332	333	334	334	336	337	337	337						
30	320	319	317	317	316	316	317	318	319	320	321	321						
35	301	300	298	297	296	296	298	298	300	301	302	302						
40	279	278	276	276	274	274	276	276	278	279	280	280						
45	255	254	252	252	250	250	251	252	254	255	256	255						
50	228	227	226	226	224	224	225	225	228	229	230	229						
55	200	199	198	198	196	196	197	197	200	201	202	201						
60	170	170	169	169	167	167	167	168	170	172	173	171						
65	140	140	139	139	137	137	137	138	140	141	142	141						
70	109	109	108	107	106	107	107	108	109	109	110	110						
75	78.9	79.1	76.4	75.8	75.1	76.9	77.5	77.5	77.7	77.4	78.8	79.7						
80	47.4	49.4	45.0	44.0	43.8	47.7	46.6	47.0	46.3	45.5	47.4	48.4						
85	20.0	20.2	15.8	14.8	14.8	18.9	18.3	15.6	16.6	15.6	17.2	17.2						
90	0.15	0.10	0.09	0.08	0.10	0.12	0.14	0.29	0.16	0.16	0.15	0.20						
95	0.10	0.16	0.11	0.15	0.27	0.18	0.24	0.25	0.29	0.22	0.24	0.22						
100	0.23	0.26	0.22	0.26	0.22	0.28	0.36	0.31	0.34	0.31	0.34	0.30						
105	0.33	0.37	0.31	0.37	0.33	0.39	0.50	0.43	0.46	0.41	0.47	0.41						
110	0.47	0.50	0.43	0.49	0.44	0.52	0.64	0.54	0.60	0.53	0.60	0.53						
115	0.64	0.62	0.55	0.60	0.54	0.64	0.77	0.67	0.72	0.67	0.72	0.64						
120	0.79	0.77	0.66	0.70	0.66	0.76	0.93	0.81	0.82	0.78	0.81	0.78						
125	0.95	0.91	0.75	0.82	0.77	0.87	1.06	0.92	0.92	0.88	0.92	1.02						
130	1.17	1.03	0.86	0.93	0.86	0.95	1.16	1.00	1.06	1.06	1.05	1.04						
135	1.14	0.95	0.92	0.95	0.90	0.99	1.20	1.08	1.20	1.22	1.24	1.04						
140	1.06	1.03	0.97	1.03	0.99	1.06	1.22	1.16	1.17	1.32	1.17	1.10						
145	1.19	1.10	1.06	1.22	1.06	1.12	1.28	1.22	1.23	1.41	1.23	1.18						
150	1.15	1.20	1.16	1.28	1.16	1.22	1.33	1.27	1.33	1.52	1.28	1.23						
155	1.21	1.27	1.25	1.29	1.27	1.38	1.39	1.35	1.35	1.63	1.35	1.29						
160	1.31	1.33	1.29	1.37	1.33	1.39	1.46	1.42	1.40	1.41	1.41	1.35						
165	1.40	1.39	1.38	1.45	1.39	1.43	1.53	1.66	1.50	1.70	1.51	1.60						
170	1.46	1.48	1.49	1.51	1.48	1.53	1.59	1.57	1.65	1.81	1.76	1.49						
175	1.53	1.55	1.54	1.56	1.53	1.56	1.60	1.59	1.61	1.65	1.59	1.52						
180	1.59	1.60	1.59	1.59	1.59	1.58	1.60	1.60	1.60	1.60	1.59	1.57						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-6-7

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.600m [K=1.1233]
Remarks: