
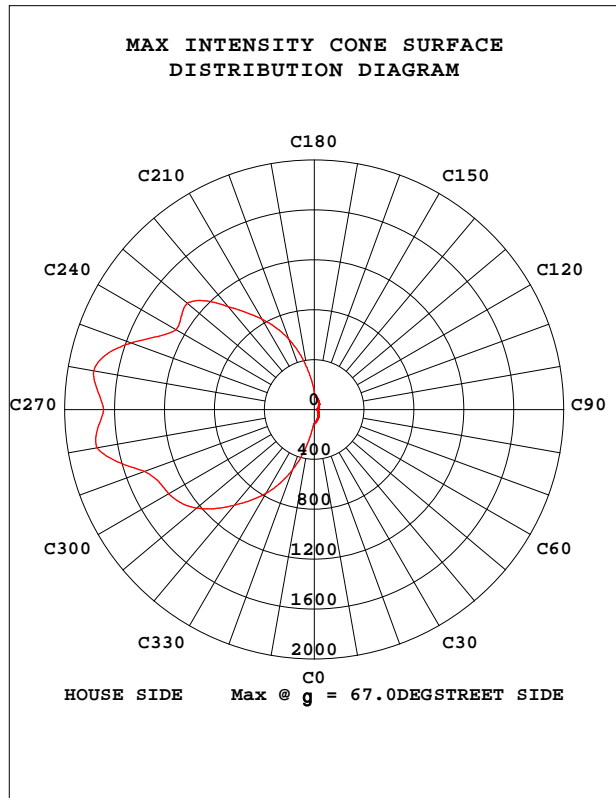


STREETLIGHT PHOTOMETRIC TEST REPORT

Test:U:120.25V I:0.2089A P:24.755W PF:0.9856 Freq:0Hz Lamp Flux:3385.72x1 lm		
NAME: ASD-LSWP01-26DCC-PC(5000K)	TYPE: LED wall pack	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 136.77 lm/W			
MSDELSWP01-26DCC-PC(5000K)		Imax(cd)	1796	h street_up(%)	1.1
NOMINAL POWER(W)	26	LOR(%)	100.0	h street_down(%)	8.8
RATED VOLTAGE(V)	110-277	TOTAL FLUX(lm)	3386	h house_up(%)	4.8
NOMINAL FLUX(lm)	3385.72	MAXIMUM @(C,g )	260,67.0	h house_down(%)	85.4
LAMPS INSIDE	1	h up(%)	5.8	76 FLASHAREA(m2)	0.00100
TEST VOLTAGE(V)	120.0	h down(%)	94.2	SLI	16.361

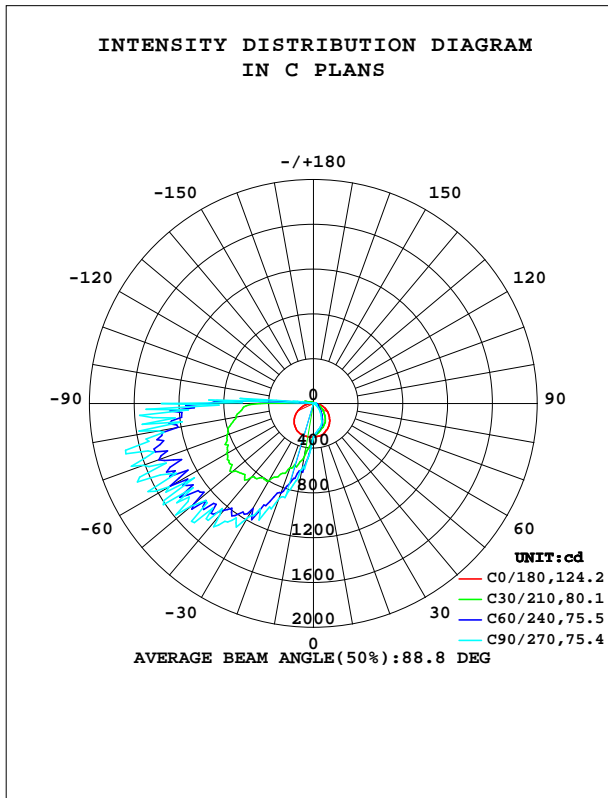


C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-05-14

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.000m [K=1.0000]  
 Remarks:

STREETLIGHT ISOCANDELA DIAGRAM

Test:U:120.25V I:0.2089A P:24.755W PF:0.9856 Freq:0Hz Lamp Flux:3385.72x1 lm		
NAME: ASD-LSWP01-26DCC-PC(5000K)	TYPE: LED wall pack	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

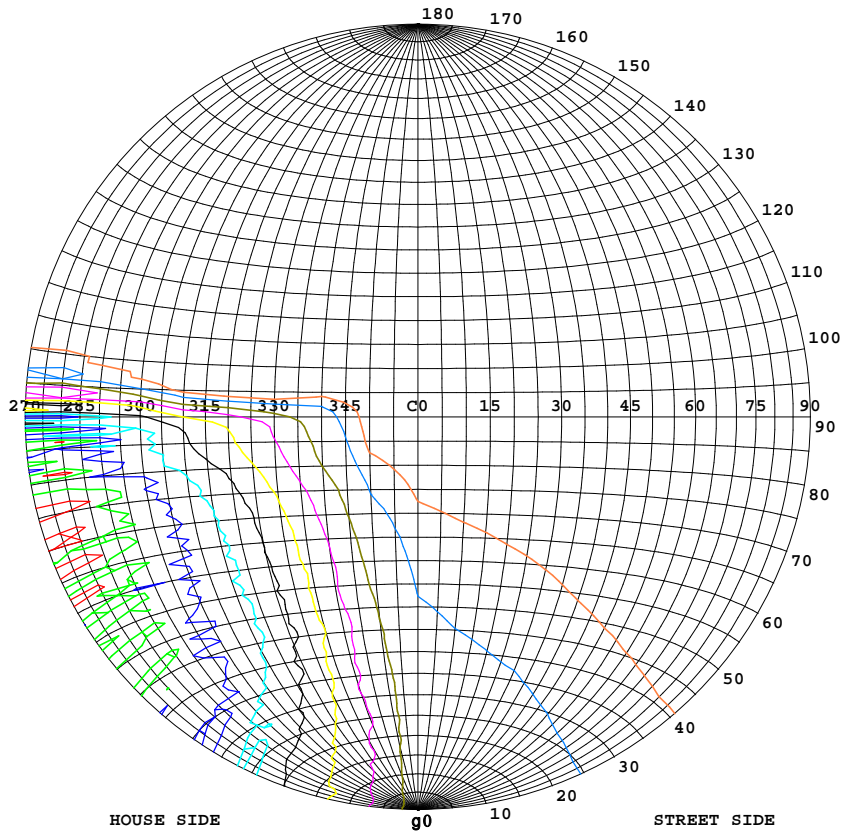

Classification:



IES:Type V - Very Short  
 CIE:Narrow - Intermediate  
 IES:None cut-off  
 CIE:Non-cut-off  
 Max.At80:415.4cd/klm  
 Max.At90:403.2cd/klm  
 Max.80-90:500.1cd/klm

ISOCANDELA DIAGRAM	
UNIT	cd
Imax=100%	1796
90%	1617
80%	1437
70%	1258
60%	1078
50%	898
40%	719
30%	539
20%	359
10%	180
5%	90

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-05-14

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.000m [K=1.0000]  
 Remarks:

COEFFICIENT OF UTILIZATION CURVE  
AND ISOLUX DIAGRAM

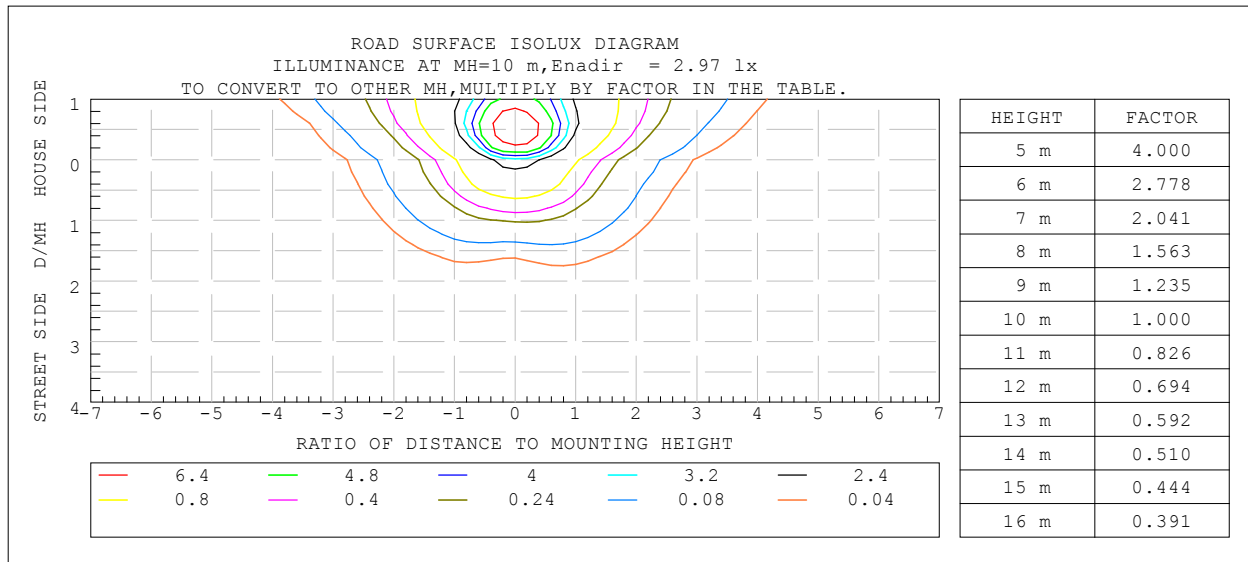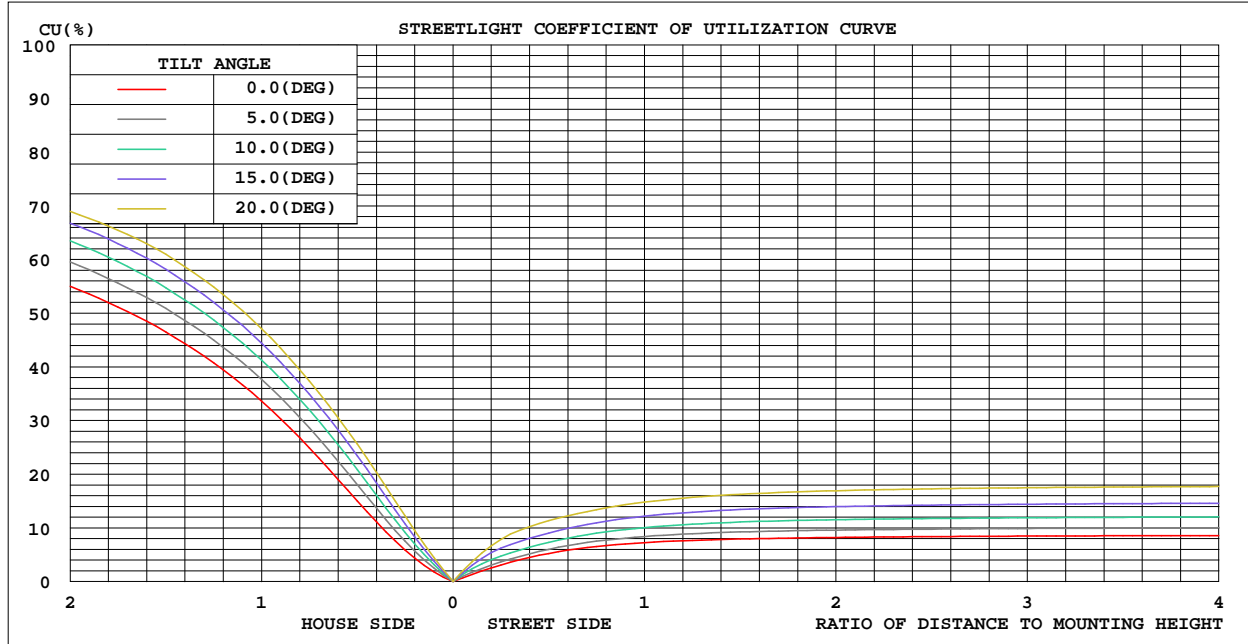

C Range: 0 - 360DEG  
C Interval: 10.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators:  
Test Date: 2021-05-14

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
Humidity: 65.0%  
Test Distance: 8.000m [K=1.0000]  
Remarks:

ZONAL FLUX DIAGRAM

Test:U:120.25V I:0.2089A P:24.755W PF:0.9856 Freq:0Hz Lamp Flux:3385.72x1 lm		
NAME: ASD-LSWP01-26DCC-PC(5000K)	TYPE: LED wall pack	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	296.7	254.0	242.4	256.8	301.8	544.3	600.9	545.3	0- 10	33.98	33.98	1,1
20	281.8	222.2	208.5	224.0	299.0	755.2	905.4	731.1	10- 20	121.6	155.6	4.6,4.6
30	257.2	185.7	145.1	192.0	286.1	980.2	1180	898.5	20- 30	230.9	386.5	11.4,11.4
40	225.4	135.7	93.35	143.7	261.0	1130	1303	1055	30- 40	344.3	730.9	21.6,21.6
50	187.3	94.46	50.09	102.1	225.4	1183	1429	1113	40- 50	433.8	1165	34.4,34.4
60	146.9	63.00	26.09	69.27	179.8	1178	1488	1126	50- 60	495.1	1660	49,49
70	100.9	40.91	18.73	44.36	124.0	1174	1619	1093	60- 70	537.6	2197	64.9,64.9
80	51.37	26.23	12.14	26.84	68.86	1055	1406	951.8	70- 80	537.7	2735	80.8,80.8
90	19.67	15.98	9.079	16.11	27.59	712.7	1358	651.3	80- 90	452.7	3188	94.2,94.2
100	11.46	13.59	12.05	13.80	16.14	71.68	101.7	53.65	90-100	134.6	3322	98.1,98.1
110	13.80	17.00	12.72	16.51	15.00	28.28	6.835	22.03	100-110	23.53	3346	98.8,98.8
120	11.90	14.36	12.66	14.96	11.67	8.433	2.683	8.789	110-120	12.76	3359	99.2,99.2
130	11.79	10.64	11.60	11.26	12.82	7.380	4.159	10.69	120-130	10.28	3369	99.5,99.5
140	8.892	8.409	9.811	8.804	8.938	6.725	7.099	6.136	130-140	7.918	3377	99.7,99.7
150	6.498	7.109	8.212	7.094	6.328	4.960	7.333	2.768	140-150	4.440	3381	99.9,99.9
160	5.744	6.867	6.825	6.410	5.154	3.529	3.098	3.092	150-160	2.440	3384	99.9,99.9
170	6.269	5.833	5.714	5.954	5.989	4.632	3.819	4.384	160-170	1.427	3385	100,100
180	5.496	5.688	5.024	5.544	5.523	5.699	5.010	5.553	170-180	0.5106	3386	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-05-14

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.000m [K=1.0000]  
 Remarks:

ISOCANDELA DIAGRAM


Test:U:120.25V I:0.2089A P:24.755W PF:0.9856 Freq:0Hz Lamp Flux:3385.72x1 lm		
NAME: ASD-LSWP01-26DCC-PC(5000K)	TYPE: LED wall pack	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

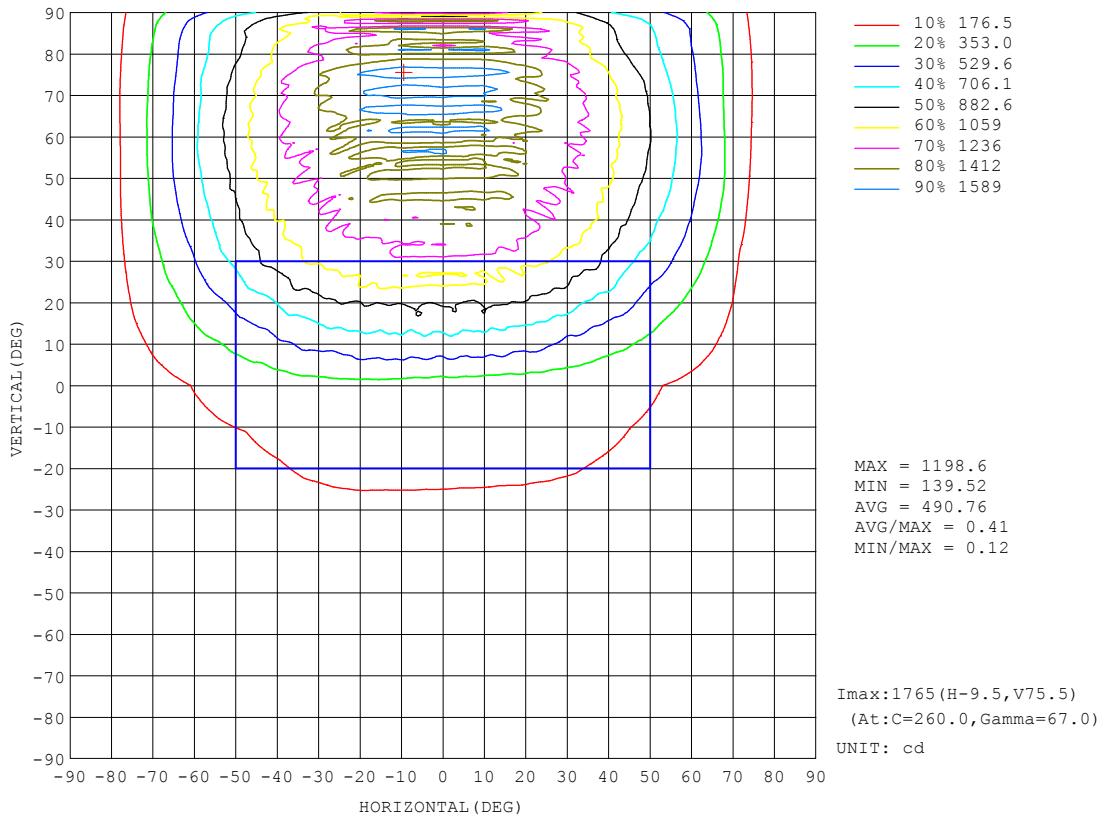

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-05-14

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.000m [K=1.0000]  
 Remarks:

Planar Illuminance Curve

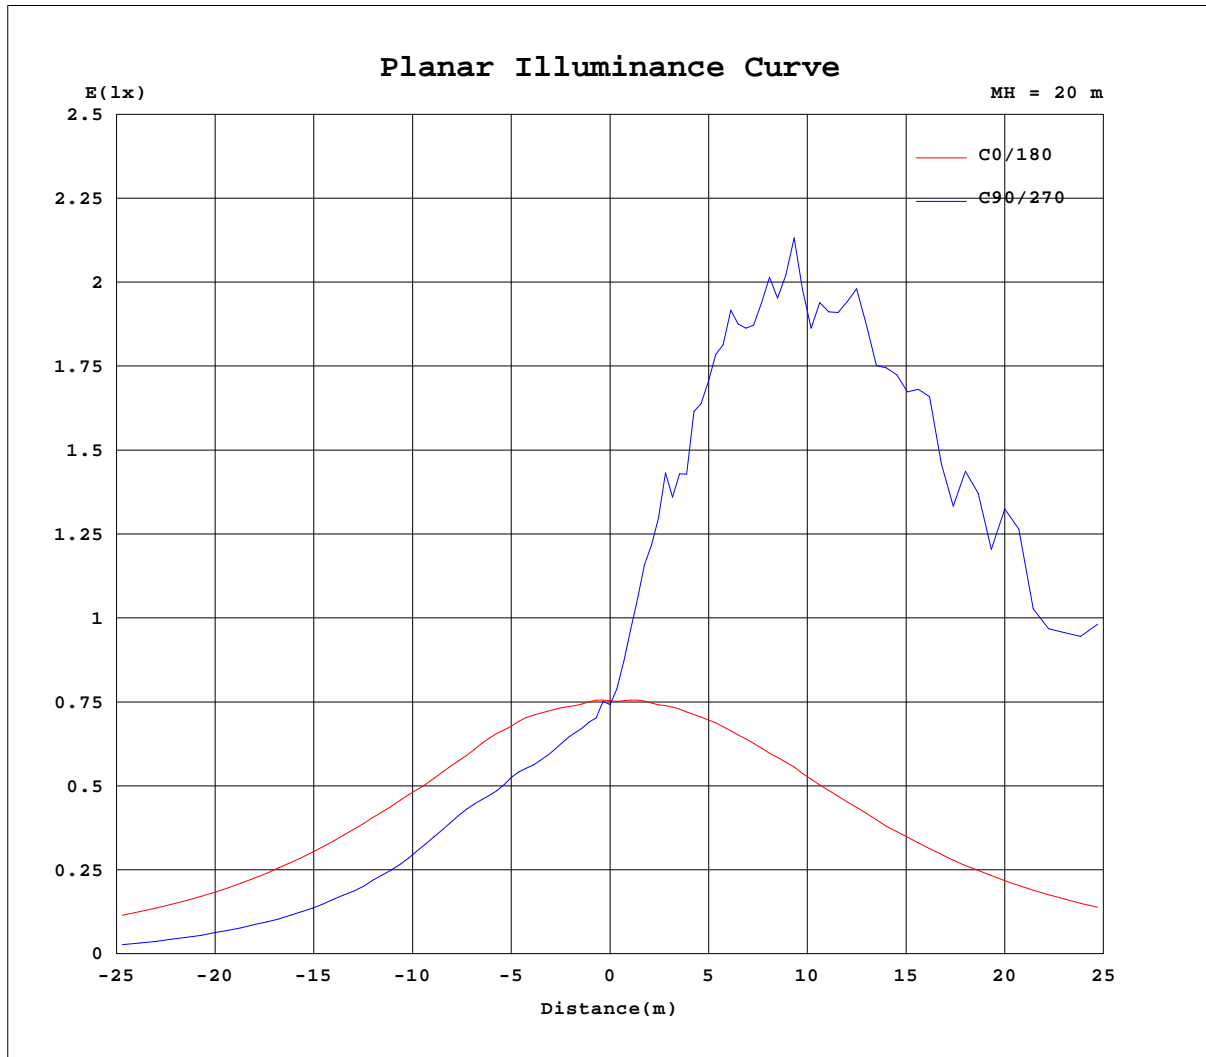


C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2021-05-14

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity: 65.0%  
 Test Distance: 8.000m [K=1.0000]  
 Remarks:

LCS REPORT

Test:U:120.25V I:0.2089A P:24.755W PF:0.9856 Freq:0Hz Lamp Flux:3385.72x1 lm		
NAME: ASD-LSWP01-26DCC-PC(5000K)	TYPE: LED wall pack	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

LUMINAIRE CLASSIFICATION SYSTEM(LCS) GRAPH

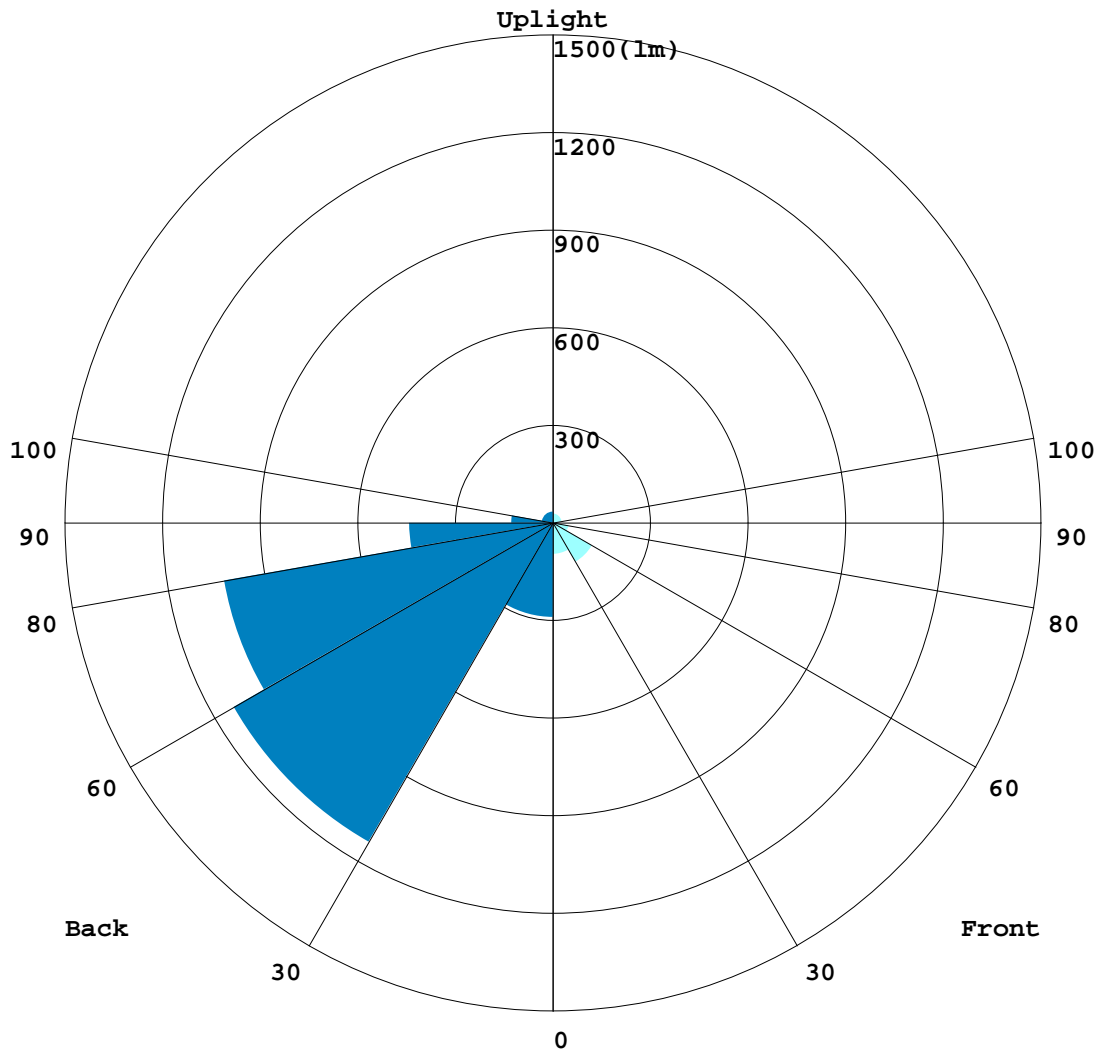

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-05-14

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.000m [K=1.0000]  
 Remarks:

## BUG REPORT

Test:U:120.25V I:0.2089A P:24.755W PF:0.9856 Freq:0Hz Lamp Flux:3385.72x1 lm		
NAME: ASD-LSWP01-26DCC-PC(5000K)	TYPE: LED wall pack	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

## IESNA Luminaire Flux Distribution Table:

Zone	Lumens	Luminaire %
FL - Front-Low(0-30)	96.072	2.8
FM - Front-Medium(30-60)	140.11	4.1
FH - Front-High(60-80)	49.867	1.5
FVH - Front-Very High(80-90)	11.412	0.3
Total Forward Light	333.02	9.8

BL - Back-Low(0-30)	290.45	8.6
BM - Back-Medium(30-60)	1133.1	33.5
BH - Back-High(60-80)	1025.5	30.3
BVH - Back-Very High(80-90)	441.32	13.0
Total Back Light	3052.7	90.2

UL - Uplight-Low(90-100)	134.58	4.0
UH - Uplight-High(100-180)	63.3	1.9
Total Up Light	197.88	5.8

BUG(Back,Up,Glare) Rating	B3-U3-G3
---------------------------	----------

Zone	Downward Lumens	Upward Lumens	Total Lumens
House Side	2890.4	162.31	3052.7
Street Side	297.46	35.564	333.02

C Range: 0 - 360DEG  
C Interval: 10.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2021-05-14


g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
Humidity:65.0%  
Test Distance:8.000m [K=1.0000]  
Remarks:



ROAD ISOCANDELA REPORT

Test:U:120.25V I:0.2089A P:24.755W PF:0.9856 Freq:0Hz Lamp Flux:3385.72x1 lm		
NAME: ASD-LSWP01-26DCC-PC(5000K)	TYPE: LED wall pack	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

ROAD SURFACE ISOCANDELA DIAGRAM

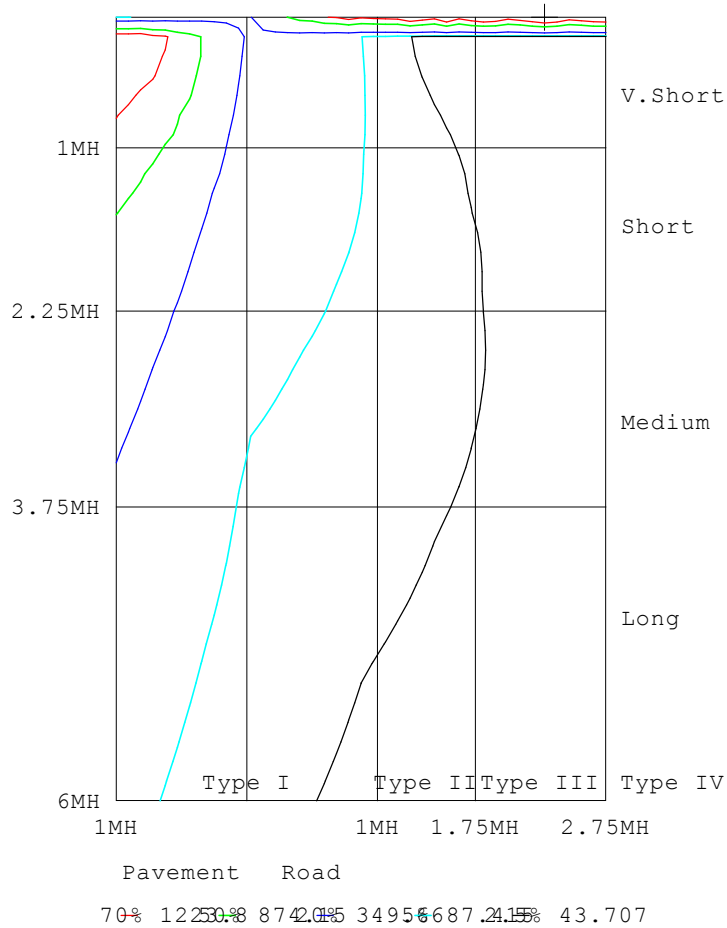

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-05-14

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.000m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.25V I:0.2089A P:24.755W PF:0.9856 Freq:0Hz Lamp Flux:3385.72x1 lm		
NAME: ASD-LSWP01-26DCC-PC(5000K)	TYPE: LED wall pack	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180
0	298	298	298	298	298	298	298	298	298	298	298	298	298	298	298	298	298	298	298
5	296	297	283	281	276	272	270	270	268	268	267	269	270	273	278	280	290	294	301
10	297	281	270	265	257	251	247	244	243	242	243	245	248	253	260	266	275	290	302
15	293	270	258	248	239	237	233	229	225	225	226	231	234	235	241	252	262	275	302
20	282	259	243	233	226	218	214	212	209	208	209	211	214	220	229	236	251	267	299
25	269	248	231	219	210	203	192	183	178	177	180	187	197	206	212	224	237	256	296
30	257	233	217	204	193	178	160	151	146	145	147	154	168	185	199	208	222	242	286
35	243	216	198	188	169	150	135	125	120	119	122	128	141	158	179	192	205	227	274
40	225	199	182	166	145	127	112	102	94.7	93.4	96.9	107	118	134	154	174	187	209	261
45	206	179	164	143	123	105	93.2	81.4	74.6	73.0	77.0	85.2	98.4	112	131	153	169	190	244
50	187	160	143	122	102	86.9	73.9	61.0	52.2	50.1	55.3	66.6	79.0	93.7	110	131	151	170	225
55	167	142	124	103	84.9	69.7	56.8	44.5	34.0	31.8	37.6	49.1	62.0	76.2	92.3	111	132	150	204
60	147	125	104	86.6	70.2	55.8	45.5	34.9	27.2	26.1	29.5	39.0	49.5	61.5	77.0	93.3	112	129	180
65	125	103	84.9	70.5	56.4	45.1	38.7	29.7	22.9	22.2	24.7	33.8	41.4	49.2	62.4	75.4	90.8	108	152
70	101	80.6	66.0	55.4	44.4	37.4	33.5	25.3	19.5	18.7	20.8	29.2	35.2	39.9	48.9	59.4	71.1	86.3	124
75	75.6	58.9	49.0	41.7	34.8	30.6	27.7	21.2	15.7	14.8	17.3	24.3	28.6	31.8	37.4	44.2	52.4	64.4	96.0
80	51.4	39.8	33.8	30.2	27.1	25.4	24.6	18.4	13.3	12.1	14.9	21.1	24.4	25.7	28.0	31.3	35.6	44.0	68.9
85	32.4	24.8	22.3	21.7	21.7	22.0	22.5	16.5	12.0	10.6	13.3	19.2	21.5	21.2	21.0	21.1	22.4	27.0	44.5
90	19.7	16.0	14.6	15.6	15.8	16.2	13.9	12.4	9.89	9.08	10.9	13.8	15.2	16.2	16.0	14.4	14.3	16.9	27.6
95	13.7	12.3	11.6	12.0	11.3	10.5	11.4	10.9	10.4	10.1	10.5	12.0	11.0	11.9	13.4	12.4	12.6	14.2	19.1
100	11.5	11.4	11.6	11.4	12.9	14.3	13.8	12.6	12.6	12.0	12.5	12.8	14.4	14.1	13.5	13.1	12.7	13.4	16.1
105	12.9	11.5	11.8	13.0	15.4	17.2	14.3	12.9	12.8	12.5	12.8	13.4	15.7	17.3	13.9	12.3	12.2	12.9	15.8
110	13.8	12.7	13.0	14.5	17.0	17.0	13.7	12.8	12.9	12.7	12.9	13.1	14.7	17.8	15.2	13.4	12.1	12.2	15.0
115	12.8	12.4	13.7	14.4	17.8	15.6	12.9	12.6	12.9	12.8	12.9	12.7	13.5	17.4	15.3	13.6	12.6	12.0	13.2
120	11.9	12.3	13.2	14.2	15.4	13.3	12.2	12.5	12.8	12.7	12.8	12.3	12.6	14.8	15.2	13.2	12.6	11.2	11.7
125	12.1	12.0	12.6	14.0	13.5	11.6	11.3	12.4	12.6	12.6	12.7	12.0	11.6	12.3	14.7	13.1	12.1	11.8	12.3
130	11.8	11.9	12.5	12.6	10.9	10.4	10.1	11.5	11.7	11.6	11.8	11.1	10.5	10.8	11.7	12.9	12.1	11.3	12.8
135	11.7	11.9	11.2	9.79	9.32	9.18	9.27	10.2	10.5	10.7	10.3	9.75	9.35	9.54	9.63	10.5	11.9	11.3	12.4
140	8.89	8.58	8.41	8.31	8.58	8.23	8.76	9.30	9.67	9.81	9.52	9.05	8.60	9.07	8.53	8.47	8.51	8.78	8.94
145	7.04	7.36	7.67	7.99	7.08	7.49	8.51	8.86	8.81	8.94	8.79	8.80	8.11	7.38	8.33	7.90	7.49	7.08	6.72
150	6.50	6.36	5.59	6.68	7.18	7.04	7.58	7.95	8.15	8.21	8.11	7.74	7.29	7.18	7.00	6.14	6.82	6.56	6.33
155	5.13	5.52	5.50	6.02	6.81	7.13	7.13	7.41	7.45	7.48	7.47	7.12	7.18	7.01	6.60	5.56	5.11	4.95	4.64
160	5.74	6.07	5.91	6.08	6.76	6.98	6.87	6.75	6.77	6.83	6.84	6.84	6.98	6.85	5.97	5.45	5.61	5.45	5.15
165	6.13	6.63	6.92	6.56	6.65	6.59	6.34	6.23	6.27	6.27	6.24	6.29	6.36	6.41	6.25	6.41	6.22	5.82	5.78
170	6.27	6.44	6.10	5.92	5.91	5.75	5.80	5.79	5.76	5.71	5.67	5.58	5.53	5.91	6.00	5.93	5.96	5.71	5.99
175	5.80	5.67	5.47	5.38	5.39	5.38	5.36	5.29	5.24	5.29	5.31	5.25	5.24	5.21	5.26	5.28	5.22	5.50	5.79
180	5.50	5.45	5.38	5.45	5.66	5.71	5.89	5.84	5.88	5.02	5.74	5.69	5.65	5.57	5.52	5.43	5.45	5.45	5.52

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-05-14

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.000m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.25V I:0.2089A P:24.755W PF:0.9856 Freq:0Hz Lamp Flux:3385.72x1 lm		
NAME: ASD-LSWP01-26DCC-PC(5000K)	TYPE: LED wall pack	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

Table--2

UNIT: cd

C(DEG) g (DEG)	190	200	210	220	230	240	250	260	270	280	290	300	310	320	330	340	350		
0	298	298	298	298	298	298	298	298	298	298	298	298	298	298	298	298	298		
5	317	345	381	407	434	448	457	459	470	477	474	454	429	401	368	336	310		
10	353	421	486	506	583	608	615	593	601	637	598	580	574	517	469	397	328		
15	391	490	587	619	680	694	794	783	795	802	732	712	647	582	553	459	348		
20	422	562	610	694	816	848	892	874	905	887	849	896	760	703	590	498	370		
25	448	575	699	861	871	1008	1053	1125	1149	1120	980	964	882	775	658	553	381		
30	457	614	796	889	1071	1083	1144	1151	1180	1148	1121	1049	956	841	711	546	385		
35	488	641	811	1028	1101	1223	1242	1233	1274	1254	1268	1170	1031	908	764	569	384		
40	457	684	861	1042	1219	1249	1364	1348	1303	1413	1382	1257	1163	948	780	570	374		
45	431	656	890	1115	1250	1263	1336	1387	1503	1334	1387	1218	1183	1026	846	584	369		
50	422	680	950	1119	1247	1398	1312	1402	1429	1379	1308	1389	1174	1052	811	571	349		
55	396	666	921	1117	1217	1460	1432	1386	1313	1440	1344	1318	1198	1013	805	552	319		
60	387	667	899	1119	1236	1479	1357	1617	1488	1583	1218	1273	1217	1035	799	555	290		
65	354	611	870	1145	1238	1449	1332	1586	1509	1524	1330	1324	1225	1014	778	530	259		
70	321	575	822	1094	1255	1471	1429	1692	1619	1638	1329	1415	1190	996	748	486	216		
75	275	527	771	1033	1254	1419	1478	1745	1735	1604	1364	1296	1122	939	697	445	169		
80	208	457	700	942	1168	1230	1374	1372	1406	1304	1237	1230	1051	852	618	356	115		
85	152	392	641	845	1043	1182	1111	1292	1445	1227	1033	1163	920	749	547	305	68.7		
90	110	298	475	651	775	929	1185	1339	1358	1365	1141	933	714	588	418	242	47.7		
95	49.2	88.1	41.7	55.3	106	255	319	424	333	449	292	182	54.8	36.9	28.3	59.4	21.9		
100	27.7	67.6	9.53	49.8	93.6	42.6	62.2	96.7	102	136	63.8	51.7	51.5	55.8	4.97	49.4	13.7		
105	30.9	66.7	82.5	20.4	27.5	23.1	4.97	6.07	5.26	6.51	6.94	24.2	13.4	39.0	76.6	42.1	20.7		
110	26.1	40.5	41.9	33.5	23.1	5.71	7.17	7.05	6.84	6.89	6.52	3.62	3.68	40.4	36.4	30.2	19.5		
115	17.4	21.1	19.5	16.4	9.25	4.52	2.83	2.13	1.89	2.31	3.15	6.02	5.17	18.3	19.0	18.0	14.5		
120	13.8	16.6	16.2	10.1	6.74	4.77	3.54	2.92	2.68	3.07	3.68	5.75	5.27	12.3	17.1	15.3	12.0		
125	16.0	20.5	21.8	8.61	6.33	5.21	4.14	3.50	3.25	3.64	4.30	5.47	6.09	15.1	22.0	16.5	12.9		
130	17.9	26.2	26.1	8.41	6.35	5.90	5.42	4.36	4.16	4.64	5.28	5.84	6.63	14.8	26.5	20.2	14.3		
135	16.9	20.6	13.4	7.05	6.90	6.95	6.41	5.80	5.67	6.12	6.21	6.82	6.19	8.10	16.6	20.2	14.1		
140	8.89	6.63	5.64	6.80	6.65	7.15	7.32	7.15	7.10	7.26	7.02	6.66	6.22	6.05	5.54	7.10	8.41		
145	6.27	5.23	5.49	5.35	6.03	7.21	7.50	7.22	7.38	7.24	7.11	6.53	5.30	2.95	4.78	5.33	5.97		
150	6.01	5.19	3.08	4.85	5.07	6.75	7.11	6.99	7.33	6.95	6.70	5.90	2.23	3.31	2.63	4.54	5.49		
155	4.09	3.56	3.32	3.23	6.01	2.57	2.66	4.12	4.65	3.80	2.18	3.76	2.63	2.68	2.83	3.18	3.68		
160	4.22	3.91	3.66	3.64	3.42	3.23	2.59	3.32	3.10	2.69	2.26	2.77	2.99	3.20	3.35	3.44	4.28		
165	4.74	4.45	4.21	4.04	3.53	3.26	3.05	2.84	2.69	2.72	2.84	3.01	3.44	3.80	4.01	4.16	5.10		
170	5.51	4.93	5.06	4.73	4.54	4.22	4.17	3.91	3.82	3.80	3.91	4.02	4.05	4.72	4.86	5.43	5.85		
175	5.58	5.70	5.49	5.86	5.75	5.70	5.40	5.45	5.56	5.42	5.28	5.25	5.15	5.20	5.27	5.50	5.61		
180	5.44	5.38	5.46	5.68	5.71	5.90	5.84	5.89	5.01	5.75	5.68	5.67	5.58	5.53	5.43	5.47	5.45		

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-05-14

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.426  
 Humidity:65.0%  
 Test Distance:8.000m [K=1.0000]  
 Remarks: