
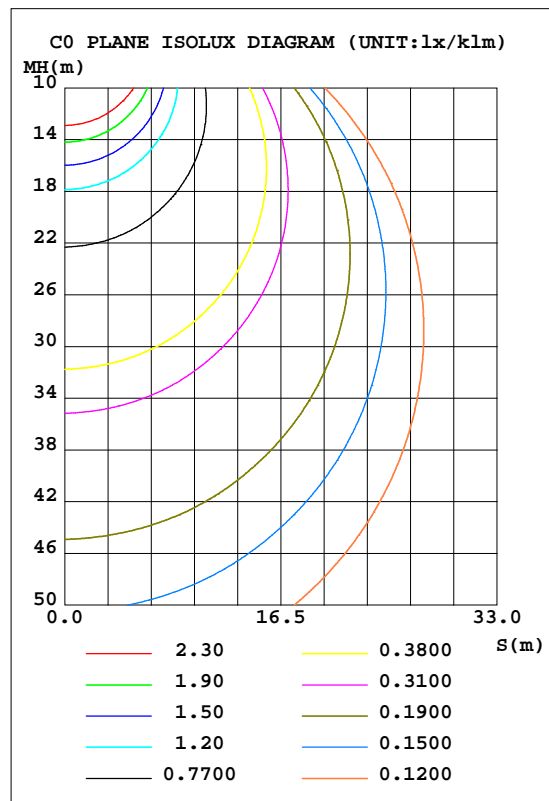


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.09V I:0.1493A P:14.592W PF:0.8138 Freq:59.98Hz Lamp Flux:1020.1x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 69.91 lm/W			
MODEL: DLOBR-6D15AC-WH (2700K)		I _{max} (cd/klm)	383.0	S/MH(C0/180)	1.27
NOMINAL POWER(W)	15	LOR(%)	100.0	S/MH(C90/270)	1.27
RATED VOLTAGE(V)	120	TOTAL FLUX(lm/klm)	1000.0	h UP, DN(C0-180)	0.5, 48.8
NOMINAL FLUX(lm)	1020.1	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.4, 50.2
LAMPS INSIDE	1	h up(%)	0.9	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120	h down(%)	99.1	CIBSE SHR MAX	1.35

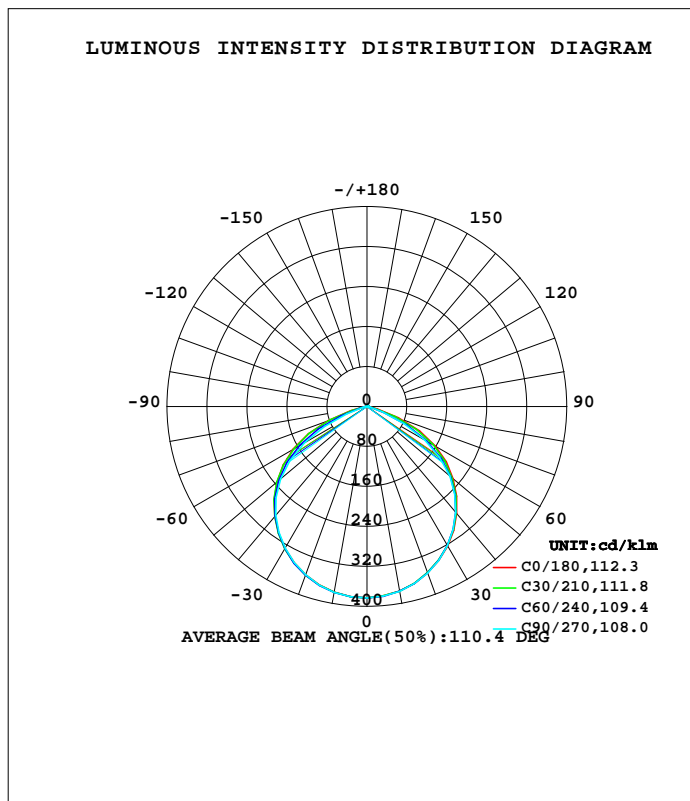

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-02-26

g Range: 0 - 180DEG
 g Interval: 5.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.000m [K=1.0250]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	375.1	375.6	375.7	376.7	377.6	377.6	377.9	376.5	0- 10	36.25	36.25	3.63,3.63
20	354.7	354.4	355.0	356.9	358.6	359.5	358.7	356.7	10- 20	103.9	140.2	14,14
30	322.8	321.7	322.0	325.0	328.0	328.7	327.4	324.9	20- 30	157.8	298.0	29.8,29.8
40	279.6	278.1	276.3	282.5	287.4	286.3	284.0	281.6	30- 40	190.7	488.7	48.9,48.9
50	225.4	222.6	216.4	227.5	235.3	232.0	226.2	224.9	40- 50	197.1	685.8	68.6,68.6
60	157.9	148.3	133.3	154.0	170.1	161.8	144.7	149.6	50- 60	170.6	856.5	85.6,85.6
70	67.00	49.63	33.56	56.74	83.09	67.01	43.48	53.02	60- 70	104.3	960.7	96.1,96.1
80	6.841	5.992	5.667	6.770	8.563	7.292	6.488	6.325	70- 80	26.63	987.4	98.7,98.7
90	0.4013	0.4038	0.3386	0.2692	0.4537	0.2489	0.1816	0.2187	80- 90	3.293	990.6	99.1,99.1
100	0.7411	0.6963	0.6633	0.5709	0.6029	0.5379	0.5435	0.5146	90-100	0.5071	991.2	99.1,99.1
110	1.172	1.100	1.072	0.9976	1.006	0.9230	0.9242	0.9227	100-110	0.8696	992.0	99.2,99.2
120	1.594	1.518	1.503	1.434	1.414	1.336	1.347	1.373	110-120	1.229	993.2	99.3,99.3
130	2.043	1.893	1.893	1.809	1.785	1.698	1.746	1.739	120-130	1.476	994.7	99.5,99.5
140	2.312	2.153	2.241	2.102	2.123	1.967	2.103	2.059	130-140	1.546	996.3	99.6,99.6
150	2.659	2.492	2.474	2.440	2.369	2.352	2.391	2.449	140-150	1.434	997.7	99.8,99.8
160	2.817	2.803	2.775	2.714	2.698	2.691	2.693	2.713	150-160	1.199	998.9	99.9,99.9
170	2.980	2.984	2.970	2.950	2.915	2.905	2.915	2.945	160-170	0.8080	999.7	100,100
180	3.077	3.099	3.096	3.108	3.086	3.099	3.096	3.117	170-180	0.2872	1000	100,100
DEG	LUMINOUS INTENSITY:cd/klm									UNIT:lm/klm		

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-02-26

g Range: 0 - 180DEG
g Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.000m [K=1.0250]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.09V I:0.1493A P:14.592W PF:0.8138 Freq:59.98Hz Lamp Flux:1020.1x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

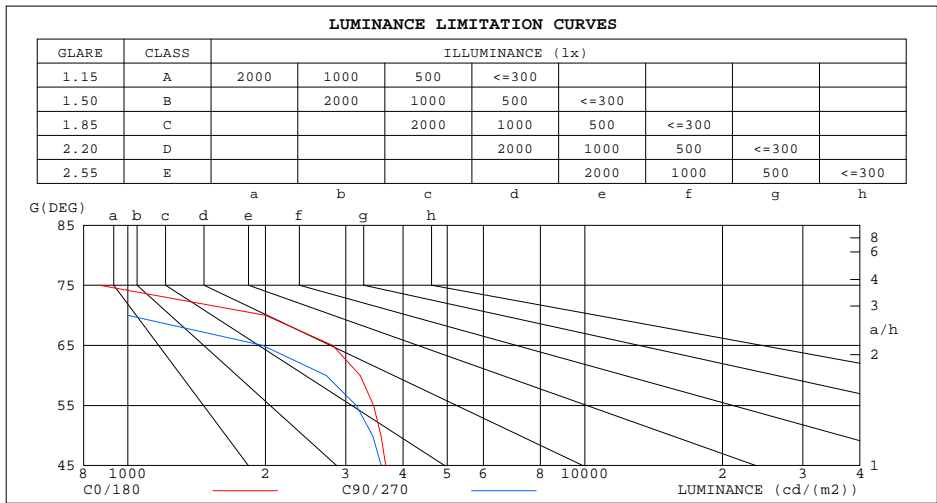


C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-02-26

g Range: 0 - 180DEG
 g Interval: 5.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.000m [K=1.0250]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.09V I:0.1493A P:14.592W PF:0.8138 Freq:59.98Hz Lamp Flux:1020.1x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

r _{cc}	80%			70%			50%			30%			10%			0
r _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.06	1.02	.99	1.04	1.00	.97	.99	.96	.94	.95	.93	.91	.91	.90	.88	.86
2.0	.93	.87	.82	.91	.86	.81	.88	.83	.79	.84	.81	.77	.81	.78	.75	.73
3.0	.83	.75	.69	.81	.74	.68	.78	.72	.67	.75	.70	.66	.72	.68	.65	.62
4.0	.73	.65	.59	.72	.64	.58	.69	.63	.58	.67	.61	.57	.65	.60	.56	.54
5.0	.66	.57	.51	.65	.57	.51	.62	.55	.50	.60	.54	.49	.58	.53	.49	.47
6.0	.59	.51	.45	.58	.50	.44	.56	.49	.44	.55	.48	.43	.53	.47	.43	.41
7.0	.54	.45	.39	.53	.45	.39	.51	.44	.39	.50	.43	.38	.48	.43	.38	.36
8.0	.49	.41	.35	.48	.40	.35	.47	.40	.35	.46	.39	.34	.44	.39	.34	.32
9.0	.45	.37	.32	.44	.37	.31	.43	.36	.31	.42	.36	.31	.41	.35	.31	.29
10.0	.42	.34	.29	.41	.34	.29	.40	.33	.28	.39	.33	.28	.38	.32	.28	.26

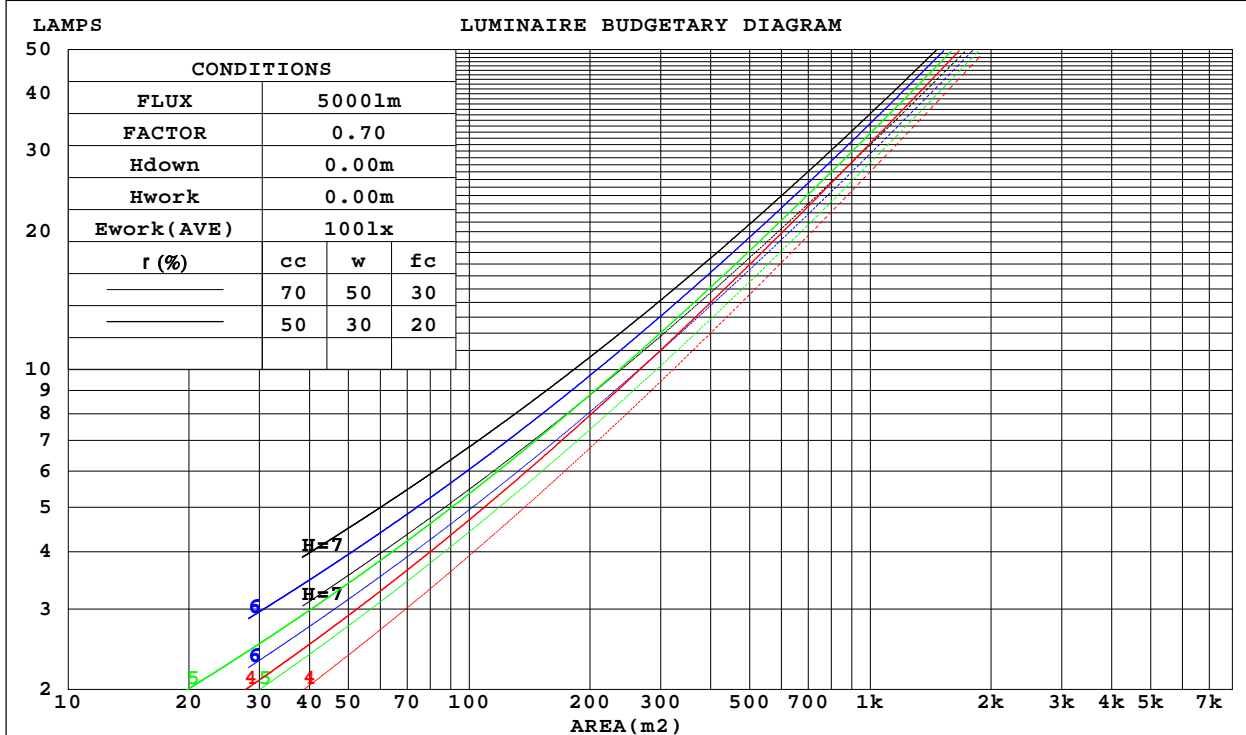

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-02-26

g Range: 0 - 180DEG
 g Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.0250]
 Remarks:

WEC AND CCEC

Test:U:120.09V I:0.1493A P:14.592W PF:0.8138 Freq:59.98Hz Lamp Flux:1020.1x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.268	.152	.048	.261	.149	.047	.247	.142	.045	.235	.135	.043	.223	.129	.042	
2.0	.262	.143	.044	.255	.141	.043	.243	.135	.042	.232	.130	.041	.222	.126	.040	
3.0	.248	.132	.040	.242	.130	.039	.232	.126	.038	.222	.122	.037	.213	.118	.037	
4.0	.233	.121	.036	.228	.119	.035	.218	.116	.035	.210	.113	.034	.202	.110	.033	
5.0	.218	.111	.032	.213	.110	.032	.205	.107	.031	.197	.104	.031	.190	.102	.031	
6.0	.204	.102	.029	.200	.101	.029	.193	.099	.029	.186	.096	.028	.179	.094	.028	
7.0	.191	.094	.027	.188	.093	.027	.181	.091	.026	.175	.090	.026	.169	.088	.026	
8.0	.179	.088	.025	.176	.087	.025	.170	.085	.024	.165	.083	.024	.159	.082	.024	
9.0	.169	.082	.023	.166	.081	.023	.161	.079	.023	.155	.078	.022	.151	.077	.022	
10.0	.159	.076	.021	.157	.076	.021	.152	.074	.021	.147	.073	.021	.143	.072	.021	

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.198	.198	.198	.169	.169	.169	.115	.115	.115	.066	.066	.066	.021	.021	.021	
1.0	.185	.164	.145	.158	.140	.125	.108	.097	.086	.062	.056	.050	.020	.018	.016	
2.0	.175	.139	.109	.150	.120	.094	.103	.083	.066	.059	.048	.038	.019	.016	.013	
3.0	.168	.121	.085	.144	.105	.073	.099	.073	.051	.057	.042	.030	.018	.014	.010	
4.0	.160	.108	.068	.137	.093	.059	.094	.065	.042	.055	.038	.025	.018	.012	.008	
5.0	.153	.097	.056	.131	.084	.049	.091	.059	.035	.052	.035	.021	.017	.011	.007	
6.0	.146	.089	.048	.126	.077	.042	.087	.054	.030	.050	.032	.018	.016	.010	.006	
7.0	.140	.082	.042	.120	.071	.036	.083	.050	.026	.048	.029	.015	.016	.010	.005	
8.0	.134	.076	.037	.115	.066	.032	.080	.046	.023	.046	.027	.014	.015	.009	.005	
9.0	.128	.071	.033	.110	.062	.029	.076	.044	.021	.044	.026	.012	.014	.008	.004	
10.0	.123	.067	.030	.106	.058	.026	.073	.041	.019	.043	.024	.011	.014	.008	.004	

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-02-26

g Range: 0 - 180DEG
 g Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.0250]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.09V I:0.1493A P:14.592W PF:0.8138 Freq:59.98Hz Lamp Flux:1020.1x1 lm										
NAME: LED DOWNLIGHT					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: ASD LIGHTING CORP					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	16.6	18.1	17.0	18.5	18.8	15.9	17.5	16.3	17.8	18.2
3H	17.7	19.0	18.1	19.4	19.8	16.4	17.8	16.8	18.1	18.5
4H	17.7	19.0	18.2	19.4	19.8	16.4	17.7	16.8	18.0	18.4
6H	17.7	18.9	18.1	19.3	19.7	16.3	17.5	16.8	17.9	18.3
8H	17.7	18.8	18.1	19.2	19.6	16.3	17.4	16.8	17.9	18.3
12H	17.7	18.7	18.1	19.1	19.6	16.3	17.4	16.7	17.8	18.2
4H 2H	16.9	18.2	17.3	18.6	19.0	16.5	17.7	16.9	18.1	18.5
3H	18.1	19.1	18.5	19.6	20.0	17.0	18.0	17.4	18.4	18.9
4H	18.2	19.1	18.6	19.5	20.0	16.9	17.9	17.4	18.3	18.8
6H	18.1	19.0	18.6	19.4	19.9	16.9	17.7	17.4	18.2	18.7
8H	18.1	18.9	18.6	19.3	19.8	16.9	17.7	17.4	18.1	18.6
12H	18.1	18.8	18.6	19.3	19.8	16.9	17.5	17.4	18.0	18.5
8H 4H	18.1	18.9	18.6	19.3	19.8	17.0	17.7	17.4	18.2	18.7
6H	18.1	18.7	18.6	19.2	19.7	16.9	17.6	17.4	18.1	18.6
8H	18.0	18.6	18.6	19.1	19.6	16.9	17.5	17.4	18.0	18.5
12H	18.0	18.5	18.5	19.0	19.6	16.9	17.4	17.4	17.9	18.5
12H 4H	18.1	18.7	18.6	19.2	19.7	16.9	17.6	17.4	18.1	18.6
6H	18.0	18.6	18.6	19.1	19.6	16.9	17.5	17.4	17.9	18.5
8H	18.0	18.5	18.5	19.0	19.6	16.9	17.4	17.4	17.9	18.5
CIE190: 2010										

CIE190: 2010
Area: 0.1 m2

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-02-26

g Range: 0 - 180DEG
g Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.000m [K=1.0250]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.09V I:0.1493A P:14.592W PF:0.8138 Freq:59.98Hz Lamp Flux:1020.1x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	59	48	41	59	48	41	57	47	41	35
0.80	70	59	52	69	58	52	67	58	51	45
1.00	79	68	62	78	68	61	75	69	61	54
1.25	86	76	70	85	76	69	82	74	68	62
1.50	91	82	76	89	81	75	86	79	74	67
2.00	98	90	84	96	89	83	92	86	82	74
2.50	101	94	89	99	93	88	95	90	86	78
3.00	104	98	93	102	97	92	98	94	90	82
4.00	108	103	99	105	101	97	101	98	95	86
5.00	110	106	102	107	104	101	103	100	97	88
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-02-26

g Range: 0 - 180DEG
g Interval: 5.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity: 65.0%
Test Distance: 8.000m [K=1.0250]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.09V I:0.1493A P:14.592W PF:0.8138 Freq:59.98Hz Lamp Flux:1020.1x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

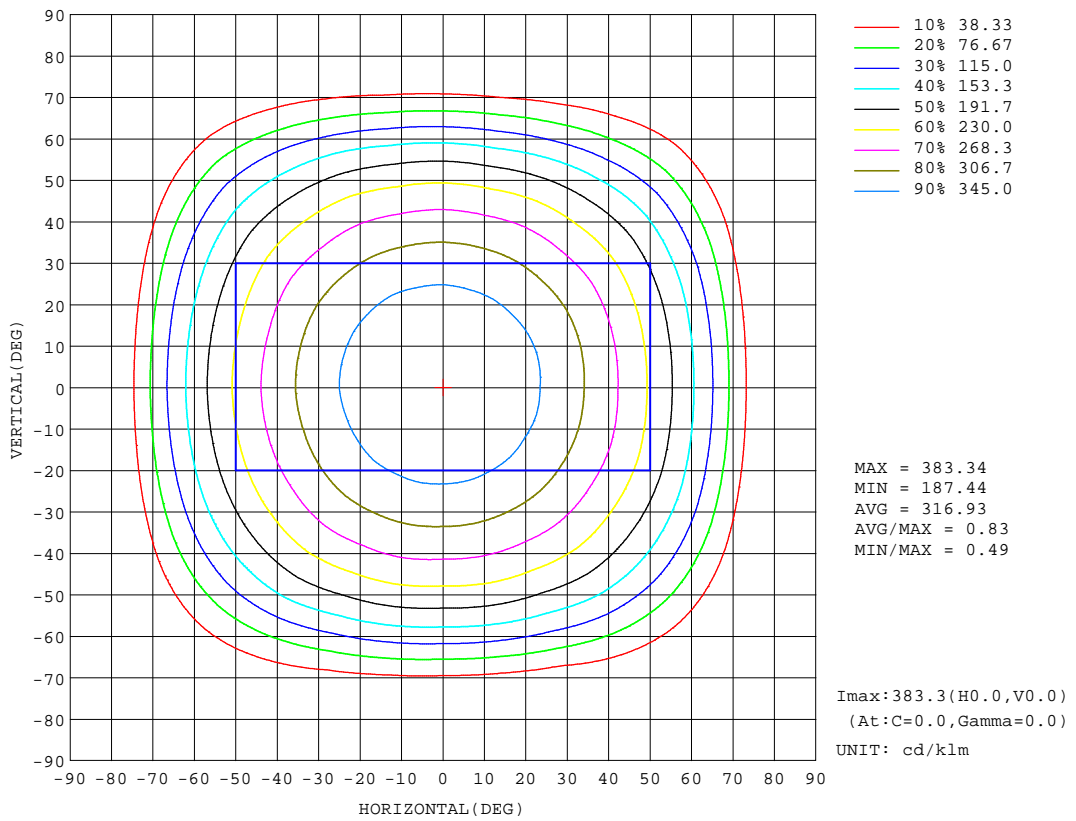


C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-02-26

g Range: 0 - 180DEG
 g Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.0250]
 Remarks:

AAI Figure

Test:U:120.09V I:0.1493A P:14.592W PF:0.8138 Freq:59.98Hz Lamp Flux:1020.1x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

Flux out:792.4 lm

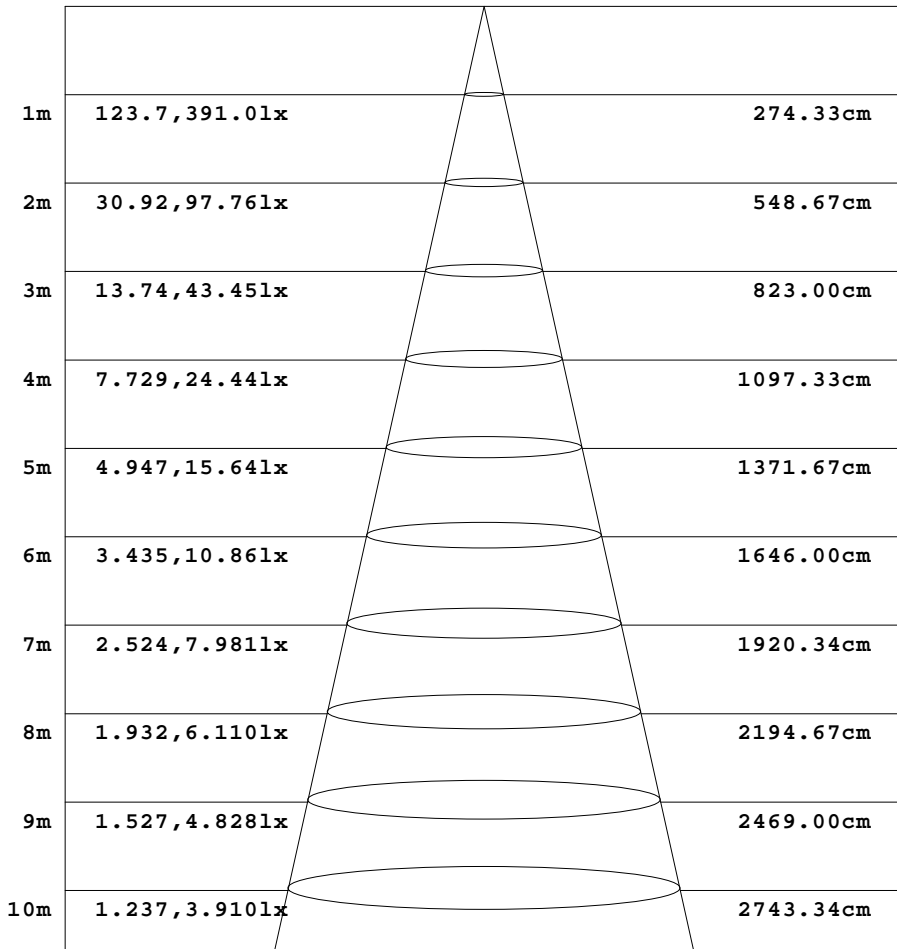

Height Eavg, Emax Angle:107.81deg Diameter


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-02-26

g Range: 0 - 180DEG
 g Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.0250]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.09V I:0.1493A P:14.592W PF:0.8138 Freq:59.98Hz Lamp Flux:1020.1x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

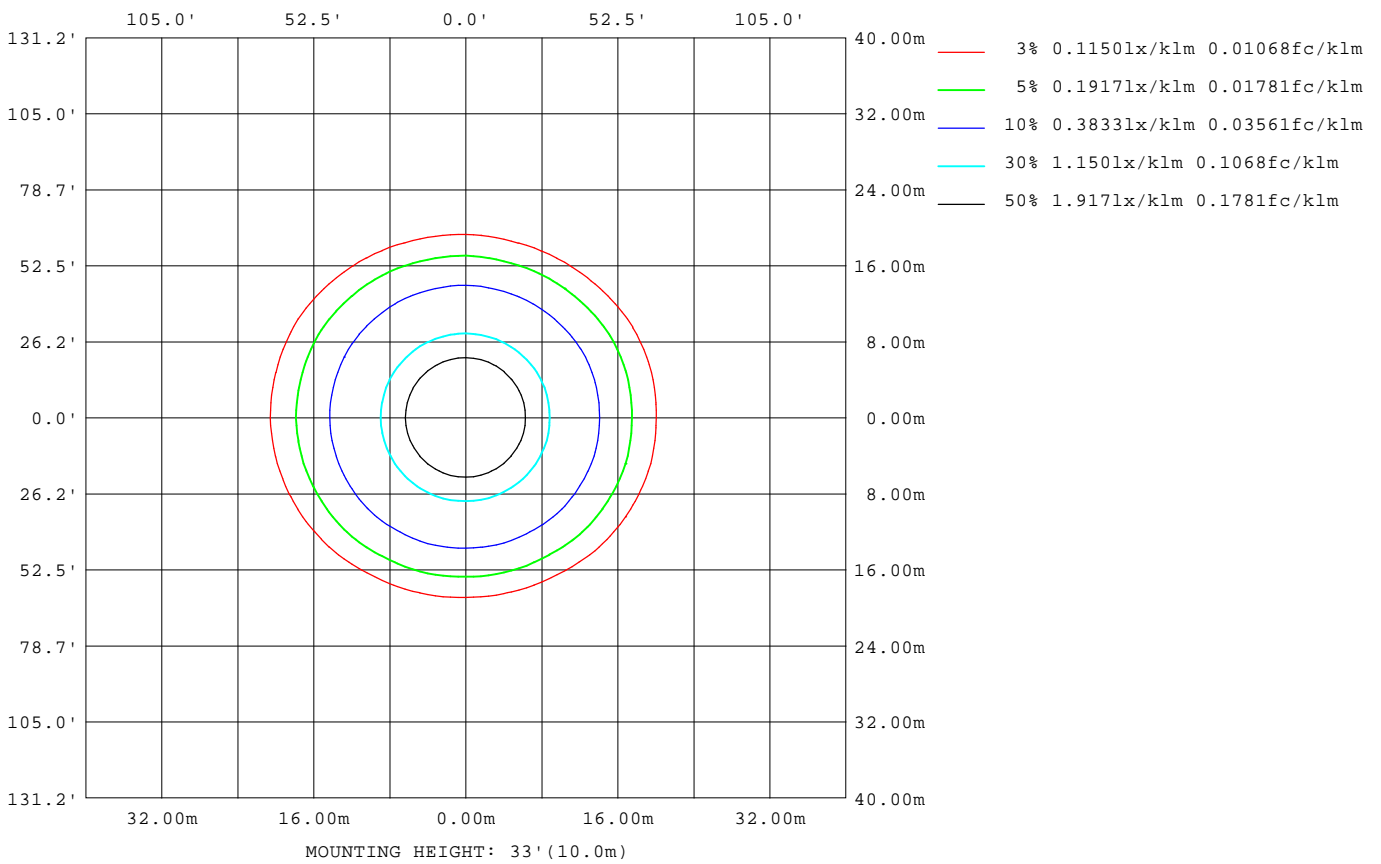

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-02-26

g Range: 0 - 180DEG
 g Interval: 5.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.000m [K=1.0250]
 Remarks:

LED Avg.L Report

Test:U:120.09V I:0.1493A P:14.592W PF:0.8138 Freq:59.98Hz Lamp Flux:1020.1x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	2970
L_0~180(75)av	1110
L_0~180(85)av	420
L_90~270(65)av	2120
L_90~270(75)av	453
L_90~270(85)av	203
L_45(65)av	2591
L_45(75)av	674
L_45(85)av	279

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-02-26

g Range: 0 - 180DEG
g Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.000m [K=1.0250]
Remarks:

Planar Illuminance Curve

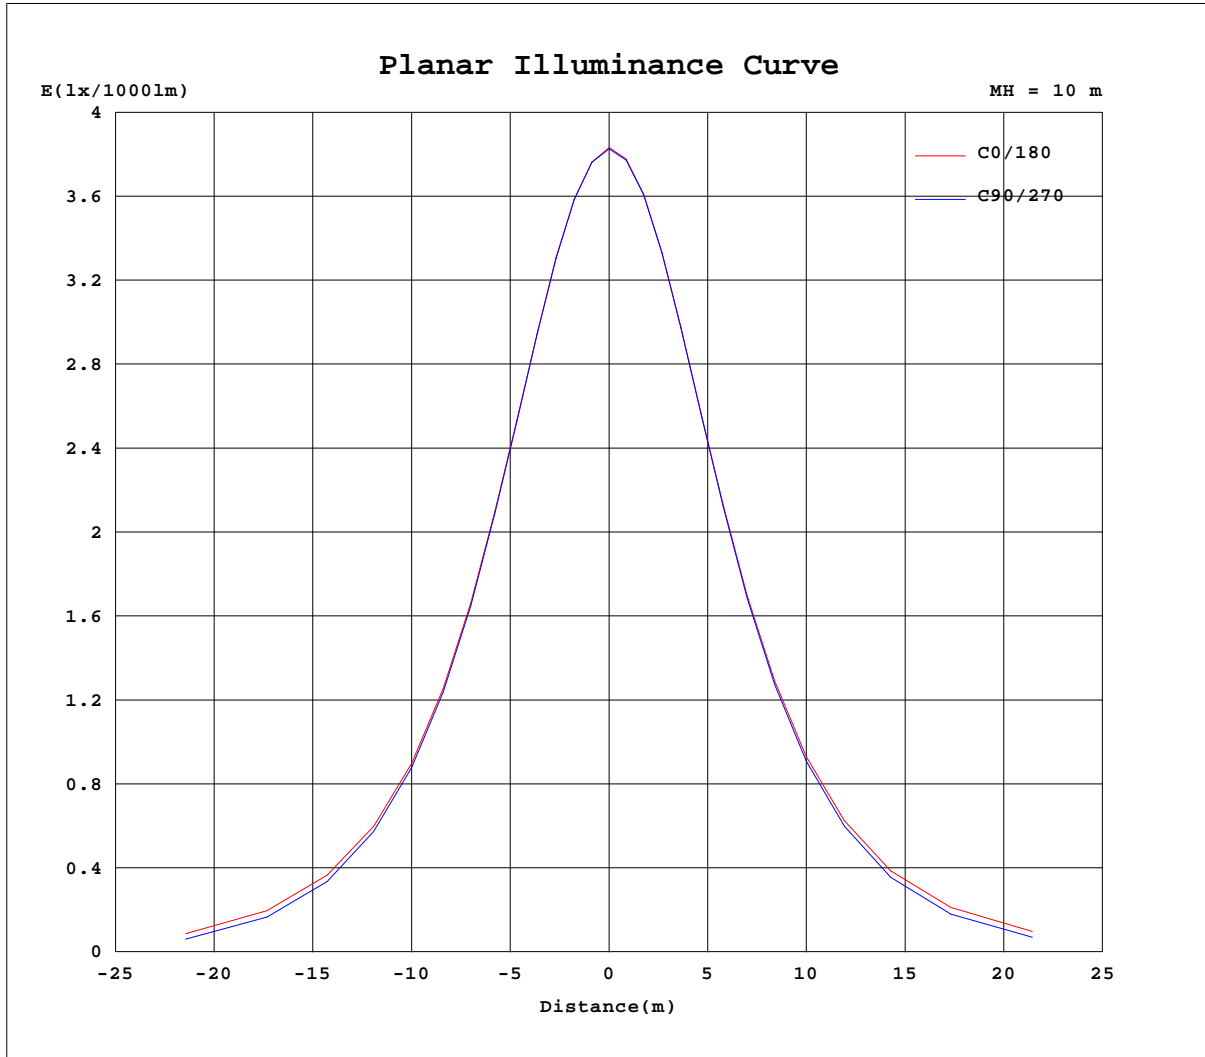

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-02-26

g Range: 0 - 180DEG
 g Interval: 5.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.000m [K=1.0250]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.09V I:0.1493A P:14.592W PF:0.8138 Freq:59.98Hz Lamp Flux:1020.1x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

Table--1

UNIT: cd/klm

C(DEG) g (DEG)	0	15	30	45	60	75	90	105	120	135	150	165	180	195	210	225	240	255	270
0	383	383	383	383	383	383	383	383	383	383	383	383	383	383	383	383	383	383	383
5	380	381	380	381	381	381	381	381	381	381	382	382	382	383	382	382	382	382	382
10	375	376	375	376	375	375	376	376	376	377	376	377	378	378	377	378	378	377	378
15	367	367	366	366	366	367	367	367	367	368	368	369	370	370	370	370	371	369	370
20	355	355	354	354	355	355	355	355	356	357	357	358	359	359	359	360	360	359	359
25	340	341	339	340	339	339	340	340	341	342	342	343	345	345	345	346	346	344	345
30	323	323	322	322	321	322	322	323	323	325	325	327	328	328	329	329	329	328	327
35	303	303	301	301	300	300	301	302	303	305	306	307	309	310	310	309	309	307	307
40	280	281	278	278	277	277	276	279	279	282	283	285	287	287	288	286	286	284	284
45	254	255	252	253	249	250	249	252	253	257	257	261	263	262	264	261	261	257	258
50	225	227	223	223	218	218	216	220	222	228	229	232	235	235	236	232	231	226	226
55	194	195	190	189	182	180	178	182	185	194	197	201	205	204	205	200	197	190	189
60	158	159	153	148	138	135	133	138	142	154	160	166	170	170	169	162	156	147	145
65	116	116	110	101	88.6	83.2	81.8	86.8	93.8	107	118	125	130	130	128	118	107	97.6	93.9
70	67.0	66.5	59.6	49.6	38.0	34.1	33.6	37.7	43.5	56.7	69.1	77.7	83.1	82.9	79.6	67.0	55.2	45.9	43.5
75	22.0	21.4	18.0	13.7	10.6	10.2	10.3	11.0	12.0	16.9	24.8	30.7	34.3	33.5	31.1	22.4	16.3	13.1	12.7
80	6.84	6.75	6.36	5.99	5.68	5.68	5.67	5.98	6.26	6.77	7.30	8.02	8.56	8.37	8.17	7.29	6.96	6.63	6.49
85	2.92	2.74	2.15	1.79	1.42	1.40	1.35	1.58	1.79	2.49	3.05	3.73	4.26	4.13	3.77	3.18	2.77	2.31	2.11
90	0.40	0.49	0.51	0.40	0.47	0.39	0.34	0.27	0.26	0.27	0.30	0.33	0.45	0.39	0.32	0.25	0.21	0.17	0.18
95	0.56	0.61	0.63	0.53	0.62	0.56	0.48	0.44	0.40	0.39	0.42	0.46	0.43	0.49	0.50	0.39	0.46	0.44	0.39
100	0.74	0.79	0.82	0.70	0.77	0.71	0.66	0.61	0.58	0.57	0.60	0.64	0.60	0.64	0.65	0.54	0.60	0.58	0.54
105	0.96	0.99	1.00	0.89	0.96	0.90	0.87	0.81	0.78	0.78	0.80	0.84	0.80	0.83	0.82	0.72	0.78	0.76	0.73
110	1.17	1.20	1.21	1.10	1.16	1.12	1.07	1.02	1.00	1.00	1.02	1.05	1.01	1.02	1.01	0.92	0.98	0.96	0.92
115	1.39	1.41	1.42	1.31	1.37	1.33	1.29	1.24	1.21	1.22	1.23	1.26	1.21	1.23	1.22	1.12	1.19	1.17	1.15
120	1.59	1.60	1.62	1.52	1.57	1.53	1.50	1.46	1.44	1.43	1.45	1.48	1.41	1.42	1.41	1.34	1.39	1.37	1.35
125	1.81	1.81	1.82	1.71	1.77	1.73	1.70	1.66	1.63	1.62	1.64	1.66	1.60	1.61	1.60	1.53	1.58	1.57	1.55
130	2.04	2.00	2.00	1.89	1.96	1.91	1.89	1.85	1.82	1.81	1.83	1.85	1.78	1.80	1.78	1.70	1.76	1.76	1.75
135	2.21	2.20	2.16	2.05	2.06	2.09	2.07	2.02	1.99	1.95	1.99	2.03	1.97	1.96	1.95	1.86	1.93	1.92	1.95
140	2.31	2.31	2.32	2.15	2.17	2.26	2.24	2.19	2.15	2.10	2.16	2.20	2.12	2.12	2.11	1.97	2.09	2.07	2.10
145	2.43	2.42	2.35	2.33	2.39	2.36	2.36	2.32	2.31	2.27	2.29	2.35	2.27	2.26	2.17	2.16	2.20	2.25	2.18
150	2.66	2.51	2.49	2.49	2.49	2.47	2.47	2.45	2.43	2.44	2.44	2.46	2.37	2.35	2.34	2.35	2.32	2.32	2.39
155	2.79	2.65	2.75	2.74	2.63	2.63	2.63	2.60	2.61	2.58	2.62	2.62	2.52	2.51	2.49	2.51	2.57	2.51	2.55
160	2.82	2.77	2.82	2.80	2.81	2.81	2.78	2.82	2.76	2.71	2.76	2.81	2.70	2.67	2.67	2.69	2.79	2.68	2.69
165	2.92	2.87	2.91	2.96	2.94	2.92	2.92	2.89	2.87	2.82	2.87	2.88	2.84	2.80	2.81	2.85	2.82	2.81	2.87
170	2.98	2.97	2.95	2.98	2.99	2.97	2.97	2.93	2.94	2.95	2.96	2.96	2.92	2.92	2.91	2.90	2.90	2.91	2.92
175	3.05	3.04	3.04	3.06	3.06	3.05	3.04	3.03	3.03	3.05	3.06	3.04	3.01	3.02	3.03	3.03	3.01	3.00	3.02
180	3.08	3.08	3.08	3.10	3.09	3.10	3.10	3.08	3.10	3.11	3.10	3.09	3.09	3.09	3.09	3.10	3.10	3.10	3.10

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-02-26

g Range: 0 - 180DEG
 g Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.0250]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.09V I:0.1493A P:14.592W PF:0.8138 Freq:59.98Hz Lamp Flux:1020.1x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

Table--2

UNIT: cd/klm

C(DEG) g (DEG)	285	300	315	330	345														
0	383	383	383	383	383														
5	382	382	381	381	381														
10	377	377	376	376	376														
15	369	368	368	368	368														
20	358	358	357	357	357														
25	343	343	342	343	342														
30	326	326	325	325	325														
35	306	306	305	306	305														
40	282	283	282	283	282														
45	255	256	255	258	256														
50	223	225	225	229	228														
55	185	188	190	196	196														
60	141	145	150	158	160														
65	91.6	95.4	103	114	118														
70	41.8	45.1	53.0	65.0	69.8														
75	12.0	12.7	15.4	22.1	24.4														
80	6.30	6.34	6.33	6.70	6.94														
85	1.89	1.93	2.06	2.49	2.87														
90	0.19	0.19	0.22	0.24	0.31														
95	0.35	0.33	0.35	0.37	0.44														
100	0.51	0.50	0.51	0.56	0.61														
105	0.70	0.69	0.71	0.74	0.81														
110	0.90	0.90	0.92	0.96	1.02														
115	1.12	1.11	1.14	1.17	1.24														
120	1.34	1.34	1.37	1.40	1.50														
125	1.57	1.56	1.57	1.62	1.71														
130	1.77	1.78	1.74	1.81	1.90														
135	1.95	1.96	1.90	1.93	2.02														
140	2.09	2.06	2.06	2.10	2.15														
145	2.23	2.22	2.21	2.23	2.29														
150	2.42	2.36	2.45	2.39	2.45														
155	2.61	2.55	2.60	2.57	2.64														
160	2.77	2.73	2.71	2.73	2.79														
165	2.87	2.86	2.82	2.84	2.88														
170	2.94	2.94	2.95	2.93	2.94														
175	3.02	3.04	3.06	3.05	3.04														
180	3.08	3.09	3.12	3.10	3.09														

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-02-26

g Range: 0 - 180DEG
 g Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.0250]
 Remarks: