
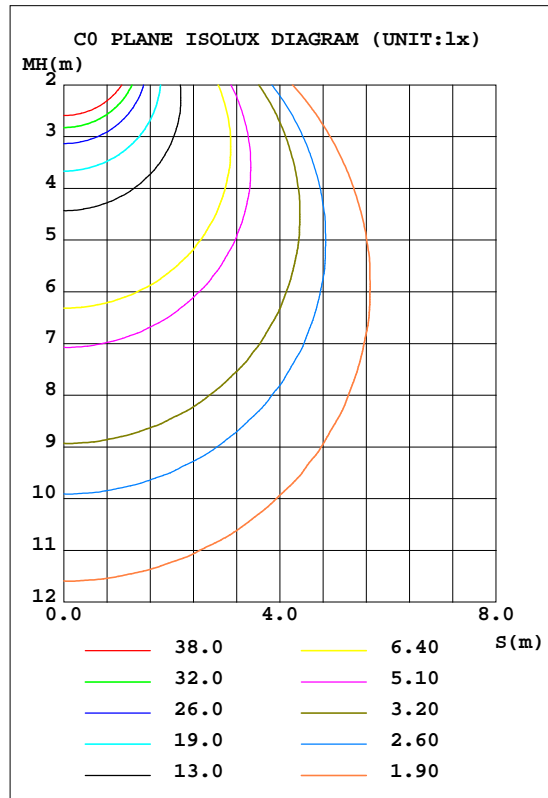


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.22V I:0.0980A P:11.790W PF:0.9792 Freq:59.98Hz Lamp Flux:750x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.09*0.09	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 63.62 lm/W			
MODELASD-JBS-4D12AC(2700K)		I _{max} (cd)	256.3	S/MH(C0/180)	1.26
NOMINAL POWER(W)	12	LOR(%)	100.0	S/MH(C90/270)	1.27
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	750	h UP, DN(C0-180)	0.2,49.3
NOMINAL FLUX(lm)	750	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.2,50.4
LAMPS INSIDE	1	h up(%)	0.4	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	h down(%)	99.6	CIBSE SHR MAX	1.35

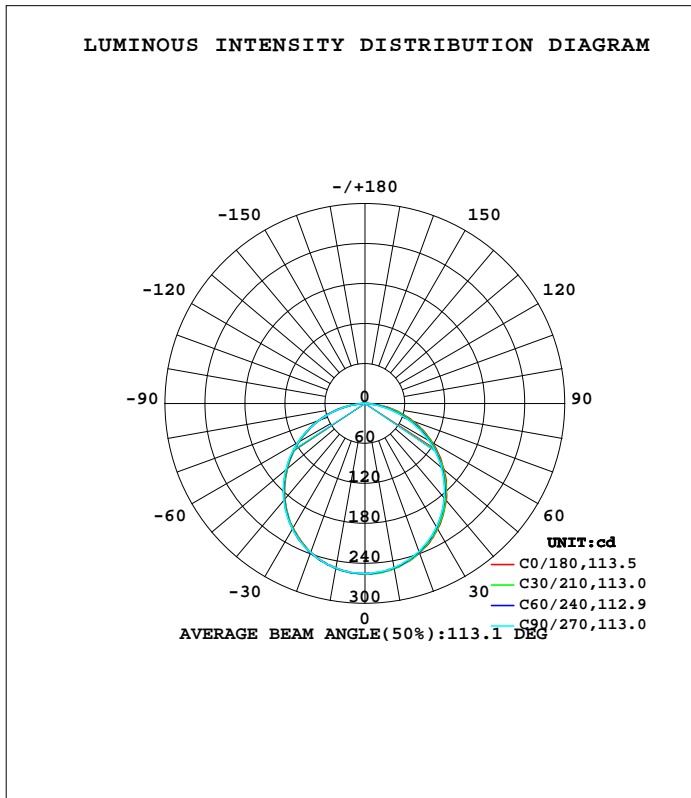

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-3

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.0930]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	251.2	251.0	250.1	250.1	250.9	251.4	250.6	251.6	0- 10	24.17	24.17	3.28,3.28
20	238.9	237.8	236.6	236.4	237.7	238.5	238.2	239.1	10- 20	69.29	93.46	12.7,12.7
30	217.6	216.2	214.3	214.2	215.8	216.8	217.8	218.5	20- 30	105.2	198.6	27,27
40	189.8	187.0	185.2	184.8	186.8	188.3	189.4	190.2	30- 40	126.9	325.6	44.2,44.2
50	155.0	152.1	149.9	149.7	152.2	153.5	155.0	155.7	40- 50	131.8	457.3	62.1,62.1
60	116.6	113.1	110.1	110.4	113.2	114.8	116.2	117.2	50- 60	119.6	576.9	78.3,78.3
70	76.05	71.01	65.94	68.12	72.67	73.10	72.69	75.51	60- 70	92.13	669.1	90.9,90.9
80	35.74	28.45	22.62	25.48	32.43	29.99	28.31	32.38	70- 80	53.27	722.3	98.1,98.1
90	0.1556	0.0467	0.0374	0.0624	0	0.0125	0.0067	0.0189	80- 90	11.43	733.8	99.6,99.6
100	0.1182	0.1401	0.1491	0.1461	0.0934	0.0871	0.0310	0.0622	90-100	0.0608	733.8	99.7,99.7
110	0.3047	0.3049	0.2857	0.2889	0.3808	0.3803	0.1489	0.1769	100-110	0.2216	734.0	99.7,99.7
120	0.4791	0.4293	0.3850	0.4506	0.8242	0.8142	0.3848	0.2982	110-120	0.4231	734.5	99.7,99.7
130	0.6100	0.5068	0.5218	0.5437	0.9154	0.5705	0.4966	0.4068	120-130	0.4678	734.9	99.8,99.8
140	0.6499	0.5787	0.7018	0.6338	0.5666	0.5100	0.4916	0.4318	130-140	0.4409	735.4	99.9,99.9
150	0.6945	0.6622	0.8545	0.6804	0.6726	0.5633	0.8007	0.4972	140-150	0.3798	735.7	99.9,99.9
160	0.7098	0.7219	0.9111	0.7643	0.7105	0.6420	0.7160	0.5784	150-160	0.3192	736.1	100,100
170	0.7150	0.7520	0.8127	0.8849	0.7202	0.6836	0.6871	0.6338	160-170	0.2127	736.3	100,100
180	0.7222	0.7655	0.8071	0.7612	0.7160	0.7188	0.7078	0.6991	170-180	0.0693	736.3	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-3

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.0930]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.22V I:0.0980A P:11.790W PF:0.9792 Freq:59.98Hz Lamp Flux:750x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.09*0.09	Shielding Angle:

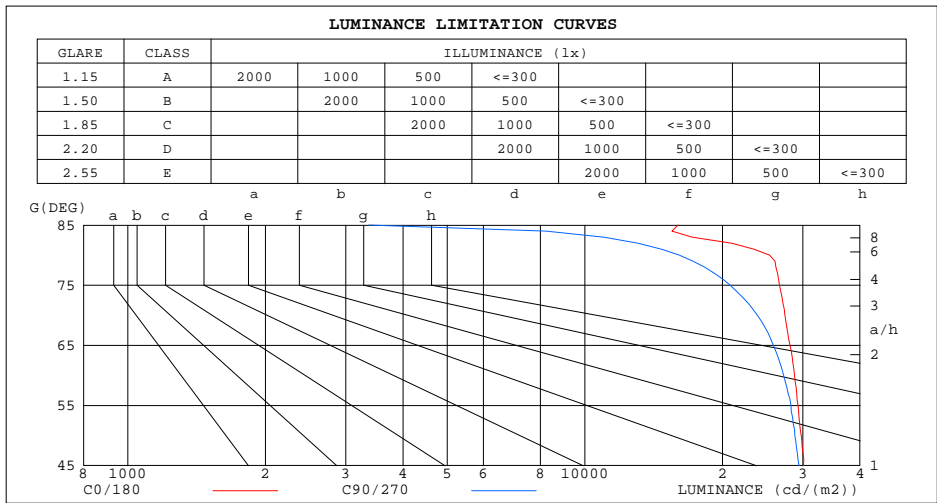

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	16001	3368
80	25381	16104
75	26656	20807
70	27419	23839
65	28129	25876
60	28760	27232
55	29275	28277
50	29740	28830
45	30113	29413


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-3

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.0930]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.22V I:0.0980A P:11.790W PF:0.9792 Freq:59.98Hz Lamp Flux:750x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.09*0.09	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.00	.96	1.02	.98	.94	.97	.94	.91	.93	.91	.88	.90	.88	.86	.83
2.0	.90	.84	.78	.88	.82	.77	.85	.80	.75	.81	.77	.73	.78	.75	.71	.69
3.0	.79	.71	.64	.78	.70	.64	.75	.68	.63	.72	.66	.62	.69	.64	.60	.58
4.0	.70	.61	.54	.69	.60	.54	.66	.59	.53	.64	.58	.53	.62	.56	.52	.50
5.0	.63	.54	.47	.61	.53	.47	.59	.52	.46	.57	.51	.45	.55	.50	.45	.43
6.0	.56	.47	.41	.55	.47	.41	.53	.46	.40	.52	.45	.40	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.42	.36	.49	.41	.36	.47	.40	.35	.46	.40	.35	.33
8.0	.47	.38	.32	.46	.38	.32	.44	.37	.32	.43	.36	.32	.42	.36	.31	.29
9.0	.43	.34	.29	.42	.34	.29	.41	.34	.29	.40	.33	.28	.39	.33	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.26	.24

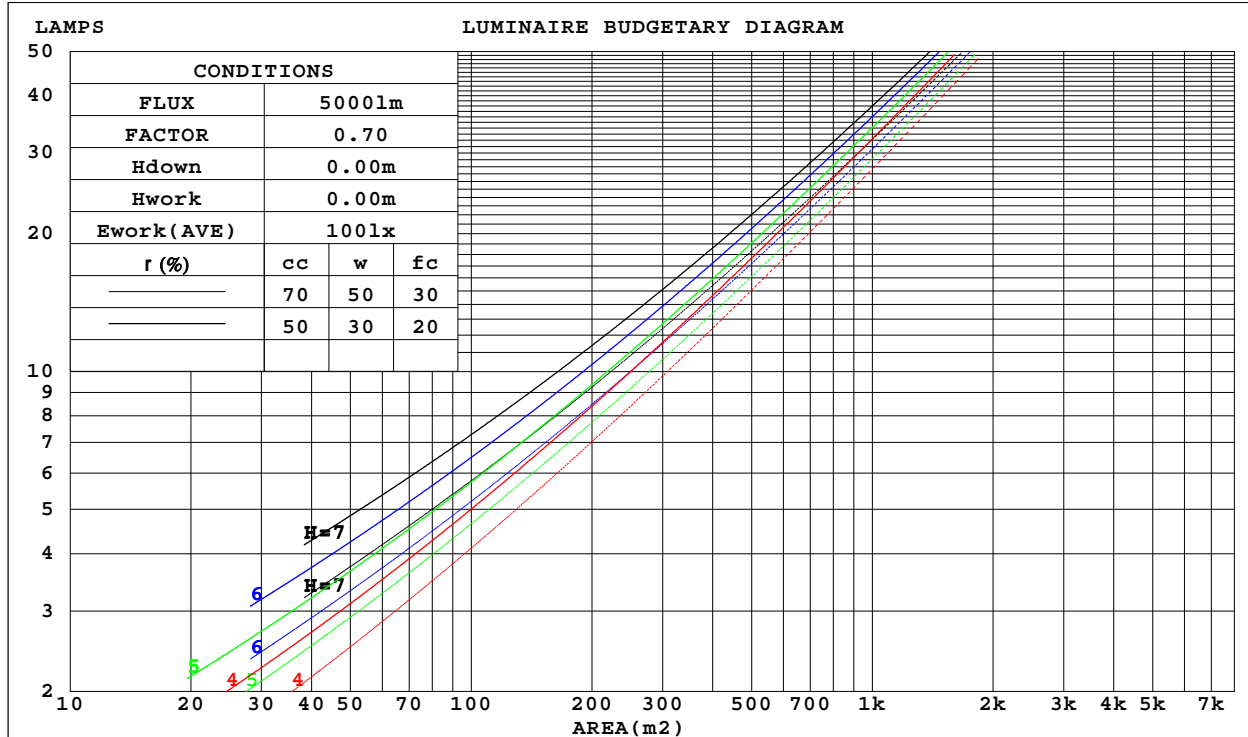

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-3

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.0930]
 Remarks:

WEC AND CCEC

Test:U:120.22V I:0.0980A P:11.790W PF:0.9792 Freq:59.98Hz Lamp Flux:750x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.09*0.09	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.308	.175	.056	.301	.172	.055	.288	.165	.053	.275	.159	.051	.264	.153	.049	
2.0	.292	.160	.049	.285	.157	.048	.273	.152	.047	.262	.147	.046	.252	.143	.045	
3.0	.270	.144	.043	.265	.142	.043	.254	.138	.042	.244	.134	.041	.235	.130	.040	
4.0	.249	.130	.038	.245	.128	.038	.235	.125	.037	.227	.122	.037	.218	.119	.036	
5.0	.231	.118	.034	.226	.116	.034	.218	.113	.033	.210	.111	.033	.203	.108	.033	
6.0	.214	.107	.031	.210	.106	.031	.203	.104	.030	.196	.102	.030	.189	.100	.030	
7.0	.199	.098	.028	.196	.097	.028	.189	.096	.028	.183	.094	.027	.177	.092	.027	
8.0	.186	.091	.026	.183	.090	.025	.177	.088	.025	.171	.087	.025	.166	.085	.025	
9.0	.174	.084	.024	.171	.084	.023	.166	.082	.023	.161	.081	.023	.156	.079	.023	
10.0	.164	.079	.022	.161	.078	.022	.156	.077	.022	.152	.075	.021	.148	.074	.021	

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.193	.193	.193	.165	.165	.165	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.183	.159	.137	.156	.136	.118	.107	.094	.082	.062	.054	.047	.020	.017	.015	
2.0	.175	.135	.101	.150	.116	.087	.103	.080	.061	.059	.047	.036	.019	.015	.012	
3.0	.167	.117	.077	.143	.101	.067	.098	.070	.047	.057	.041	.028	.018	.013	.009	
4.0	.160	.104	.061	.137	.090	.053	.094	.062	.037	.055	.037	.022	.018	.012	.007	
5.0	.152	.093	.050	.131	.081	.043	.090	.056	.031	.052	.033	.018	.017	.011	.006	
6.0	.145	.085	.042	.125	.074	.036	.086	.052	.026	.050	.030	.015	.016	.010	.005	
7.0	.138	.078	.036	.119	.068	.031	.082	.047	.022	.048	.028	.013	.015	.009	.004	
8.0	.132	.072	.031	.113	.063	.027	.079	.044	.019	.046	.026	.012	.015	.009	.004	
9.0	.126	.067	.028	.108	.058	.024	.075	.041	.017	.044	.024	.010	.014	.008	.003	
10.0	.120	.063	.025	.103	.055	.022	.072	.039	.016	.042	.023	.009	.014	.007	.003	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-3

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.0930]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.22V I:0.0980A P:11.790W PF:0.9792 Freq:59.98Hz Lamp Flux:750x1 lm										
NAME:					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: ASD LIGHTNG CORP					SUR.: 0.09*0.09			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.9	25.6	24.3	25.9	26.2	23.6	25.3	24.0	25.6	25.9
3H	25.9	27.4	26.3	27.7	28.1	25.4	26.8	25.7	27.2	27.5
4H	26.7	28.0	27.1	28.4	28.8	25.9	27.3	26.3	27.7	28.1
6H	27.3	28.6	27.7	28.9	29.3	26.3	27.6	26.7	28.0	28.4
8H	27.4	28.7	27.9	29.1	29.5	26.4	27.6	26.8	28.0	28.4
12H	27.5	28.7	27.9	29.1	29.5	26.4	27.5	26.8	27.9	28.4
4H 2H	24.5	25.9	25.0	26.3	26.7	24.3	25.7	24.7	26.0	26.4
3H	26.7	27.9	27.1	28.3	28.7	26.2	27.4	26.6	27.8	28.2
4H	27.6	28.7	28.1	29.1	29.6	26.9	27.9	27.3	28.4	28.8
6H	28.4	29.3	28.8	29.8	30.2	27.3	28.3	27.8	28.7	29.2
8H	28.6	29.5	29.1	29.9	30.4	27.4	28.3	27.9	28.7	29.2
12H	28.7	29.5	29.2	30.0	30.4	27.4	28.2	27.9	28.7	29.2
8H 4H	27.9	28.8	28.4	29.2	29.7	27.2	28.1	27.7	28.5	29.0
6H	28.8	29.5	29.3	30.0	30.5	27.7	28.4	28.2	28.9	29.4
8H	29.1	29.7	29.6	30.2	30.7	27.8	28.5	28.4	29.0	29.5
12H	29.2	29.8	29.7	30.3	30.9	27.9	28.4	28.4	28.9	29.5
12H 4H	27.9	28.7	28.4	29.2	29.7	27.2	28.0	27.7	28.5	29.0
6H	28.8	29.5	29.4	29.9	30.5	27.8	28.4	28.3	28.9	29.4
8H	29.1	29.7	29.7	30.2	30.8	27.9	28.5	28.4	29.0	29.6
CIE190: 2010										

CIE190: 2010
Area: 0.0081 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-6-3

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.600m [K=1.0930]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.22V I:0.0980A P:11.790W PF:0.9792 Freq:59.98Hz Lamp Flux:750x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.09*0.09	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	46	39	57	45	39	55	45	38	32
0.80	67	56	48	66	55	48	64	54	48	41
1.00	76	65	57	75	64	57	72	65	56	49
1.25	83	72	65	81	72	65	79	70	64	57
1.50	88	78	71	86	77	70	83	75	69	62
2.00	95	86	80	93	85	79	89	83	77	70
2.50	99	91	85	97	90	84	93	87	82	74
3.00	102	95	90	100	94	89	96	91	86	78
4.00	106	101	96	104	99	94	99	95	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-3

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=1.0930]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.22V I:0.0980A P:11.790W PF:0.9792 Freq:59.98Hz Lamp Flux:750x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.09*0.09	Shielding Angle:

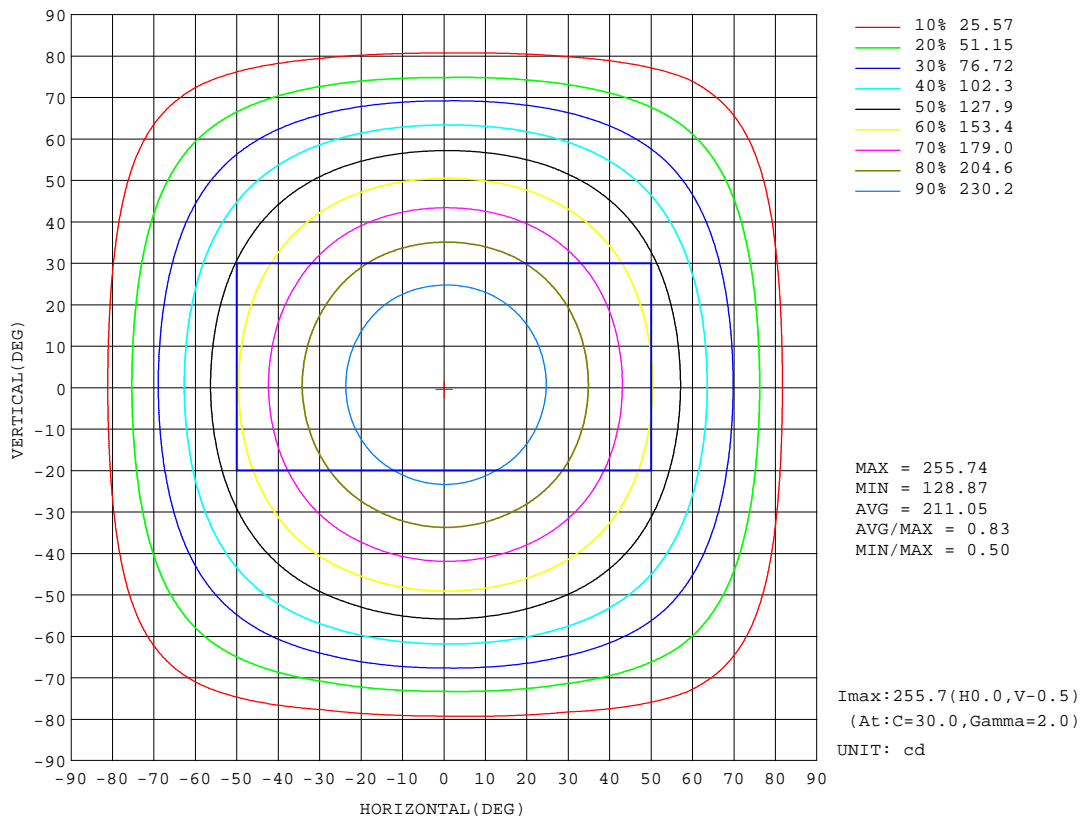


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-3

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=1.0930]
 Remarks:

AAI Figure

Test:U:120.22V I:0.0980A P:11.790W PF:0.9792 Freq:59.98Hz Lamp Flux:750x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.09*0.09	Shielding Angle:

Flux out:543.3 lm

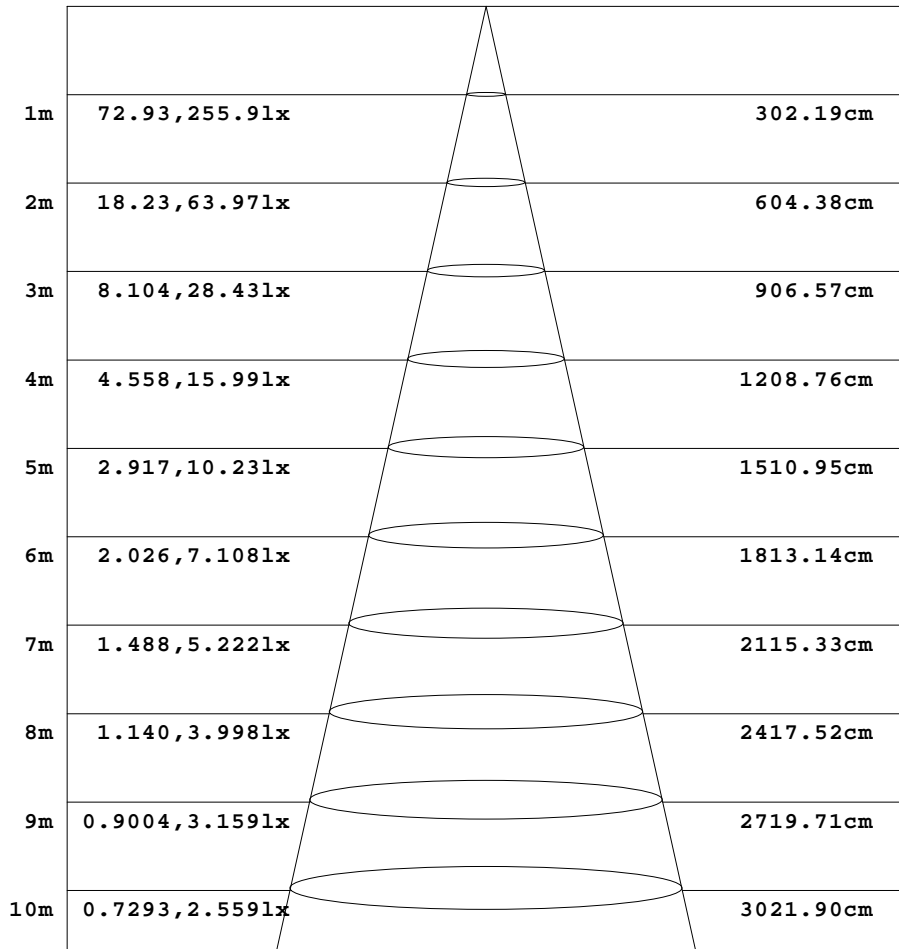

Height Eavg, Emax Angle:113.00deg Diameter


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-3

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.0930]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.22V I:0.0980A P:11.790W PF:0.9792 Freq:59.98Hz Lamp Flux:750x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.09*0.09	Shielding Angle:

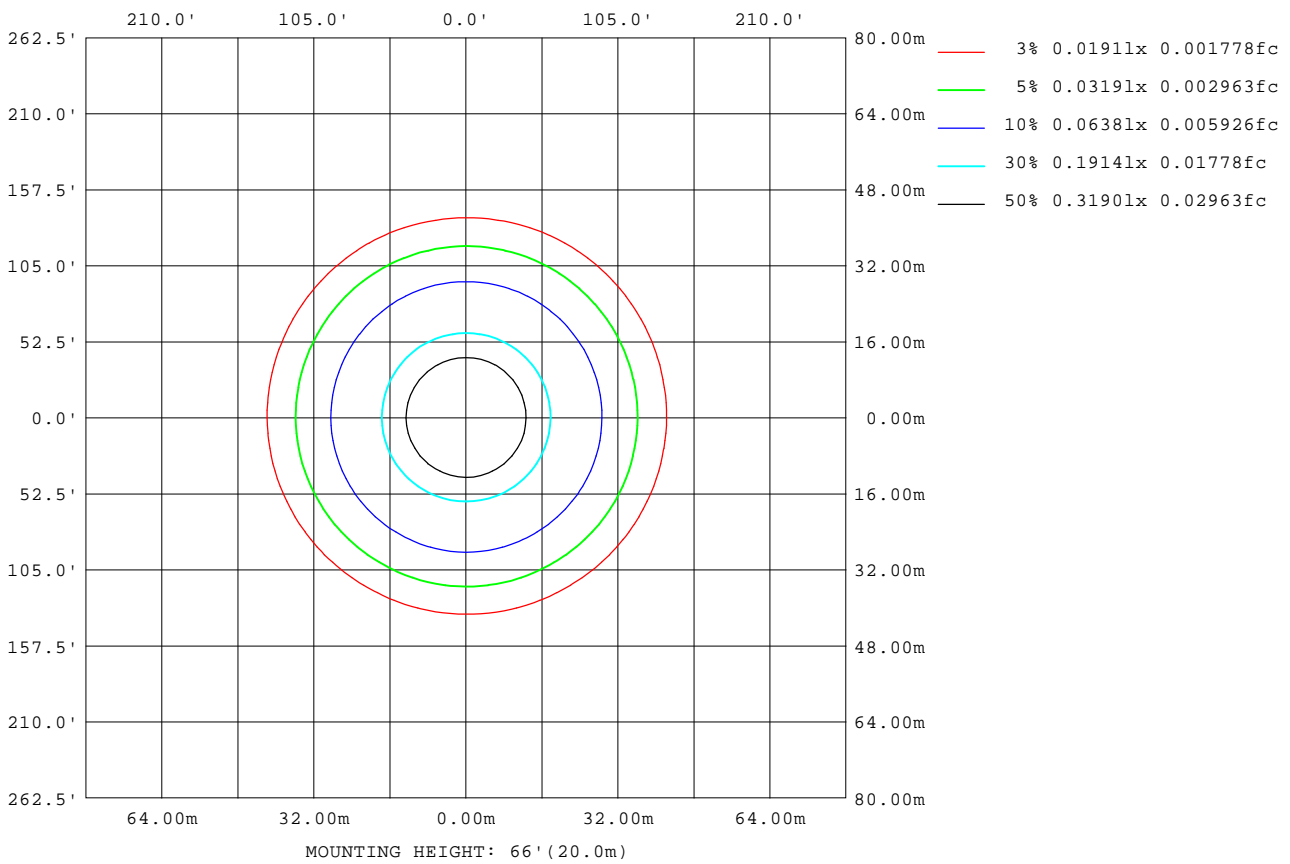

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-3

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=1.0930]
 Remarks:

LED Avg.L Report

Test:U:120.22V I:0.0980A P:11.790W PF:0.9792 Freq:59.98Hz Lamp Flux:750x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.09*0.09	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	27699
L_0~180(75)av	25876
L_0~180(85)av	14406
L_90~270(65)av	26775
L_90~270(75)av	22307
L_90~270(85)av	7780
L_45(65)av	27226
L_45(75)av	24030
L_45(85)av	12416

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-6-3

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.600m [K=1.0930]
Remarks:

Planar Illuminance Curve

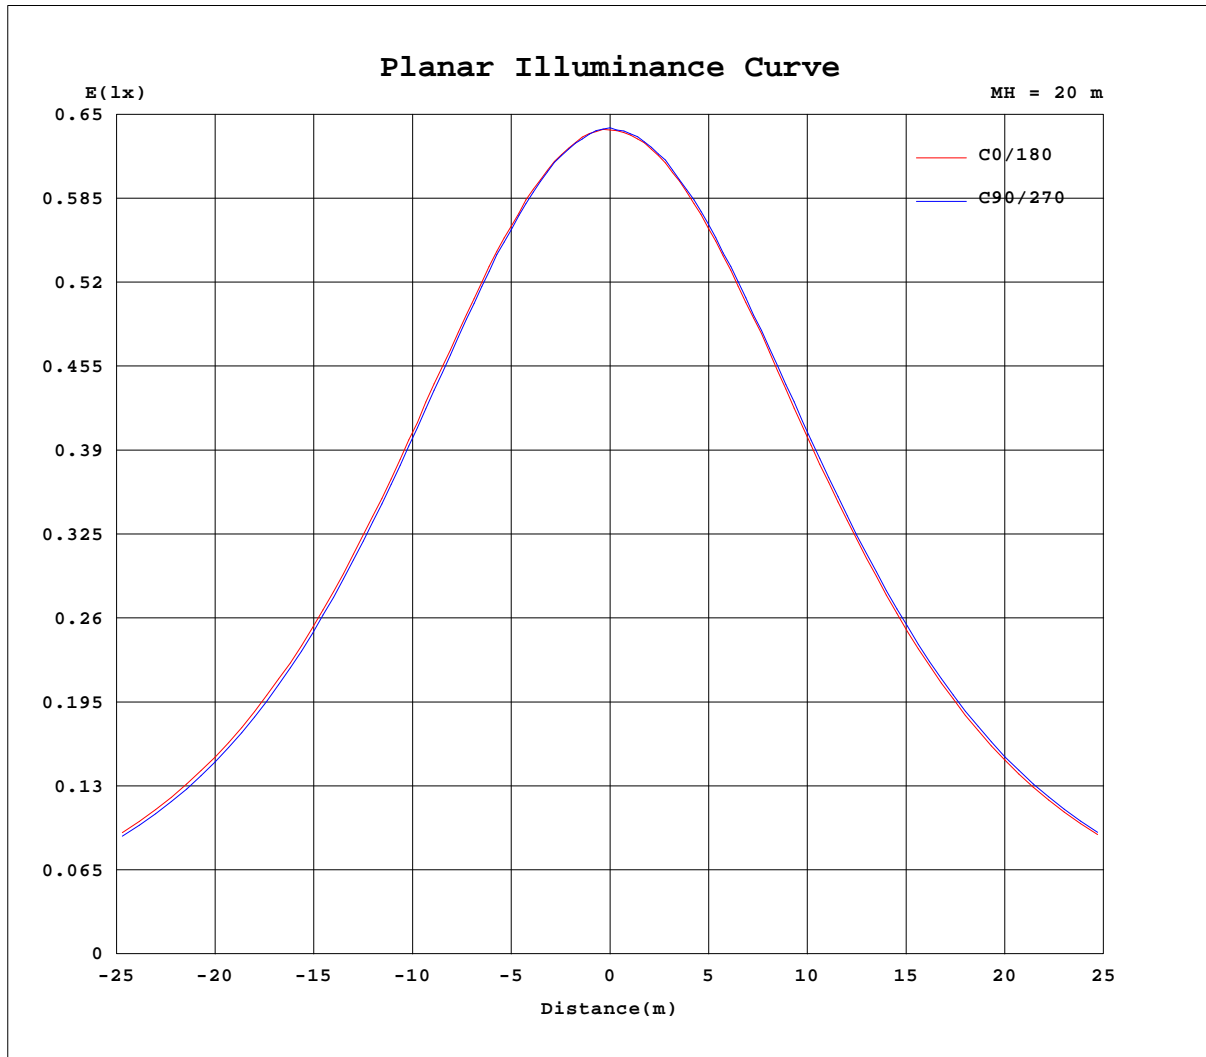

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-3

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=1.0930]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.22V I:0.0980A P:11.790W PF:0.9792 Freq:59.98Hz Lamp Flux:750x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.09*0.09	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	255	255	255	255	255	255	255	255	255	255	255	255						
5	255	255	254	254	254	254	254	255	254	254	254	255						
10	251	251	251	250	250	250	251	252	251	251	252	251						
15	246	246	245	244	244	245	245	246	246	246	246	247						
20	239	238	237	237	236	237	238	238	239	238	239	239						
25	230	229	227	227	226	227	227	228	229	229	230	230						
30	218	217	215	214	214	215	216	216	217	218	219	218						
35	204	204	202	201	200	201	202	203	204	204	205	205						
40	190	188	186	185	184	185	187	188	189	189	190	190						
45	173	172	169	168	167	168	170	171	172	173	174	174						
50	155	153	151	150	149	150	152	153	154	155	156	156						
55	136	134	132	131	130	131	133	134	135	136	137	137						
60	117	115	111	110	110	111	113	114	116	116	117	117						
65	96.4	94.3	90.4	88.4	88.4	90.7	93.2	93.7	94.8	94.9	96.5	96.9						
70	76.1	73.6	68.4	65.9	66.3	69.9	72.7	73.0	73.2	72.7	74.9	76.2						
75	56.0	52.8	46.2	43.6	44.0	49.1	52.5	52.0	51.1	50.0	52.8	55.2						
80	35.7	32.0	24.9	22.6	22.8	28.1	32.4	31.1	28.9	28.3	30.5	34.2						
85	11.3	11.3	5.37	2.37	3.43	8.32	9.03	10.1	8.96	8.61	9.63	12.2						
90	0.16	0.02	0.07	0.04	0.06	0.06	0.00	0.03	0.00	0.01	0.00	0.04						
95	0.06	0.07	0.06	0.09	0.06	0.12	0.06	0.00	0.01	0.00	0.03	0.00						
100	0.12	0.16	0.12	0.15	0.12	0.17	0.09	0.10	0.07	0.03	0.07	0.06						
105	0.22	0.25	0.19	0.22	0.19	0.25	0.24	0.53	0.20	0.07	0.14	0.14						
110	0.30	0.34	0.27	0.29	0.27	0.31	0.38	0.44	0.32	0.15	0.20	0.15						
115	0.39	0.40	0.33	0.35	0.36	0.40	0.71	0.48	1.31	0.26	0.27	0.16						
120	0.48	0.47	0.39	0.39	0.42	0.48	0.82	0.53	1.10	0.38	0.35	0.24						
125	0.54	0.52	0.42	0.43	0.49	0.58	0.85	0.60	0.67	0.42	0.39	0.36						
130	0.61	0.54	0.47	0.52	0.53	0.55	0.92	0.65	0.49	0.50	0.41	0.40						
135	0.70	0.55	0.52	0.61	0.63	0.60	1.03	0.44	0.62	0.57	0.46	0.39						
140	0.65	0.57	0.58	0.70	0.70	0.57	0.57	0.49	0.53	0.49	0.46	0.40						
145	0.68	0.62	0.61	0.88	0.67	0.62	0.62	0.51	0.58	0.50	0.49	0.43						
150	0.69	0.68	0.64	0.85	0.68	0.68	0.67	0.51	0.62	0.80	0.54	0.45						
155	0.71	0.70	0.67	0.70	0.76	0.72	0.71	0.56	0.93	0.88	0.83	0.51						
160	0.71	0.74	0.71	0.91	0.77	0.76	0.71	0.59	0.69	0.72	0.63	0.52						
165	0.71	1.06	0.72	1.06	0.77	1.26	0.72	0.61	0.72	0.70	0.66	0.55						
170	0.71	0.77	0.73	0.81	0.77	1.00	0.72	0.65	0.72	0.69	0.68	0.59						
175	0.72	0.79	0.74	0.78	0.77	0.76	0.73	0.67	0.72	0.68	0.71	0.61						
180	0.72	0.79	0.74	0.81	0.80	0.72	0.72	0.72	0.72	0.71	0.70	0.70						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-3

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.0930]
 Remarks: