
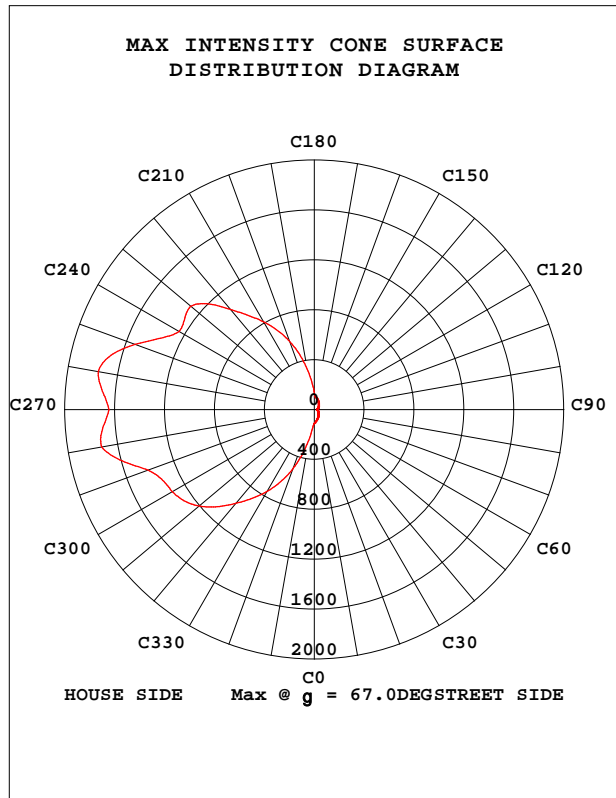


STREETLIGHT PHOTOMETRIC TEST REPORT

Test:U:120.24V I:0.2083A P:24.688W PF:0.9856 Freq:59.98Hz Lamp Flux:3313.32x1 lm		
NAME: ASD-LSWP01-26DCC-PC(3000K)	TYPE: LED wall pack	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 134.21 lm/W			
MSDELSWP01-26DCC-PC(3000K)		Imax(cd)	1759	h street_up(%)	1.0
NOMINAL POWER(W)	26	LOR(%)	100.0	h street_down(%)	8.8
RATED VOLTAGE(V)	110-277	TOTAL FLUX(lm)	3313	h house_up(%)	4.8
NOMINAL FLUX(lm)	3313.32	MAXIMUM @(C,g)	260,67.0	h house_down(%)	85.4
LAMPS INSIDE	1	h up(%)	5.9	76 FLASHAREA(m2)	0.00100
TEST VOLTAGE(V)	120.0	h down(%)	94.1	SLI	16.305

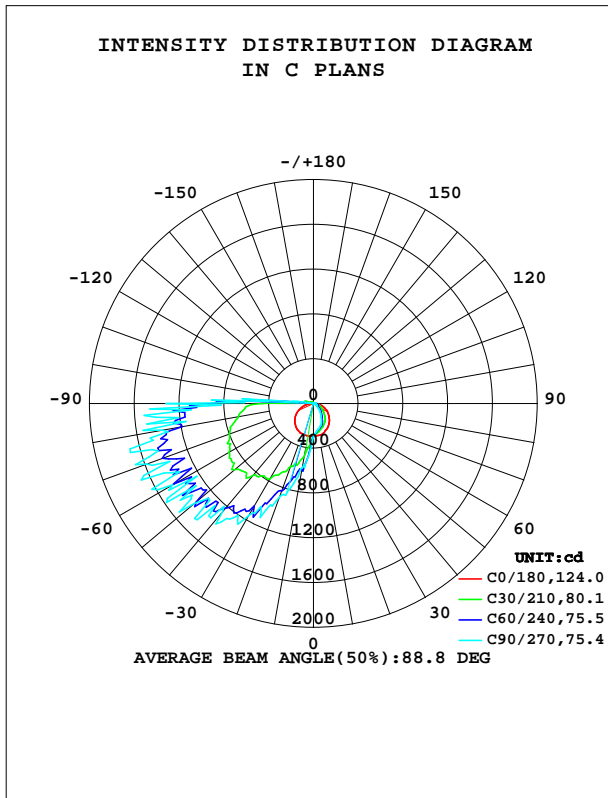


C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-05-14

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=0.9925]
 Remarks:

STREETLIGHT ISOCANDELA DIAGRAM

Test:U:120.24V I:0.2083A P:24.688W PF:0.9856 Freq:59.98Hz Lamp Flux:3313.32x1 lm		
NAME: ASD-LSWP01-26DCC-PC(3000K)	TYPE: LED wall pack	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

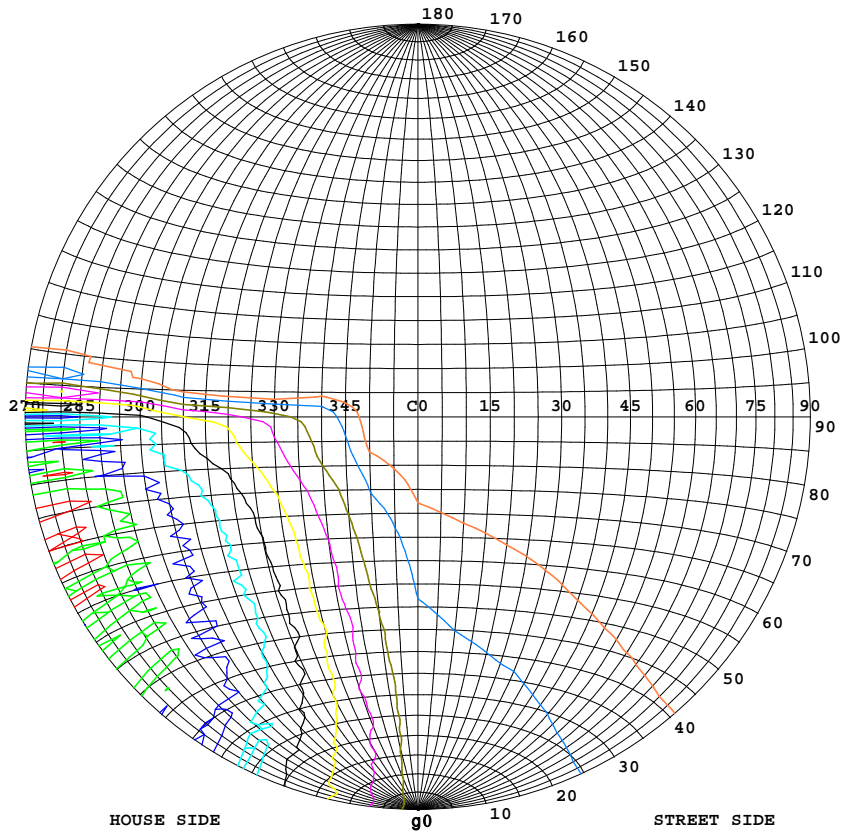

Classification:



IES:Type V - Very Short
 CIE:Narrow - Intermediate
 IES:None cut-off
 CIE:Non-cut-off
 Max.At80:414.8cd/klm
 Max.At90:401.9cd/klm
 Max.80-90:500.0cd/klm

ISOCANDELA DIAGRAM	
UNIT	cd
Imax=100%	1759
90%	1583
80%	1407
70%	1231
60%	1056
50%	880
40%	704
30%	528
20%	352
10%	176
5%	88

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-05-14

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=0.9925]
 Remarks:

COEFFICIENT OF UTILIZATION CURVE
AND ISOLUX DIAGRAM

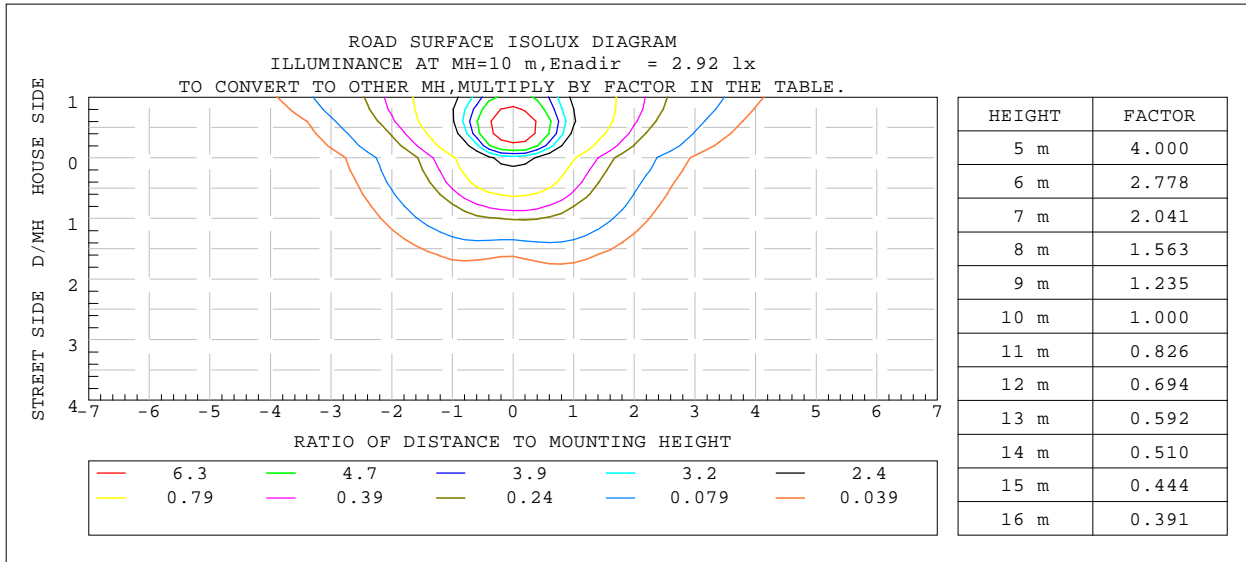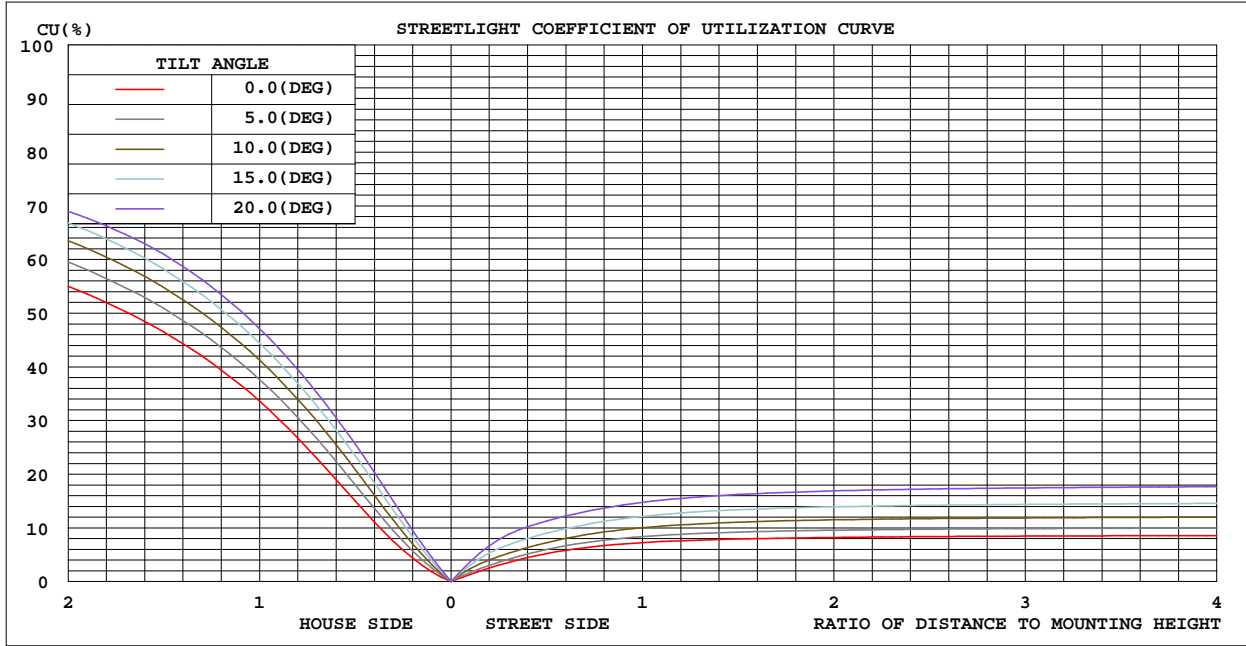

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2021-05-14

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity: 65.0%
Test Distance: 8.000m [K=0.9925]
Remarks:

ZONAL FLUX DIAGRAM

Test:U:120.24V I:0.2083A P:24.688W PF:0.9856 Freq:59.98Hz Lamp Flux:3313.32x1 lm		
NAME: ASD-LSWP01-26DCC-PC(3000K)	TYPE: LED wall pack	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	290.1	248.9	237.1	251.4	294.8	532.1	586.6	533.9	0- 10	33.26	33.26	1,1
20	277.6	217.7	203.9	219.2	291.5	737.8	884.9	715.9	10- 20	119.0	152.3	4.6,4.6
30	252.3	182.2	141.9	187.9	278.4	956.6	1153	880.3	20- 30	226.1	378.4	11.4,11.4
40	221.2	133.2	91.29	140.6	253.0	1106	1270	1034	30- 40	337.0	715.3	21.6,21.6
50	183.6	92.73	49.03	99.78	217.9	1154	1395	1091	40- 50	424.6	1140	34.4,34.4
60	143.9	61.93	25.51	67.73	173.8	1148	1455	1101	50- 60	484.6	1625	49,49
70	99.02	40.15	18.32	43.36	120.0	1146	1582	1069	60- 70	526.2	2151	64.9,64.9
80	50.12	25.65	11.87	26.24	66.29	1028	1374	934.2	70- 80	526.1	2677	80.8,80.8
90	19.18	15.69	8.860	15.80	26.47	688.6	1315	638.7	80- 90	442.7	3119	94.2,94.2
100	11.21	13.24	11.76	13.50	15.70	70.57	107.3	54.68	90-100	132.0	3252	98.1,98.1
110	13.48	16.58	12.42	16.13	14.41	27.48	6.559	21.49	100-110	23.04	3275	98.8,98.8
120	11.49	14.07	12.39	14.66	11.25	8.215	2.620	8.361	110-120	12.42	3287	99.2,99.2
130	11.44	10.41	11.34	11.00	12.51	7.324	4.047	10.04	120-130	10.02	3297	99.5,99.5
140	8.611	8.263	9.574	8.609	8.697	6.556	6.921	6.017	130-140	7.721	3305	99.7,99.7
150	6.305	6.931	8.018	6.939	6.166	4.859	7.154	2.758	140-150	4.333	3309	99.9,99.9
160	5.564	6.622	6.669	6.277	4.921	3.450	3.029	3.025	150-160	2.384	3311	99.9,99.9
170	6.121	5.707	5.583	5.810	5.827	4.525	3.718	4.369	160-170	1.392	3313	100,100
180	5.391	5.757	5.105	5.431	5.382	5.753	5.047	5.435	170-180	0.4988	3313	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-05-14

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.000m [K=0.9925]
Remarks:

ISOCANDELA DIAGRAM


Test:U:120.24V I:0.2083A P:24.688W PF:0.9856 Freq:59.98Hz Lamp Flux:3313.32x1 lm		
NAME: ASD-LSWP01-26DCC-PC(3000K)	TYPE: LED wall pack	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

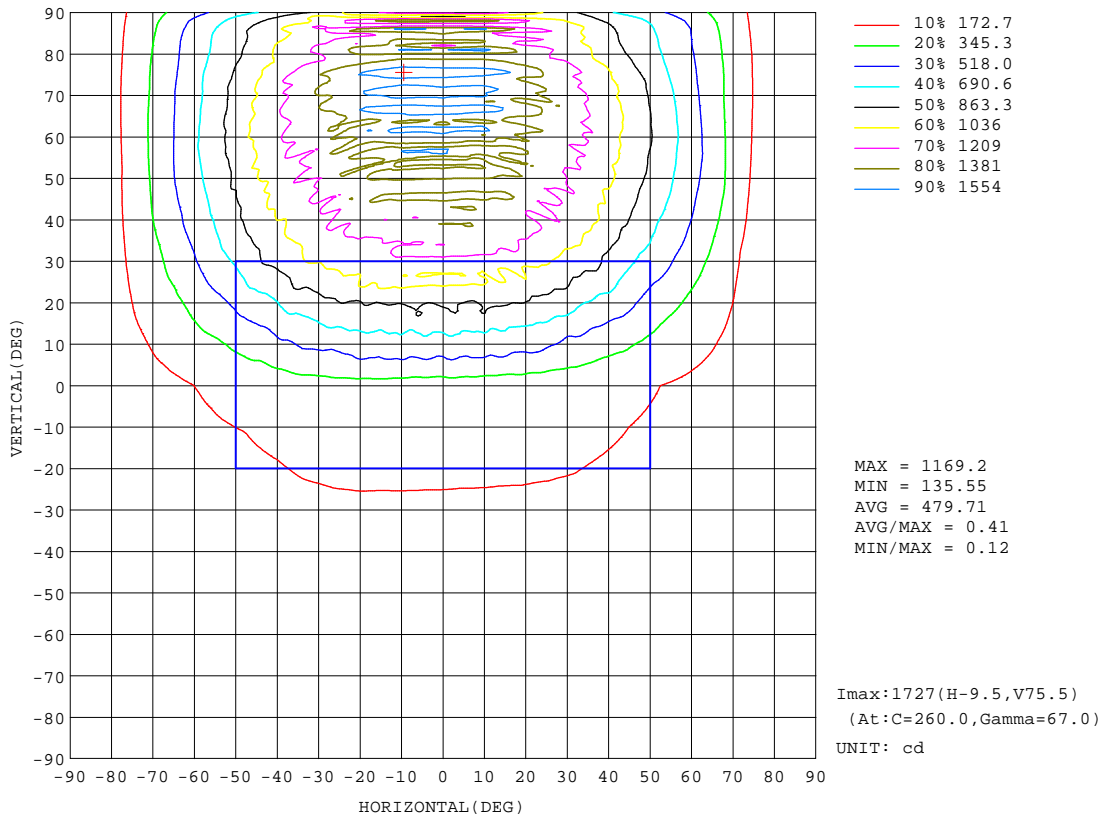

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-05-14

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=0.9925]
 Remarks:

Planar Illuminance Curve

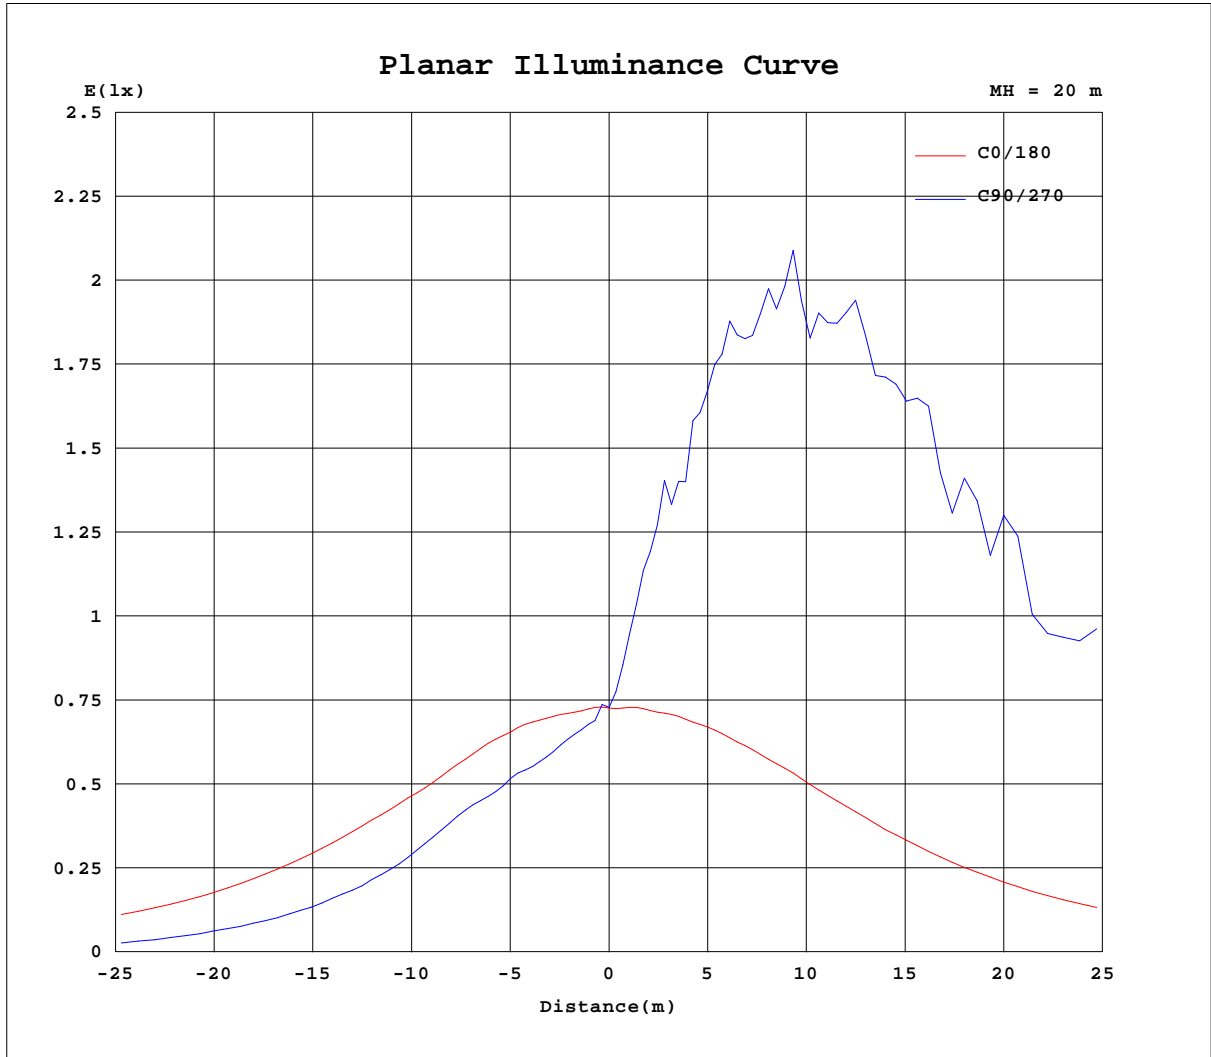


C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-05-14

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.9925]
 Remarks:

LCS REPORT

Test:U:120.24V I:0.2083A P:24.688W PF:0.9856 Freq:59.98Hz Lamp Flux:3313.32x1 lm		
NAME: ASD-LSWP01-26DCC-PC(3000K)	TYPE: LED wall pack	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

LUMINAIRE CLASSIFICATION SYSTEM(LCS) GRAPH

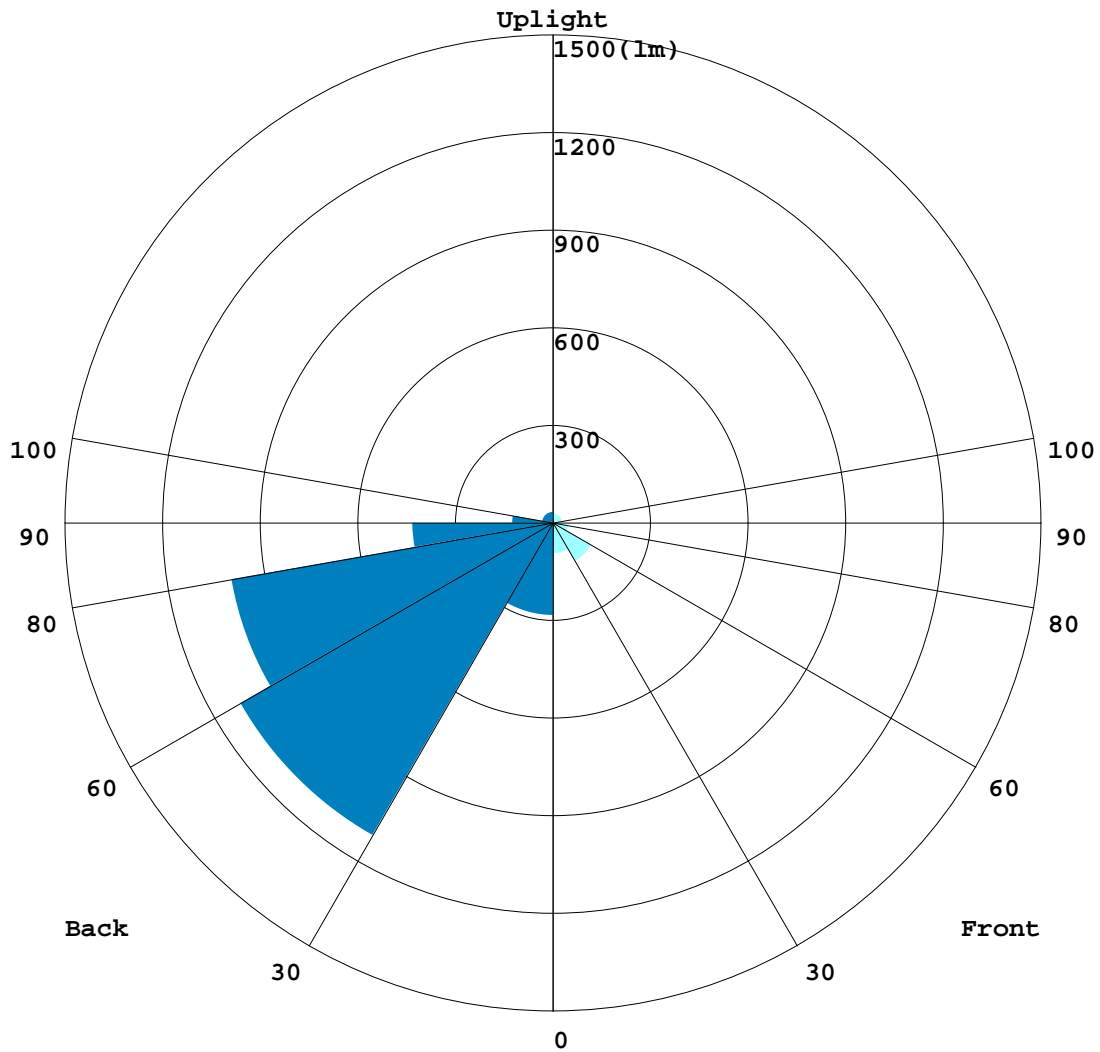

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-05-14

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=0.9925]
 Remarks:

BUG REPORT

Test:U:120.24V I:0.2083A P:24.688W PF:0.9856 Freq:59.98Hz Lamp Flux:3313.32x1 lm		
NAME: ASD-LSWP01-26DCC-PC(3000K)	TYPE: LED wall pack	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

IESNA Luminaire Flux Distribution Table:

Zone	Lumens	Luminaire %
FL - Front-Low(0-30)	94.049	2.8
FM - Front-Medium(30-60)	137.12	4.1
FH - Front-High(60-80)	48.758	1.5
FVH - Front-Very High(80-90)	11.145	0.3
Total Forward Light	325.81	9.8

BL - Back-Low(0-30)	284.33	8.6
BM - Back-Medium(30-60)	1109	33.5
BH - Back-High(60-80)	1003.5	30.3
BVH - Back-Very High(80-90)	431.56	13.0
Total Back Light	2987.5	90.2

UL - Uplight-Low(90-100)	132.02	4.0
UH - Uplight-High(100-180)	61.805	1.9
Total Up Light	193.83	5.9

BUG(Back,Up,Glare) Rating	B3-U3-G3
---------------------------	----------

Zone	Downward Lumens	Upward Lumens	Total Lumens
House Side	2828.4	159.09	2987.5
Street Side	291.07	34.743	325.81


C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2021-05-14

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.000m [K=0.9925]
Remarks:

ROAD ISOCANDELA REPORT

Test:U:120.24V I:0.2083A P:24.688W PF:0.9856 Freq:59.98Hz Lamp Flux:3313.32x1 lm		
NAME: ASD-LSWP01-26DCC-PC(3000K)	TYPE: LED wall pack	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

ROAD SURFACE ISOCANDELA DIAGRAM

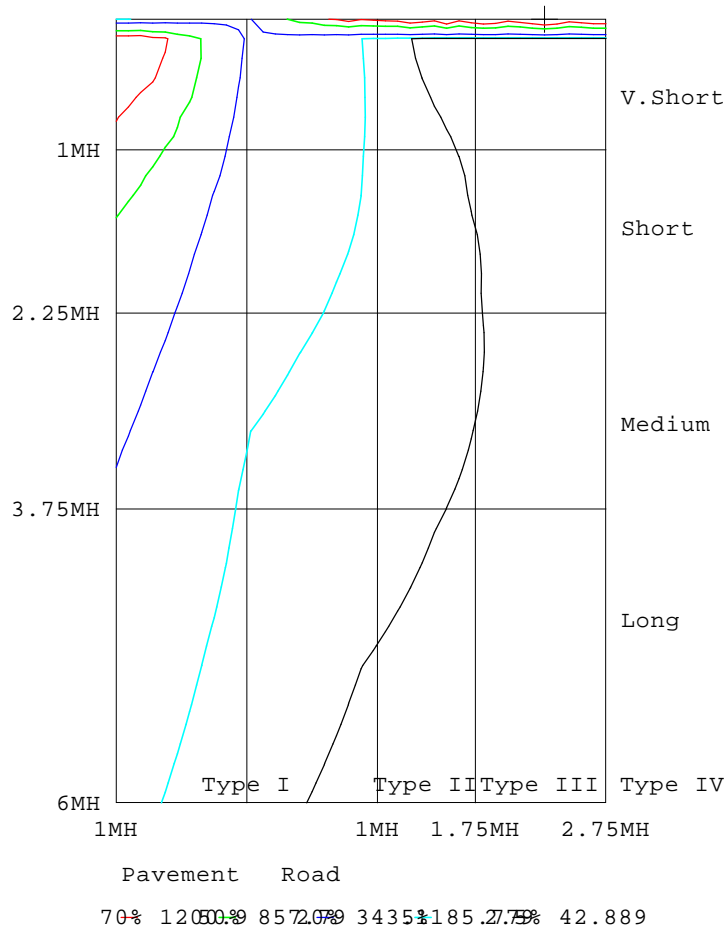

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-05-14

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=0.9925]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.24V I:0.2083A P:24.688W PF:0.9856 Freq:59.98Hz Lamp Flux:3313.32x1 lm		
NAME: ASD-LSWP01-26DCC-PC(3000K)	TYPE: LED wall pack	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180
0	292	292	292	292	292	292	292	292	292	292	292	292	292	292	292	292	292	292	292
5	290	292	277	275	270	267	264	264	262	262	262	263	264	267	272	273	283	287	294
10	290	275	265	259	252	246	241	239	238	237	238	239	243	248	255	260	269	284	295
15	287	266	253	243	235	232	229	224	221	220	221	226	229	230	236	246	256	269	294
20	278	254	238	228	222	214	210	207	205	204	205	207	210	215	224	231	245	261	291
25	264	244	226	215	206	198	188	180	174	173	176	183	193	202	207	219	232	250	288
30	252	228	212	199	190	175	157	148	143	142	144	151	164	181	195	204	217	237	278
35	238	212	194	184	166	147	132	122	118	117	120	125	138	155	175	188	201	222	266
40	221	195	178	163	142	124	110	100	92.9	91.3	94.9	104	116	131	150	170	183	204	253
45	202	176	161	140	121	104	91.4	79.9	73.2	71.4	75.4	83.4	96.2	110	128	149	165	186	237
50	184	157	140	120	100	85.3	72.6	59.9	51.2	49.0	54.2	65.0	77.2	91.6	108	128	148	166	218
55	164	139	121	101	83.5	68.5	55.8	43.8	33.4	31.1	36.7	48.0	60.6	74.5	90.3	108	129	147	197
60	144	122	102	84.9	69.0	54.9	44.8	34.3	26.7	25.5	28.8	38.1	48.4	60.1	75.3	91.1	110	127	174
65	123	101	83.4	69.2	55.5	44.2	38.0	29.2	22.5	21.7	24.2	33.0	40.5	48.1	61.0	73.7	88.7	105	147
70	99.0	79.0	64.8	54.3	43.6	36.7	32.8	24.9	19.1	18.3	20.4	28.5	34.5	39.0	47.8	58.1	69.5	84.4	120
75	74.0	57.7	48.0	40.8	34.1	29.9	27.1	20.8	15.5	14.5	16.9	23.7	28.0	31.1	36.5	43.2	51.2	62.9	92.8
80	50.1	38.9	33.1	29.5	26.5	24.8	24.1	18.1	13.0	11.9	14.5	20.6	23.9	25.1	27.4	30.6	34.8	43.0	66.3
85	31.6	24.2	21.8	21.2	21.2	21.5	22.0	16.2	11.8	10.4	13.0	18.7	21.0	20.8	20.6	20.6	21.9	26.3	42.7
90	19.2	15.6	14.3	15.2	15.5	15.9	13.6	12.2	9.71	8.86	10.7	13.5	14.9	16.0	15.6	14.1	14.0	16.5	26.5
95	13.3	12.0	11.3	11.7	11.0	10.3	11.2	10.7	10.2	9.83	10.3	11.7	10.8	11.7	13.1	12.1	12.3	13.8	18.5
100	11.2	11.2	11.3	11.2	12.6	13.9	13.4	12.3	12.3	11.8	12.3	12.5	14.1	13.8	13.2	12.8	12.5	13.1	15.7
105	12.6	11.4	11.4	12.6	15.0	16.8	13.9	12.6	12.5	12.2	12.5	13.1	15.3	17.0	13.6	12.0	11.9	12.6	15.3
110	13.5	12.3	12.6	14.1	16.6	16.6	13.3	12.5	12.6	12.4	12.6	12.9	14.4	17.3	14.9	13.1	11.9	12.0	14.4
115	12.3	12.0	13.3	14.1	17.2	15.4	12.6	12.3	12.6	12.5	12.6	12.4	13.1	17.0	15.0	13.3	12.3	11.7	12.8
120	11.5	11.9	12.8	13.8	15.1	13.0	11.9	12.3	12.5	12.4	12.5	12.1	12.3	14.4	14.9	13.0	12.3	11.0	11.3
125	11.6	11.6	12.2	13.6	13.2	11.4	11.1	12.0	12.4	12.3	12.4	11.8	11.3	12.1	14.4	12.8	11.8	11.6	11.8
130	11.4	11.5	12.2	12.4	10.6	10.2	9.86	11.2	11.4	11.3	11.6	10.8	10.2	10.5	11.5	12.7	11.9	11.1	12.5
135	11.3	11.5	10.9	9.57	9.13	9.04	9.06	9.96	10.3	10.4	10.1	9.53	9.14	9.33	9.42	10.3	11.7	11.1	12.1
140	8.61	8.32	8.21	8.10	8.50	8.03	8.56	9.09	9.46	9.57	9.31	8.85	8.41	8.87	8.34	8.28	8.33	8.60	8.70
145	6.77	7.14	7.49	7.90	6.91	7.31	8.30	8.64	8.61	8.73	8.61	8.60	7.94	7.24	8.15	7.72	7.34	6.92	6.56
150	6.31	6.30	5.47	6.50	6.98	6.88	7.40	7.77	8.00	8.02	7.95	7.58	7.13	7.03	6.85	6.01	6.67	6.45	6.17
155	5.00	5.34	5.37	5.84	6.68	6.97	6.98	7.24	7.31	7.31	7.31	6.96	7.02	6.86	6.46	5.42	4.99	4.84	4.51
160	5.56	5.90	5.77	5.90	6.49	6.76	6.76	6.61	6.66	6.67	6.70	6.69	6.84	6.70	5.85	5.32	5.49	5.33	4.92
165	5.99	6.36	6.63	6.30	6.44	6.42	6.21	6.09	6.14	6.12	6.12	6.14	6.23	6.27	6.12	6.25	6.09	5.68	5.47
170	6.12	6.27	5.97	5.81	5.79	5.62	5.66	5.66	5.64	5.58	5.56	5.45	5.41	5.77	5.85	5.80	5.82	5.58	5.83
175	5.68	5.54	5.35	5.25	5.28	5.27	5.24	5.18	5.13	5.17	5.20	5.14	5.12	5.10	5.15	5.15	5.11	5.37	5.65
180	5.39	5.33	5.26	5.26	5.65	5.86	5.76	5.70	5.72	5.10	5.61	5.55	5.52	5.45	5.42	5.31	5.31	5.32	5.38

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-05-14

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=0.9925]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.24V I:0.2083A P:24.688W PF:0.9856 Freq:59.98Hz Lamp Flux:3313.32x1 lm		
NAME: ASD-LSWP01-26DCC-PC(3000K)	TYPE: LED wall pack	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.:	Shielding Angle:

Table--2

UNIT: cd

C(DEG) g (DEG)	190	200	210	220	230	240	250	260	270	280	290	300	310	320	330	340	350		
0	292	292	292	292	292	292	292	292	292	292	292	292	292	292	292	292	292		
5	310	337	372	399	425	438	447	449	460	467	464	445	420	392	360	329	303		
10	345	412	475	495	569	594	603	581	587	623	586	567	562	505	459	389	321		
15	382	480	574	605	665	678	777	767	776	785	717	696	635	570	542	450	341		
20	413	549	596	679	797	830	872	856	885	868	830	877	744	688	577	488	364		
25	437	561	681	842	850	987	1029	1101	1123	1096	959	945	862	758	644	542	374		
30	446	599	777	867	1046	1057	1117	1125	1153	1124	1096	1025	937	824	697	535	378		
35	477	624	791	1004	1076	1190	1214	1206	1245	1227	1239	1144	1011	890	747	558	378		
40	446	667	837	1020	1192	1220	1333	1319	1270	1380	1353	1230	1139	928	765	560	368		
45	417	638	867	1087	1217	1234	1309	1357	1470	1307	1356	1191	1158	1007	831	576	364		
50	413	662	923	1090	1218	1365	1284	1371	1395	1349	1282	1362	1152	1030	795	561	343		
55	384	649	895	1090	1191	1430	1403	1359	1281	1405	1322	1294	1169	994	789	542	314		
60	377	647	875	1091	1205	1445	1322	1584	1455	1550	1195	1253	1190	1012	782	544	285		
65	344	595	850	1110	1202	1412	1300	1551	1473	1493	1294	1295	1199	996	762	522	255		
70	312	557	802	1071	1221	1436	1394	1656	1582	1605	1301	1390	1164	975	734	478	214		
75	266	512	752	1005	1222	1385	1441	1705	1694	1569	1335	1269	1096	920	683	437	167		
80	199	442	679	920	1136	1192	1337	1342	1374	1275	1216	1202	1031	837	607	351	115		
85	146	380	621	826	1018	1154	1087	1274	1417	1207	1011	1138	902	736	536	301	67.7		
90	106	290	462	630	747	899	1141	1298	1315	1332	1116	913	701	576	411	237	47.1		
95	46.5	88.1	40.4	53.3	102	252	321	417	327	440	287	179	53.7	35.6	27.7	58.5	21.3		
100	26.5	67.6	9.16	49.2	91.9	42.7	66.8	107	107	137	64.0	50.2	52.9	56.4	5.01	49.0	13.4		
105	30.1	64.9	80.9	20.5	25.8	22.1	4.89	5.87	5.10	6.30	6.48	23.5	13.2	37.9	75.1	41.2	20.5		
110	25.6	39.1	40.6	32.6	22.4	5.42	6.95	6.64	6.56	6.69	6.33	3.35	3.59	39.4	35.4	29.6	19.0		
115	17.1	20.4	19.0	16.0	8.85	4.46	2.77	2.09	1.84	2.25	3.06	5.68	5.09	17.4	18.5	17.5	14.2		
120	13.3	16.2	15.8	9.97	6.46	4.69	3.49	2.86	2.62	2.99	3.58	5.49	5.09	11.6	16.6	15.0	11.7		
125	15.5	19.9	22.0	8.66	6.15	5.12	4.06	3.43	3.17	3.55	4.19	5.31	5.84	14.3	21.4	16.1	12.6		
130	17.4	26.0	26.1	8.47	6.18	5.76	5.31	4.27	4.05	4.52	5.15	5.69	6.44	13.7	25.7	19.9	14.1		
135	16.7	20.4	13.1	6.89	6.68	6.78	6.26	5.66	5.54	5.97	6.06	6.65	6.04	7.68	15.1	19.7	13.9		
140	8.70	6.42	5.46	6.63	6.48	6.96	7.14	6.97	6.92	7.10	6.85	6.51	6.09	5.94	5.03	6.81	8.24		
145	6.13	5.12	5.37	5.13	5.87	7.01	7.32	7.04	7.19	7.07	6.94	6.39	5.19	2.85	4.64	5.07	5.82		
150	5.88	5.10	3.01	4.89	4.83	6.58	6.94	6.83	7.15	6.80	6.56	5.74	2.18	3.34	2.57	4.35	5.37		
155	3.97	3.49	3.24	3.16	5.74	2.52	2.55	4.01	4.55	3.72	2.12	3.65	2.58	2.62	2.76	3.11	3.59		
160	4.13	3.82	3.58	3.56	3.34	3.19	2.53	3.24	3.03	2.63	2.20	2.70	2.92	3.13	3.27	3.36	4.18		
165	4.81	4.34	4.13	3.95	3.44	3.19	2.99	2.79	2.64	2.65	2.77	2.93	3.45	3.71	3.92	4.06	4.98		
170	5.49	4.61	4.79	4.62	4.44	4.16	4.07	3.83	3.72	3.71	3.81	3.93	4.06	4.68	4.84	5.30	5.69		
175	5.35	5.47	5.54	5.58	5.61	5.55	5.28	5.38	5.39	5.31	5.16	5.13	5.08	5.13	5.20	5.37	5.48		
180	5.33	5.26	5.26	5.65	5.86	5.77	5.70	5.71	5.05	5.60	5.55	5.52	5.45	5.42	5.30	5.31	5.32		

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-05-14

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=0.9925]
 Remarks: