
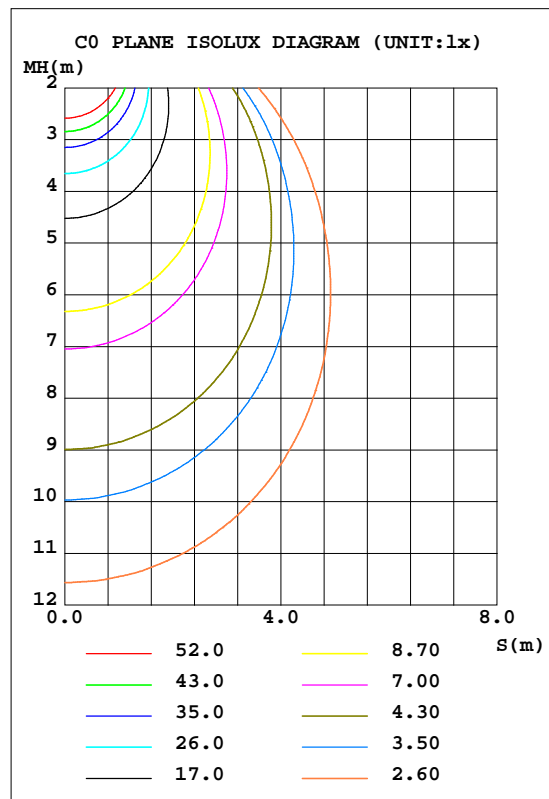


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.00V I:0.0771A P:7.9600W PF:0.8526 Freq:60.00Hz Lamp Flux:684.04x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 85.93 lm/W			
MOBESD-LRKR-4D9AC-WH(3000K)		I _{max} (cd)	340.3	S/MH(C0/180)	1.10
NOMINAL POWER(W)	8.6	LOR(%)	100.0	S/MH(C90/270)	1.11
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	684.04	h UP, DN(C0-180)	0.2,49.5
NOMINAL FLUX(lm)	684.04	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.2,50.1
LAMPS INSIDE	1	h up(%)	0.4	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	h down(%)	99.6	CIBSE SHR MAX	1.25

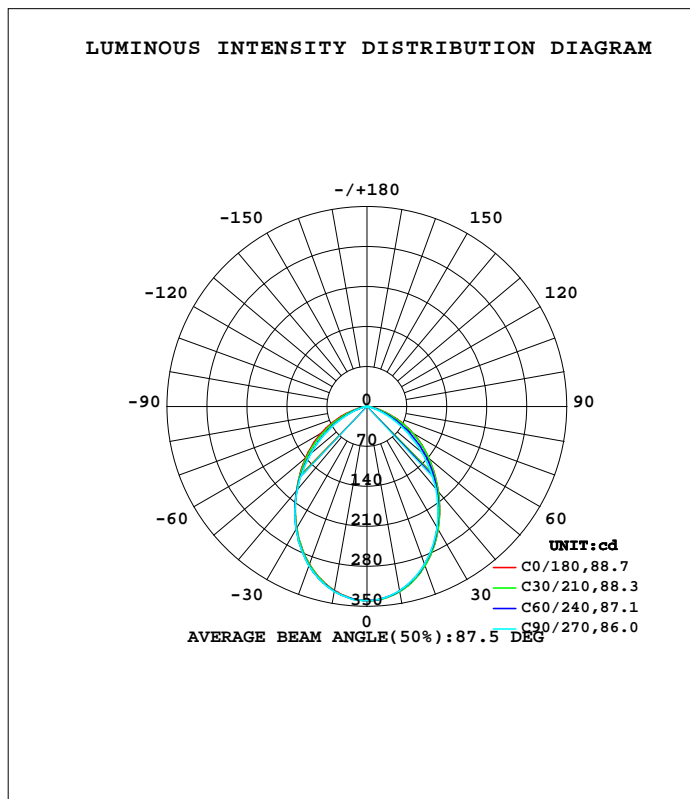

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.0667]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	328.7	328.5	327.7	326.6	327.2	328.3	328.9	329.8	0- 10	31.88	31.88	4.66,4.66
20	296.7	295.7	294.4	292.8	294.3	295.8	296.8	297.9	10- 20	88.35	120.2	17.6,17.6
30	248.8	247.6	245.3	244.4	246.1	247.3	248.4	250.1	20- 30	125.4	245.6	35.9,35.9
40	194.3	192.4	187.3	188.2	192.3	191.0	189.7	194.9	30- 40	137.2	382.9	56,56
50	141.6	137.9	125.5	130.9	140.4	133.6	128.4	140.5	40- 50	125.7	508.5	74.3,74.3
60	92.14	84.43	68.21	76.73	91.71	79.30	71.08	87.32	50- 60	96.57	605.1	88.5,88.5
70	44.10	35.31	23.68	30.33	43.61	32.29	25.47	37.36	60- 70	56.16	661.3	96.7,96.7
80	8.575	5.404	3.234	4.505	6.166	5.138	3.552	5.569	70- 80	18.33	679.6	99.4,99.4
90	0.0546	0.0061	0	0.0093	0.0237	0.0122	0.0001	0.0032	80- 90	1.720	681.3	99.6,99.6
100	0.1005	0.0543	0.0733	0.0676	0.1187	0.0511	0	0.0124	90-100	0.0258	681.3	99.6,99.6
110	0.2308	0.1928	0.2136	0.2243	0.2608	0.1898	0.1036	0.1291	100-110	0.1243	681.5	99.6,99.6
120	0.4027	0.3765	0.4088	0.4119	0.4208	0.3644	0.2804	0.3012	110-120	0.2726	681.7	99.7,99.7
130	0.6101	0.5753	0.6223	0.6178	0.6165	0.5423	0.4876	0.4735	120-130	0.4161	682.2	99.7,99.7
140	0.7760	0.7561	0.8113	0.7991	0.7705	0.7199	0.6463	0.6518	130-140	0.5026	682.7	99.8,99.8
150	0.9241	0.9157	0.9758	0.9468	0.9187	0.8797	0.8232	0.8116	140-150	0.5120	683.2	99.9,99.9
160	1.043	1.036	1.092	1.054	1.079	1.033	0.9697	0.9684	150-160	0.4455	683.6	99.9,99.9
170	1.114	1.139	1.183	1.156	1.221	1.154	1.104	1.113	160-170	0.3074	683.9	100,100
180	1.238	1.247	1.244	1.227	1.286	1.265	1.214	1.220	170-180	0.1134	684.0	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-08-06

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.700m [K=1.0667]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.00V I:0.0771A P:7.9600W PF:0.8526 Freq:60.00Hz Lamp Flux:684.04x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

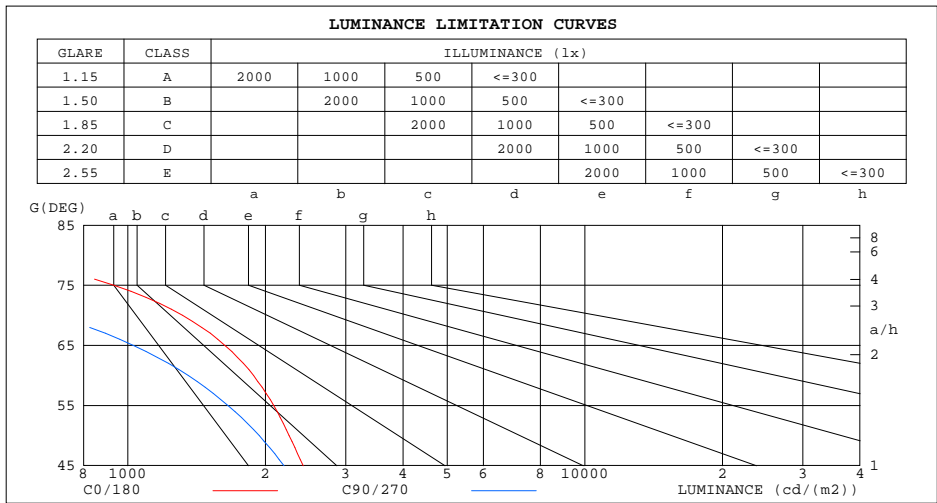

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	144	68
80	505	185
75	931	386
70	1319	688
65	1632	1028
60	1885	1356
55	2087	1658
50	2253	1940
45	2420	2198


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.0667]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.00V I:0.0771A P:7.9600W PF:0.8526 Freq:60.00Hz Lamp Flux:684.04x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

r _{cc}	80%			70%			50%			30%			10%			0
r _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.07	1.03	.00	1.04	1.01	.98	1.00	.98	.95	.96	.94	.92	.93	.91	.89	.87
2.0	.95	.89	.84	.93	.88	.83	.90	.85	.81	.86	.83	.79	.83	.80	.78	.76
3.0	.85	.78	.72	.83	.77	.71	.80	.75	.70	.78	.73	.69	.75	.71	.68	.66
4.0	.76	.68	.62	.75	.67	.62	.72	.66	.61	.70	.65	.60	.68	.63	.59	.57
5.0	.69	.61	.55	.68	.60	.54	.66	.59	.54	.64	.58	.53	.62	.57	.53	.51
6.0	.62	.54	.48	.61	.54	.48	.60	.53	.48	.58	.52	.47	.56	.51	.47	.45
7.0	.57	.49	.43	.56	.49	.43	.55	.48	.43	.53	.47	.42	.52	.46	.42	.40
8.0	.52	.44	.39	.52	.44	.39	.50	.44	.39	.49	.43	.38	.48	.42	.38	.36
9.0	.48	.41	.35	.48	.40	.35	.47	.40	.35	.46	.39	.35	.44	.39	.35	.33
10.0	.45	.37	.32	.44	.37	.32	.43	.37	.32	.42	.36	.32	.41	.36	.32	.30

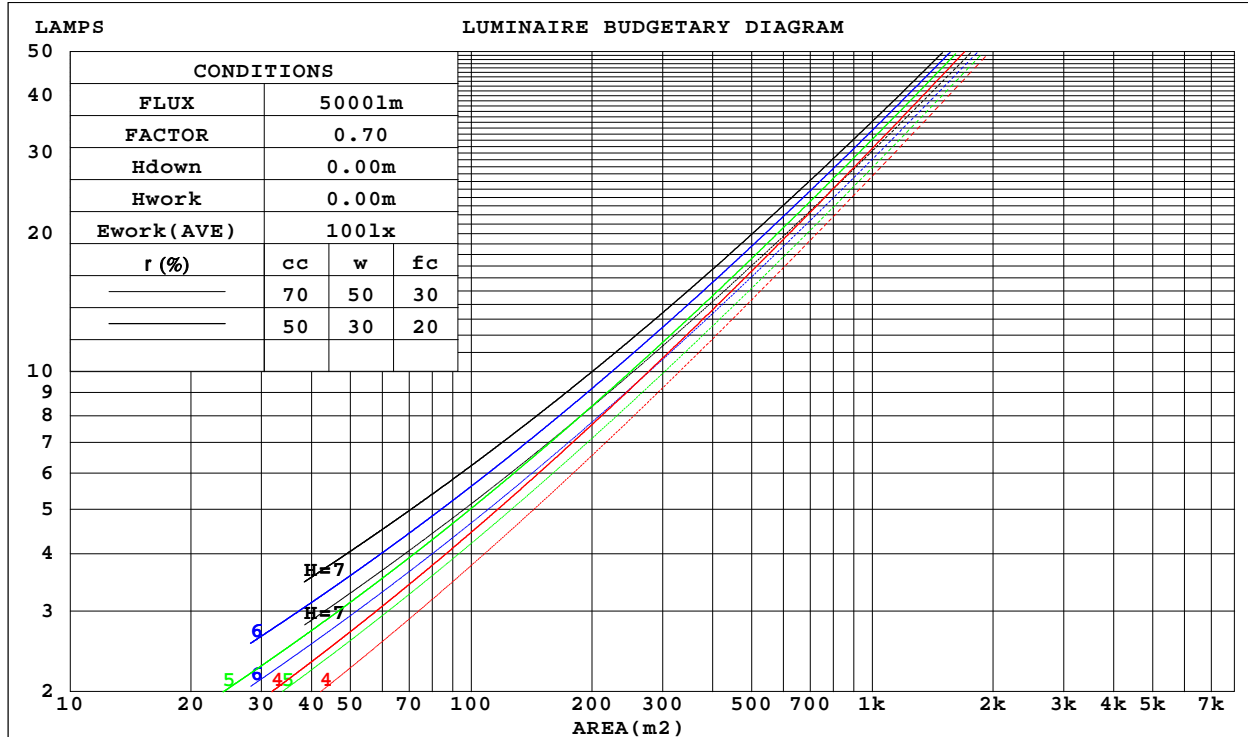

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.0667]
 Remarks:

WEC AND CCEC

Test:U:120.00V I:0.0771A P:7.9600W PF:0.8526 Freq:60.00Hz Lamp Flux:684.04x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.254	.144	.046	.247	.141	.045	.234	.134	.043	.222	.128	.041	.210	.122	.039	
2.0	.248	.136	.042	.241	.133	.041	.230	.128	.040	.219	.123	.038	.209	.118	.037	
3.0	.235	.125	.037	.229	.123	.037	.219	.119	.036	.210	.115	.035	.201	.111	.034	
4.0	.221	.115	.034	.216	.113	.033	.207	.110	.033	.199	.107	.032	.191	.104	.032	
5.0	.207	.105	.031	.203	.104	.030	.195	.101	.030	.187	.099	.029	.180	.096	.029	
6.0	.194	.097	.028	.190	.096	.028	.183	.094	.027	.177	.092	.027	.171	.090	.027	
7.0	.182	.090	.026	.179	.089	.025	.173	.087	.025	.167	.086	.025	.161	.084	.025	
8.0	.172	.084	.024	.169	.083	.023	.163	.081	.023	.158	.080	.023	.153	.078	.023	
9.0	.162	.078	.022	.159	.078	.022	.154	.076	.022	.149	.075	.021	.145	.074	.021	
10.0	.153	.073	.020	.151	.073	.020	.146	.072	.020	.142	.070	.020	.138	.069	.020	

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.194	.194	.194	.165	.165	.165	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.180	.160	.142	.154	.137	.122	.105	.094	.084	.060	.055	.049	.019	.018	.016	
2.0	.169	.135	.106	.145	.116	.092	.099	.081	.064	.057	.047	.038	.018	.015	.012	
3.0	.161	.117	.082	.138	.101	.071	.095	.070	.050	.055	.041	.030	.018	.013	.010	
4.0	.153	.103	.066	.131	.089	.057	.090	.062	.040	.052	.036	.024	.017	.012	.008	
5.0	.146	.093	.054	.125	.080	.047	.086	.056	.033	.050	.033	.020	.016	.011	.006	
6.0	.139	.084	.045	.119	.073	.039	.082	.051	.028	.048	.030	.017	.015	.010	.005	
7.0	.132	.077	.039	.114	.067	.034	.079	.047	.024	.046	.028	.014	.015	.009	.005	
8.0	.126	.071	.034	.109	.062	.029	.075	.043	.021	.044	.026	.012	.014	.008	.004	
9.0	.121	.066	.030	.104	.058	.026	.072	.041	.018	.042	.024	.011	.014	.008	.004	
10.0	.115	.062	.027	.100	.054	.023	.069	.038	.017	.040	.022	.010	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.0667]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.00V I:0.0771A P:7.9600W PF:0.8526 Freq:60.00Hz Lamp Flux:684.04x1 lm										
NAME: LED DOWNLIGHT					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: ASD LIGHTING CORP					SUR.: 0.1*0.1			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	14.5	16.0	14.9	16.3	16.6	12.5	13.9	12.8	14.3	14.6
3H	15.7	17.0	16.1	17.3	17.7	13.1	14.4	13.5	14.7	15.1
4H	15.9	17.2	16.3	17.5	17.9	13.1	14.4	13.6	14.7	15.1
6H	16.0	17.1	16.4	17.5	17.9	13.1	14.3	13.5	14.6	15.0
8H	16.0	17.1	16.4	17.5	17.9	13.1	14.2	13.5	14.6	15.0
12H	16.0	17.0	16.4	17.4	17.8	13.1	14.1	13.5	14.5	14.9
4H 2H	14.8	16.0	15.2	16.4	16.8	12.9	14.1	13.3	14.5	14.9
3H	16.1	17.1	16.5	17.5	18.0	13.6	14.6	14.0	15.0	15.4
4H	16.4	17.3	16.9	17.8	18.2	13.7	14.6	14.1	15.0	15.5
6H	16.5	17.3	17.0	17.8	18.2	13.7	14.5	14.2	14.9	15.4
8H	16.5	17.2	17.0	17.7	18.2	13.7	14.4	14.1	14.8	15.3
12H	16.5	17.1	17.0	17.6	18.1	13.6	14.3	14.1	14.8	15.2
8H 4H	16.4	17.1	16.9	17.6	18.1	13.8	14.5	14.2	14.9	15.4
6H	16.5	17.1	17.0	17.6	18.1	13.7	14.3	14.2	14.8	15.3
8H	16.5	17.0	17.0	17.6	18.1	13.7	14.2	14.2	14.7	15.2
12H	16.5	17.0	17.0	17.5	18.0	13.7	14.1	14.2	14.6	15.2
12H 4H	16.4	17.0	16.9	17.5	18.0	13.7	14.4	14.2	14.9	15.3
6H	16.5	17.0	17.0	17.5	18.1	13.7	14.2	14.2	14.7	15.3
8H	16.5	17.0	17.0	17.5	18.0	13.7	14.2	14.2	14.7	15.2
CIE190: 2010										

CIE190: 2010
Area: 0.1 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-08-06

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.700m [K=1.0667]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.00V I:0.0771A P:7.9600W PF:0.8526 Freq:60.00Hz Lamp Flux:684.04x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	64	53	47	63	53	47	62	53	47	41
0.80	74	64	57	73	63	57	71	63	57	50
1.00	82	73	66	81	72	66	79	73	65	59
1.25	89	80	74	88	79	74	85	78	73	66
1.50	93	85	79	92	84	79	89	83	78	71
2.00	99	92	87	98	91	86	94	89	85	78
2.50	103	96	91	101	95	90	97	92	88	81
3.00	106	100	95	103	98	94	100	95	92	84
4.00	109	104	100	107	102	99	102	99	96	88
5.00	111	107	104	108	105	102	104	101	99	90
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-08-06

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity: 65.0%
Test Distance: 8.700m [K=1.0667]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.00V I:0.0771A P:7.9600W PF:0.8526 Freq:60.00Hz Lamp Flux:684.04x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

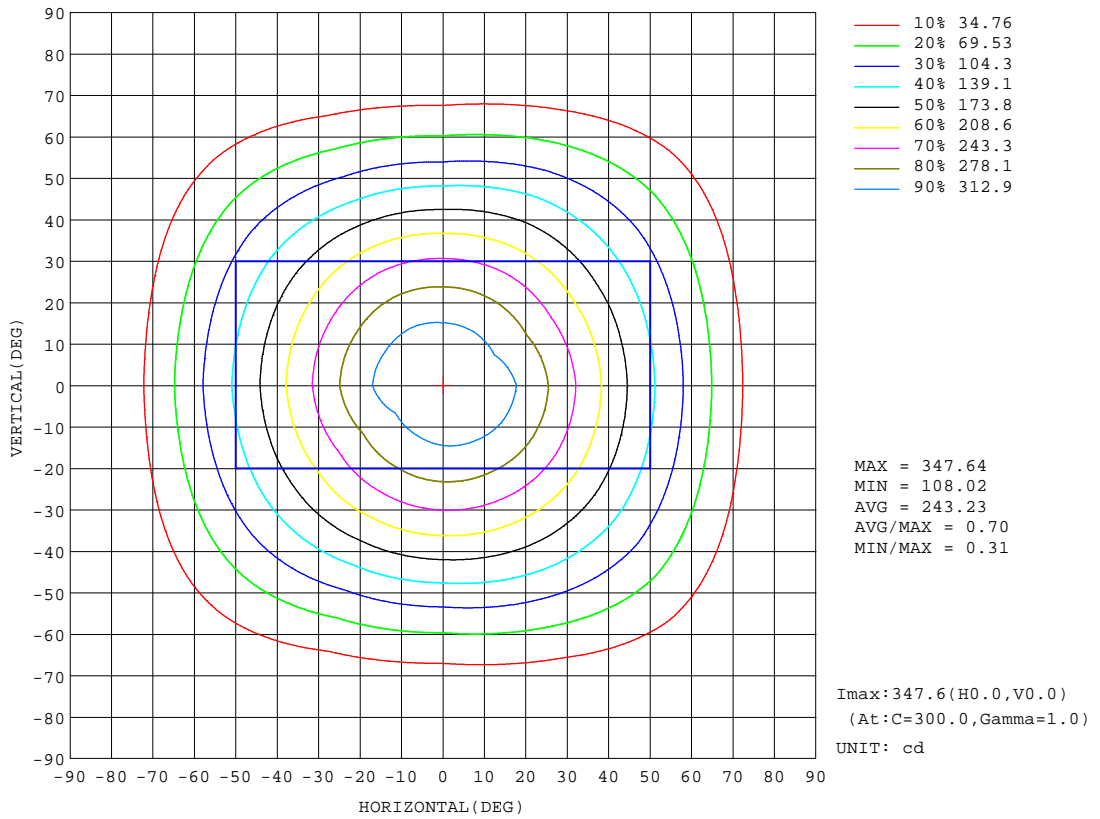


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.0667]
 Remarks:

AAI Figure

Test:U:120.00V I:0.0771A P:7.9600W PF:0.8526 Freq:60.00Hz Lamp Flux:684.04x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

Flux out:422.7 lm

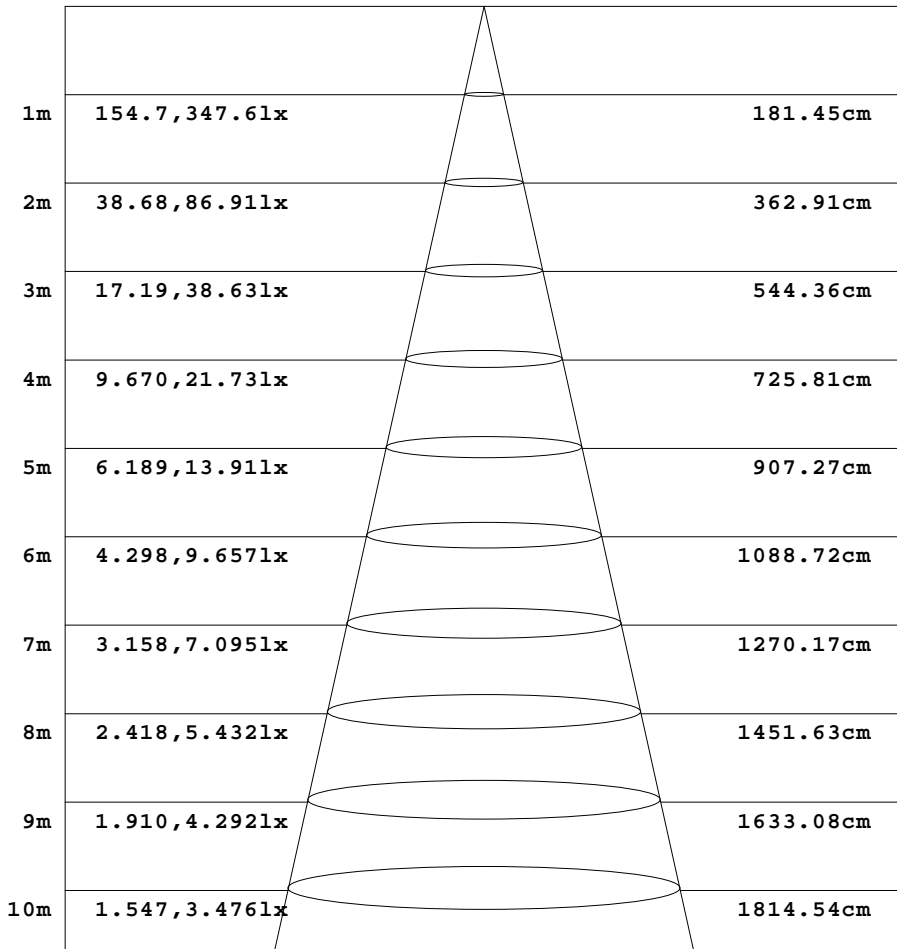

Height Eavg, Emax Angle:84.43deg Diameter


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.0667]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.00V I:0.0771A P:7.9600W PF:0.8526 Freq:60.00Hz Lamp Flux:684.04x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

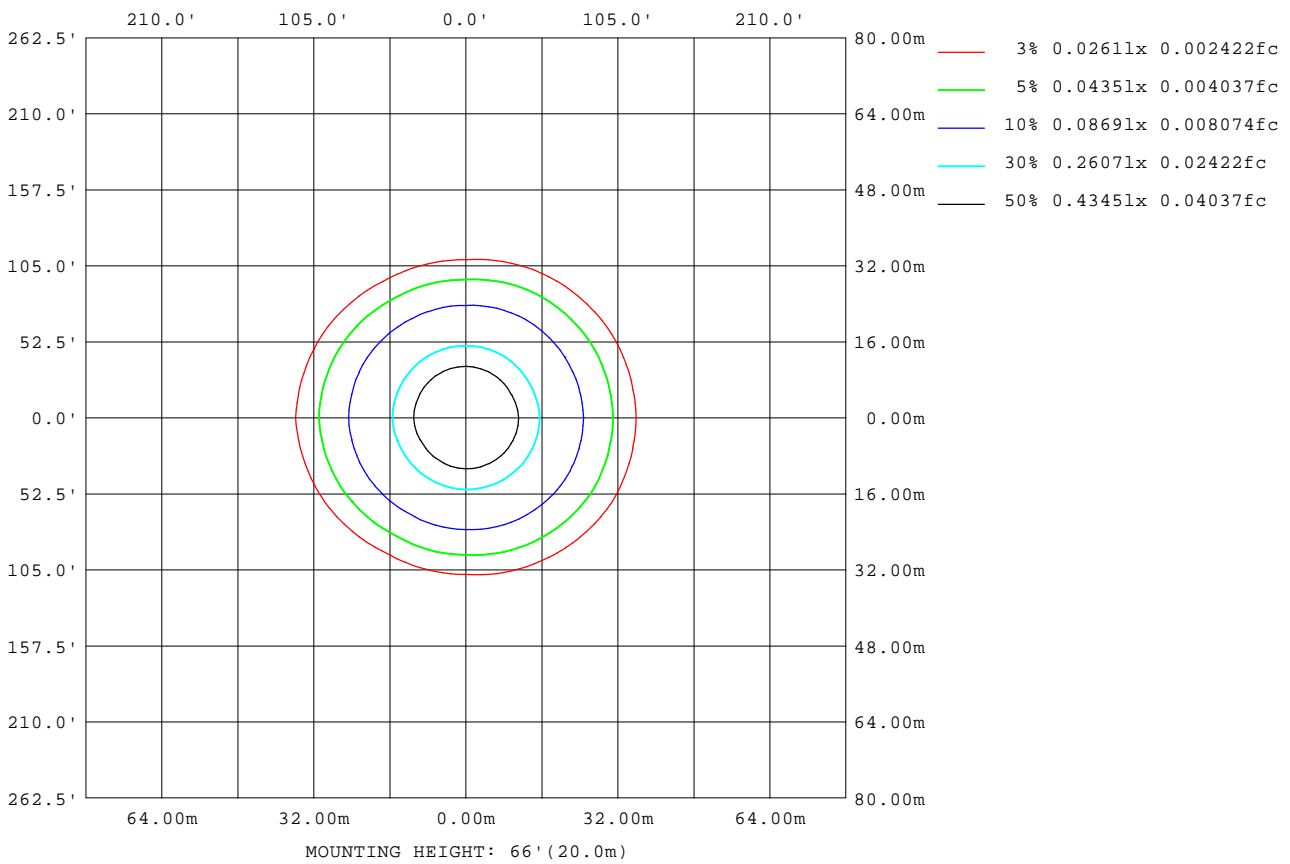

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-08-06

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=1.0667]
 Remarks:

LED Avg.L Report

Test:U:120.00V I:0.0771A P:7.9600W PF:0.8526 Freq:60.00Hz Lamp Flux:684.04x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	1591
L_0~180(75)av	901
L_0~180(85)av	148
L_90~270(65)av	1064
L_90~270(75)av	405
L_90~270(85)av	78
L_45(65)av	1338
L_45(75)av	610
L_45(85)av	139

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-08-06

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.700m [K=1.0667]
Remarks:

Planar Illuminance Curve

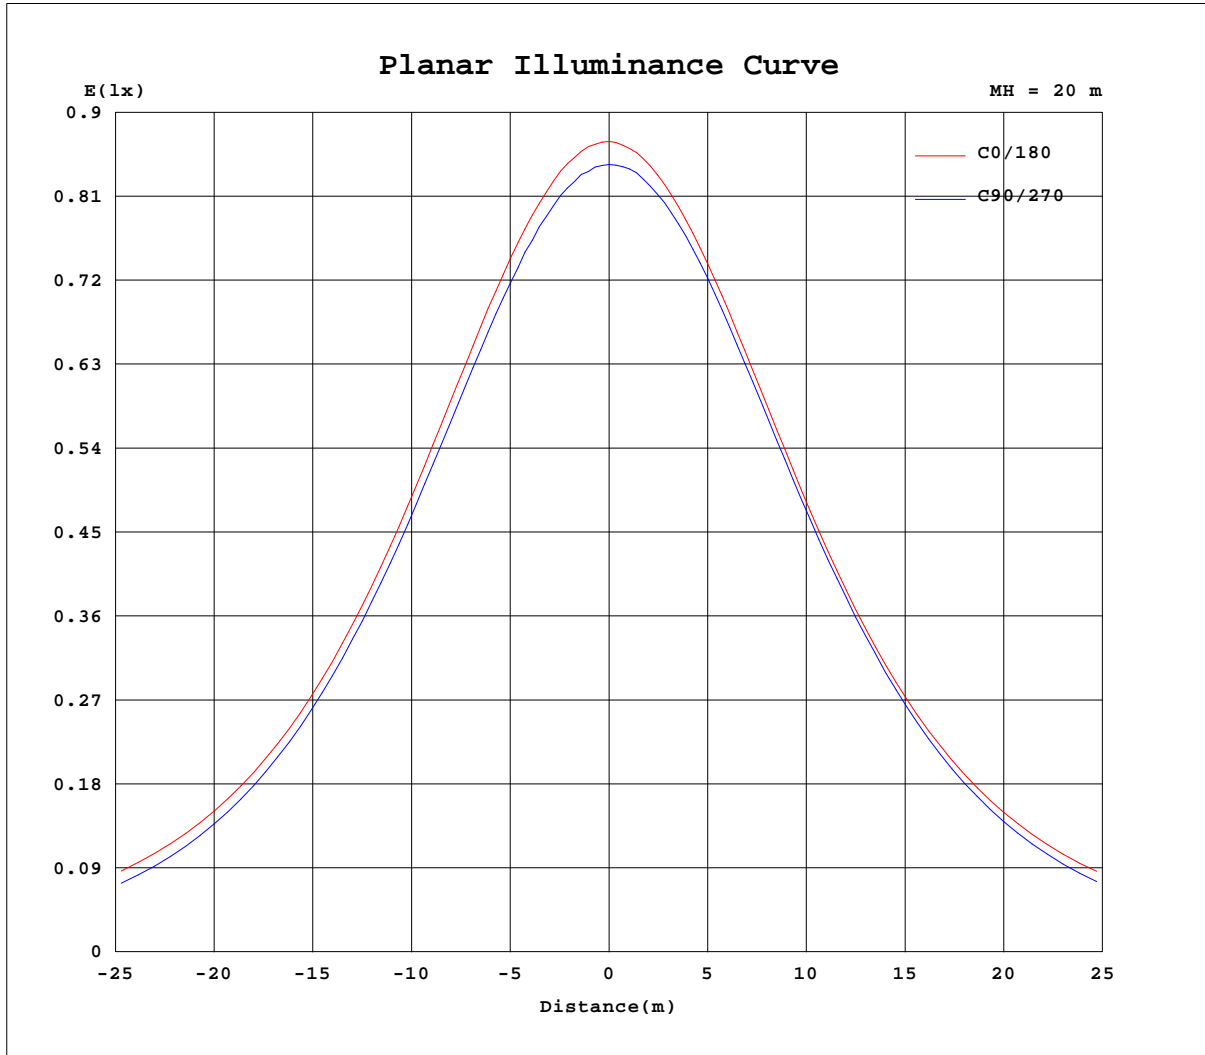

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-08-06

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=1.0667]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.00V I:0.0771A P:7.9600W PF:0.8526 Freq:60.00Hz Lamp Flux:684.04x1 lm		
NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	340	340	340	340	340	340	340	340	340	340	340	340						
5	337	337	337	336	336	336	336	337	337	337	338	338						
10	329	329	328	328	327	327	327	328	329	329	330	330						
15	315	315	314	313	312	312	313	314	315	315	316	316						
20	297	297	294	294	293	293	294	295	297	297	298	297						
25	274	274	272	271	270	270	272	272	274	274	276	275						
30	249	249	246	245	244	245	246	246	248	248	250	250						
35	222	222	219	217	216	218	219	219	220	220	222	223						
40	194	194	191	187	186	190	192	191	190	190	195	195						
45	167	167	163	156	156	163	166	164	160	159	167	168						
50	142	141	134	125	125	136	140	138	130	128	138	143						
55	117	116	106	95.7	96.2	110	116	111	101	98.7	110	118						
60	92.1	90.5	78.3	68.2	69.2	84.3	91.7	85.3	73.3	71.1	82.7	91.9						
65	67.4	64.9	52.4	43.7	44.8	59.0	67.1	60.1	48.5	46.2	56.3	66.2						
70	44.1	40.9	29.7	23.7	24.6	36.1	43.6	37.0	27.5	25.5	32.8	42.0						
75	23.6	20.4	13.0	10.04	10.5	17.5	23.1	18.3	12.3	10.9	14.4	21.0						
80	8.58	6.85	3.94	3.23	3.25	5.77	6.17	6.26	4.00	3.55	4.48	6.66						
85	1.23	1.72	0.83	0.59	0.58	1.34	1.35	1.52	0.94	0.77	1.02	1.55						
90	0.05	0.01	0.00	0.00	0.01	0.01	0.02	0.02	0.00	0.00	0.00	0.01						
95	0.04	0.04	0.00	0.02	0.01	0.06	0.06	0.00	0.02	0.00	0.00	0.00						
100	0.10	0.11	0.00	0.07	0.03	0.10	0.12	0.03	0.07	0.00	0.02	0.00						
105	0.17	0.17	0.07	0.13	0.10	0.18	0.18	0.10	0.13	0.03	0.08	0.06						
110	0.23	0.25	0.13	0.21	0.19	0.26	0.26	0.17	0.21	0.10	0.14	0.12						
115	0.31	0.34	0.22	0.31	0.28	0.35	0.34	0.25	0.29	0.19	0.22	0.20						
120	0.40	0.44	0.31	0.41	0.38	0.44	0.42	0.34	0.39	0.28	0.30	0.30						
125	0.52	0.55	0.41	0.52	0.48	0.55	0.51	0.44	0.48	0.38	0.40	0.38						
130	0.61	0.63	0.52	0.62	0.58	0.65	0.62	0.52	0.56	0.49	0.49	0.46						
135	0.69	0.72	0.62	0.73	0.67	0.73	0.69	0.62	0.65	0.56	0.58	0.55						
140	0.78	0.80	0.71	0.81	0.78	0.82	0.77	0.70	0.74	0.65	0.68	0.63						
145	0.85	0.89	0.79	0.90	0.84	0.89	0.84	0.78	0.82	0.75	0.77	0.71						
150	0.92	0.97	0.87	0.98	0.91	0.98	0.92	0.86	0.90	0.82	0.83	0.79						
155	0.98	1.03	0.92	1.02	0.98	1.04	1.01	0.95	0.97	0.90	0.93	0.89						
160	1.04	1.07	1.00	1.09	1.03	1.08	1.08	1.02	1.05	0.97	0.99	0.94						
165	1.09	1.11	1.06	1.13	1.08	1.13	1.16	1.08	1.12	1.05	1.09	1.02						
170	1.11	1.16	1.12	1.18	1.13	1.18	1.22	1.15	1.16	1.10	1.14	1.09						
175	1.18	1.23	1.20	1.24	1.18	1.22	1.27	1.21	1.25	1.16	1.23	1.16						
180	1.24	1.26	1.23	1.24	1.22	1.23	1.29	1.26	1.27	1.21	1.23	1.21						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.0667]
 Remarks: