
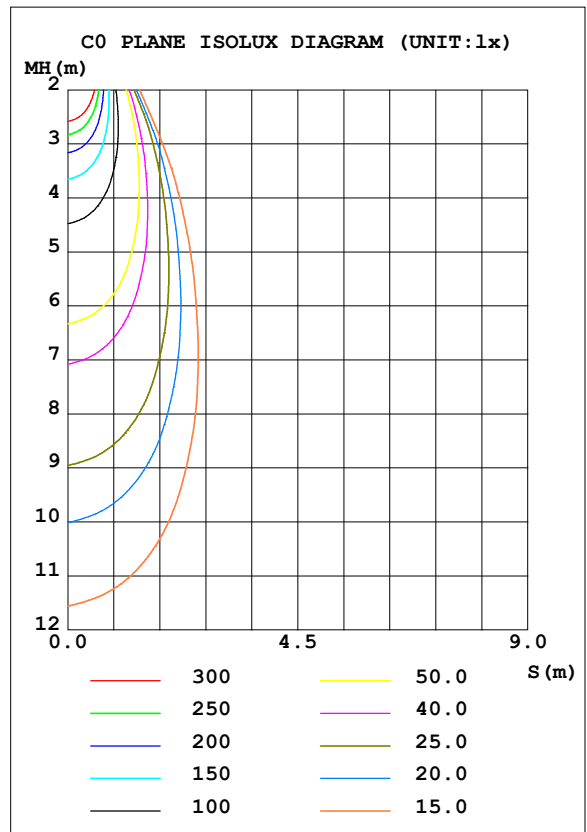


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.96V I:0.1107A P:13.093W PF:0.9494 Freq:59.98Hz Lamp Flux:1000.44x1 lm		
NAME: ASD-CD-TR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 76.41 lm/W			
MODEL		I _{max} (cd)	2030	S/MH (C0/180)	0.65
NOMINAL POWER (W)	15	LOR (%)	100.0	S/MH (C90/270)	0.69
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	1000.4	<input type="checkbox"/> UP, DN (C0-180)	0.0, 47.3
NOMINAL FLUX (lm)	1000.44	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 52.7
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	0.65

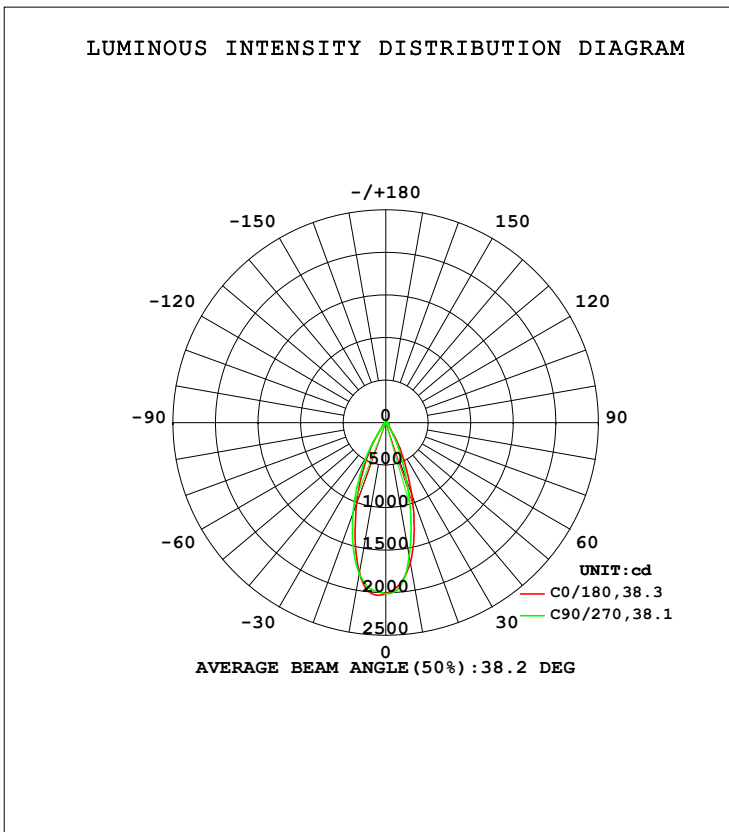

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-10-19

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	1668	1642	1596	1759	1790	1796	1804	1765	0- 10	179.7	179.7	18,18
20	892.8	826.7	710.8	1038	1004	1050	1127	879.8	10- 20	367.5	547.2	54.7,54.7
30	298.3	269.4	215.4	393.8	381.3	400.8	451.5	299.4	20- 30	271.2	818.4	81.8,81.8
40	69.92	67.37	61.17	80.49	79.54	77.84	75.04	68.77	30- 40	95.71	914.2	91.4,91.4
50	39.46	39.04	36.81	38.95	38.70	38.28	38.70	40.06	40- 50	40.02	954.2	95.4,95.4
60	21.64	21.16	19.49	20.47	20.66	19.02	18.30	21.19	50- 60	25.52	979.7	97.9,97.9
70	11.62	10.78	8.487	9.440	10.35	8.162	7.254	9.624	60- 70	14.41	994.1	99.4,99.4
80	4.198	2.368	1.156	1.888	3.381	1.356	0.7129	1.625	70- 80	5.771	999.9	99.9,99.9
90	0.0335	0.0319	0.0279	0.0245	0.0449	0.0425	0.0409	0.0487	80- 90	0.5610	1000	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-10-19

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.96V I:0.1107A P:13.093W PF:0.9494 Freq:59.98Hz Lamp Flux:1000.44x1 lm		
NAME: ASD-CD-TR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

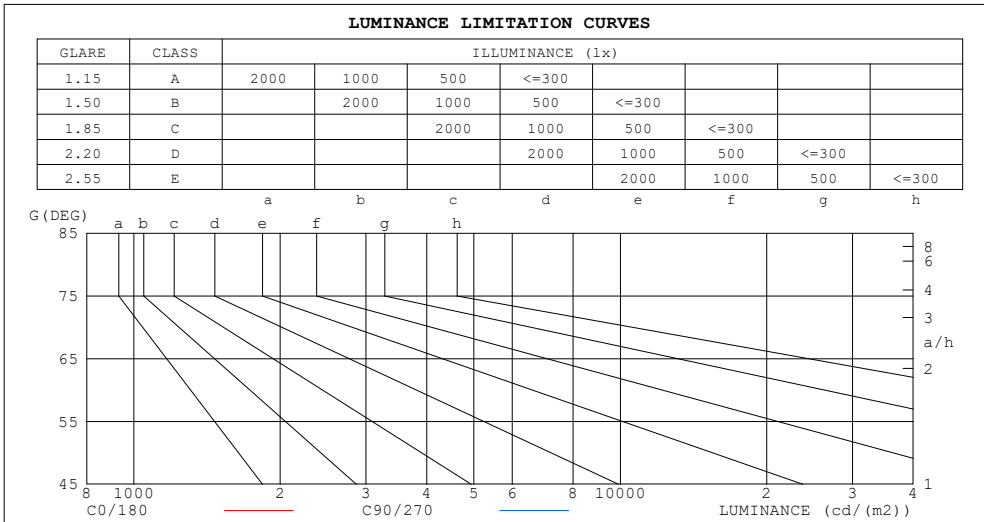

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	56	28
80	217	60
75	264	149
70	305	224
65	347	295
60	388	353
55	458	418
50	551	518
45	655	592


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-10-19

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.96V I:0.1107A P:13.093W PF:0.9494 Freq:59.98Hz Lamp Flux:1000.44x1 lm		
NAME: ASD-CD-TR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.05	1.03	1.02	1.01	.00	.99	.98	.97	.96	.94
2.0	1.04	1.00	.97	1.02	.99	.96	.99	.96	.94	.96	.94	.92	.93	.92	.90	.88
3.0	.98	.93	.89	.96	.92	.89	.94	.90	.87	.91	.88	.86	.89	.87	.85	.83
4.0	.92	.87	.83	.91	.86	.83	.89	.85	.82	.87	.84	.81	.85	.82	.80	.78
5.0	.87	.82	.78	.86	.81	.78	.85	.80	.77	.83	.79	.76	.81	.78	.76	.74
6.0	.83	.77	.73	.82	.77	.73	.81	.76	.73	.79	.75	.72	.78	.74	.72	.70
7.0	.79	.73	.70	.78	.73	.69	.77	.72	.69	.76	.72	.69	.75	.71	.68	.67
8.0	.75	.70	.66	.75	.69	.66	.74	.69	.66	.73	.68	.65	.72	.68	.65	.64
9.0	.72	.66	.63	.71	.66	.63	.70	.66	.63	.70	.65	.62	.69	.65	.62	.61
10.0	.69	.64	.60	.68	.63	.60	.68	.63	.60	.67	.63	.60	.66	.62	.60	.58

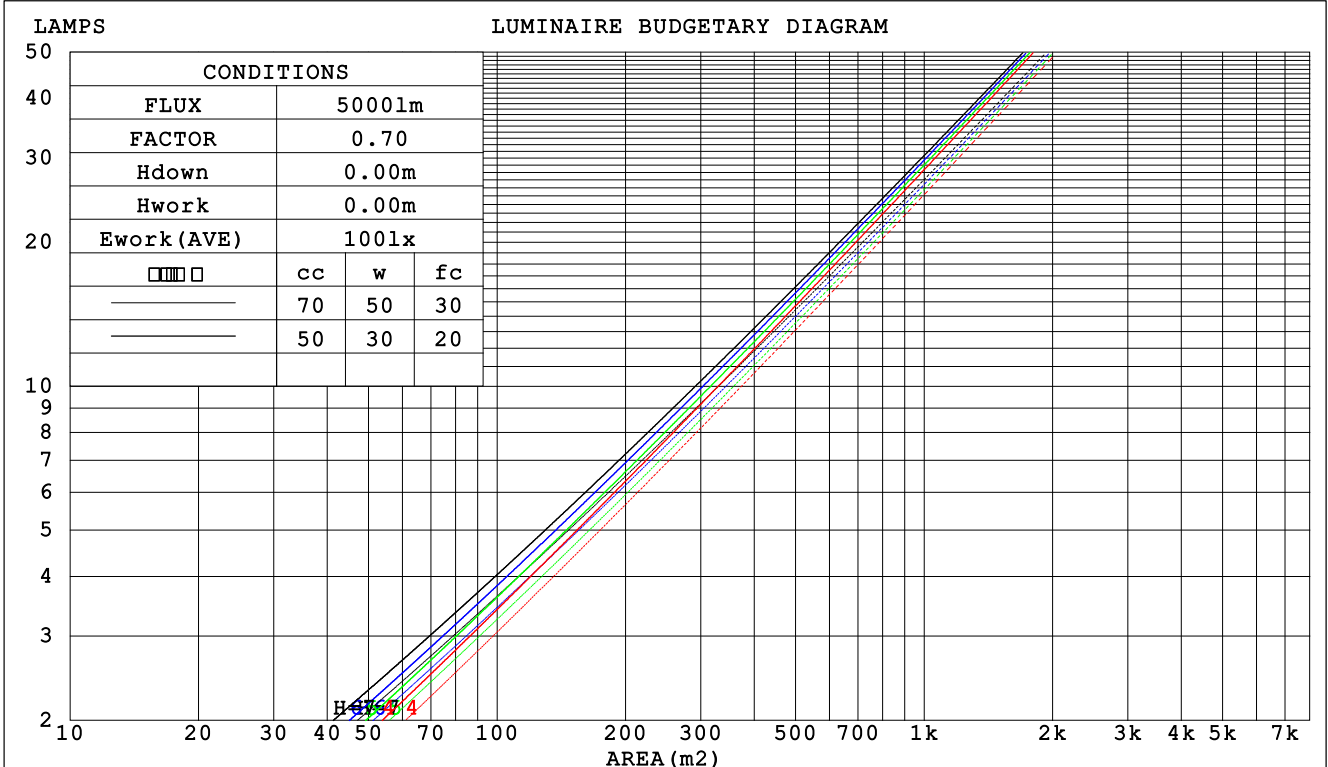

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-10-19

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.96V I:0.1107A P:13.093W PF:0.9494 Freq:59.98Hz Lamp Flux:1000.44x1 lm		
NAME: ASD-CD-TR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients (WEC)			
0.0						
1.0	.170 .097 .031	.163 .093 .030	.151 .086 .028	.139 .080 .026	.128 .074 .024	
2.0	.161 .088 .027	.155 .086 .026	.145 .081 .025	.135 .076 .024	.126 .071 .023	
3.0	.152 .081 .024	.147 .079 .024	.138 .075 .023	.130 .071 .022	.122 .068 .021	
4.0	.143 .075 .022	.139 .073 .022	.132 .070 .021	.125 .067 .020	.118 .064 .020	
5.0	.136 .069 .020	.132 .068 .020	.126 .065 .019	.119 .063 .019	.114 .061 .018	
6.0	.129 .065 .018	.126 .064 .018	.120 .061 .018	.115 .060 .018	.110 .058 .017	
7.0	.123 .061 .017	.120 .060 .017	.115 .058 .017	.110 .056 .016	.106 .055 .016	
8.0	.117 .057 .016	.114 .056 .016	.110 .055 .016	.106 .054 .015	.102 .052 .015	
9.0	.112 .054 .015	.110 .053 .015	.105 .052 .015	.102 .051 .015	.098 .050 .014	
10.0	.107 .051 .014	.105 .051 .014	.101 .050 .014	.098 .049 .014	.095 .048 .014	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients (CCEC)			
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.171 .157 .145	.146 .135 .125	.100 .093 .087	.057 .054 .050	.018 .017 .016	
2.0	.155 .133 .114	.133 .114 .098	.091 .079 .069	.052 .046 .040	.017 .015 .013	
3.0	.142 .114 .091	.122 .098 .079	.083 .068 .055	.048 .040 .033	.015 .013 .011	
4.0	.131 .099 .074	.112 .085 .064	.077 .059 .045	.045 .035 .027	.014 .011 .009	
5.0	.122 .087 .061	.104 .075 .053	.072 .052 .038	.042 .031 .022	.013 .010 .007	
6.0	.114 .077 .051	.098 .067 .045	.067 .047 .032	.039 .028 .019	.013 .009 .006	
7.0	.107 .070 .044	.092 .060 .038	.063 .042 .027	.037 .025 .016	.012 .008 .005	
8.0	.101 .063 .037	.087 .055 .033	.060 .038 .023	.035 .023 .014	.011 .007 .005	
9.0	.095 .058 .033	.082 .050 .028	.057 .035 .020	.033 .021 .012	.011 .007 .004	
10.0	.090 .053 .029	.078 .046 .025	.054 .033 .018	.032 .019 .011	.010 .006 .004	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-10-19

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.96V I:0.1107A P:13.093W PF:0.9494 Freq:59.98Hz Lamp Flux:1000.44x1 lm										
NAME: ASD-CD-TR-2D15AC-WH					TYPE:			WEIGHT:		
SPEC.:5000K 90					DIM.:			SERIAL No.:		
MFR.: ASD Lighting Corp					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	5.0	5.9	5.3	6.1	6.2	4.5	5.3	4.7	5.5	5.7
3H	5.7	6.5	6.0	6.7	6.9	5.0	5.8	5.3	6.0	6.2
4H	6.0	6.8	6.3	7.0	7.2	5.1	5.9	5.4	6.1	6.3
6H	6.2	6.9	6.5	7.1	7.4	5.1	5.8	5.4	6.0	6.3
8H	6.1	6.8	6.5	7.1	7.3	5.0	5.7	5.3	6.0	6.2
12H	6.1	6.8	6.4	7.0	7.3	5.0	5.6	5.3	5.9	6.2
4H 2H	5.3	6.0	5.6	6.3	6.5	4.8	5.5	5.1	5.8	6.0
3H	6.1	6.8	6.5	7.1	7.3	5.5	6.1	5.8	6.4	6.7
4H	6.5	7.1	6.8	7.4	7.7	5.6	6.2	6.0	6.5	6.8
6H	6.7	7.3	7.1	7.6	7.9	5.6	6.1	6.0	6.5	6.8
8H	6.7	7.2	7.1	7.6	7.9	5.6	6.1	6.0	6.4	6.8
12H	6.7	7.1	7.1	7.5	7.9	5.5	6.0	5.9	6.3	6.7
8H 4H	6.5	7.0	6.9	7.4	7.7	5.7	6.2	6.1	6.5	6.9
6H	6.8	7.2	7.2	7.6	8.0	5.7	6.1	6.1	6.5	6.9
8H	6.8	7.2	7.2	7.6	8.0	5.6	6.0	6.1	6.4	6.9
12H	6.8	7.1	7.2	7.5	8.0	5.6	5.9	6.1	6.3	6.8
12H 4H	6.5	6.9	6.9	7.3	7.7	5.6	6.1	6.1	6.5	6.9
6H	6.7	7.1	7.2	7.5	8.0	5.7	6.0	6.1	6.4	6.9
8H	6.8	7.1	7.2	7.5	8.0	5.6	5.9	6.1	6.4	6.8
Variations with the observer position at spacings:										
S = 1.0H	+ 0.5 / - 0.7					+ 0.7 / - 0.9				
1.5H	+ 0.7 / - 0.4					+ 0.6 / - 0.5				
2.0H	+ 0.9 / - 0.8					+ 1.0 / - 1.0				

CIE Pub.117, 1000 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 0.0)
 Area: 0.111111 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-10-19

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.96V I:0.1107A P:13.093W PF:0.9494 Freq:59.98Hz Lamp Flux:1000.44x1 lm		
NAME: ASD-CD-TR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	86	80	76	86	79	76	85	79	75	72
0.80	94	88	84	93	87	84	92	87	83	79
1.00	98	92	89	97	92	88	96	92	88	84
1.25	102	97	93	101	96	93	99	95	92	88
1.50	105	100	97	104	99	96	102	98	95	91
2.00	108	104	100	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	111	108	105	110	106	104	106	104	102	95
4.00	114	111	108	111	109	107	108	106	104	97
5.00	115	112	111	113	111	109	109	107	106	98
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-10-19

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.96V I:0.1107A P:13.093W PF:0.9494 Freq:59.98Hz Lamp Flux:1000.44x1 lm		
NAME: ASD-CD-TR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

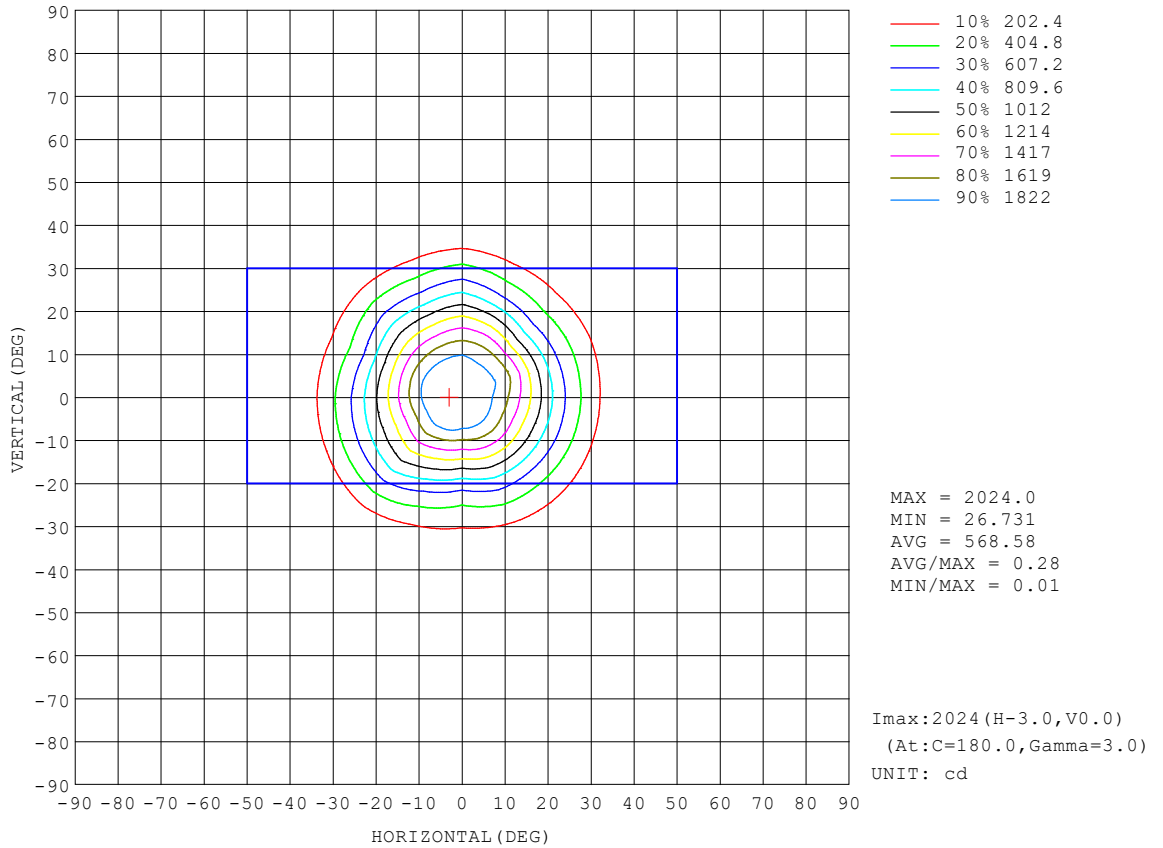


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-10-19

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

AAI Figure

Test:U:119.96V I:0.1107A P:13.093W PF:0.9494 Freq:59.98Hz Lamp Flux:1000.44x1 lm		
NAME: ASD-CD-TR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

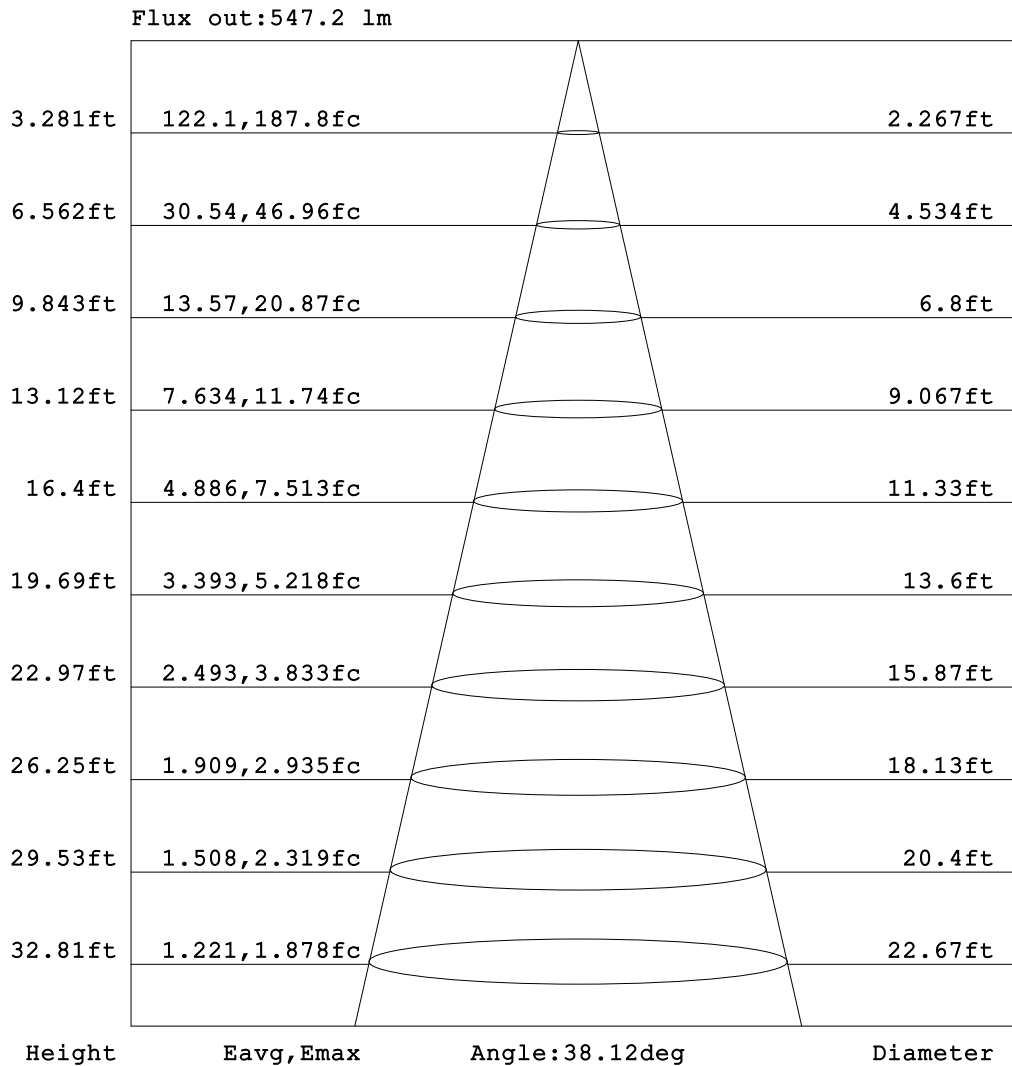


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-10-19

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.96V I:0.1107A P:13.093W PF:0.9494 Freq:59.98Hz Lamp Flux:1000.44x1 lm		
NAME: ASD-CD-TR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

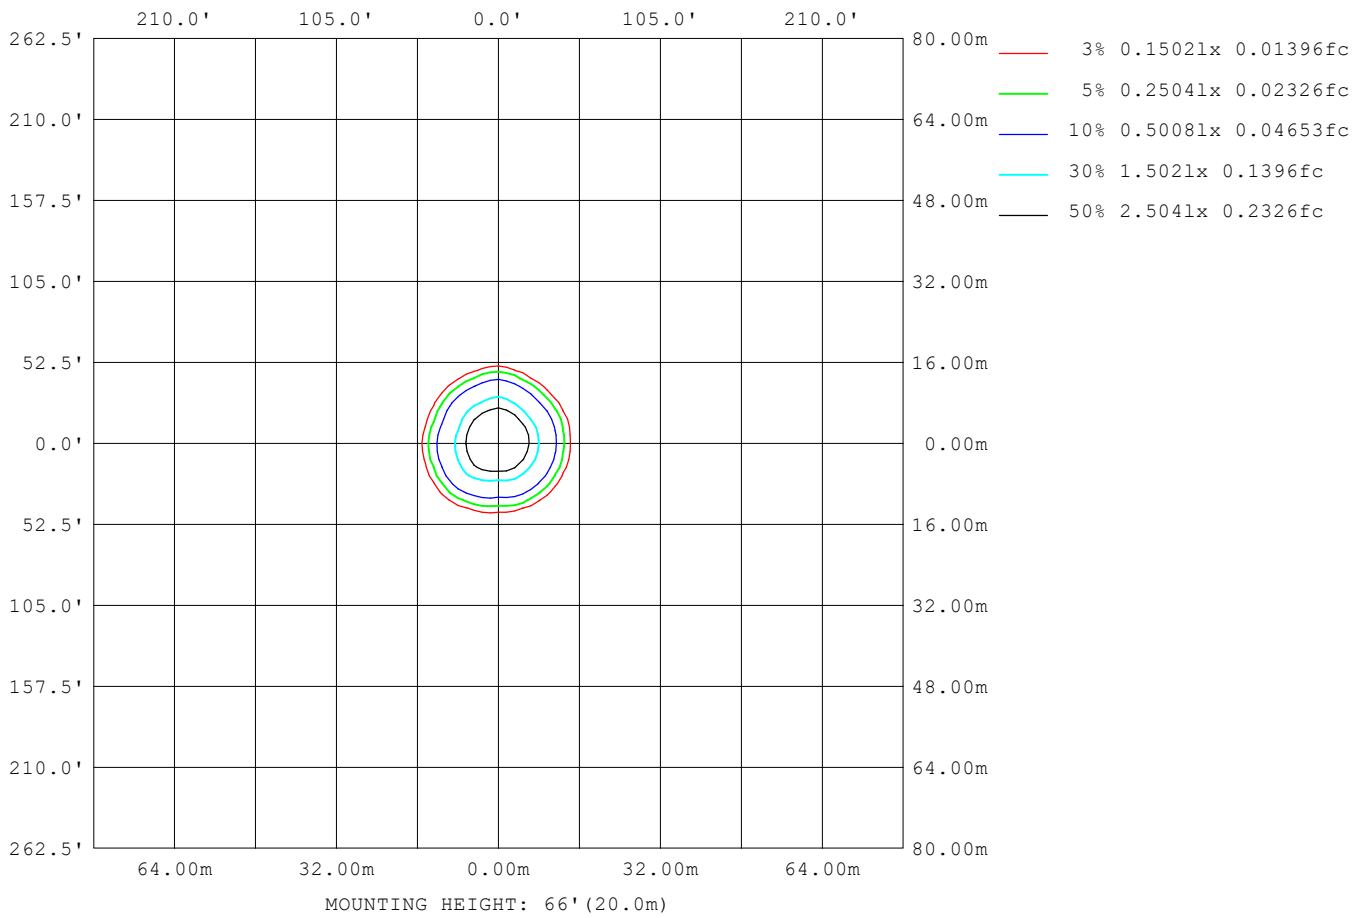

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-10-19

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:119.96V I:0.1107A P:13.093W PF:0.9494 Freq:59.98Hz Lamp Flux:1000.44x1 lm		
NAME: ASD-CD-TR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	334
L_0~180 (75) av	246
L_0~180 (85) av	55
L_90~270 (65) av	276
L_90~270 (75) av	134
L_90~270 (85) av	18
L_45 (65) av	312
L_45 (75) av	181
L_45 (85) av	18

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-10-19

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

Planar Illuminance Curve

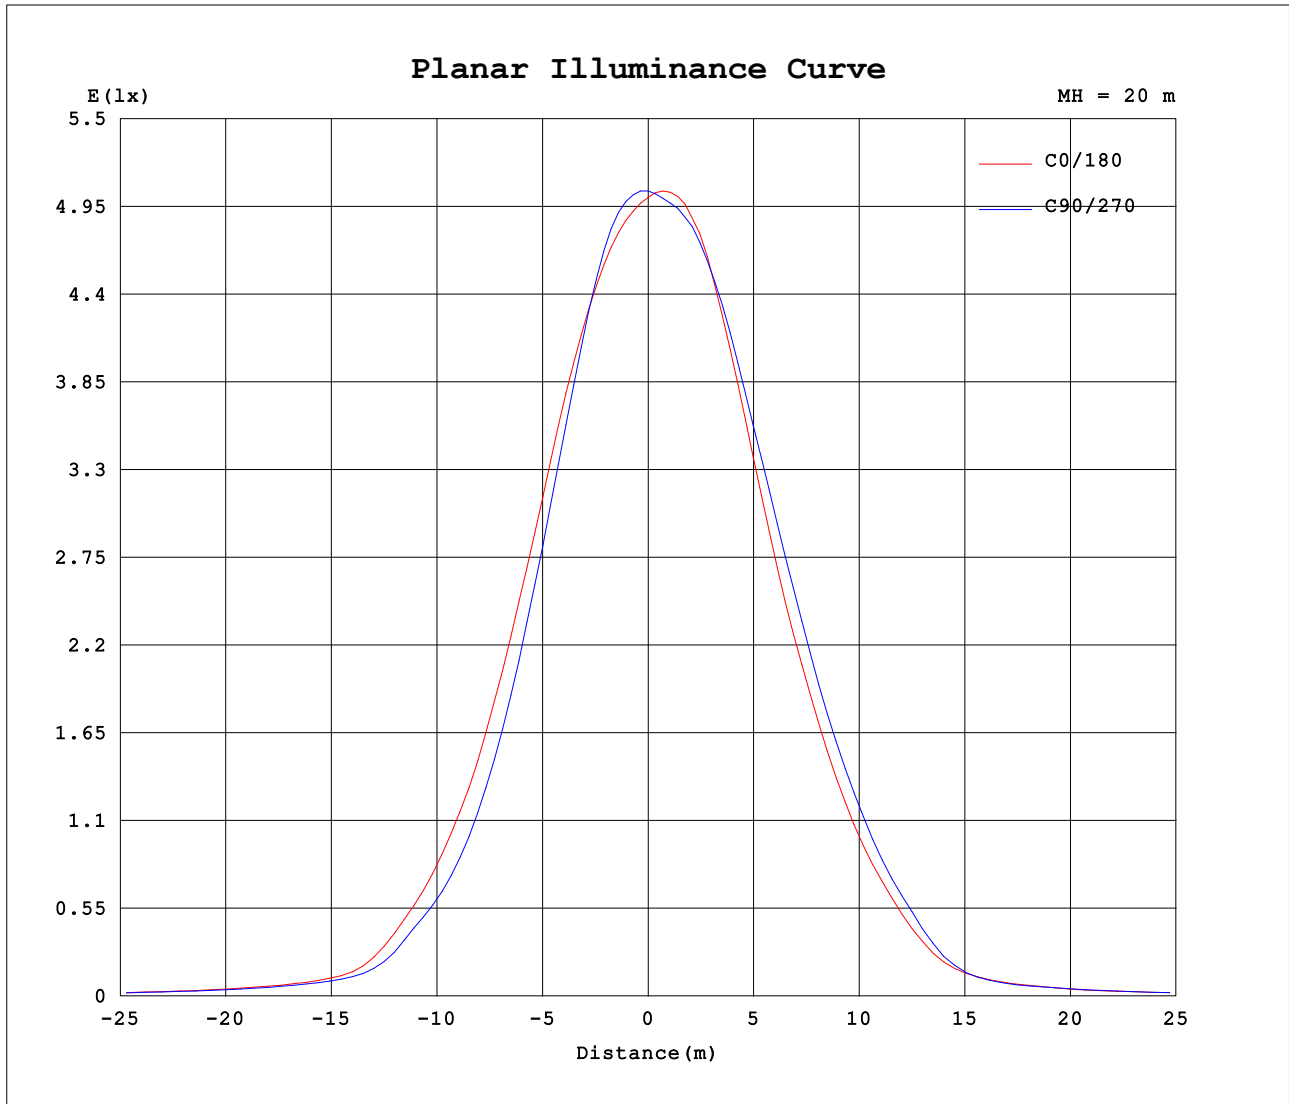

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-10-19

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.96V I:0.1107A P:13.093W PF:0.9494 Freq:59.98Hz Lamp Flux:1000.44x1 lm		
NAME: ASD-CD-TR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	2009	2009	2009	2009	2009	2009	2009	2009	2009	2009	2009	2009	2009	2009	2009	2009			
5	1905	1903	1910	1923	1937	1985	2014	2010	2015	2001	1984	1971	1966	1953	1940	1942			
10	1668	1630	1642	1629	1596	1679	1759	1748	1790	1813	1796	1791	1804	1766	1765	1773			
15	1295	1238	1238	1213	1141	1247	1390	1353	1400	1412	1440	1447	1492	1452	1353	1372			
20	893	852	827	809	711	847	1038	1004	1004	979	1050	1053	1127	1017	880	903			
25	550	530	493	484	404	514	701	680	657	590	690	677	765	615	525	541			
30	298	286	269	255	215	276	394	390	381	331	401	384	451	347	299	312			
35	112	111	107	98.1	90.0	109	158	155	158	140	159	156	180	129	116	125			
40	69.9	68.7	67.4	64.3	61.2	66.6	80.5	79.2	79.5	75.1	77.8	76.4	75.0	69.1	68.8	71.3			
45	51.6	49.9	49.0	47.2	46.2	47.5	49.4	47.7	51.0	50.6	51.6	52.2	53.2	52.3	51.7	53.0			
50	39.5	39.0	39.0	37.7	36.8	37.8	39.0	37.6	38.7	38.6	38.3	37.9	38.7	39.5	40.1	40.8			
55	29.3	28.7	28.6	27.1	26.5	27.7	28.8	28.2	28.6	28.9	27.5	25.8	26.2	26.9	29.7	30.9			
60	21.6	21.3	21.2	20.4	19.5	19.8	20.5	19.9	20.7	20.4	19.0	18.1	18.3	19.2	21.2	22.6			
65	16.4	16.1	15.9	14.8	13.8	13.8	14.6	14.3	15.0	14.6	13.1	12.1	12.2	13.0	15.1	16.9			
70	11.6	11.4	10.8	9.45	8.49	8.57	9.44	9.86	10.3	9.68	8.16	7.30	7.25	7.89	9.62	11.6			
75	7.61	7.41	6.18	4.96	4.27	4.40	5.21	6.01	6.52	5.64	4.29	3.57	3.46	3.85	5.17	7.04			
80	4.20	3.61	2.37	1.50	1.16	1.25	1.89	2.77	3.38	2.44	1.36	0.79	0.71	0.83	1.63	3.23			
85	0.54	0.66	0.36	0.33	0.27	0.24	0.17	0.51	0.52	0.37	0.06	0.07	0.07	0.08	0.12	0.49			
90	0.03	0.03	0.03	0.02	0.03	0.03	0.02	0.03	0.04	0.05	0.04	0.04	0.04	0.04	0.05	0.04			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-10-19

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks: