
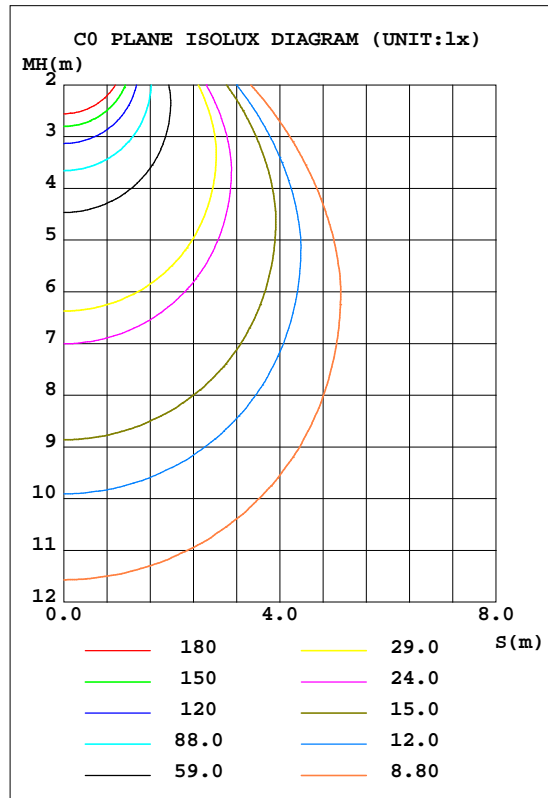


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.08V I:0.2560A P:30.400W PF:0.9884 Freq:60.00Hz Lamp Flux:2487.49x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 81.83 lm/W			
AMODEDL7-6DA30AC(30W 5000K)		I _{max} (cd)	1178	S/MH(C0/180)	1.18
NOMINAL POWER(W)	30	LOR(%)	100.0	S/MH(C90/270)	1.18
RATED VOLTAGE(V)	120-277	TOTAL FLUX(lm)	2487.5	h UP, DN(C0-180)	0.2,48.7
NOMINAL FLUX(lm)	2487.49	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.2,50.8
LAMPS INSIDE	1	h up(%)	0.4	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	h down(%)	99.6	CIBSE SHR MAX	1.30

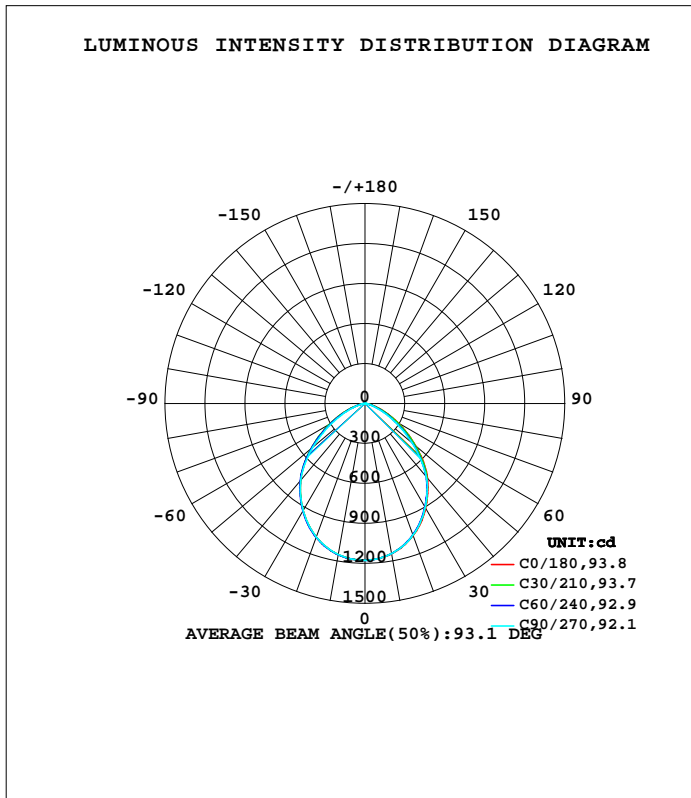

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-11-30

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.2069]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	1146	1144	1145	1148	1152	1152	1151	1150	0- 10	111.0	111.0	4.46,4.46
20	1055	1051	1052	1059	1068	1070	1068	1065	10- 20	313.2	424.2	17.1,17.1
30	911.2	902.0	902.6	915.7	929.4	931.2	929.0	923.5	20- 30	457.9	882.1	35.5,35.5
40	729.1	717.7	714.1	734.4	751.9	755.3	750.7	743.0	30- 40	519.0	1401	56.3,56.3
50	501.0	483.8	465.1	498.6	526.0	529.9	511.4	512.5	40- 50	480.9	1882	75.7,75.7
60	280.8	260.1	234.3	267.1	301.0	297.8	271.4	281.9	50- 60	344.4	2226	89.5,89.5
70	117.8	99.90	79.80	99.14	123.7	117.5	99.61	112.2	60- 70	182.6	2409	96.8,96.8
80	25.08	20.87	17.59	20.16	23.43	22.40	21.64	24.26	70- 80	58.77	2468	99.2,99.2
90	0.2612	0.0584	0.0235	0.0429	0.0391	0.0855	0.0941	0.0719	80- 90	8.918	2477	99.6,99.6
100	0.3483	0.2831	0.3262	0.2871	0.3649	0.3065	0.1705	0.2873	90-100	0.1561	2477	99.6,99.6
110	0.8906	0.8262	0.8774	0.8148	0.9078	0.8495	0.6903	0.8111	100-110	0.5726	2477	99.6,99.6
120	1.588	1.517	1.584	1.498	1.590	1.552	1.396	1.486	110-120	1.153	2479	99.6,99.6
130	2.263	2.223	2.375	2.239	2.295	2.285	2.172	2.232	120-130	1.690	2480	99.7,99.7
140	2.790	2.809	2.942	2.841	2.830	2.882	2.824	2.829	130-140	1.978	2482	99.8,99.8
150	3.325	3.371	3.516	3.357	3.303	3.391	3.337	3.342	140-150	1.950	2484	99.9,99.9
160	3.845	3.821	4.013	3.892	3.822	3.910	3.895	3.846	150-160	1.671	2486	99.9,99.9
170	4.109	4.178	4.323	4.273	4.148	4.275	4.245	4.211	160-170	1.143	2487	100,100
180	4.551	4.671	4.478	4.560	4.458	4.562	4.563	4.541	170-180	0.4171	2487	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-11-30

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.700m [K=1.2069]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.08V I:0.2560A P:30.400W PF:0.9884 Freq:60.00Hz Lamp Flux:2487.49x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

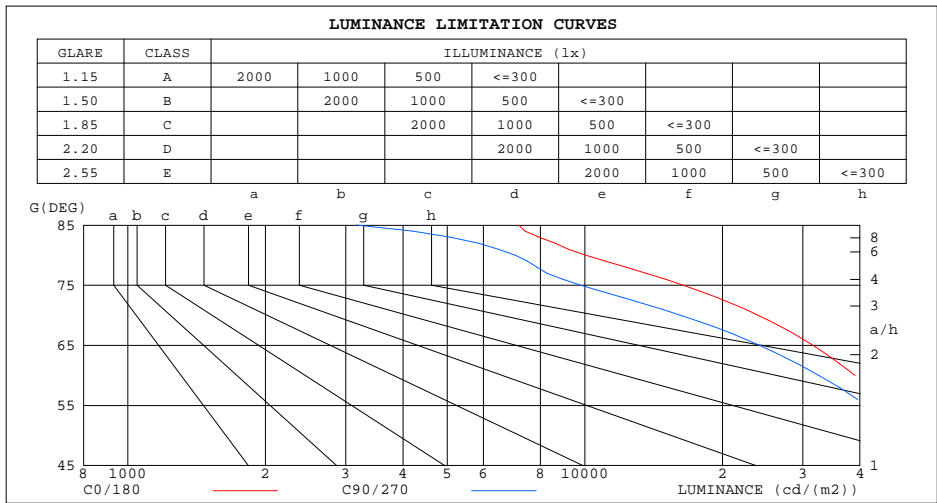

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	7161	3167
80	10036	7033
75	16413	9799
70	23943	16200
65	31579	24118
60	39032	32535
55	46705	41352
50	54175	50242
45	61071	58199


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-11-30

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.2069]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.08V I:0.2560A P:30.400W PF:0.9884 Freq:60.00Hz Lamp Flux:2487.49x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.07	1.03	1.00	1.05	1.01	.98	1.00	.98	.95	.96	.94	.92	.93	.91	.90	.88
2.0	.95	.89	.85	.93	.88	.83	.90	.85	.82	.87	.83	.80	.84	.81	.78	.76
3.0	.85	.78	.72	.83	.77	.72	.81	.75	.70	.78	.73	.69	.75	.71	.68	.66
4.0	.76	.69	.63	.75	.68	.62	.73	.66	.61	.70	.65	.60	.68	.64	.60	.58
5.0	.69	.61	.55	.68	.60	.55	.66	.59	.54	.64	.58	.53	.62	.57	.53	.51
6.0	.63	.54	.49	.62	.54	.48	.60	.53	.48	.58	.52	.47	.57	.51	.47	.45
7.0	.57	.49	.43	.56	.49	.43	.55	.48	.43	.53	.47	.43	.52	.47	.42	.40
8.0	.52	.44	.39	.52	.44	.39	.50	.44	.39	.49	.43	.38	.48	.42	.38	.36
9.0	.48	.41	.35	.48	.40	.35	.47	.40	.35	.46	.39	.35	.44	.39	.35	.33
10.0	.45	.37	.32	.44	.37	.32	.43	.37	.32	.42	.36	.32	.41	.36	.32	.30

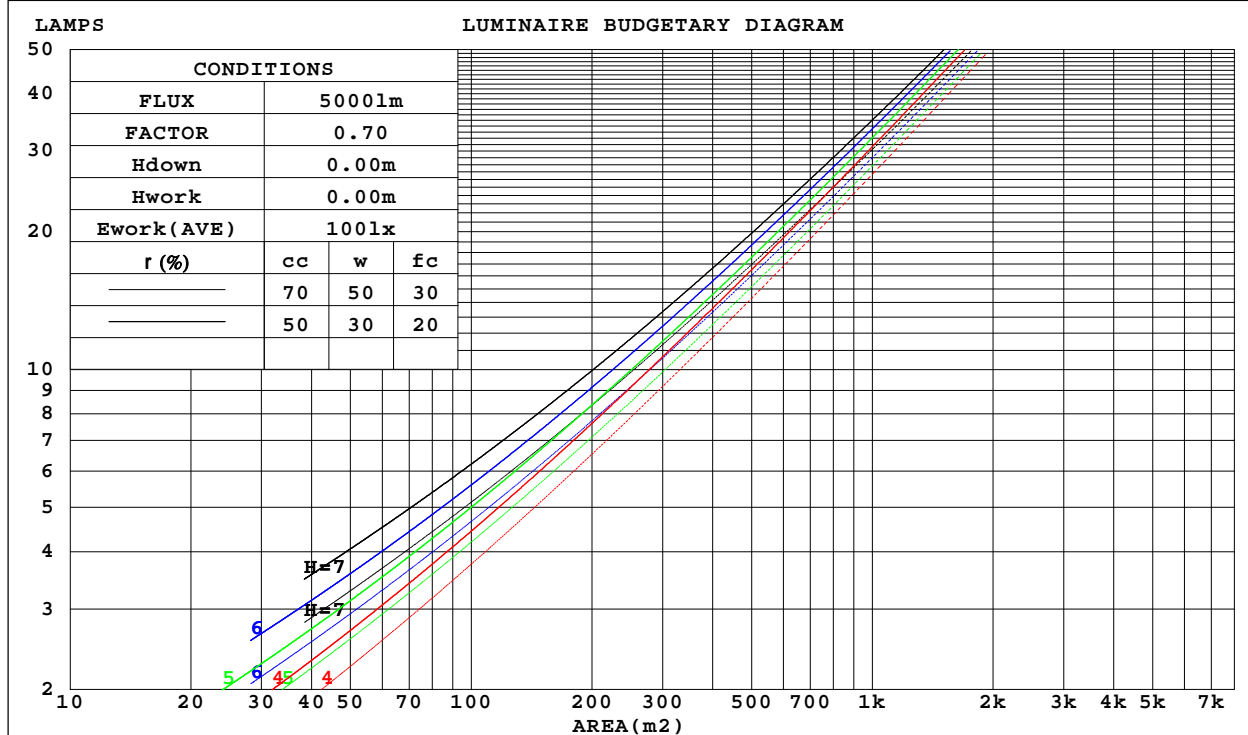

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-11-30

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.2069]
 Remarks:

WEC AND CCEC

Test:U:120.08V I:0.2560A P:30.400W PF:0.9884 Freq:60.00Hz Lamp Flux:2487.49x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.252	.143	.045	.245	.140	.044	.232	.133	.042	.220	.127	.041	.209	.121	.039	
2.0	.245	.135	.041	.239	.132	.041	.228	.127	.039	.217	.122	.038	.207	.117	.037	
3.0	.233	.124	.037	.228	.122	.037	.217	.118	.036	.208	.114	.035	.199	.110	.034	
4.0	.219	.114	.034	.215	.112	.033	.206	.109	.033	.197	.106	.032	.190	.103	.031	
5.0	.206	.105	.030	.202	.104	.030	.194	.101	.030	.187	.098	.029	.180	.096	.029	
6.0	.194	.097	.028	.190	.096	.028	.183	.094	.027	.176	.092	.027	.170	.089	.027	
7.0	.182	.090	.026	.179	.089	.025	.172	.087	.025	.166	.085	.025	.161	.084	.025	
8.0	.172	.084	.024	.169	.083	.023	.163	.081	.023	.158	.080	.023	.153	.078	.023	
9.0	.162	.078	.022	.159	.078	.022	.154	.076	.022	.149	.075	.021	.145	.074	.021	
10.0	.153	.074	.020	.151	.073	.020	.146	.072	.020	.142	.070	.020	.138	.069	.020	

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.194	.194	.194	.166	.166	.166	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.180	.160	.142	.154	.137	.122	.105	.094	.085	.061	.055	.049	.019	.018	.016	
2.0	.169	.135	.107	.145	.117	.092	.099	.081	.064	.057	.047	.038	.018	.015	.012	
3.0	.161	.117	.083	.138	.101	.072	.095	.070	.050	.055	.041	.030	.018	.013	.010	
4.0	.153	.104	.066	.131	.090	.057	.090	.062	.040	.052	.037	.024	.017	.012	.008	
5.0	.146	.093	.054	.125	.080	.047	.086	.056	.033	.050	.033	.020	.016	.011	.007	
6.0	.139	.084	.045	.119	.073	.040	.082	.051	.028	.048	.030	.017	.015	.010	.005	
7.0	.133	.077	.039	.114	.067	.034	.079	.047	.024	.046	.028	.014	.015	.009	.005	
8.0	.127	.072	.034	.109	.062	.030	.075	.044	.021	.044	.026	.012	.014	.008	.004	
9.0	.121	.067	.030	.104	.058	.026	.072	.041	.019	.042	.024	.011	.014	.008	.004	
10.0	.116	.062	.027	.100	.054	.024	.069	.038	.017	.040	.023	.010	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-11-30

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.2069]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.08V I:0.2560A P:30.400W PF:0.9884 Freq:60.00Hz Lamp Flux:2487.49x1 lm										
NAME:					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: ASD LIGHTNG CORP					SUR.: 0.12*0.12			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.6	26.1	25.0	26.4	26.7	23.8	25.2	24.2	25.6	25.9
3H	25.5	26.8	25.9	27.1	27.5	24.3	25.6	24.7	26.0	26.4
4H	25.7	26.9	26.1	27.2	27.6	24.4	25.6	24.8	26.0	26.4
6H	25.7	26.8	26.1	27.2	27.6	24.4	25.5	24.8	25.9	26.3
8H	25.7	26.8	26.1	27.2	27.6	24.4	25.5	24.8	25.9	26.3
12H	25.7	26.7	26.1	27.1	27.5	24.4	25.4	24.8	25.8	26.2
4H 2H	24.9	26.1	25.3	26.4	26.8	24.2	25.4	24.6	25.7	26.1
3H	25.9	26.9	26.3	27.3	27.7	24.8	25.8	25.2	26.2	26.6
4H	26.1	27.0	26.5	27.4	27.9	24.9	25.8	25.3	26.2	26.7
6H	26.2	27.0	26.7	27.4	27.9	24.9	25.7	25.4	26.2	26.6
8H	26.2	26.9	26.7	27.4	27.8	24.9	25.6	25.4	26.1	26.6
12H	26.2	26.8	26.7	27.3	27.8	24.9	25.5	25.4	26.0	26.5
8H 4H	26.1	26.8	26.6	27.3	27.7	24.9	25.7	25.4	26.1	26.6
6H	26.2	26.8	26.7	27.3	27.8	25.0	25.6	25.5	26.1	26.6
8H	26.2	26.7	26.7	27.2	27.7	25.0	25.5	25.5	26.0	26.5
12H	26.2	26.7	26.7	27.2	27.7	24.9	25.4	25.5	25.9	26.5
12H 4H	26.1	26.7	26.5	27.2	27.7	24.9	25.5	25.4	26.0	26.5
6H	26.2	26.7	26.7	27.2	27.7	25.0	25.5	25.5	26.0	26.5
8H	26.2	26.6	26.7	27.1	27.7	25.0	25.4	25.5	25.9	26.5
CIE190: 2010										

CIE190: 2010
Area: 0.0144 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-11-30

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.700m [K=1.2069]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.08V I:0.2560A P:30.400W PF:0.9884 Freq:60.00Hz Lamp Flux:2487.49x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	64	53	47	63	53	47	62	53	47	41
0.80	74	64	58	73	64	57	72	63	57	51
1.00	83	73	67	81	72	66	79	73	66	60
1.25	89	80	74	88	80	74	85	78	73	67
1.50	94	86	80	92	85	79	89	83	78	72
2.00	100	93	87	98	92	87	95	89	85	78
2.50	103	97	92	101	95	91	97	93	89	81
3.00	106	100	96	104	99	95	100	96	92	84
4.00	109	104	101	107	103	99	103	99	96	88
5.00	111	107	104	108	105	102	104	101	99	90
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-11-30

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=1.2069]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.08V I:0.2560A P:30.400W PF:0.9884 Freq:60.00Hz Lamp Flux:2487.49x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

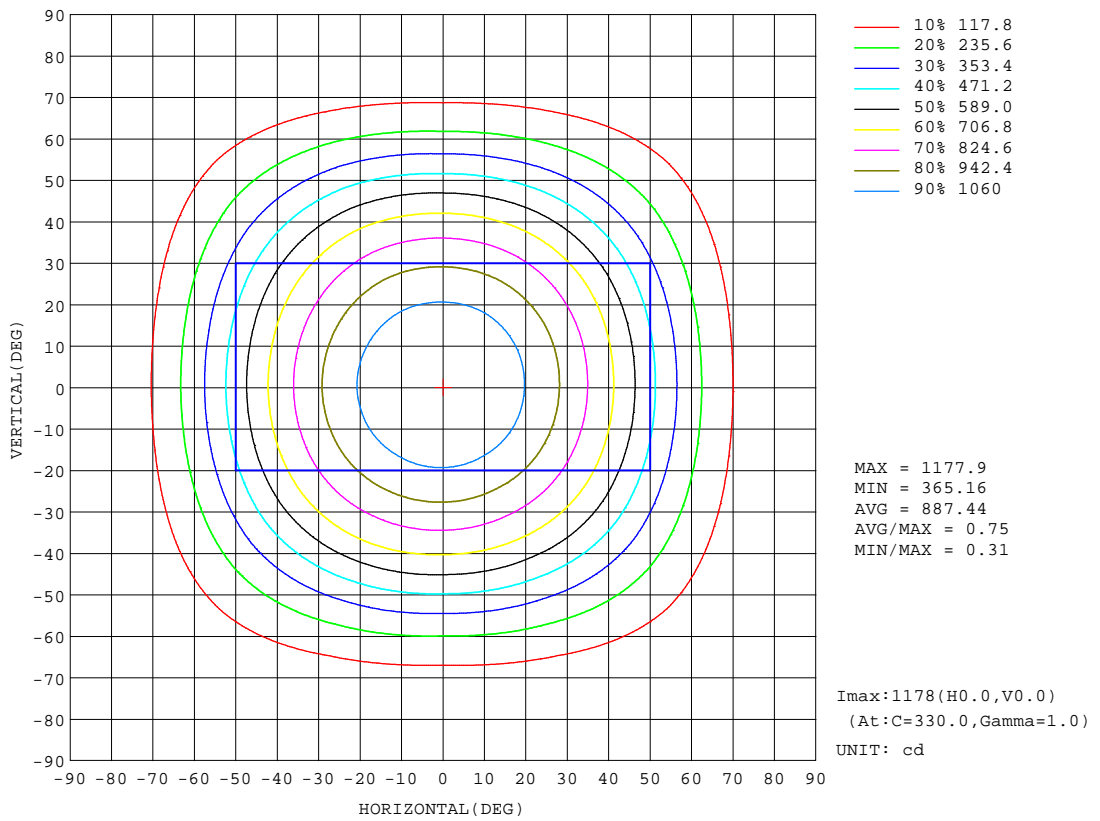


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-11-30

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.2069]
 Remarks:

AAI Figure

Test:U:120.08V I:0.2560A P:30.400W PF:0.9884 Freq:60.00Hz Lamp Flux:2487.49x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

Flux out:1749 lm

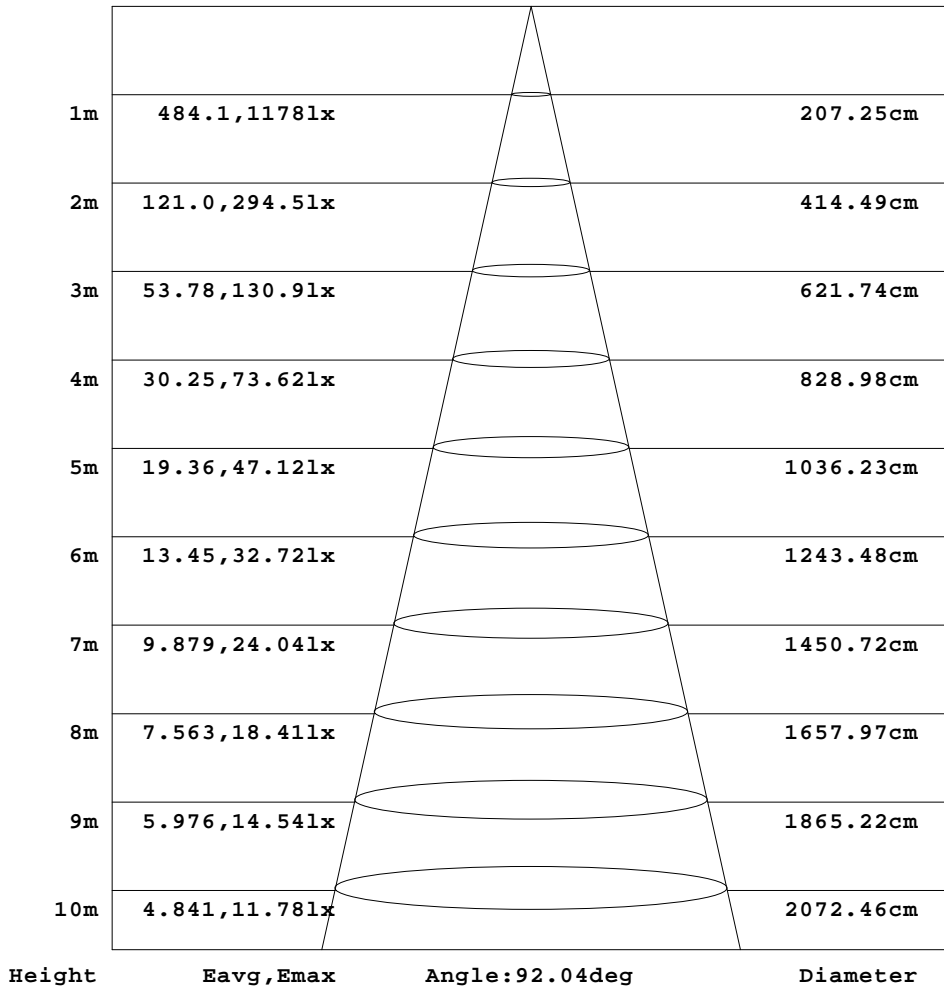


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-11-30

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.2069]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.08V I:0.2560A P:30.400W PF:0.9884 Freq:60.00Hz Lamp Flux:2487.49x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

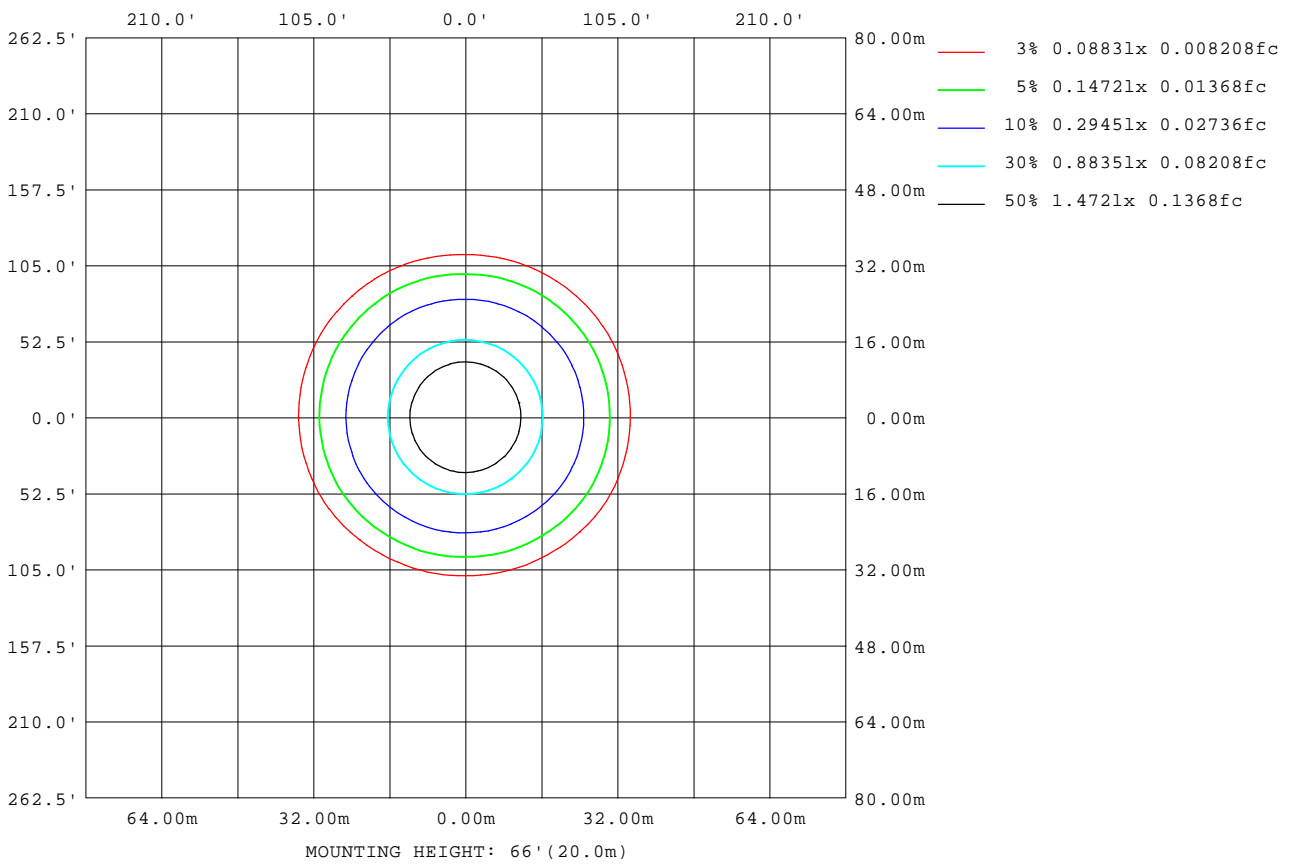

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-11-30

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=1.2069]
 Remarks:

LED Avg.L Report

Test:U:120.08V I:0.2560A P:30.400W PF:0.9884 Freq:60.00Hz Lamp Flux:2487.49x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	32590
L_0~180(75)av	16350
L_0~180(85)av	6650
L_90~270(65)av	26523
L_90~270(75)av	11150
L_90~270(85)av	4373
L_45(65)av	30197
L_45(75)av	13849
L_45(85)av	5511

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-11-30

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.700m [K=1.2069]
Remarks:

Planar Illuminance Curve

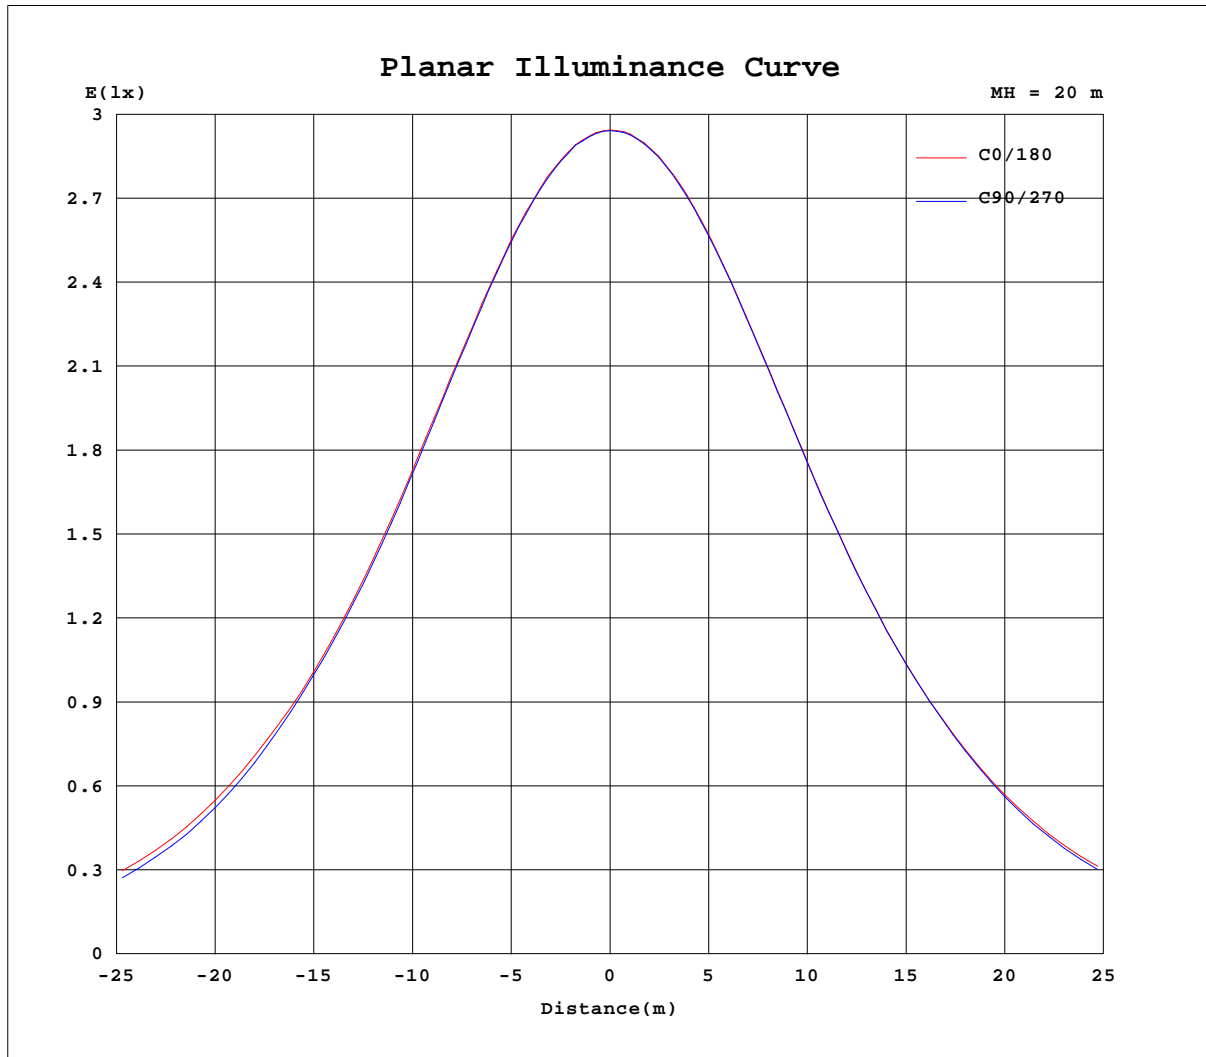

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-11-30

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=1.2069]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.08V I:0.2560A P:30.400W PF:0.9884 Freq:60.00Hz Lamp Flux:2487.49x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.12*0.12	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	1177	1177	1177	1177	1177	1177	1177	1177	1177	1177	1177	1177						
5	1169	1167	1168	1170	1170	1171	1172	1172	1172	1171	1171	1170						
10	1146	1145	1143	1145	1146	1150	1152	1151	1154	1151	1151	1148						
15	1107	1105	1104	1107	1109	1114	1118	1117	1120	1117	1115	1113						
20	1055	1053	1049	1052	1054	1064	1068	1068	1071	1068	1067	1062						
25	990	985	980	984	990	999	1005	1006	1008	1004	1002	998						
30	911	904	900	903	910	921	929	929	933	929	927	920						
35	823	816	810	815	822	835	843	844	849	842	839	832						
40	729	722	714	714	727	741	752	753	758	751	747	739						
45	621	614	596	593	610	633	643	649	650	636	635	632						
50	501	495	473	465	484	513	526	531	528	511	513	512						
55	385	379	352	342	360	394	411	413	407	385	391	393						
60	281	274	246	234	250	284	301	304	291	271	278	286						
65	192	185	158	147	159	189	205	207	192	176	182	194						
70	118	111	88.8	79.8	87.6	111	124	125	110	99.6	106	118						
75	61.1	55.4	40.9	36.5	39.5	53.0	60.8	61.1	50.9	46.6	50.9	60.9						
80	25.1	22.6	19.1	17.6	18.4	21.9	23.4	22.5	22.3	21.6	23.2	25.3						
85	8.98	8.28	5.05	3.98	4.36	7.17	7.71	6.23	7.28	7.00	8.40	8.56						
90	0.26	0.06	0.05	0.02	0.03	0.05	0.04	0.13	0.04	0.09	0.04	0.11						
95	0.15	0.14	0.09	0.16	0.09	0.12	0.17	0.13	0.13	0.02	0.15	0.09						
100	0.35	0.30	0.26	0.33	0.26	0.31	0.36	0.32	0.30	0.17	0.30	0.27						
105	0.59	0.51	0.51	0.57	0.50	0.55	0.63	0.57	0.53	0.40	0.54	0.50						
110	0.89	0.81	0.84	0.88	0.81	0.82	0.91	0.88	0.82	0.69	0.83	0.79						
115	1.25	1.14	1.16	1.21	1.14	1.13	1.24	1.25	1.14	1.03	1.15	1.13						
120	1.59	1.50	1.53	1.58	1.52	1.48	1.59	1.63	1.48	1.40	1.51	1.47						
125	1.94	1.85	1.92	1.97	1.89	1.86	1.94	1.99	1.84	1.78	1.89	1.85						
130	2.26	2.19	2.26	2.38	2.25	2.23	2.30	2.36	2.21	2.17	2.27	2.20						
135	2.55	2.49	2.56	2.65	2.58	2.56	2.61	2.65	2.55	2.52	2.58	2.55						
140	2.79	2.75	2.87	2.94	2.87	2.81	2.83	2.94	2.83	2.82	2.84	2.82						
145	3.06	3.09	3.14	3.24	3.12	3.07	3.05	3.24	3.10	3.10	3.09	3.12						
150	3.33	3.36	3.38	3.52	3.39	3.32	3.30	3.47	3.32	3.34	3.31	3.38						
155	3.64	3.56	3.66	3.75	3.62	3.67	3.57	3.71	3.60	3.58	3.58	3.65						
160	3.84	3.78	3.87	4.01	3.82	3.97	3.82	3.95	3.87	3.90	3.82	3.87						
165	3.91	3.83	4.11	4.18	4.09	4.08	3.99	4.14	4.06	4.10	4.08	4.02						
170	4.11	4.05	4.31	4.32	4.20	4.35	4.15	4.31	4.24	4.24	4.22	4.20						
175	4.39	4.40	4.46	4.46	4.46	4.53	4.36	4.50	4.47	4.44	4.47	4.38						
180	4.55	4.78	4.56	4.48	4.61	4.51	4.46	4.56	4.56	4.56	4.57	4.51						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-11-30

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=1.2069]
 Remarks: