
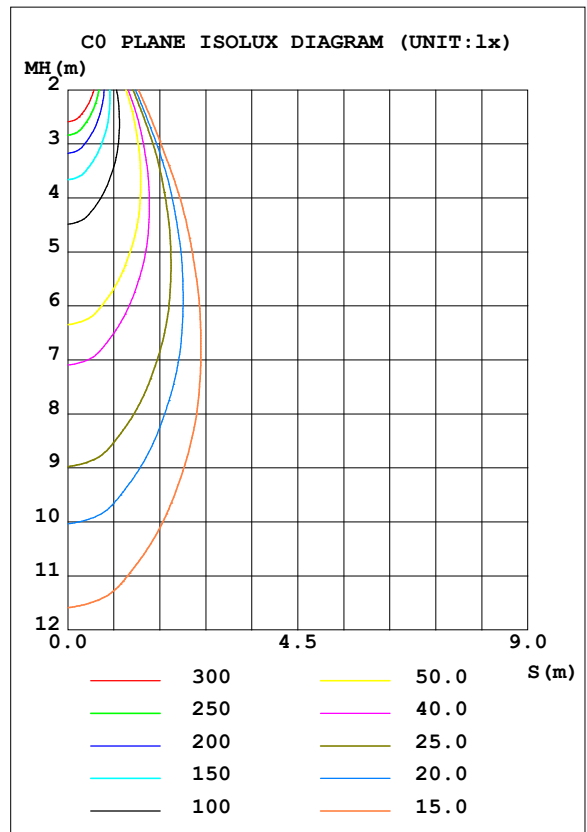


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.65V I:0.1189A P:14.029W PF:0.9486 Freq:59.98Hz Lamp Flux:916.738x1 lm		
NAME: ASD-CD-PR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 65.35 lm/W			
MODEL		Imax (cd)	1989	S/MH (C0/180)	0.61
NOMINAL POWER (W)	15	LOR (%)	100.0	S/MH (C90/270)	0.58
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	916.74	<input type="checkbox"/> UP, DN (C0-180)	0.0, 49.9
NOMINAL FLUX (lm)	916.738	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 50.1
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	0.65

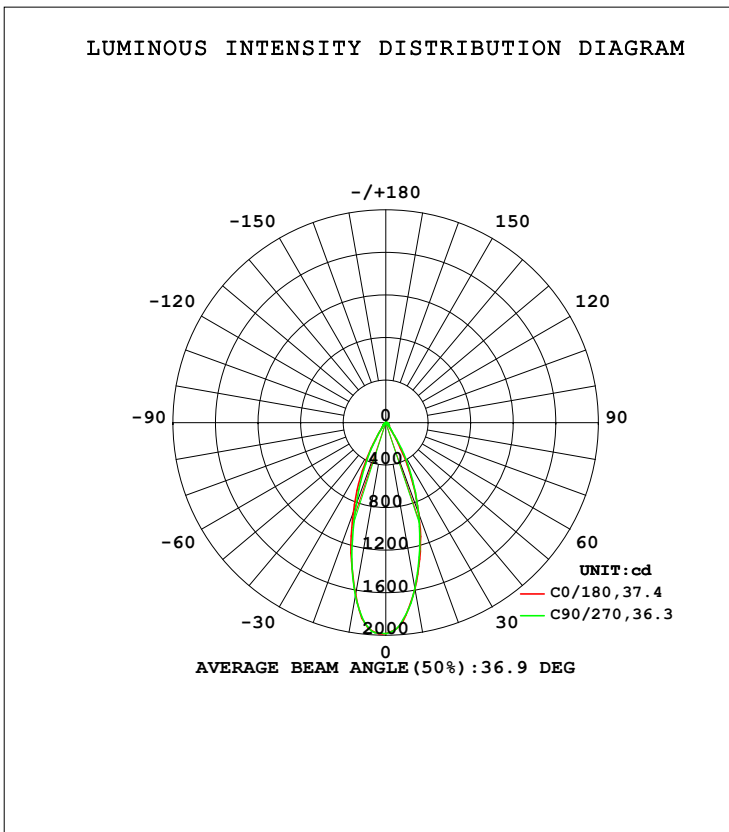

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

°	C0	C45	C90	C135	C180	C225	C270	C315	°	□ zone	□ total	%lum, lamp
10	1587	1584	1581	1627	1640	1649	1654	1643	0- 10	172.2	172.2	18.8,18.8
20	906.4	863.2	900.0	904.9	896.4	976.4	816.6	867.8	10- 20	345.5	517.7	56.5,56.5
30	276.1	255.5	346.1	311.6	279.3	291.6	243.2	258.0	20- 30	253.9	771.6	84.2,84.2
40	49.74	49.49	57.09	53.61	49.53	50.19	48.07	49.58	30- 40	73.67	845.3	92.2,92.2
50	29.44	30.04	30.46	30.23	29.94	29.48	29.43	29.45	40- 50	29.15	874.4	95.4,95.4
60	17.58	17.81	17.98	17.98	18.04	17.87	17.78	17.62	50- 60	20.72	895.1	97.6,97.6
70	9.723	9.818	9.825	9.787	9.913	10.02	10.08	9.832	60- 70	13.61	908.7	99.1,99.1
80	3.809	3.230	2.405	3.125	3.885	3.655	3.245	3.539	70- 80	6.890	915.6	99.9,99.9
90	0.0381	0.0299	0.0352	0.0260	0.0427	0.0405	0.0422	0.0425	80- 90	1.121	916.7	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.65V I:0.1189A P:14.029W PF:0.9486 Freq:59.98Hz Lamp Flux:916.738x1 lm		
NAME: ASD-CD-PR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:



LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	77	5
80	201	124
75	230	208
70	260	258
65	292	291
60	322	323
55	360	367
50	419	425
45	470	465


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.65V I:0.1189A P:14.029W PF:0.9486 Freq:59.98Hz Lamp Flux:916.738x1 lm		
NAME: ASD-CD-PR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.05	1.03	1.02	1.01	1.00	.99	.98	.97	.96	.94
2.0	1.04	1.00	.97	1.03	.99	.96	.99	.97	.94	.96	.94	.92	.94	.92	.90	.89
3.0	.98	.94	.90	.97	.93	.89	.94	.91	.88	.92	.89	.86	.90	.87	.85	.84
4.0	.93	.88	.84	.92	.87	.83	.89	.86	.82	.88	.84	.81	.86	.83	.81	.79
5.0	.88	.83	.79	.87	.82	.78	.85	.81	.78	.84	.80	.77	.82	.79	.76	.75
6.0	.84	.78	.74	.83	.78	.74	.81	.77	.74	.80	.76	.73	.79	.75	.73	.71
7.0	.80	.74	.71	.79	.74	.70	.78	.73	.70	.77	.73	.70	.76	.72	.69	.68
8.0	.76	.71	.67	.75	.70	.67	.74	.70	.67	.73	.69	.66	.73	.69	.66	.65
9.0	.73	.68	.64	.72	.67	.64	.71	.67	.64	.71	.66	.64	.70	.66	.63	.62
10.0	.70	.65	.61	.69	.64	.61	.69	.64	.61	.68	.64	.61	.67	.63	.61	.60

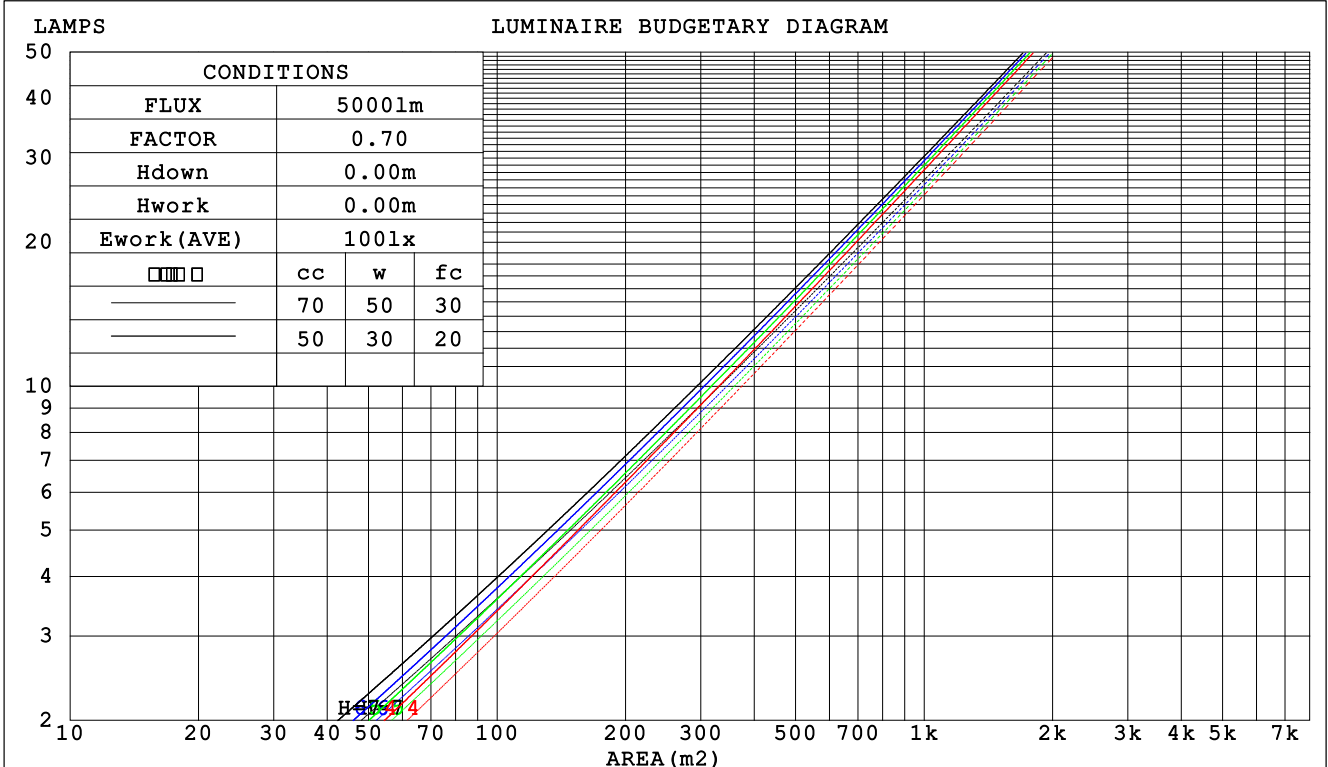

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.65V I:0.1189A P:14.029W PF:0.9486 Freq:59.98Hz Lamp Flux:916.738x1 lm		
NAME: ASD-CD-PR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients (WEC)			
0.0						
1.0	.169 .096 .030	.162 .093 .029	.150 .086 .027	.138 .080 .026	.128 .074 .024	
2.0	.159 .087 .027	.154 .085 .026	.143 .080 .025	.134 .075 .023	.125 .071 .022	
3.0	.150 .080 .024	.145 .078 .023	.136 .074 .022	.128 .070 .022	.120 .067 .021	
4.0	.141 .073 .022	.137 .072 .021	.130 .069 .021	.123 .066 .020	.116 .063 .019	
5.0	.133 .068 .020	.130 .067 .019	.123 .064 .019	.117 .062 .018	.112 .060 .018	
6.0	.127 .063 .018	.124 .062 .018	.118 .060 .018	.112 .058 .017	.107 .057 .017	
7.0	.120 .059 .017	.118 .059 .017	.113 .057 .016	.108 .055 .016	.103 .054 .016	
8.0	.115 .056 .016	.112 .055 .016	.108 .054 .015	.104 .052 .015	.100 .051 .015	
9.0	.110 .053 .015	.107 .052 .015	.103 .051 .015	.100 .050 .014	.096 .049 .014	
10.0	.105 .050 .014	.103 .050 .014	.099 .049 .014	.096 .048 .014	.093 .047 .013	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients (CCEC)			
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.171 .157 .146	.146 .135 .125	.100 .093 .087	.057 .054 .050	.018 .017 .016	
2.0	.155 .133 .114	.132 .114 .099	.091 .079 .069	.052 .046 .040	.017 .015 .013	
3.0	.141 .113 .091	.121 .098 .079	.083 .068 .056	.048 .040 .033	.015 .013 .011	
4.0	.130 .099 .074	.112 .085 .065	.077 .059 .046	.044 .035 .027	.014 .011 .009	
5.0	.121 .087 .062	.104 .075 .054	.071 .052 .038	.041 .031 .022	.013 .010 .007	
6.0	.113 .077 .052	.097 .067 .045	.067 .047 .032	.039 .028 .019	.013 .009 .006	
7.0	.106 .069 .044	.091 .060 .038	.063 .042 .027	.037 .025 .016	.012 .008 .005	
8.0	.100 .063 .038	.086 .055 .033	.059 .038 .023	.035 .023 .014	.011 .007 .005	
9.0	.094 .058 .033	.081 .050 .029	.056 .035 .020	.033 .021 .012	.011 .007 .004	
10.0	.090 .053 .029	.077 .046 .025	.054 .032 .018	.031 .019 .011	.010 .006 .004	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.65V I:0.1189A P:14.029W PF:0.9486 Freq:59.98Hz Lamp Flux:916.738x1 lm										
NAME: ASD-CD-PR-2D15AC-WH					TYPE:			WEIGHT:		
SPEC.:2700K 90					DIM.:			SERIAL No.:		
MFR.: ASD Lighting Corp					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	4.2	5.1	4.4	5.2	5.4	4.7	5.5	4.9	5.7	5.9
3H	5.0	5.8	5.3	6.0	6.2	5.3	6.1	5.6	6.3	6.5
4H	5.3	6.1	5.6	6.3	6.5	5.6	6.3	5.9	6.5	6.8
6H	5.5	6.2	5.8	6.5	6.7	5.7	6.4	6.0	6.6	6.8
8H	5.5	6.2	5.9	6.5	6.7	5.6	6.3	5.9	6.6	6.8
12H	5.5	6.2	5.8	6.4	6.7	5.6	6.2	5.9	6.5	6.8
4H 2H	4.5	5.3	4.8	5.5	5.7	4.9	5.7	5.2	5.9	6.1
3H	5.5	6.1	5.8	6.4	6.7	5.8	6.4	6.1	6.7	6.9
4H	5.9	6.5	6.2	6.8	7.1	6.1	6.7	6.4	7.0	7.3
6H	6.2	6.7	6.6	7.1	7.4	6.2	6.7	6.6	7.1	7.4
8H	6.3	6.7	6.6	7.1	7.5	6.2	6.7	6.6	7.0	7.4
12H	6.2	6.7	6.6	7.0	7.4	6.1	6.6	6.6	7.0	7.3
8H 4H	6.0	6.5	6.4	6.8	7.2	6.2	6.7	6.6	7.0	7.4
6H	6.4	6.8	6.8	7.2	7.6	6.4	6.8	6.8	7.1	7.6
8H	6.5	6.8	6.9	7.3	7.7	6.3	6.7	6.8	7.1	7.6
12H	6.5	6.8	7.0	7.2	7.7	6.3	6.6	6.8	7.0	7.5
12H 4H	6.0	6.4	6.4	6.8	7.2	6.1	6.6	6.6	7.0	7.4
6H	6.4	6.7	6.8	7.1	7.6	6.3	6.7	6.8	7.1	7.6
8H	6.5	6.8	6.9	7.2	7.7	6.3	6.6	6.8	7.1	7.5
Variations with the observer position at spacings:										
S = 1.0H	+ 0.5 / - 0.6					+ 0.9 / - 0.7				
1.5H	+ 0.7 / - 0.3					+ 1.6 / - 0.4				
2.0H	+ 0.5 / - 0.5					+ 0.6 / - 0.6				

CIE Pub.117, 916.7 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.3)
 Area: 0.111111 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.65V I:0.1189A P:14.029W PF:0.9486 Freq:59.98Hz Lamp Flux:916.738x1 lm		
NAME: ASD-CD-PR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	87	80	76	86	80	76	85	80	76	73
0.80	94	88	84	93	88	84	92	87	84	80
1.00	99	93	89	98	92	89	96	92	88	84
1.25	103	97	94	101	97	93	100	95	92	88
1.50	105	100	97	104	100	96	102	98	95	91
2.00	108	104	100	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	111	108	105	110	106	104	106	104	102	95
4.00	114	111	108	111	109	107	108	106	104	97
5.00	115	113	111	113	111	109	109	107	106	98
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.65V I:0.1189A P:14.029W PF:0.9486 Freq:59.98Hz Lamp Flux:916.738x1 lm		
NAME: ASD-CD-PR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

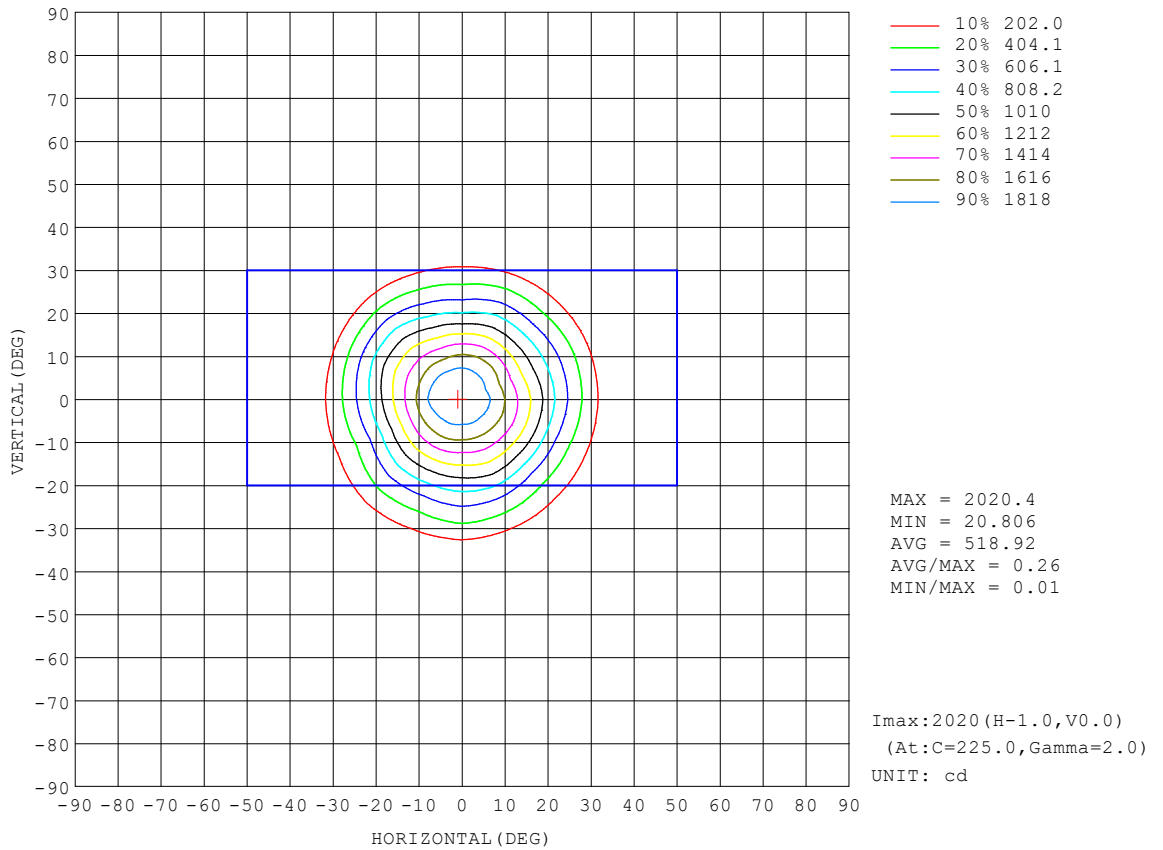


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

AAI Figure

Test:U:119.65V I:0.1189A P:14.029W PF:0.9486 Freq:59.98Hz Lamp Flux:916.738x1 lm		
NAME: ASD-CD-PR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

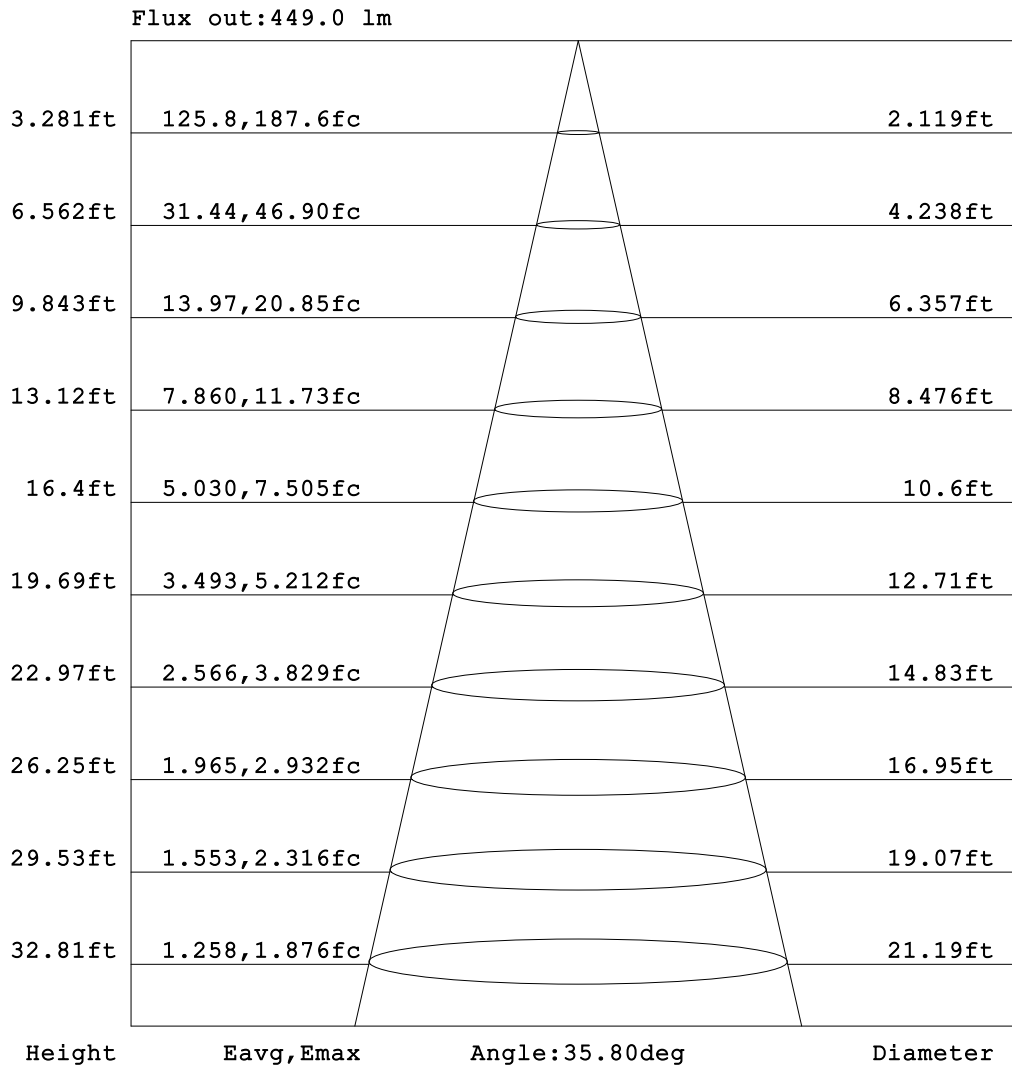


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.65V I:0.1189A P:14.029W PF:0.9486 Freq:59.98Hz Lamp Flux:916.738x1 lm		
NAME: ASD-CD-PR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

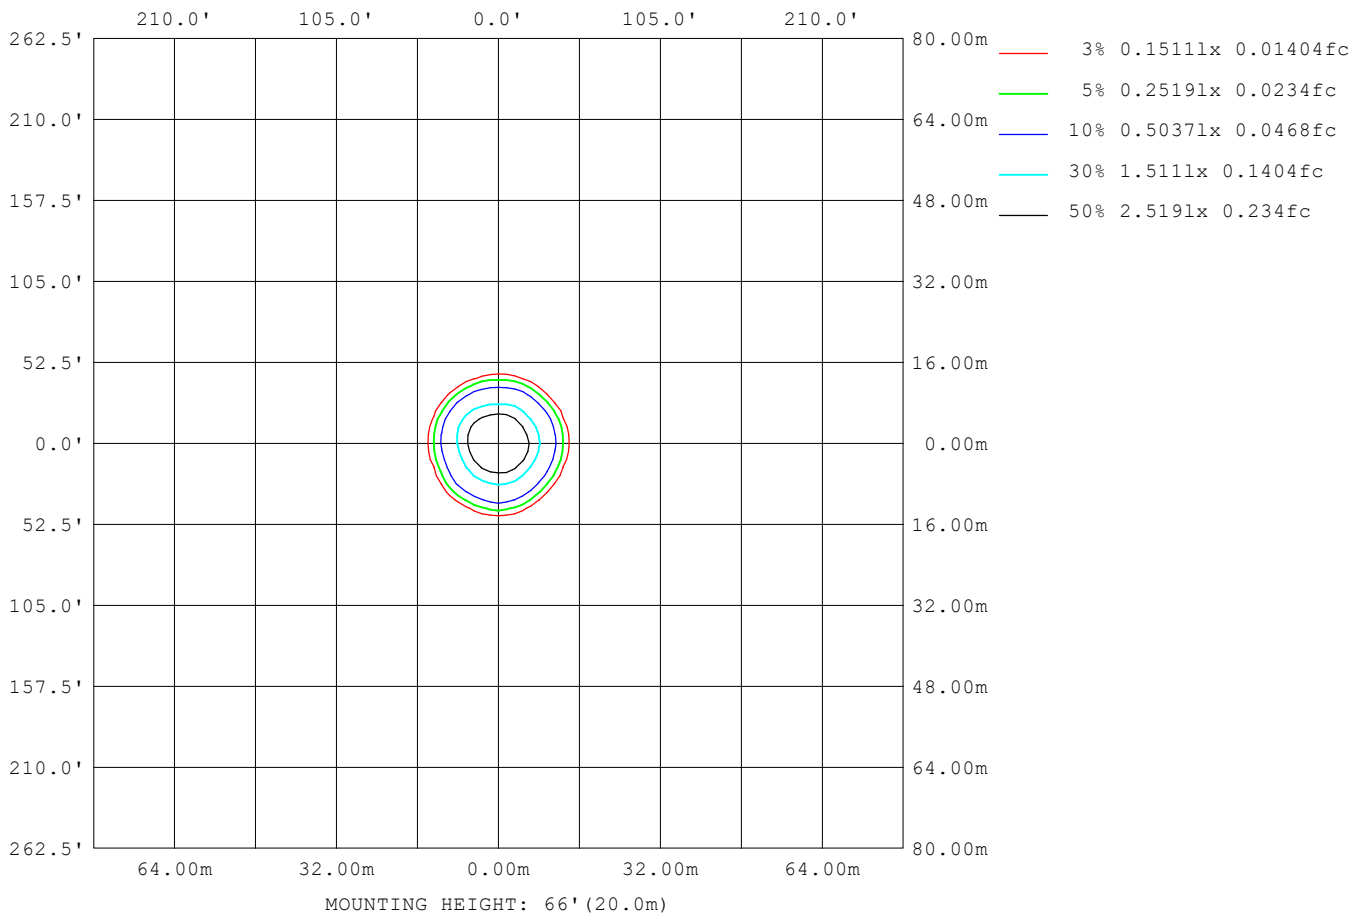

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:119.65V I:0.1189A P:14.029W PF:0.9486 Freq:59.98Hz Lamp Flux:916.738x1 lm		
NAME: ASD-CD-PR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	291
L_0~180 (75) av	228
L_0~180 (85) av	82
L_90~270 (65) av	294
L_90~270 (75) av	222
L_90~270 (85) av	20
L_45 (65) av	292
L_45 (75) av	228
L_45 (85) av	51

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

Planar Illuminance Curve

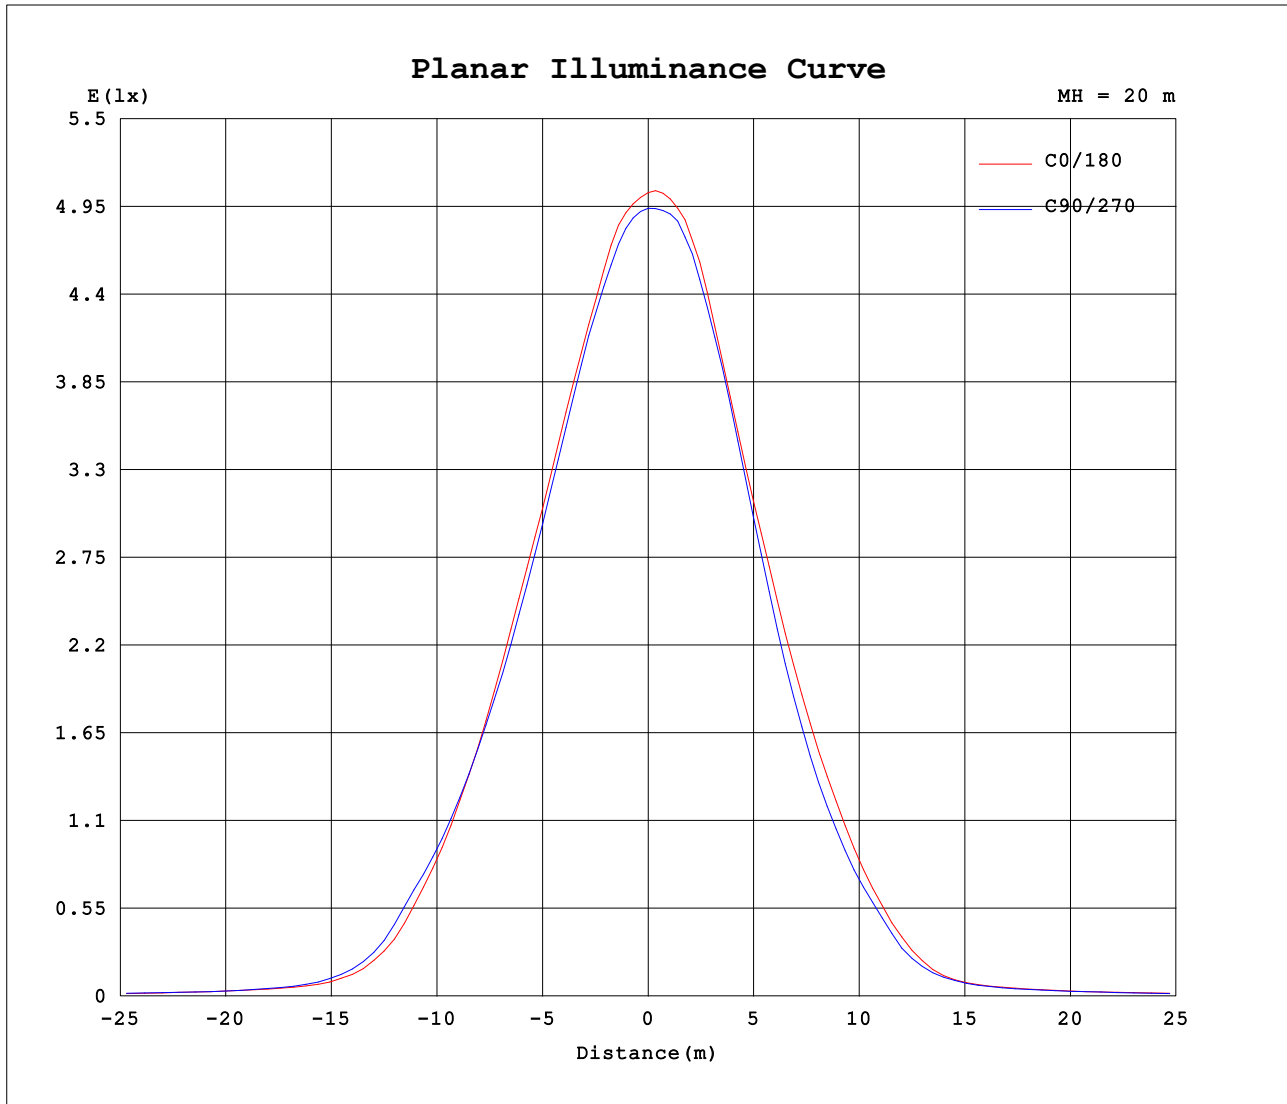

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.65V I:0.1189A P:14.029W PF:0.9486 Freq:59.98Hz Lamp Flux:916.738x1 lm		
NAME: ASD-CD-PR-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1982	1982	1982	1982	1982	1982	1982	1982	1982	1982	1982	1982	1982	1982	1982	1982			
5	1874	1865	1857	1866	1861	1884	1898	1928	1937	1937	1943	1935	1931	1922	1911	1889			
10	1587	1595	1584	1575	1581	1611	1627	1659	1640	1640	1649	1627	1654	1655	1643	1595			
15	1256	1265	1252	1265	1234	1249	1267	1250	1268	1321	1316	1240	1234	1268	1249	1230			
20	906	872	863	915	900	881	905	845	896	983	976	856	817	885	868	891			
25	567	508	503	567	601	553	577	502	566	627	624	535	493	555	537	581			
30	276	253	256	303	346	301	312	256	279	292	292	255	243	263	258	282			
35	99.0	90.3	94.7	107	126	111	110	88.9	92.8	100	99.6	91.7	87.4	94.7	94.5	99.1			
40	49.7	49.2	49.5	53.1	57.1	54.2	53.6	49.2	49.5	50.6	50.2	48.3	48.1	49.0	49.6	49.9			
45	36.3	36.2	36.2	36.6	36.7	37.0	36.7	36.5	36.5	35.9	35.9	35.8	36.0	36.0	36.2	35.9			
50	29.4	29.8	30.0	30.4	30.5	30.6	30.2	30.1	29.9	29.5	29.5	29.4	29.4	29.3	29.4	29.3			
55	22.6	22.8	23.0	23.4	23.5	23.4	23.1	23.1	23.2	22.6	22.5	22.2	22.3	22.2	22.4	22.3			
60	17.6	17.8	17.8	18.0	18.0	18.1	18.0	18.1	18.0	17.8	17.9	17.7	17.8	17.6	17.6	17.5			
65	13.5	13.7	13.7	13.8	13.7	13.8	13.7	13.8	13.9	13.7	13.9	13.8	13.9	13.6	13.6	13.4			
70	9.72	9.82	9.82	9.89	9.83	9.84	9.79	9.87	9.91	9.86	10.0	10.0	10.1	9.91	9.83	9.68			
75	6.50	6.55	6.52	6.26	6.01	6.16	6.44	6.56	6.61	6.59	6.72	6.69	6.74	6.62	6.60	6.47			
80	3.81	3.83	3.23	2.68	2.41	2.61	3.13	3.82	3.88	3.88	3.65	3.35	3.25	3.27	3.54	3.79			
85	0.73	1.19	0.37	0.04	0.05	0.04	0.32	1.14	0.86	1.26	0.70	0.39	0.33	0.33	0.58	1.16			
90	0.04	0.03	0.03	0.03	0.04	0.03	0.03	0.03	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-26

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks: