
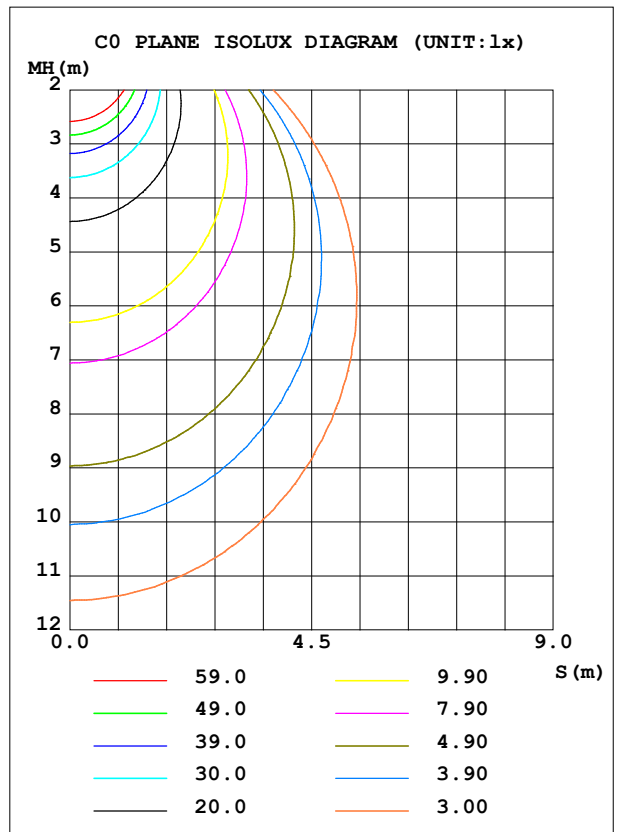


LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 80.76 lm/W
MODEL	SD-LRKS-6D12AC-XX (2700K)	Imax (cd)	394.5	S/MH (C0/180)		1.22
NOMINAL POWER (W)	12	LOR (%)	100.0	S/MH (C90/270)		1.21
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	965.93	<input type="checkbox"/> UP, DN (C0-180)		0.2, 50.2
NOMINAL FLUX (lm)	965.934	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)		0.2, 49.4
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.4	CIBSE SHR NOM		1.25
TEST VOLTAGE (V)	120.0	<input type="checkbox"/> down (%)	99.6	CIBSE SHR MAX		1.35

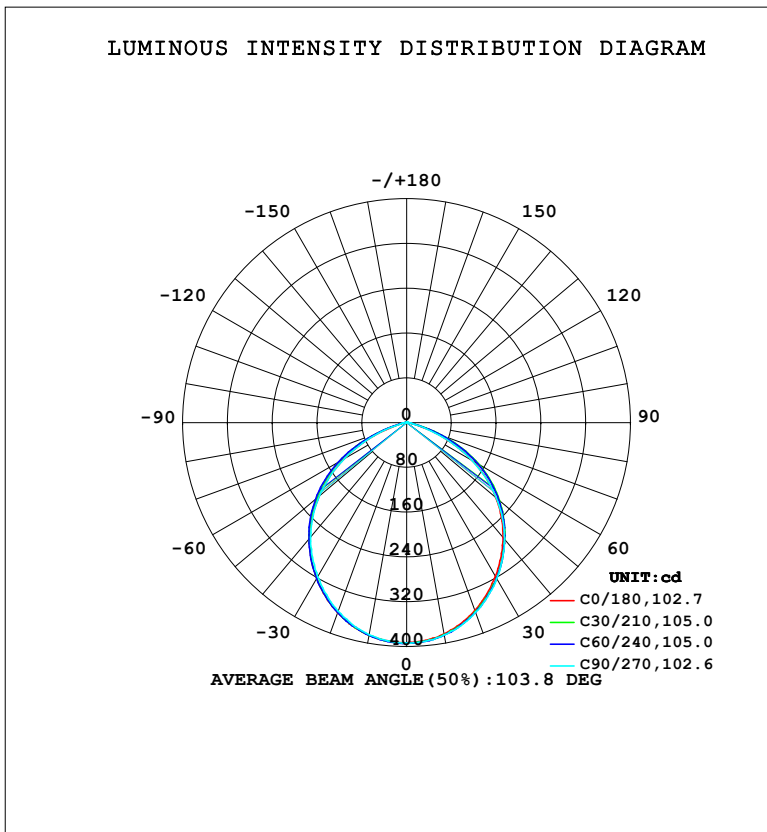

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.000m [K=1.0938]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


☐	C0	C45	C90	C135	C180	C225	C270	C315	☐	☐ zone	☐ total	%lum,lamp
10	383.1	385.1	385.0	385.9	386.3	385.7	384.8	384.0	0- 10	37.15	37.15	3.85,3.85
20	356.5	359.8	360.6	361.1	361.6	360.7	358.3	358.1	10- 20	105.5	142.7	14.8,14.8
30	316.6	321.3	322.3	322.2	321.7	321.5	318.1	319.1	20- 30	157.3	300.0	31.1,31.1
40	268.4	272.3	272.2	272.3	270.3	271.1	267.4	270.2	30- 40	185.6	485.6	50.3,50.3
50	208.0	215.8	209.5	213.1	204.2	210.8	203.5	213.0	40- 50	186.7	672.3	69.6,69.6
60	135.3	148.5	134.1	142.9	128.2	140.1	127.7	145.4	50- 60	157.6	829.8	85.9,85.9
70	54.36	67.16	53.81	61.24	47.62	58.21	48.23	64.41	60- 70	98.27	928.1	96.1,96.1
80	9.873	10.65	9.992	9.754	8.669	9.335	8.877	10.16	70- 80	29.24	957.3	99.1,99.1
90	0.1614	0.0310	0.0000	0.0332	0.0001	0.0141	0.0001	0.0012	80- 90	4.628	962.0	99.6,99.6
100	0.1289	0.1565	0.1456	0.1319	0.1562	0.1269	0.0861	0.1049	90-100	0.0594	962.0	99.6,99.6
110	0.3657	0.3966	0.3775	0.3552	0.3714	0.3453	0.3123	0.3096	100-110	0.2508	962.3	99.6,99.6
120	0.6562	0.6529	0.6415	0.5868	0.6029	0.6016	0.5549	0.5384	110-120	0.4719	962.7	99.7,99.7
130	0.9253	0.9038	0.9110	0.8182	0.8614	0.8526	0.7976	0.7430	120-130	0.6508	963.4	99.7,99.7
140	1.114	1.103	1.100	1.009	1.028	1.044	0.9915	0.9394	130-140	0.7288	964.1	99.8,99.8
150	1.248	1.241	1.234	1.163	1.173	1.182	1.132	1.101	140-150	0.6973	964.8	99.9,99.9
160	1.363	1.334	1.364	1.295	1.378	1.365	1.331	1.260	150-160	0.5784	965.4	99.9,99.9
170	1.474	1.435	1.504	1.437	1.534	1.505	1.471	1.349	160-170	0.3921	965.8	100,100
180	1.620	1.613	1.595	1.559	1.609	1.608	1.606	1.553	170-180	0.1443	965.9	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

☐ Range: 0 - 180DEG
 ☐ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.0938]
 Remarks:

LUMINANCE LIMITATION CURVES

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

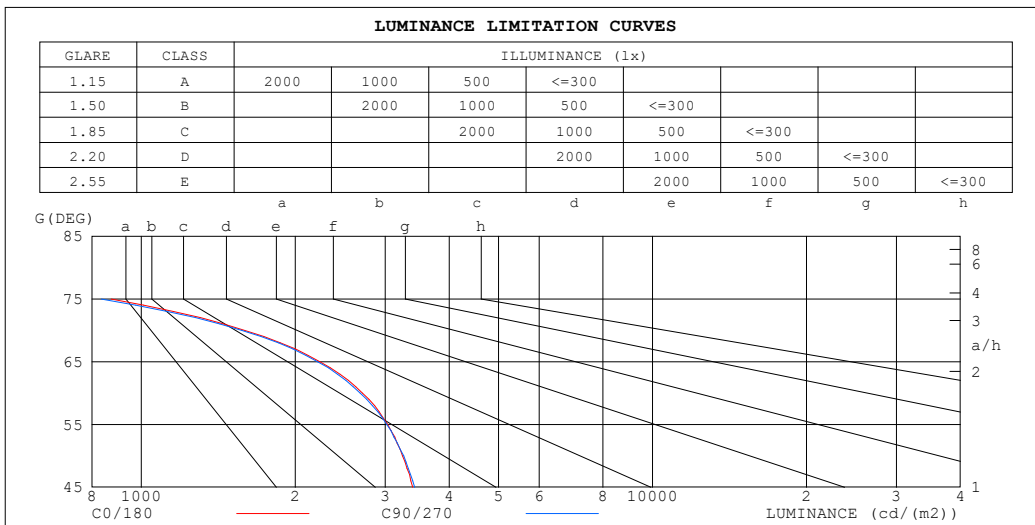

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	510	521
80	569	575
75	873	834
70	1592	1573
65	2235	2212
60	2709	2682
55	3033	3019
50	3241	3259
45	3396	3424


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.000m [K=1.0938]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.06	1.02	.99	1.04	1.00	.97	.99	.97	.94	.95	.93	.91	.92	.90	.88	.86
2.0	.94	.87	.82	.92	.86	.81	.88	.83	.79	.85	.81	.77	.82	.79	.76	.74
3.0	.83	.75	.69	.81	.74	.69	.78	.72	.67	.76	.70	.66	.73	.69	.65	.63
4.0	.74	.66	.59	.72	.65	.59	.70	.63	.58	.68	.62	.57	.65	.61	.56	.54
5.0	.66	.58	.51	.65	.57	.51	.63	.56	.51	.61	.55	.50	.59	.54	.49	.47
6.0	.60	.51	.45	.59	.51	.45	.57	.50	.44	.55	.49	.44	.54	.48	.44	.42
7.0	.54	.46	.40	.53	.46	.40	.52	.45	.40	.50	.44	.39	.49	.43	.39	.37
8.0	.50	.41	.36	.49	.41	.36	.48	.40	.35	.46	.40	.35	.45	.39	.35	.33
9.0	.46	.38	.32	.45	.37	.32	.44	.37	.32	.43	.36	.32	.42	.36	.32	.30
10.0	.42	.34	.29	.42	.34	.29	.41	.34	.29	.40	.33	.29	.39	.33	.29	.27

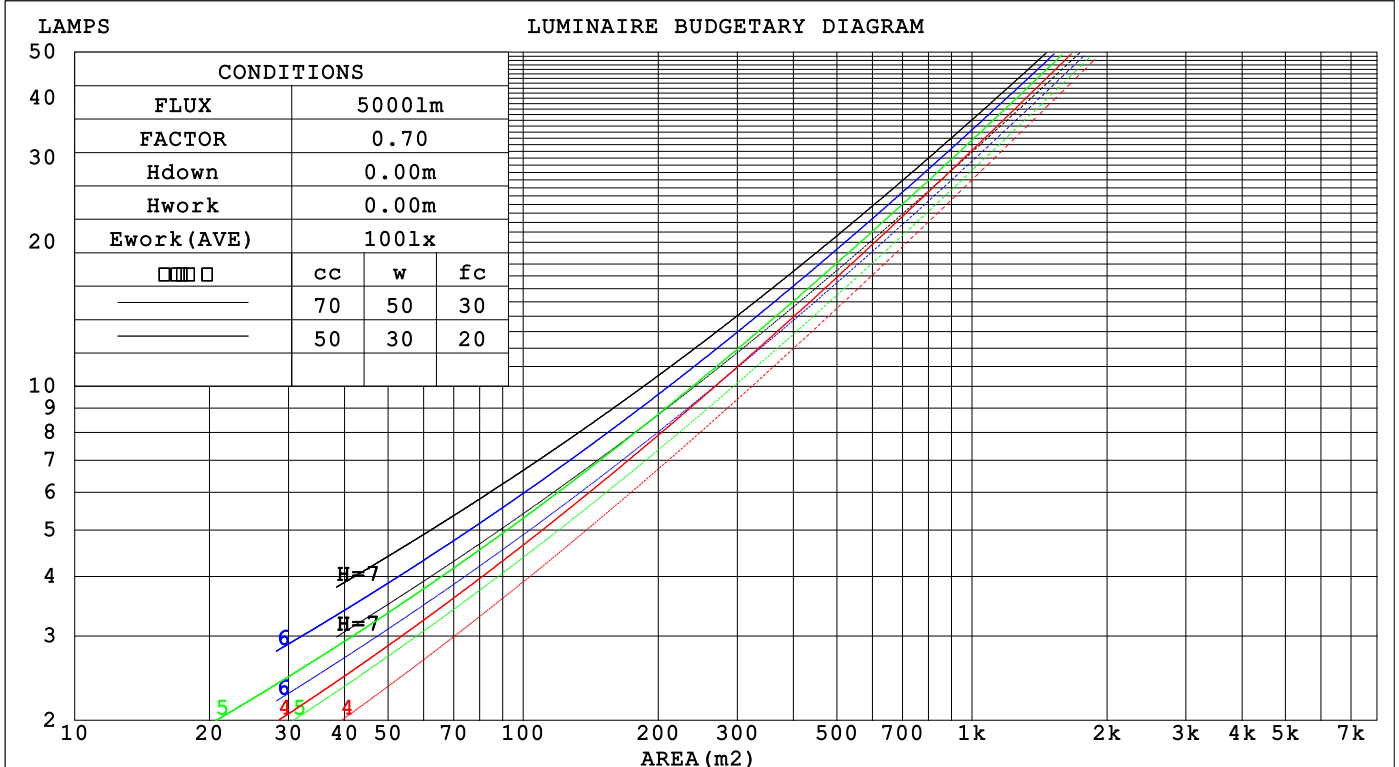

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

□ Range: 0 - 180DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.0938]
 Remarks:

WEC AND CCEC

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.269	.153	.048	.262	.149	.047	.248	.142	.045	.236	.136	.044	.225	.130	.042	
2.0	.261	.143	.044	.255	.140	.043	.243	.135	.042	.233	.131	.041	.223	.126	.040	
3.0	.247	.131	.039	.242	.129	.039	.231	.125	.038	.222	.122	.037	.213	.118	.036	
4.0	.232	.120	.035	.227	.119	.035	.218	.115	.034	.209	.112	.034	.201	.109	.033	
5.0	.217	.110	.032	.212	.109	.032	.204	.106	.031	.197	.104	.031	.190	.101	.030	
6.0	.203	.102	.029	.199	.100	.029	.192	.098	.029	.185	.096	.028	.179	.094	.028	
7.0	.190	.094	.027	.186	.093	.026	.180	.091	.026	.174	.089	.026	.168	.087	.026	
8.0	.178	.087	.024	.175	.086	.024	.169	.085	.024	.164	.083	.024	.159	.082	.024	
9.0	.168	.081	.023	.165	.080	.023	.160	.079	.022	.155	.078	.022	.150	.076	.022	
10.0	.158	.076	.021	.156	.075	.021	.151	.074	.021	.147	.073	.021	.143	.072	.021	

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.194	.194	.194	.165	.165	.165	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.181	.160	.141	.155	.137	.121	.106	.094	.084	.061	.055	.049	.019	.018	.016	
2.0	.171	.135	.105	.147	.116	.091	.101	.081	.063	.058	.047	.037	.019	.015	.012	
3.0	.163	.117	.081	.140	.101	.070	.096	.070	.049	.055	.041	.029	.018	.013	.009	
4.0	.156	.104	.064	.134	.090	.056	.092	.063	.039	.053	.037	.023	.017	.012	.008	
5.0	.149	.093	.052	.128	.081	.046	.088	.056	.032	.051	.033	.019	.016	.011	.006	
6.0	.142	.085	.044	.122	.073	.038	.084	.051	.027	.049	.030	.016	.016	.010	.005	
7.0	.135	.078	.038	.116	.068	.033	.080	.047	.023	.047	.028	.014	.015	.009	.005	
8.0	.129	.072	.033	.111	.063	.029	.077	.044	.020	.045	.026	.012	.014	.008	.004	
9.0	.123	.067	.029	.106	.058	.025	.074	.041	.018	.043	.024	.011	.014	.008	.004	
10.0	.118	.063	.026	.102	.055	.023	.071	.038	.016	.041	.023	.010	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.0938]
 Remarks:

UGR(Unified Glare Rating) Table

NAME: LED DOWNLIGHT		TYPE:					WEIGHT:				
SPEC.:		DIM.:					SERIAL No.:				
MFR.: ASD LIGHTING CORP		SUR.: 0.1*0.1					Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
x = 2H y = 2H	16.9	18.4	17.2	18.6	18.8	16.9	18.3	17.1	18.5	18.7	
3H	17.7	19.0	18.0	19.3	19.5	17.6	19.0	17.9	19.2	19.4	
4H	17.8	19.0	18.1	19.3	19.5	17.7	18.9	18.0	19.2	19.5	
6H	17.7	18.9	18.1	19.2	19.5	17.7	18.8	18.0	19.1	19.4	
8H	17.7	18.8	18.0	19.1	19.4	17.6	18.7	18.0	19.0	19.3	
12H	17.7	18.7	18.0	19.0	19.4	17.6	18.7	17.9	19.0	19.3	
4H 2H	17.4	18.7	17.7	18.9	19.2	17.4	18.6	17.7	18.9	19.1	
3H	18.3	19.4	18.7	19.7	20.0	18.3	19.3	18.6	19.6	19.9	
4H	18.5	19.4	18.8	19.8	20.1	18.4	19.4	18.8	19.7	20.0	
6H	18.4	19.3	18.8	19.7	20.0	18.4	19.2	18.8	19.6	19.9	
8H	18.4	19.2	18.8	19.6	20.0	18.3	19.1	18.8	19.5	19.9	
12H	18.4	19.1	18.8	19.5	19.9	18.3	19.1	18.8	19.4	19.9	
8H 4H	18.5	19.3	18.9	19.6	20.0	18.4	19.2	18.8	19.6	19.9	
6H	18.5	19.1	18.9	19.6	20.0	18.4	19.1	18.9	19.5	19.9	
8H	18.5	19.1	19.0	19.5	20.0	18.4	19.0	18.9	19.4	19.9	
12H	18.5	19.0	19.0	19.4	19.9	18.4	18.9	18.9	19.4	19.8	
12H 4H	18.4	19.2	18.9	19.5	20.0	18.4	19.1	18.8	19.5	19.9	
6H	18.5	19.0	18.9	19.5	19.9	18.4	19.0	18.8	19.4	19.8	
8H	18.5	19.0	19.0	19.4	19.9	18.4	18.9	18.9	19.3	19.8	
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H	+ 0.3 / - 0.4					+ 0.3 / - 0.4					
1.5H	+ 0.4 / - 0.6					+ 0.3 / - 0.6					
2.0H	+ 0.5 / - 0.7					+ 0.5 / - 0.7					

CIE Pub.117, 965.9 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.1)
 Area: 0.1 m2

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.0938]
 Remarks:

UTILIZATION FACTORS TABLE

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	60	49	43	60	49	42	58	48	42	36
0.80	71	60	53	70	59	53	68	59	52	46
1.00	79	69	62	78	69	62	76	70	62	55
1.25	87	77	70	85	76	70	82	75	69	62
1.50	91	82	76	90	82	76	87	80	75	67
2.00	98	90	85	96	89	84	93	87	82	75
2.50	101	94	89	99	93	88	96	90	86	78
3.00	104	98	94	102	97	92	98	94	90	82
4.00	108	103	99	106	101	98	102	98	95	86
5.00	110	106	102	108	104	101	103	100	98	89
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.0938]
 Remarks:

ISOCANDELA DIAGRAM

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

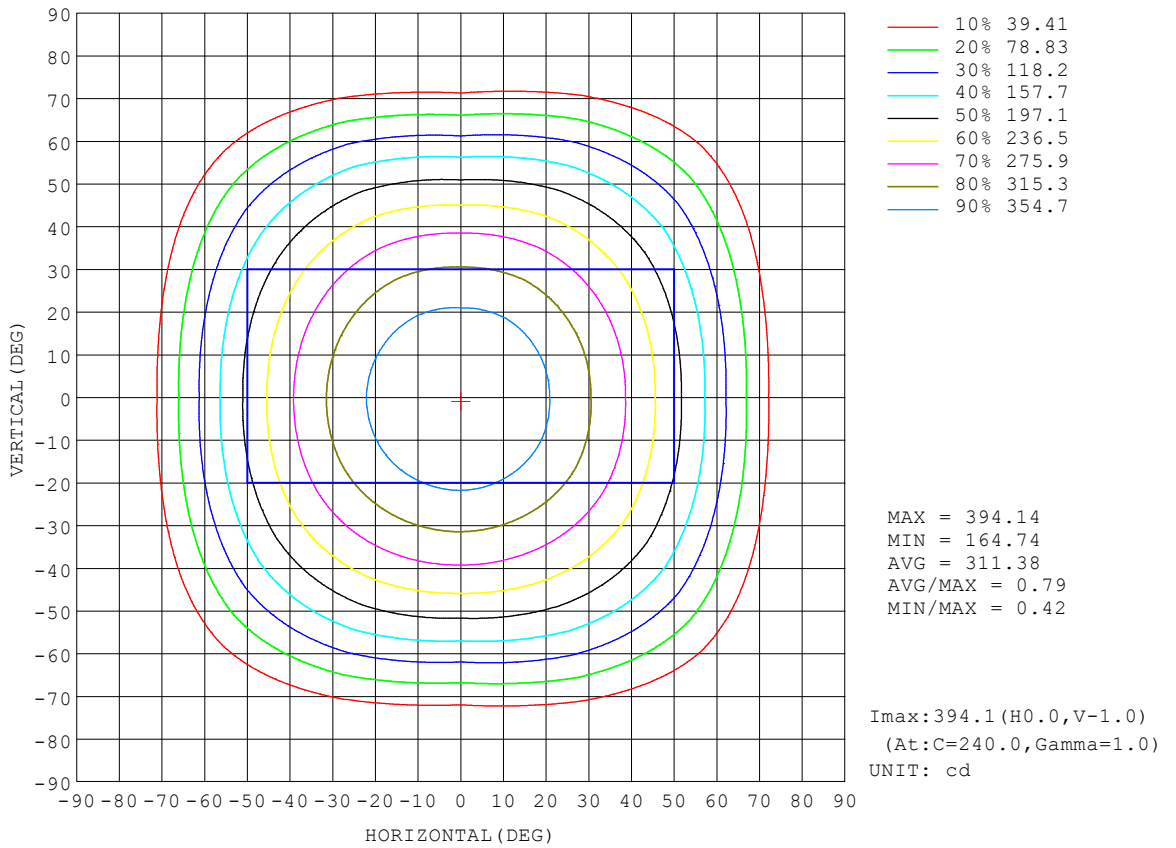


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.000m [K=1.0938]
 Remarks:

AAI Figure

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

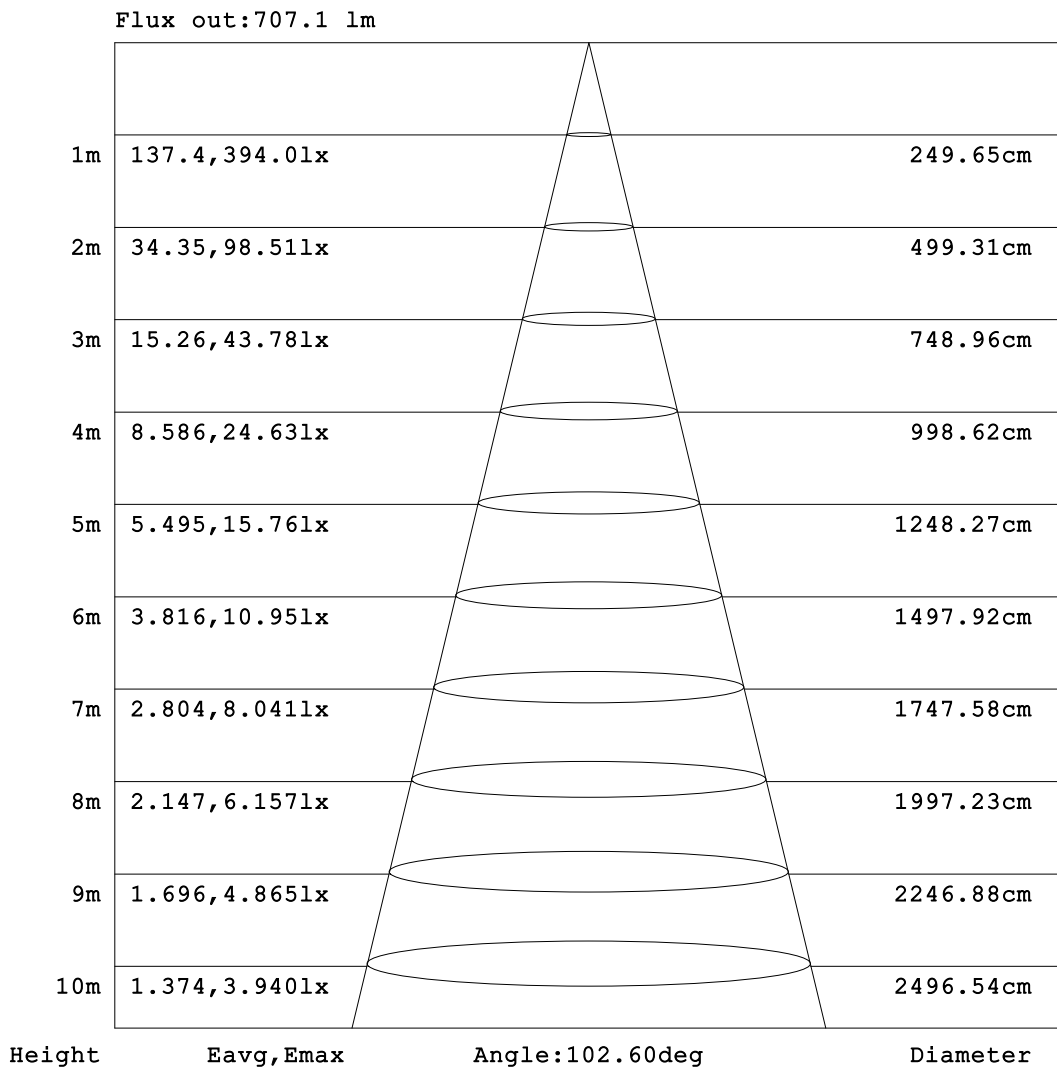


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.000m [K=1.0938]
 Remarks:

ISOLUX DIAGRAM

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

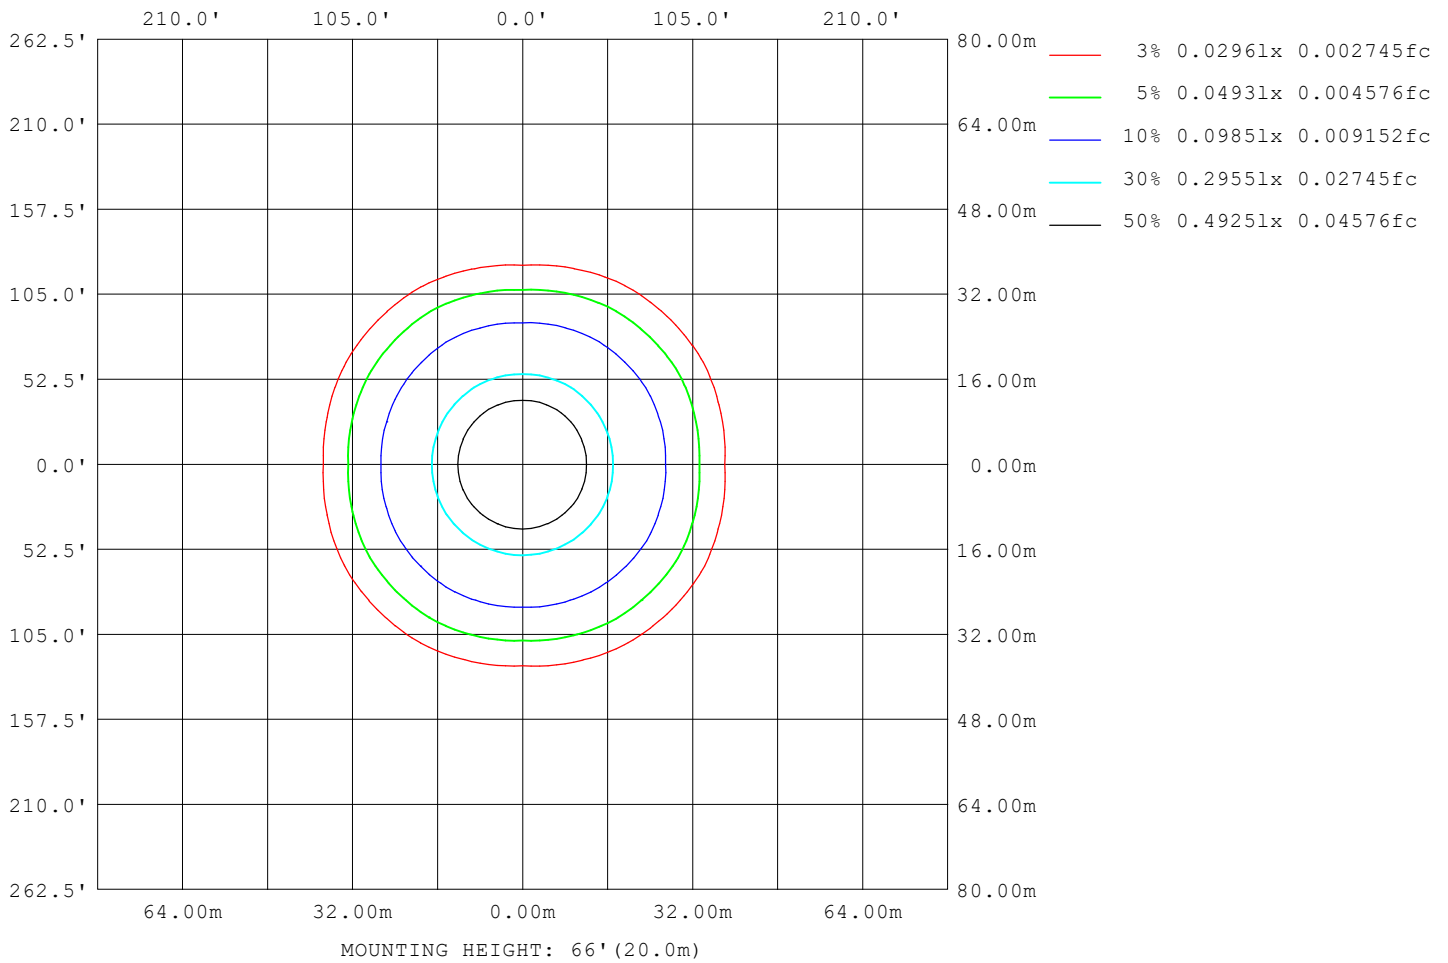

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.000m [K=1.0938]
 Remarks:

LED Avg.L Report

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	2150
L_0~180 (75) av	770
L_0~180 (85) av	463
L_90~270 (65) av	2138
L_90~270 (75) av	769
L_90~270 (85) av	475
L_45 (65) av	2505
L_45 (75) av	1050
L_45 (85) av	459

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.0938]
 Remarks:

Planar Illuminance Curve

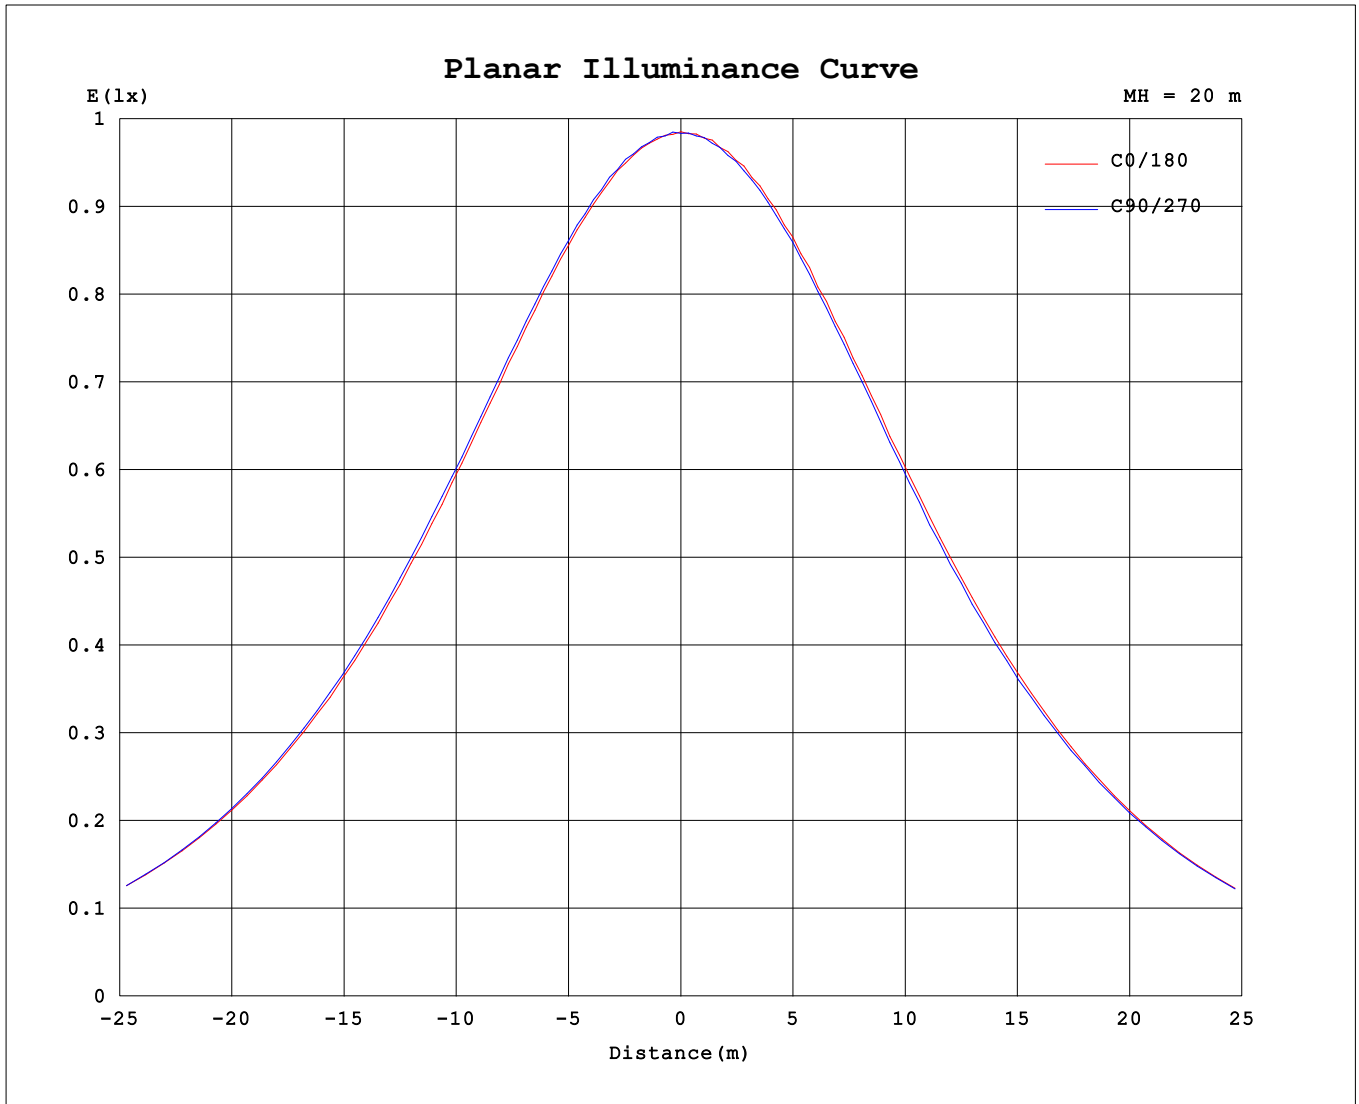

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.0938]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: LED DOWNLIGHT	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: 0.1*0.1	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ □ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	394	394	394	394	394	394	394	394	394	394	394	394							
5	391	391	392	392	390	391	391	392	393	392	390	390							
10	383	384	386	385	386	386	386	386	385	385	384	384							
15	372	374	374	376	375	376	375	375	376	373	373	372							
20	357	359	361	361	361	361	362	361	361	358	358	358							
25	339	342	342	343	343	344	342	342	343	339	340	339							
30	317	321	321	322	321	323	322	321	322	318	319	319							
35	294	298	298	298	298	299	298	297	298	293	296	295							
40	268	273	272	272	272	273	270	270	272	267	270	270							
45	240	245	245	242	245	245	239	242	243	236	242	243							
50	208	217	215	210	213	213	204	209	212	203	212	214							
55	174	185	182	173	180	178	168	176	178	167	179	182							
60	135	150	147	134	144	142	128	139	141	128	143	147							
65	94.3	110	108	93.5	103	102	87.4	99.1	100	87.2	104	108							
70	54.4	67.8	66.5	53.8	62.0	60.5	47.6	57.5	58.9	48.2	63.3	65.6							
75	22.6	30.3	29.0	21.6	26.0	24.3	17.3	22.3	23.8	18.2	26.8	28.5							
80	9.87	10.7	10.6	9.99	9.97	9.53	8.67	9.14	9.53	8.88	10.1	10.3							
85	4.44	4.84	4.70	4.54	4.17	3.92	3.63	2.87	3.84	3.74	4.32	3.44							
90	0.16	0.03	0.03	0.00	0.07	0.00	0.00	0.02	0.01	0.00	0.00	0.00							
95	0.04	0.08	0.03	0.06	0.09	0.01	0.06	0.03	0.06	0.00	0.03	0.00							
100	0.13	0.18	0.13	0.15	0.19	0.08	0.16	0.12	0.13	0.09	0.12	0.09							
105	0.26	0.29	0.26	0.25	0.31	0.16	0.25	0.23	0.23	0.19	0.22	0.19							
110	0.37	0.42	0.37	0.38	0.45	0.26	0.37	0.34	0.35	0.31	0.32	0.30							
115	0.52	0.54	0.50	0.51	0.58	0.35	0.48	0.47	0.47	0.43	0.46	0.41							
120	0.66	0.68	0.62	0.64	0.72	0.46	0.60	0.61	0.59	0.55	0.57	0.51							
125	0.80	0.83	0.75	0.78	0.84	0.58	0.73	0.75	0.71	0.69	0.69	0.61							
130	0.93	0.94	0.87	0.91	0.96	0.67	0.86	0.89	0.82	0.80	0.78	0.71							
135	1.03	1.04	0.98	1.01	1.08	0.74	0.96	0.98	0.92	0.89	0.87	0.81							
140	1.11	1.13	1.07	1.10	1.18	0.83	1.03	1.07	1.02	0.99	0.99	0.89							
145	1.19	1.21	1.14	1.17	1.26	0.92	1.10	1.16	1.10	1.07	1.09	0.96							
150	1.25	1.28	1.20	1.23	1.31	1.01	1.17	1.21	1.15	1.13	1.18	1.02							
155	1.32	1.34	1.25	1.31	1.37	1.09	1.27	1.27	1.26	1.21	1.28	1.07							
160	1.36	1.37	1.30	1.36	1.41	1.18	1.38	1.36	1.37	1.33	1.43	1.09							
165	1.39	1.38	1.38	1.44	1.46	1.28	1.44	1.43	1.46	1.41	1.45	1.15							
170	1.47	1.43	1.44	1.50	1.51	1.37	1.53	1.51	1.50	1.47	1.47	1.23							
175	1.52	1.60	1.54	1.56	1.57	1.44	1.58	1.59	1.57	1.55	1.58	1.37							
180	1.62	1.60	1.63	1.60	1.58	1.54	1.61	1.61	1.60	1.61	1.61	1.49							

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-08-06

□ Range: 0 - 180DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.000m [K=1.0938]
 Remarks: