
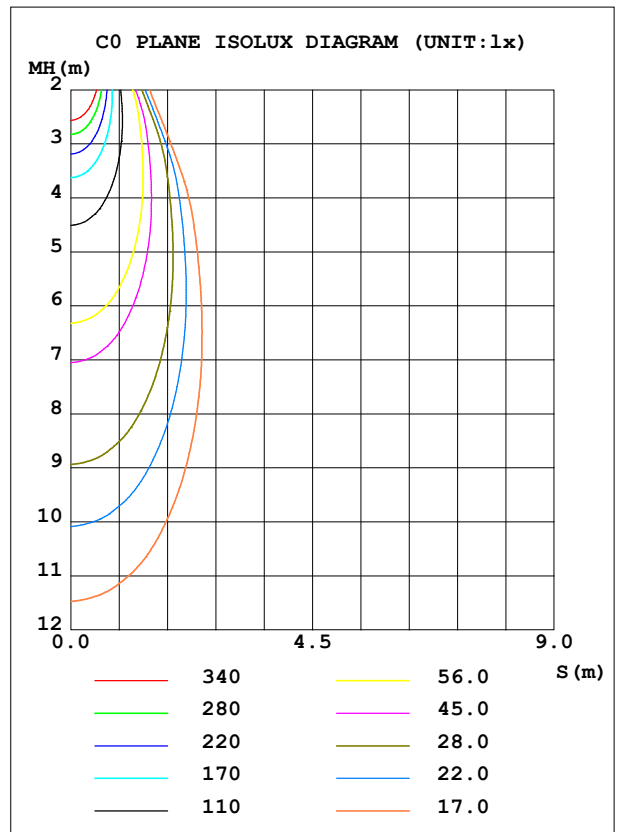


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.85V I:0.1162A P:13.559W PF:0.9733 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1081.48x1 lm		
NAME: ASD-CD-PR-MV-2D15AC-WH	TYPE:	WEIGHT:
SPEC.: 4000K 90	DIM.:	SERIAL No.:
MFR.:ASD Lighting Corp	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL		Imax (cd)	2246	S/MH (C0/180)	0.60
NOMINAL POWER (W)	15	LOR (%)	100.0	S/MH (C90/270)	0.58
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	1081.5	η UP, DN (C0-180)	0.0, 50.8
NOMINAL FLUX (lm)	1081.48	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 49.2
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	120	η down (%)	100.0	CIBSE SHR MAX	0.65

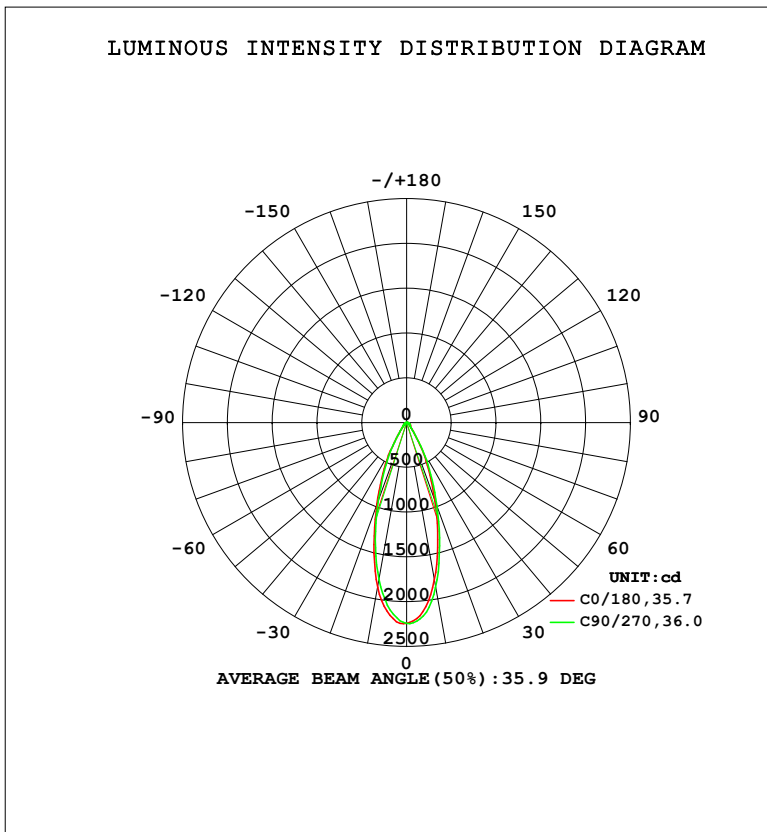

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2022-10-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	1787	1867	1868	1861	1870	1781	1782	1788	0- 10	193.9	193.9	17.9,17.9
20	923.0	986.9	995.3	965.8	971.6	926.8	919.6	942.1	10- 20	379.4	573.4	53,53
30	343.3	371.9	367.4	360.5	364.5	330.6	347.3	378.2	20- 30	283.6	856.9	79.2,79.2
40	88.33	92.40	87.45	84.06	84.99	85.34	88.06	92.72	30- 40	109.4	966.3	89.4,89.4
50	47.07	47.02	46.12	45.41	46.10	45.53	47.28	48.11	40- 50	47.32	1014	93.7,93.7
60	28.30	28.08	26.92	26.36	26.93	26.88	28.21	28.96	50- 60	32.47	1046	96.7,96.7
70	15.69	15.97	15.46	15.20	15.37	14.89	15.56	16.04	60- 70	21.21	1067	98.7,98.7
80	6.168	6.521	6.306	6.145	6.229	5.825	6.088	6.341	70- 80	11.17	1078	99.7,99.7
90	0.1032	0.0715	0.0800	0.0728	0.0886	0.0570	0.0547	0.0550	80- 90	2.985	1081	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-10-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.85V I:0.1162A P:13.559W PF:0.9733 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1081.48x1 lm		
NAME: ASD-CD-PR-MV-2D15AC-WH	TYPE:	WEIGHT:
SPEC.: 4000K 90	DIM.:	SERIAL No.:
MFR.:ASD Lighting Corp	SUR.:	Shielding Angle:

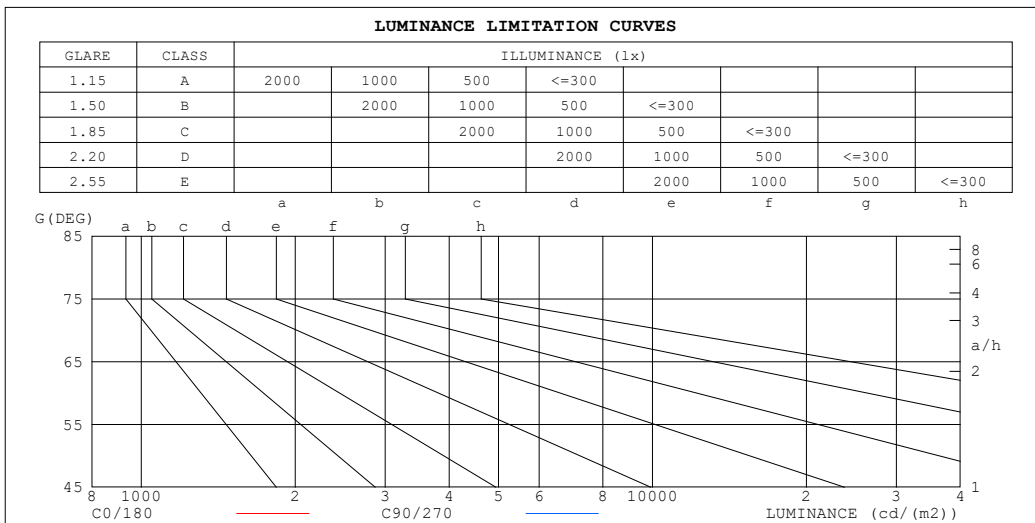

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	272	290
80	319	327
75	363	365
70	413	407
65	465	449
60	509	485
55	574	546
50	659	646
45	740	745


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-10-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.85V I:0.1162A P:13.559W PF:0.9733 Freq:59.98Hz		
UTHdi:0.00% ITHdi:0.00% KDisp:0 Lamp Flux:1081.48x1 lm		
NAME: ASD-CD-PR-MV-2D15AC-WH	TYPE:	WEIGHT:
SPEC.: 4000K 90	DIM.:	SERIAL No.:
MFR.:ASD Lighting Corp	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.11	1.08	1.06	1.09	1.06	1.04	1.05	1.03	1.01	1.01	.99	.98	.97	.96	.95	.94
2.0	1.03	.99	.96	1.02	.98	.95	.98	.95	.93	.95	.93	.91	.93	.91	.89	.87
3.0	.97	.92	.88	.96	.91	.88	.93	.89	.86	.91	.87	.85	.88	.86	.84	.82
4.0	.91	.86	.82	.90	.85	.81	.88	.84	.80	.86	.82	.80	.84	.81	.79	.77
5.0	.86	.81	.77	.85	.80	.76	.83	.79	.76	.82	.78	.75	.80	.77	.74	.73
6.0	.82	.76	.72	.81	.76	.72	.79	.75	.71	.78	.74	.71	.77	.73	.70	.69
7.0	.78	.72	.68	.77	.72	.68	.76	.71	.68	.75	.70	.67	.73	.70	.67	.66
8.0	.74	.68	.65	.73	.68	.65	.72	.68	.64	.71	.67	.64	.70	.67	.64	.62
9.0	.71	.65	.62	.70	.65	.61	.69	.65	.61	.68	.64	.61	.68	.64	.61	.60
10.0	.68	.62	.59	.67	.62	.59	.66	.62	.59	.66	.61	.58	.65	.61	.58	.57

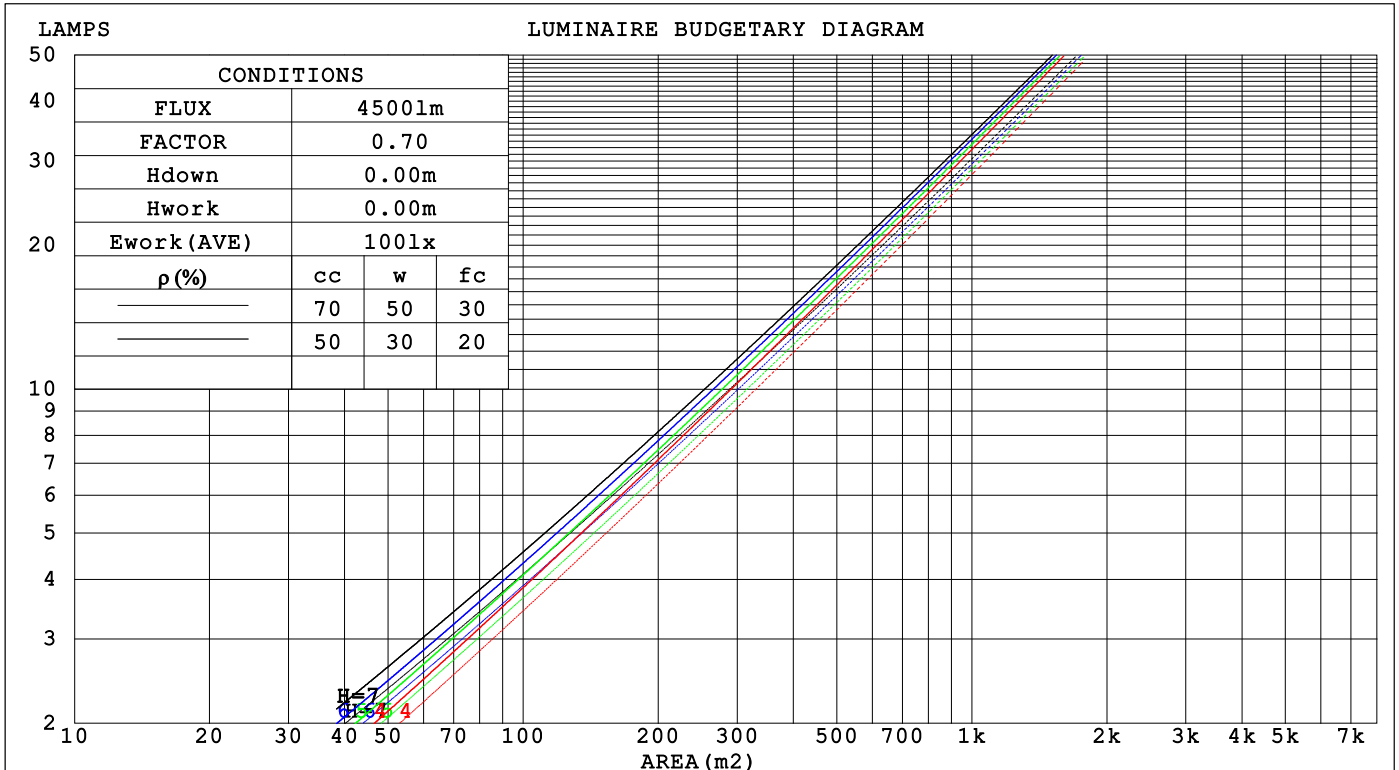

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-10-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.85V I:0.1162A P:13.559W PF:0.9733 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1081.48x1 lm		
NAME: ASD-CD-PR-MV-2D15AC-WH	TYPE:	WEIGHT:
SPEC.: 4000K 90	DIM.:	SERIAL No.:
MFR.:ASD Lighting Corp	SUR.:	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.178	.101	.032	.171	.098	.031	.159	.091	.029	.147	.085	.027	.136	.079	.025	
2.0	.168	.092	.028	.162	.089	.028	.152	.084	.026	.142	.080	.025	.133	.075	.024	
3.0	.158	.084	.025	.153	.082	.025	.144	.078	.024	.136	.074	.023	.128	.071	.022	
4.0	.148	.077	.023	.144	.075	.022	.137	.072	.022	.129	.069	.021	.123	.067	.020	
5.0	.140	.071	.021	.136	.070	.020	.130	.068	.020	.123	.065	.019	.118	.063	.019	
6.0	.132	.066	.019	.129	.065	.019	.124	.063	.018	.118	.061	.018	.113	.059	.018	
7.0	.126	.062	.018	.123	.061	.017	.118	.060	.017	.113	.058	.017	.108	.056	.017	
8.0	.120	.058	.016	.117	.058	.016	.113	.056	.016	.108	.055	.016	.104	.054	.016	
9.0	.114	.055	.015	.112	.055	.015	.108	.053	.015	.104	.052	.015	.100	.051	.015	
10.0	.109	.052	.015	.107	.052	.014	.104	.051	.014	.100	.050	.014	.097	.049	.014	

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.171	.157	.145	.146	.135	.125	.100	.093	.086	.058	.054	.050	.018	.017	.016	
2.0	.156	.133	.113	.133	.114	.098	.091	.079	.068	.053	.046	.040	.017	.015	.013	
3.0	.143	.114	.090	.122	.098	.078	.084	.068	.055	.049	.040	.032	.016	.013	.011	
4.0	.132	.099	.073	.113	.085	.064	.078	.059	.045	.045	.035	.027	.014	.011	.009	
5.0	.123	.087	.061	.105	.075	.053	.073	.053	.037	.042	.031	.022	.014	.010	.007	
6.0	.115	.078	.051	.099	.067	.044	.068	.047	.031	.039	.028	.019	.013	.009	.006	
7.0	.108	.070	.043	.093	.061	.038	.064	.042	.027	.037	.025	.016	.012	.008	.005	
8.0	.102	.063	.037	.088	.055	.032	.061	.039	.023	.035	.023	.014	.011	.007	.005	
9.0	.096	.058	.032	.083	.050	.028	.057	.035	.020	.033	.021	.012	.011	.007	.004	
10.0	.092	.054	.028	.079	.047	.025	.055	.033	.018	.032	.019	.010	.010	.006	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-10-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.85V I:0.1162A P:13.559W PF:0.9733 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1081.48x1 lm										
NAME: ASD-CD-PR-MV-2D15AC-WH					TYPE:			WEIGHT:		
SPEC.: 4000K 90					DIM.:			SERIAL No.:		
MFR.:ASD Lighting Corp					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	6.2	7.1	6.4	7.3	7.4	6.3	7.2	6.5	7.3	7.5
3H	7.0	7.8	7.3	8.0	8.2	7.0	7.8	7.3	8.0	8.2
4H	7.3	8.1	7.6	8.3	8.5	7.3	8.1	7.6	8.3	8.6
6H	7.5	8.3	7.8	8.5	8.8	7.6	8.3	7.9	8.5	8.8
8H	7.6	8.3	7.9	8.6	8.8	7.6	8.3	7.9	8.6	8.9
12H	7.6	8.3	8.0	8.6	8.9	7.7	8.4	8.0	8.6	8.9
4H 2H	6.5	7.3	6.8	7.5	7.7	6.6	7.3	6.8	7.6	7.8
3H	7.5	8.2	7.8	8.4	8.7	7.5	8.2	7.8	8.4	8.7
4H	7.9	8.5	8.3	8.8	9.1	7.9	8.5	8.3	8.8	9.2
6H	8.2	8.8	8.6	9.1	9.5	8.3	8.8	8.6	9.1	9.5
8H	8.3	8.9	8.7	9.2	9.6	8.4	8.9	8.8	9.2	9.6
12H	8.4	8.9	8.8	9.2	9.6	8.5	8.9	8.9	9.3	9.7
8H 4H	8.0	8.6	8.4	8.9	9.3	8.1	8.6	8.4	8.9	9.3
6H	8.5	8.9	8.9	9.3	9.7	8.5	8.9	8.9	9.3	9.7
8H	8.6	9.0	9.1	9.4	9.9	8.7	9.1	9.1	9.5	9.9
12H	8.8	9.1	9.2	9.5	10.0	8.8	9.1	9.3	9.6	10.1
12H 4H	8.0	8.5	8.4	8.9	9.3	8.0	8.5	8.5	8.9	9.3
6H	8.5	8.9	8.9	9.3	9.7	8.5	8.9	9.0	9.3	9.8
8H	8.7	9.0	9.2	9.5	9.9	8.7	9.1	9.2	9.5	10.0
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.5 / - 0.6					+ 0.5 / - 0.6				
1.5H	+ 0.8 / - 0.4					+ 0.9 / - 0.4				
2.0H	+ 0.5 / - 0.5					+ 0.6 / - 0.6				

CIE Pub.117, 1081 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 0.3)
 Area: 0.111111 m2

C Range: 0 - 360DEG	γ Range: 0 - 90DEG
C Interval: 22.5DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
Temperature:25.3°C	Humidity:65.0%
Operators:	Test Distance:3.090m [K=1.0000]
Test Date:2022-10-14	Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.85V I:0.1162A P:13.559W PF:0.9733 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1081.48x1 lm		
NAME: ASD-CD-PR-MV-2D15AC-WH	TYPE:	WEIGHT:
SPEC.: 4000K 90	DIM.:	SERIAL No.:
MFR.:ASD Lighting Corp	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	85	78	74	84	78	74	84	78	74	70
0.80	93	86	82	92	86	82	91	85	82	78
1.00	97	91	87	96	91	87	95	91	86	82
1.25	101	96	92	100	95	92	98	94	91	86
1.50	104	99	95	103	98	95	101	97	94	89
2.00	107	103	99	106	102	98	103	100	97	92
2.50	109	105	102	108	104	101	104	101	99	93
3.00	111	107	104	109	106	103	106	103	101	94
4.00	113	110	108	111	108	106	107	105	104	96
5.00	114	112	110	112	110	108	108	107	105	98
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-10-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.85V I:0.1162A P:13.559W PF:0.9733 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1081.48x1 lm		
NAME: ASD-CD-PR-MV-2D15AC-WH	TYPE:	WEIGHT:
SPEC.: 4000K 90	DIM.:	SERIAL No.:
MFR.:ASD Lighting Corp	SUR.:	Shielding Angle:

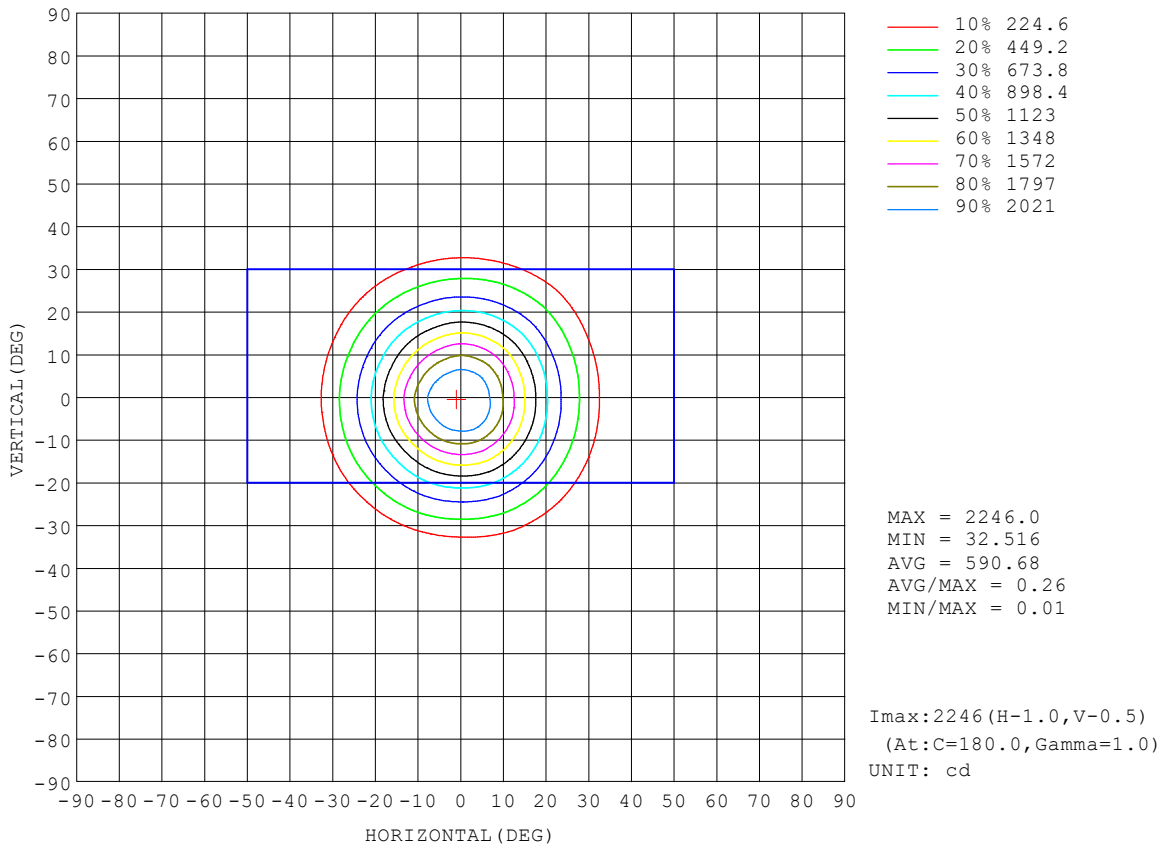


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-10-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

AAI Figure

Test:U:119.85V I:0.1162A P:13.559W PF:0.9733 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1081.48x1 lm		
NAME: ASD-CD-PR-MV-2D15AC-WH	TYPE:	WEIGHT:
SPEC.: 4000K 90	DIM.:	SERIAL No.:
MFR.:ASD Lighting Corp	SUR.:	Shielding Angle:

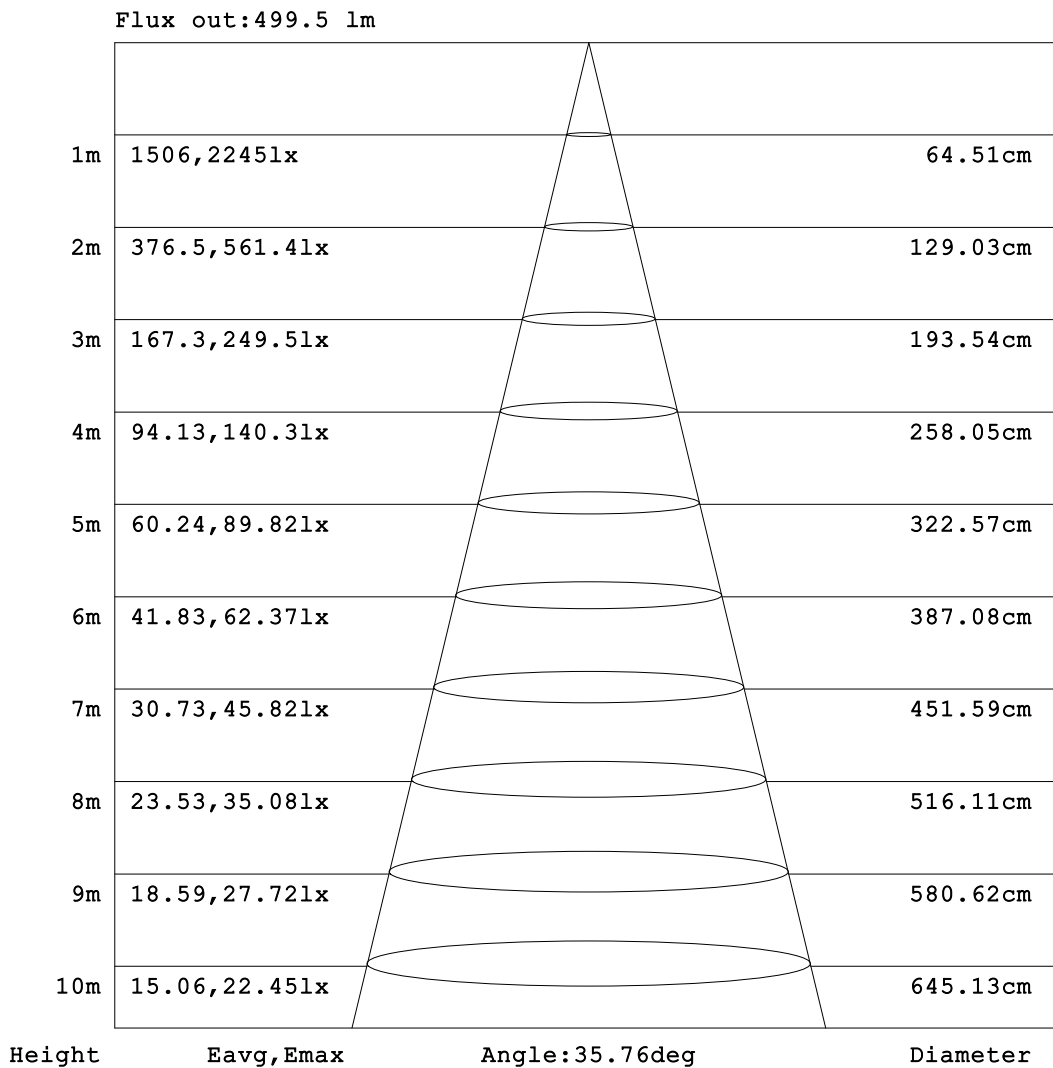


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-10-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.85V I:0.1162A P:13.559W PF:0.9733 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1081.48x1 lm		
NAME: ASD-CD-PR-MV-2D15AC-WH	TYPE:	WEIGHT:
SPEC.: 4000K 90	DIM.:	SERIAL No.:
MFR.:ASD Lighting Corp	SUR.:	Shielding Angle:

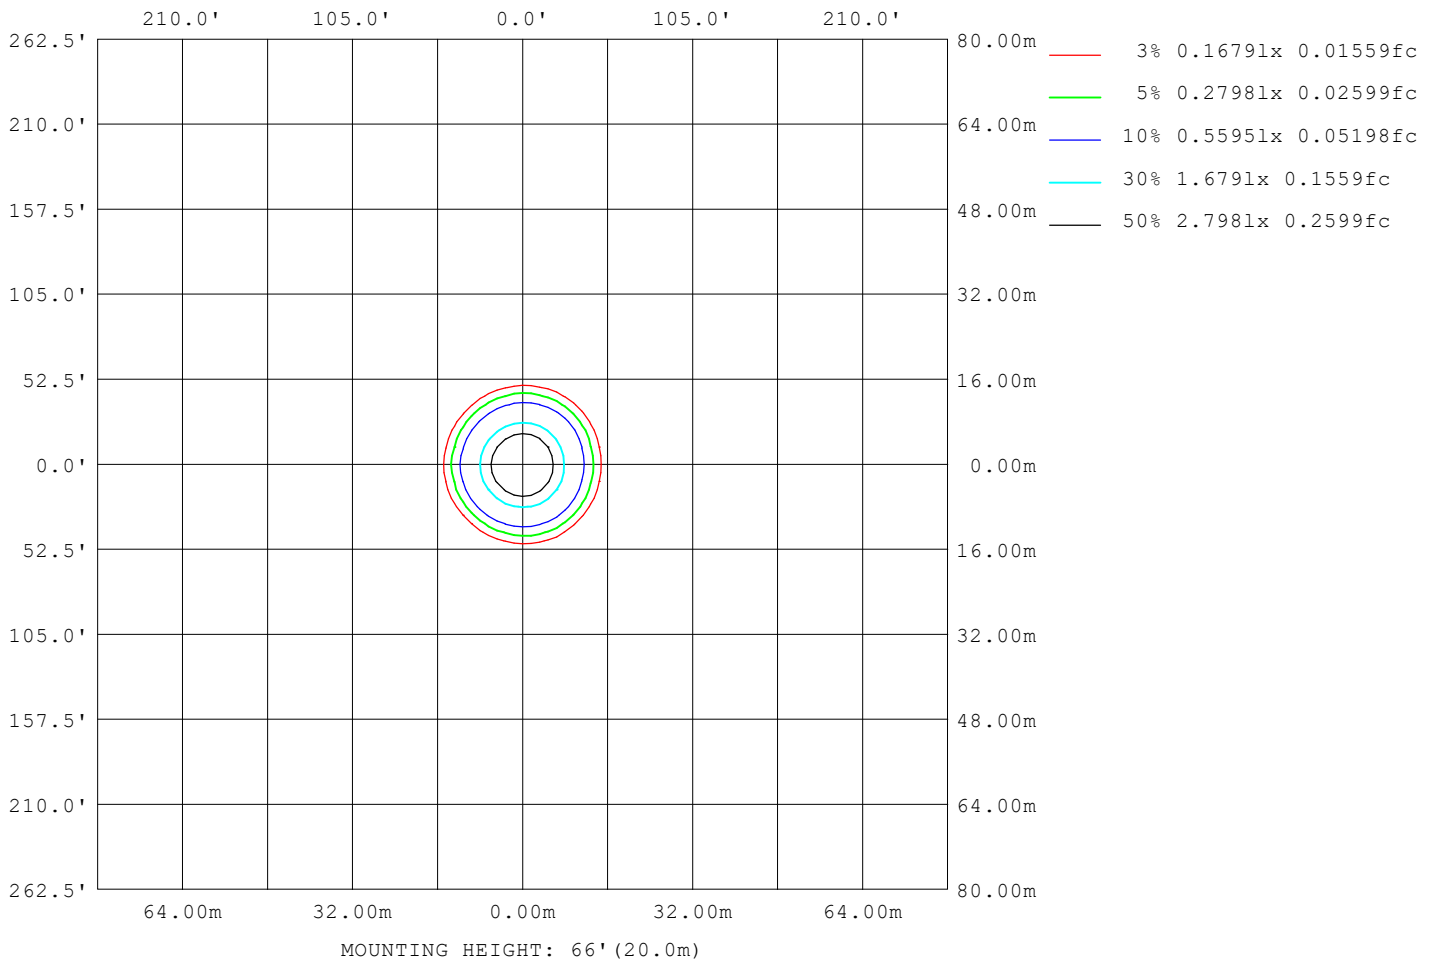

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-10-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:119.85V I:0.1162A P:13.559W PF:0.9733 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1081.48x1 lm		
NAME: ASD-CD-PR-MV-2D15AC-WH	TYPE:	WEIGHT:
SPEC.: 4000K 90	DIM.:	SERIAL No.:
MFR.:ASD Lighting Corp	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	456
L_0~180 (75) av	363
L_0~180 (85) av	276
L_90~270 (65) av	455
L_90~270 (75) av	363
L_90~270 (85) av	277
L_45 (65) av	456
L_45 (75) av	363
L_45 (85) av	276

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:
 Test Date:2022-10-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

Planar Illuminance Curve

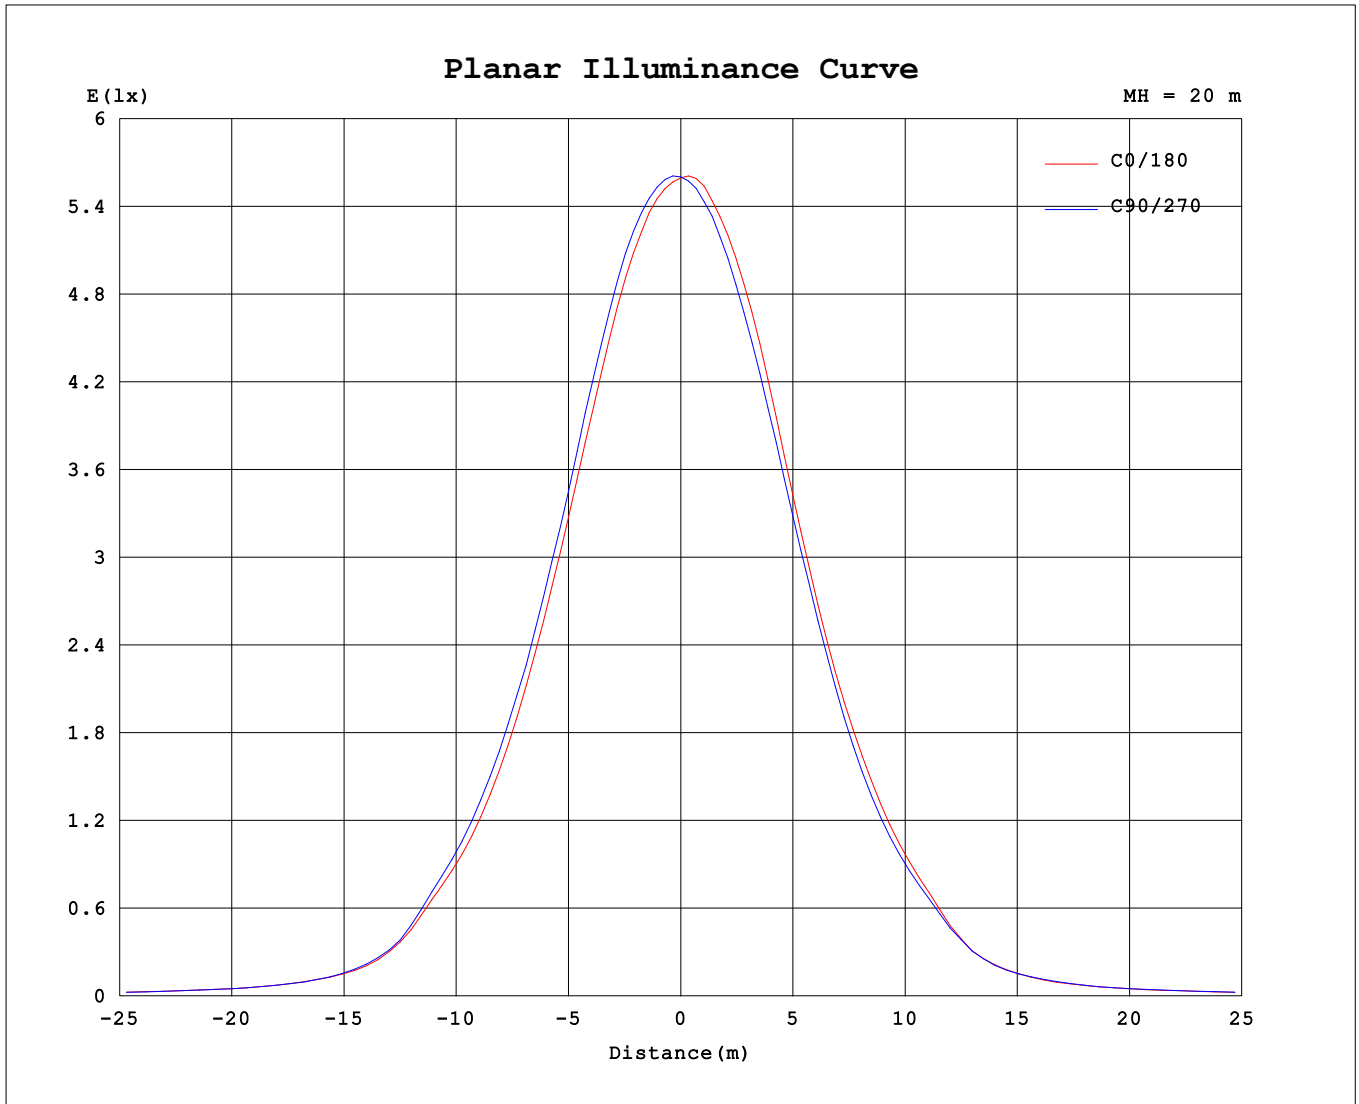

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2022-10-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.85V I:0.1162A P:13.559W PF:0.9733 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1081.48x1 lm		
NAME: ASD-CD-PR-MV-2D15AC-WH	TYPE:	WEIGHT:
SPEC.: 4000K 90	DIM.:	SERIAL No.:
MFR.:ASD Lighting Corp	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5				
0	2240	2240	2240	2240	2240	2240	2240	2240	2240	2240	2240	2240	2240	2240	2240	2240				
5	2116	2141	2164	2173	2166	2165	2153	2160	2159	2134	2112	2095	2101	2103	2112	2113				
10	1787	1832	1867	1884	1868	1868	1861	1865	1870	1812	1781	1766	1782	1781	1788	1785				
15	1350	1386	1419	1443	1425	1416	1401	1417	1412	1361	1342	1332	1352	1359	1367	1349				
20	923	955	987	1011	995	990	966	976	972	936	927	910	920	934	942	924				
25	587	608	640	658	641	643	631	637	630	605	593	578	586	598	610	590				
30	343	354	372	383	367	368	360	367	365	340	331	331	347	365	378	355				
35	152	156	165	169	161	157	151	155	156	150	148	149	153	161	163	155				
40	88.3	90.0	92.4	92.8	87.4	85.9	84.1	84.4	85.0	84.0	85.3	85.9	88.1	91.1	92.7	88.9				
45	58.2	59.5	60.4	60.5	58.5	58.2	57.5	57.8	57.8	57.3	57.3	57.4	58.0	58.5	58.8	57.9				
50	47.1	47.0	47.0	46.9	46.1	45.8	45.4	45.8	46.1	45.6	45.5	46.0	47.3	47.9	48.1	47.4				
55	36.6	36.4	36.2	35.8	34.8	34.4	34.2	34.6	35.0	34.6	34.9	35.7	37.0	37.7	38.2	37.4				
60	28.3	28.3	28.1	27.7	26.9	26.6	26.4	26.6	26.9	26.8	26.9	27.3	28.2	28.7	29.0	28.6				
65	21.9	22.0	21.9	21.6	21.1	20.8	20.7	20.8	21.0	20.7	20.7	21.0	21.6	22.2	22.4	22.1				
70	15.7	15.8	16.0	15.8	15.5	15.3	15.2	15.3	15.4	15.0	14.9	15.1	15.6	16.0	16.0	15.9				
75	10.5	10.7	10.8	10.8	10.5	10.4	10.3	10.4	10.4	10.1	9.97	10.00	10.4	10.6	10.7	10.5				
80	6.17	6.36	6.52	6.53	6.31	6.23	6.14	6.24	6.23	5.98	5.83	5.81	6.09	6.24	6.34	6.20				
85	2.64	2.82	2.97	2.98	2.81	2.71	2.63	2.68	2.71	2.42	2.38	2.37	2.56	2.66	2.73	2.64				
90	0.10	0.07	0.07	0.07	0.08	0.08	0.07	0.08	0.09	0.11	0.06	0.06	0.05	0.05	0.06	0.06				

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-10-14
 γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks: