
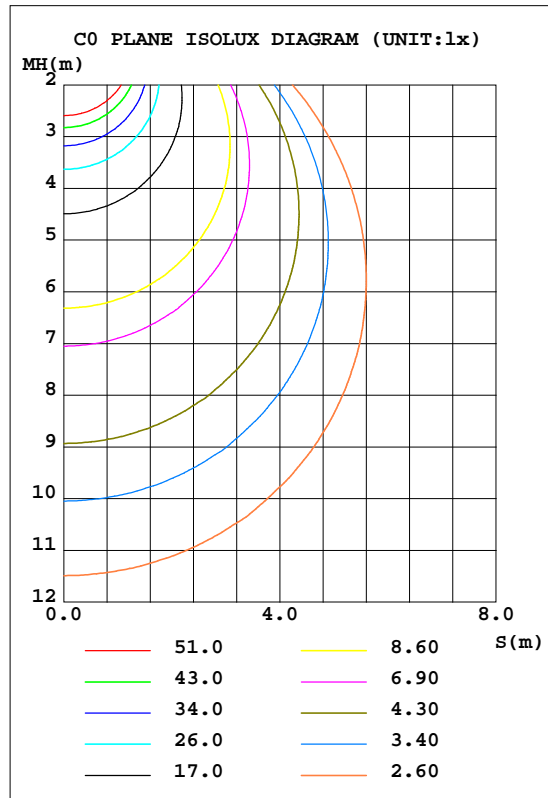


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.96V I:0.1559A P:14.767W PF:0.8219 Freq:60.00Hz Lamp Flux:1050x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: $\phi 0.14$	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 71.11 lm/W			
MODEL	ASD-LDS-6N15AC-MawHcd(2700K)	343.5	S/MH(C0/180)	1.26	
NOMINAL POWER(W)	15	LOR(%)	100.0	S/MH(C90/270)	1.25
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	1050	h UP, DN(C0-180)	1.2,49.0
NOMINAL FLUX(lm)	1050	CIE CLASS	DIRECT	h UP, DN(C180-360)	1.1,48.7
LAMPS INSIDE	1	h up(%)	2.3	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	h down(%)	97.7	CIBSE SHR MAX	1.35

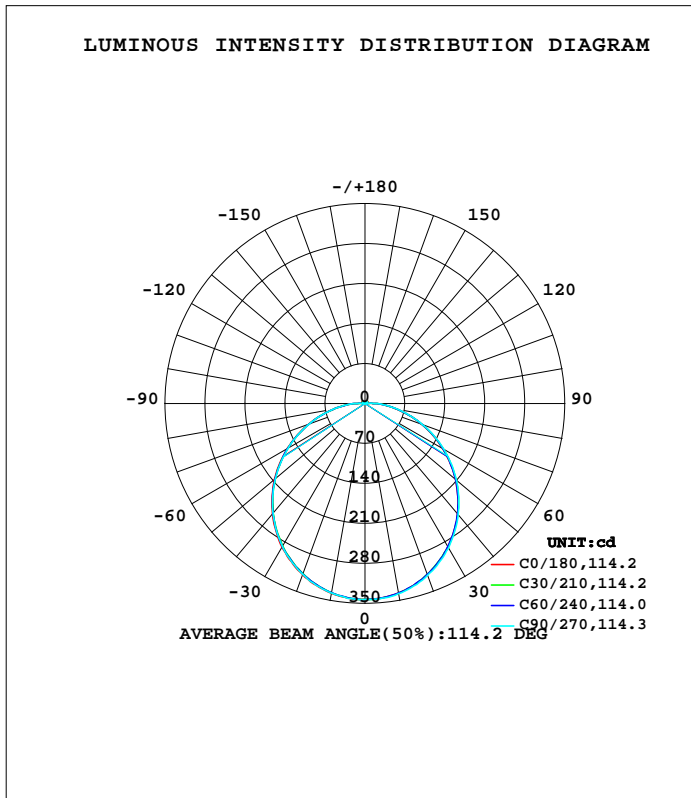

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-06-16

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=0.9540]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	337.1	337.1	338.3	337.3	337.4	336.6	336.9	336.3	0- 10	32.47	32.47	3.08,3.08
20	319.0	318.7	320.6	318.3	319.2	317.7	318.8	318.1	10- 20	92.92	125.4	11.9,11.9
30	290.3	290.3	292.5	289.6	290.5	288.7	289.0	289.7	20- 30	140.7	266.1	25.3,25.3
40	252.1	252.4	254.2	251.7	252.2	250.6	250.6	251.7	30- 40	170.1	436.2	41.4,41.4
50	207.0	207.6	209.2	206.6	207.0	205.4	204.9	206.7	40- 50	177.5	613.7	58.3,58.3
60	156.7	157.6	159.1	156.3	156.8	155.5	154.6	156.7	50- 60	162.8	776.5	73.8,73.8
70	105.2	105.7	106.6	104.3	104.2	103.4	103.2	104.8	60- 70	129.5	906.0	86.1,86.1
80	55.89	56.40	57.14	55.04	54.54	54.19	54.09	55.62	70- 80	83.84	989.8	94,94
90	18.10	19.37	19.70	18.49	18.01	16.47	17.87	18.51	80- 90	38.56	1028	97.7,97.7
100	1.198	1.229	0.9189	1.049	3.046	0.8885	0.4276	0.7689	90-100	8.084	1036	98.4,98.4
110	2.761	2.190	1.211	1.955	2.981	2.209	1.472	1.872	100-110	1.380	1038	98.6,98.6
120	5.388	4.344	2.704	4.223	6.042	4.165	2.639	3.833	110-120	3.148	1041	98.9,98.9
130	6.303	5.211	4.394	5.591	6.632	4.969	4.238	5.344	120-130	4.395	1045	99.3,99.3
140	5.338	3.965	4.126	4.420	5.322	3.372	3.860	4.420	130-140	3.774	1049	99.7,99.7
150	2.539	1.298	1.966	1.406	2.804	1.348	2.291	1.461	140-150	1.958	1051	99.8,99.8
160	1.376	2.688	2.154	2.607	1.868	2.083	1.989	2.611	150-160	0.7982	1052	99.9,99.9
170	2.662	1.492	1.429	1.619	2.809	1.925	1.768	1.650	160-170	0.7164	1053	100,100
180	1.498	1.513	1.497	1.477	1.493	1.522	1.497	1.510	170-180	0.1492	1053	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm			

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-06-16

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.700m [K=0.9540]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.96V I:0.1559A P:14.767W PF:0.8219 Freq:60.00Hz Lamp Flux:1050x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: $\phi 0.14$	Shielding Angle:

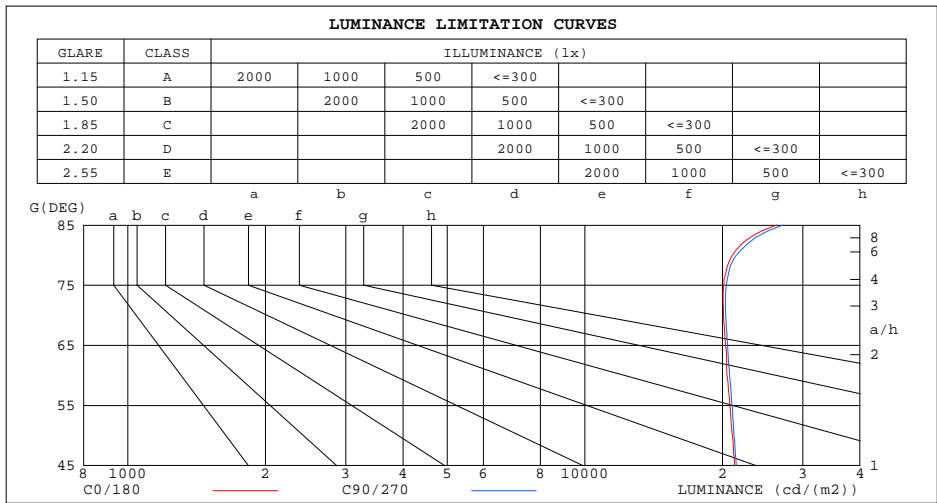

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	26274	27153
80	21038	21448
75	20134	20403
70	20108	20321
65	20347	20520
60	20484	20745
55	20766	20999
50	21045	21213
45	21280	21435


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-06-16

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=0.9540]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.96V I:0.1559A P:14.767W PF:0.8219 Freq:60.00Hz Lamp Flux:1050x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: $\phi 0.14$	Shielding Angle:

rcc	80%			70%			50%			30%			10%			0
r _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.10	1.10	1.10	1.05	1.05	1.05	.00	.00	.00	.98
1.0	1.02	.97	.93	.00	.95	.91	.95	.91	.88	.90	.88	.85	.86	.84	.82	.80
2.0	.88	.81	.75	.86	.80	.74	.82	.77	.72	.79	.74	.70	.75	.71	.68	.66
3.0	.77	.69	.62	.76	.68	.61	.72	.66	.60	.69	.63	.59	.66	.61	.57	.55
4.0	.68	.59	.52	.67	.58	.52	.64	.57	.51	.61	.55	.50	.59	.54	.49	.47
5.0	.61	.52	.45	.60	.51	.45	.57	.50	.44	.55	.48	.43	.53	.47	.42	.40
6.0	.55	.46	.39	.54	.45	.39	.52	.44	.38	.50	.43	.38	.48	.42	.37	.35
7.0	.50	.41	.34	.49	.40	.34	.47	.39	.34	.45	.39	.33	.44	.38	.33	.31
8.0	.45	.37	.31	.44	.36	.31	.43	.36	.30	.42	.35	.30	.40	.34	.30	.28
9.0	.42	.33	.28	.41	.33	.27	.40	.32	.27	.38	.32	.27	.37	.31	.27	.25
10.0	.38	.30	.25	.38	.30	.25	.37	.29	.25	.35	.29	.24	.34	.28	.24	.22

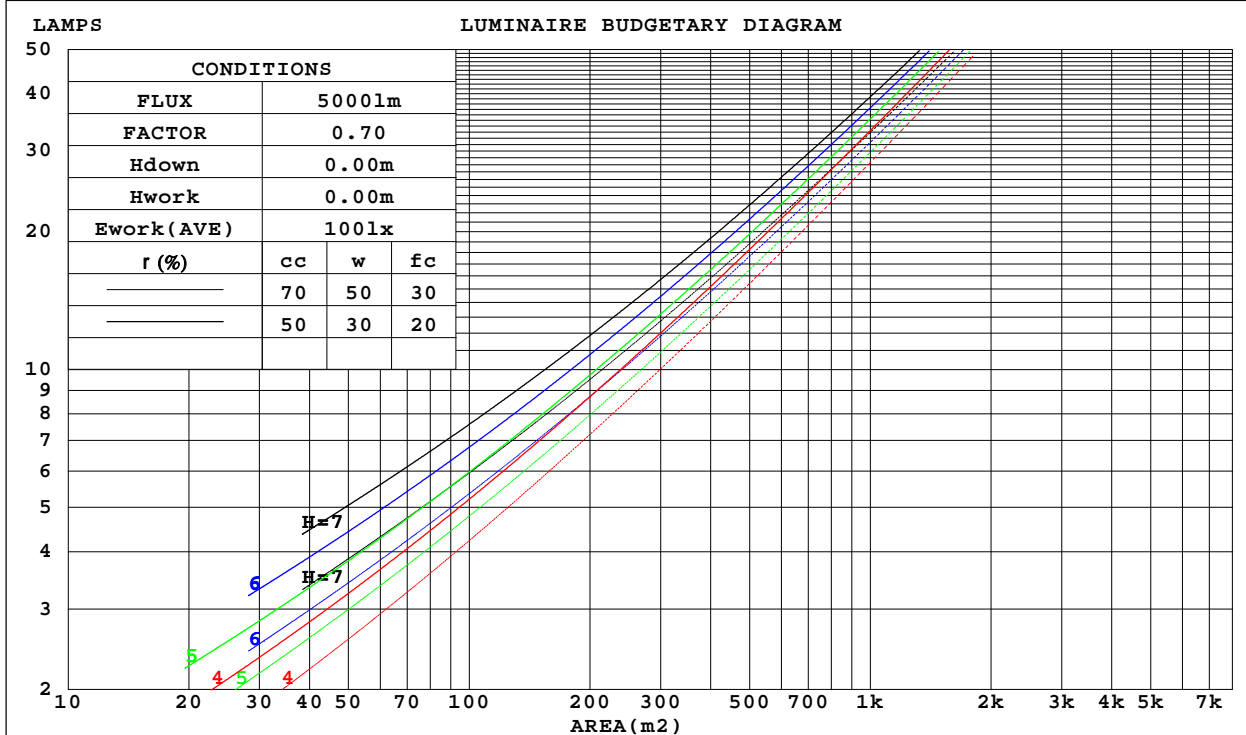

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-06-16

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=0.9540]
 Remarks:

WEC AND CCEC

Test:U:119.96V I:0.1559A P:14.767W PF:0.8219 Freq:60.00Hz Lamp Flux:1050x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: φ0.14	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.334	.190	.060	.326	.186	.059	.311	.179	.057	.298	.172	.055	.285	.165	.053	
2.0	.306	.167	.051	.299	.164	.051	.286	.159	.049	.274	.153	.048	.262	.148	.047	
3.0	.279	.149	.044	.273	.146	.044	.261	.142	.043	.251	.137	.042	.241	.133	.041	
4.0	.255	.133	.039	.250	.131	.039	.240	.127	.038	.230	.124	.037	.221	.120	.037	
5.0	.235	.120	.035	.230	.118	.034	.221	.115	.034	.212	.112	.033	.204	.109	.033	
6.0	.217	.109	.031	.213	.107	.031	.204	.105	.030	.197	.102	.030	.190	.100	.030	
7.0	.201	.100	.028	.198	.098	.028	.190	.096	.028	.183	.094	.027	.177	.092	.027	
8.0	.188	.092	.026	.184	.091	.026	.178	.089	.025	.171	.087	.025	.165	.085	.025	
9.0	.176	.085	.024	.172	.084	.024	.166	.082	.023	.161	.081	.023	.155	.079	.023	
10.0	.165	.079	.022	.162	.078	.022	.157	.077	.022	.151	.075	.021	.147	.074	.021	

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.208	.208	.208	.178	.178	.178	.121	.121	.121	.070	.070	.070	.022	.022	.022	
1.0	.200	.174	.150	.171	.149	.129	.117	.103	.089	.067	.059	.052	.022	.019	.017	
2.0	.192	.150	.114	.164	.129	.099	.113	.089	.069	.065	.052	.040	.021	.017	.013	
3.0	.184	.132	.091	.158	.114	.079	.108	.079	.055	.063	.046	.033	.020	.015	.011	
4.0	.177	.119	.075	.151	.103	.066	.104	.072	.046	.060	.042	.027	.019	.014	.009	
5.0	.169	.109	.065	.145	.094	.056	.100	.066	.040	.058	.039	.024	.019	.013	.008	
6.0	.162	.101	.057	.139	.087	.050	.096	.061	.035	.056	.036	.021	.018	.012	.007	
7.0	.155	.094	.051	.133	.081	.045	.092	.057	.032	.053	.034	.019	.017	.011	.006	
8.0	.148	.088	.047	.127	.076	.041	.088	.054	.029	.051	.032	.017	.017	.010	.006	
9.0	.142	.083	.043	.122	.072	.038	.085	.051	.027	.049	.030	.016	.016	.010	.005	
10.0	.136	.079	.041	.117	.068	.035	.081	.048	.025	.047	.028	.015	.015	.009	.005	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-06-16

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=0.9540]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.96V I:0.1559A P:14.767W PF:0.8219 Freq:60.00Hz Lamp Flux:1050x1 lm										
NAME:					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: ASD LIGHTING CORP					SUR.: φ0.14			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.5	24.1	22.9	24.5	24.9	22.5	24.1	22.9	24.5	24.9
3H	24.5	26.0	24.9	26.4	26.8	24.5	26.0	24.9	26.4	26.8
4H	25.4	26.8	25.8	27.2	27.6	25.4	26.8	25.8	27.2	27.6
6H	26.1	27.4	26.5	27.8	28.3	26.1	27.4	26.6	27.8	28.3
8H	26.4	27.7	26.9	28.1	28.5	26.4	27.7	26.9	28.1	28.6
12H	26.7	27.9	27.2	28.3	28.8	26.8	28.0	27.2	28.4	28.9
4H 2H	23.2	24.6	23.6	25.0	25.4	23.2	24.6	23.6	25.0	25.4
3H	25.5	26.6	25.9	27.1	27.5	25.4	26.6	25.9	27.0	27.5
4H	26.4	27.5	26.9	28.0	28.5	26.4	27.5	26.9	27.9	28.4
6H	27.3	28.3	27.8	28.8	29.3	27.3	28.3	27.8	28.8	29.3
8H	27.7	28.6	28.2	29.1	29.6	27.7	28.6	28.2	29.1	29.6
12H	28.1	28.9	28.6	29.4	30.0	28.1	28.9	28.7	29.5	30.0
8H 4H	26.8	27.7	27.3	28.2	28.7	26.8	27.7	27.3	28.2	28.7
6H	27.9	28.7	28.5	29.2	29.7	27.9	28.6	28.4	29.2	29.7
8H	28.4	29.1	29.0	29.7	30.2	28.4	29.1	29.0	29.6	30.2
12H	29.0	29.6	29.5	30.1	30.7	29.0	29.6	29.5	30.1	30.7
12H 4H	26.9	27.7	27.4	28.2	28.8	26.9	27.7	27.4	28.2	28.8
6H	28.1	28.7	28.6	29.2	29.8	28.0	28.7	28.6	29.2	29.8
8H	28.7	29.2	29.2	29.8	30.4	28.6	29.2	29.2	29.7	30.4
CIE190: 2010										

CIE190: 2010
Area: 0.0153 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-06-16

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.700m [K=0.9540]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.96V I:0.1559A P:14.767W PF:0.8219 Freq:60.00Hz Lamp Flux:1050x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: $\phi 0.14$	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	56	44	37	55	44	37	54	43	36	30
0.80	66	54	46	64	53	46	62	52	45	38
1.00	74	62	55	72	62	54	70	63	54	46
1.25	81	70	62	79	69	62	76	67	61	53
1.50	86	75	68	84	74	67	81	72	66	58
2.00	93	84	77	91	82	76	87	80	74	66
2.50	97	88	82	95	87	81	90	84	79	70
3.00	100	93	87	98	91	86	93	88	83	74
4.00	104	98	93	102	96	92	97	93	89	79
5.00	107	102	97	104	100	95	99	95	92	82
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-06-16

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=0.9540]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.96V I:0.1559A P:14.767W PF:0.8219 Freq:60.00Hz Lamp Flux:1050x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: $\phi 0.14$	Shielding Angle:

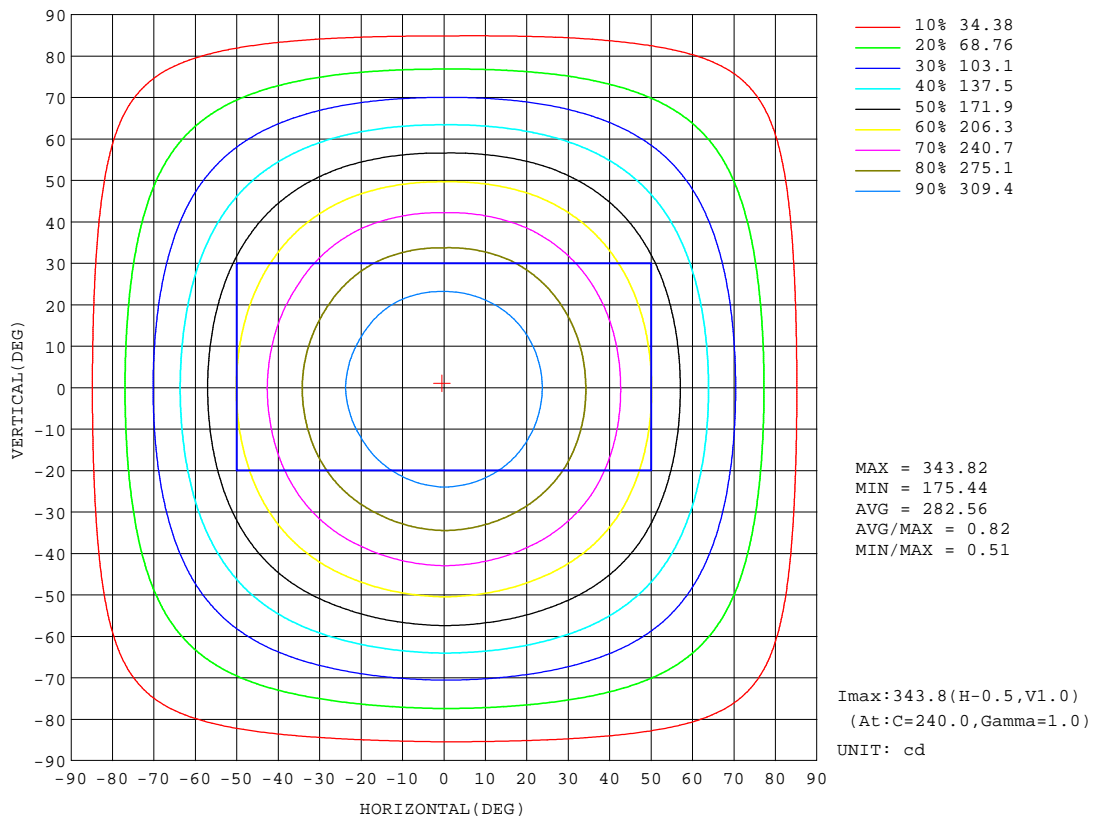


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-06-16

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=0.9540]
 Remarks:

AAI Figure

Test:U:119.96V I:0.1559A P:14.767W PF:0.8219 Freq:60.00Hz Lamp Flux:1050x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: ϕ 0.14	Shielding Angle:

Flux out:746.1 lm

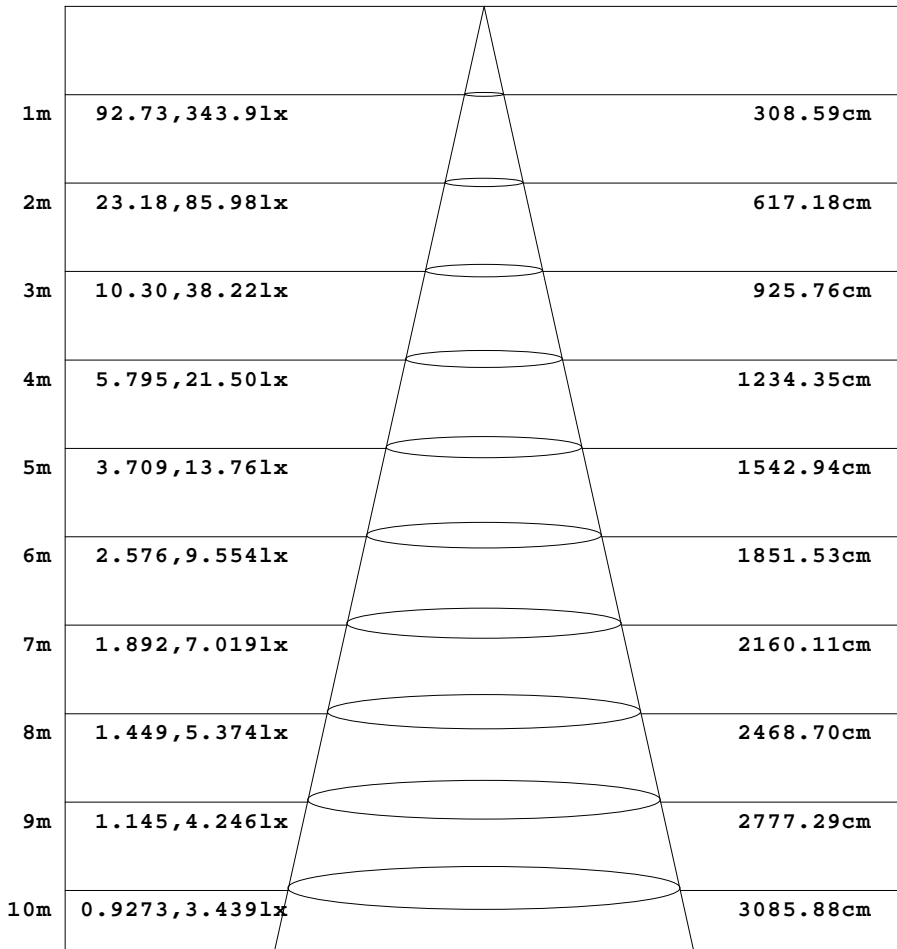

Height Eavg, Emax Angle:114.10deg Diameter


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-06-16

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=0.9540]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.96V I:0.1559A P:14.767W PF:0.8219 Freq:60.00Hz Lamp Flux:1050x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: $\phi 0.14$	Shielding Angle:

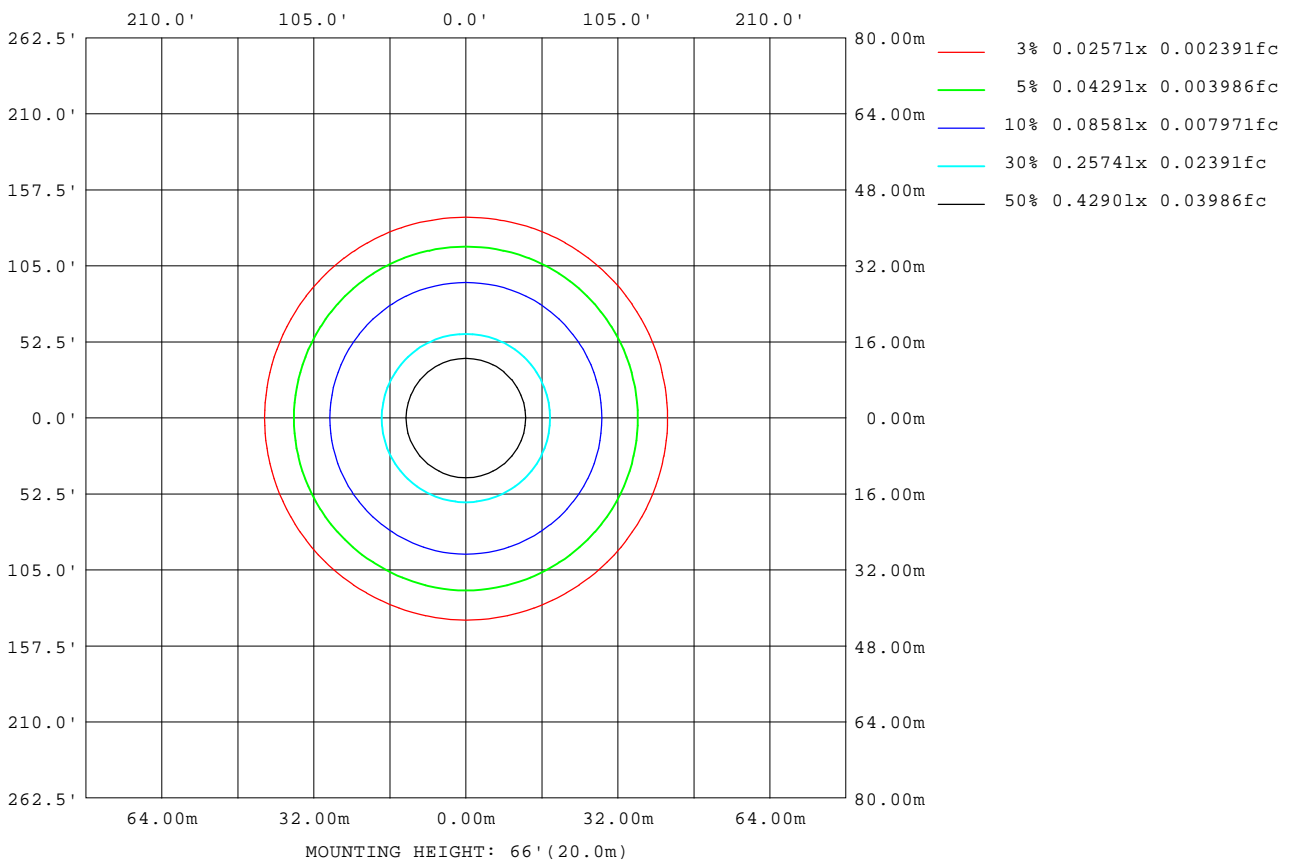

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-06-16

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=0.9540]
 Remarks:

LED Avg.L Report

Test:U:119.96V I:0.1559A P:14.767W PF:0.8219 Freq:60.00Hz Lamp Flux:1050x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: $\phi 0.14$	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	20274
L_0~180(75)av	19982
L_0~180(85)av	25816
L_90~270(65)av	20297
L_90~270(75)av	20041
L_90~270(85)av	26251
L_45(65)av	20226
L_45(75)av	19972
L_45(85)av	26051

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-06-16

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.700m [K=0.9540]
Remarks:

Planar Illuminance Curve

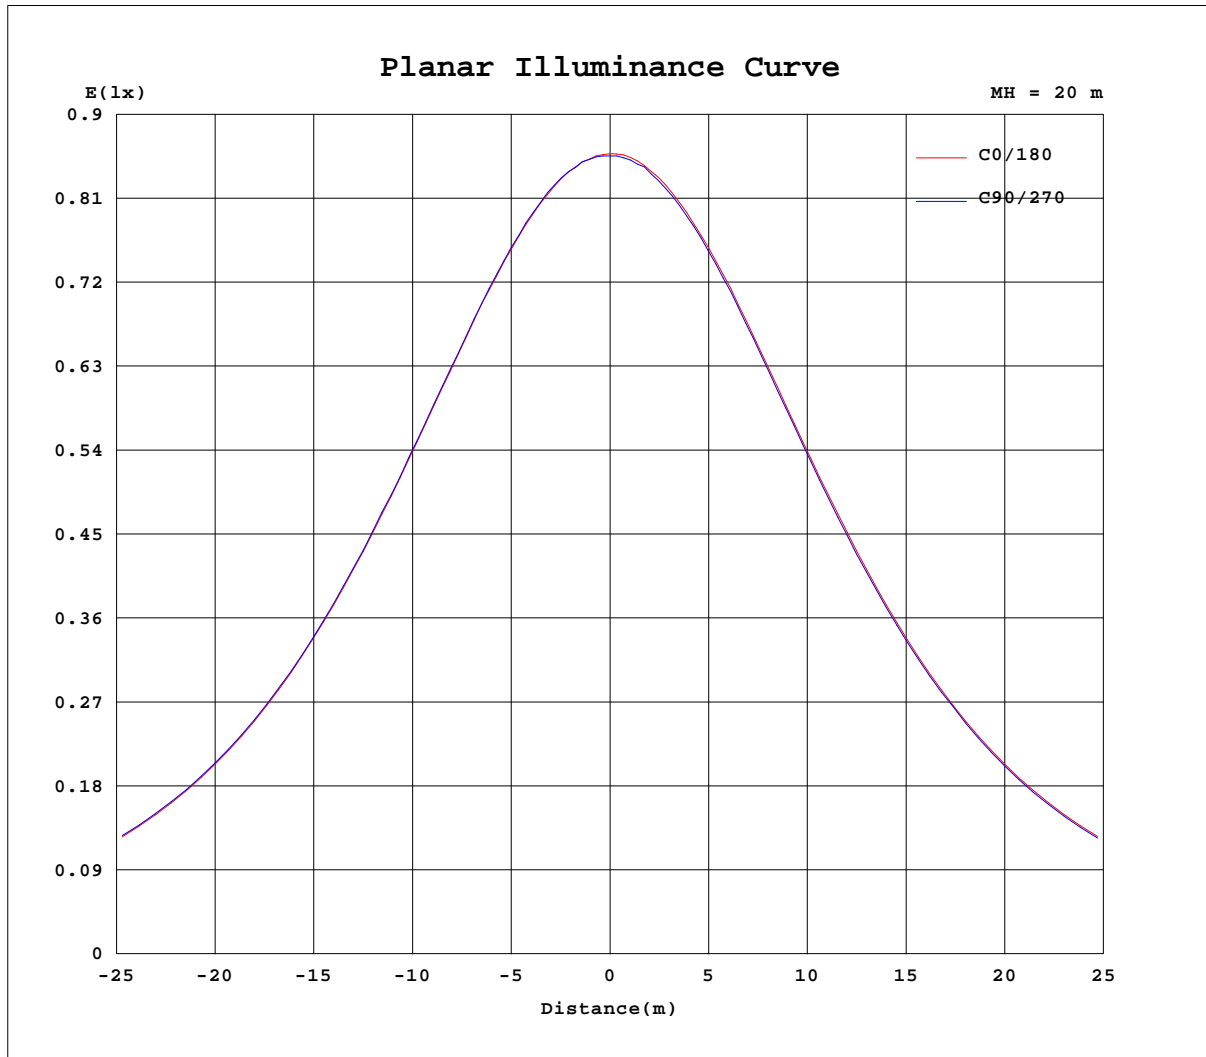

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-06-16

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=0.9540]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.96V I:0.1559A P:14.767W PF:0.8219 Freq:60.00Hz Lamp Flux:1050x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: φ0.14	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	343	343	343	343	343	343	343	343	343	343	343	343						
5	341	342	341	342	342	342	342	342	342	342	341	341						
10	337	337	337	338	337	337	337	337	336	337	337	336						
15	330	329	329	331	329	329	330	329	328	329	329	328						
20	319	319	319	321	319	318	319	317	318	319	318	318						
25	306	305	306	307	306	304	306	304	305	305	305	305						
30	290	291	290	292	290	290	290	288	289	289	290	290						
35	272	273	272	274	272	272	272	270	271	271	272	272						
40	252	253	252	254	252	252	252	250	251	251	252	252						
45	230	231	230	233	230	230	230	228	229	229	230	231						
50	207	208	207	209	207	207	207	205	206	205	207	206						
55	182	184	182	185	182	182	182	181	181	180	182	182						
60	157	158	157	159	156	157	157	155	156	155	157	156						
65	132	132	132	133	131	130	131	130	130	129	131	131						
70	105	106	106	107	105	104	104	103	103	103	105	105						
75	79.7	80.3	80.2	81.0	79.1	78.6	78.5	77.9	78.0	77.7	79.2	79.4						
80	55.9	56.4	56.4	57.1	55.3	54.8	54.5	54.1	54.3	54.1	55.6	55.7						
85	35.0	35.6	36.0	36.3	35.0	34.2	33.8	33.4	33.8	33.7	34.9	35.0						
90	18.1	19.4	19.3	19.7	18.6	18.3	18.0	15.0	17.9	17.9	18.9	18.1						
95	8.54	6.20	4.87	7.68	5.39	7.18	8.03	6.38	5.04	6.38	5.62	6.02						
100	1.20	0.74	1.72	0.92	1.45	0.65	3.05	0.80	0.97	0.43	0.85	0.69						
105	1.83	1.59	0.93	0.78	0.89	1.11	1.93	1.49	1.04	0.81	1.00	1.44						
110	2.76	2.71	1.67	1.21	1.67	2.24	2.98	3.03	1.39	1.47	1.74	2.01						
115	4.35	4.68	2.48	2.04	2.35	3.89	4.91	4.41	2.40	1.99	2.14	3.21						
120	5.39	5.33	3.36	2.70	3.20	5.24	6.04	5.29	3.05	2.64	2.97	4.70						
125	6.21	6.06	4.18	3.80	5.10	5.98	6.57	5.84	3.61	3.45	4.12	5.35						
130	6.30	6.08	4.35	4.39	5.61	5.57	6.63	5.96	3.98	4.24	5.27	5.42						
135	5.95	5.41	3.94	4.81	5.26	5.09	6.30	4.76	3.63	5.11	4.20	4.89						
140	5.34	5.02	2.92	4.13	4.19	4.65	5.32	4.68	2.06	3.86	4.09	4.75						
145	4.73	3.30	1.94	3.84	3.34	2.29	4.90	3.38	1.72	2.35	2.50	2.03						
150	2.54	1.33	1.26	1.97	1.24	1.57	2.80	1.42	1.28	2.29	1.58	1.34						
155	1.57	1.65	2.00	1.43	1.91	1.48	1.65	1.59	2.27	1.84	1.92	1.34						
160	1.38	2.39	2.99	2.15	3.73	1.48	1.87	1.71	2.45	1.99	3.81	1.41						
165	3.51	1.90	2.85	2.41	2.23	2.90	3.74	2.02	3.32	2.57	1.87	2.95						
170	2.66	1.50	1.49	1.43	1.41	1.83	2.81	1.75	2.10	1.77	1.46	1.84						
175	1.46	1.50	1.48	1.47	1.41	1.51	1.47	1.50	1.52	1.48	1.49	1.48						
180	1.50	1.52	1.50	1.50	1.46	1.49	1.49	1.52	1.53	1.50	1.51	1.51						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-06-16

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=0.9540]
 Remarks: