
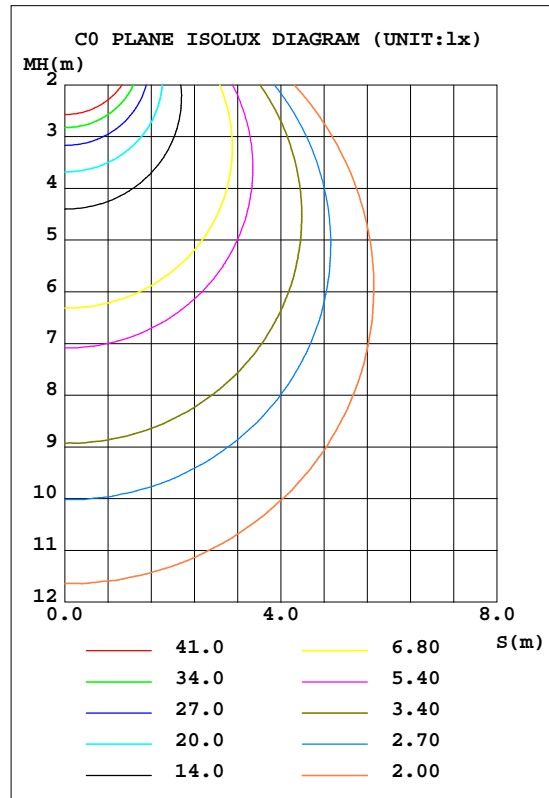


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.17V I:0.1007A P:11.870W PF:0.9810 Freq:59.98Hz Lamp Flux:780x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: ϕ 0.09	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 66.11 lm/W			
MODELASD-JBR-4D12AC(2700K)		I _{max} (cd)	271.6	S/MH(C0/180)	1.25
NOMINAL POWER(W)	12	LOR(%)	100.0	S/MH(C90/270)	1.28
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	780	h UP, DN(C0-180)	0.2, 48.7
NOMINAL FLUX(lm)	780	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.2, 50.9
LAMPS INSIDE	1	h up(%)	0.4	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	h down(%)	99.6	CIBSE SHR MAX	1.35

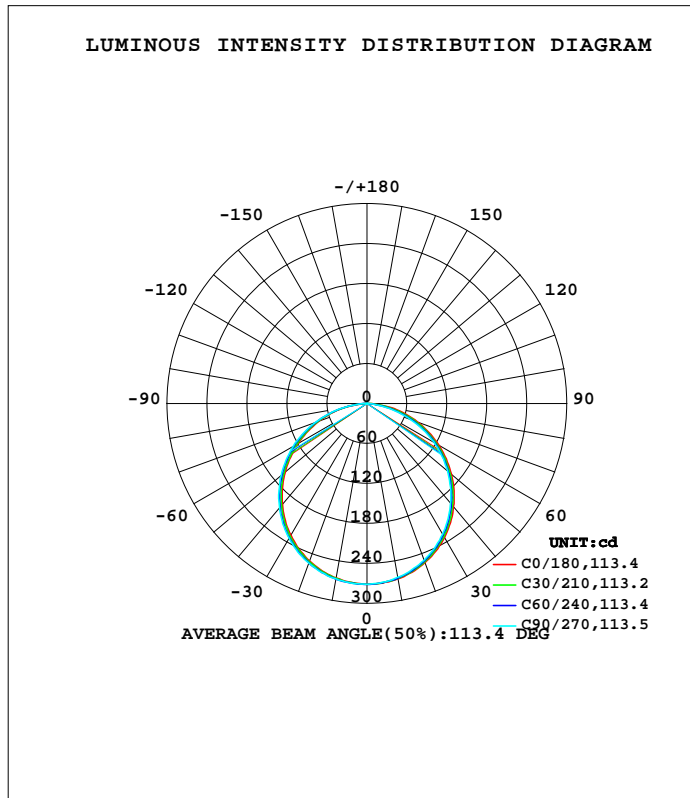

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-4

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1279]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	267.5	266.5	265.1	265.4	265.7	267.0	267.5	268.4	0- 10	25.67	25.67	3.27,3.27
20	254.3	252.4	250.3	250.2	251.8	253.7	255.4	256.1	10- 20	73.66	99.34	12.6,12.6
30	232.4	229.4	226.9	226.7	228.5	231.7	233.8	234.8	20- 30	111.9	211.3	26.9,26.9
40	202.3	198.5	195.3	195.3	197.6	201.4	204.2	205.5	30- 40	135.3	346.5	44.1,44.1
50	165.7	161.3	158.1	157.7	160.3	164.6	168.5	169.3	40- 50	140.6	487.1	62,62
60	124.2	119.4	116.0	116.1	118.8	123.4	127.8	128.6	50- 60	127.7	614.9	78.2,78.2
70	80.50	74.04	68.89	71.39	75.52	79.07	81.82	84.33	60- 70	98.59	713.5	90.8,90.8
80	37.84	27.81	21.14	25.85	33.91	33.73	34.31	37.76	70- 80	57.16	770.6	98.1,98.1
90	0.1362	0.0299	0.0200	0.0365	0.0862	0.0963	0.1194	0.0883	80- 90	12.12	782.8	99.6,99.6
100	0.1125	0.1324	0.1457	0.1390	0.2714	0.1723	0.1190	0.1557	90-100	0.1015	782.9	99.6,99.6
110	0.3044	0.3145	0.3309	0.2882	0.4370	0.3576	0.2910	0.3279	100-110	0.2526	783.1	99.7,99.7
120	0.4501	0.4875	0.4963	0.4623	0.6026	0.5312	0.4827	0.5002	110-120	0.4165	783.5	99.7,99.7
130	0.5957	0.5949	0.6351	0.5684	0.7415	0.6657	0.6349	0.6425	120-130	0.5097	784.0	99.8,99.8
140	0.6791	0.6706	0.7134	0.6750	0.8366	0.7895	0.7409	0.7419	130-140	0.5275	784.6	99.8,99.8
150	0.7726	0.7483	0.8204	0.7651	0.9072	0.8609	0.8229	0.8399	140-150	0.4812	785.0	99.9,99.9
160	0.8076	0.8642	0.9064	0.8711	0.9799	1.018	0.9128	0.9109	150-160	0.3977	785.4	100,100
170	0.9398	0.9702	1.006	0.9737	1.046	1.021	0.9790	0.9862	160-170	0.2685	785.7	100,100
180	1.039	1.060	1.052	1.040	1.066	1.073	1.065	1.040	170-180	0.0965	785.8	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-4

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1279]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.17V I:0.1007A P:11.870W PF:0.9810 Freq:59.98Hz Lamp Flux:780x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: ϕ 0.09	Shielding Angle:

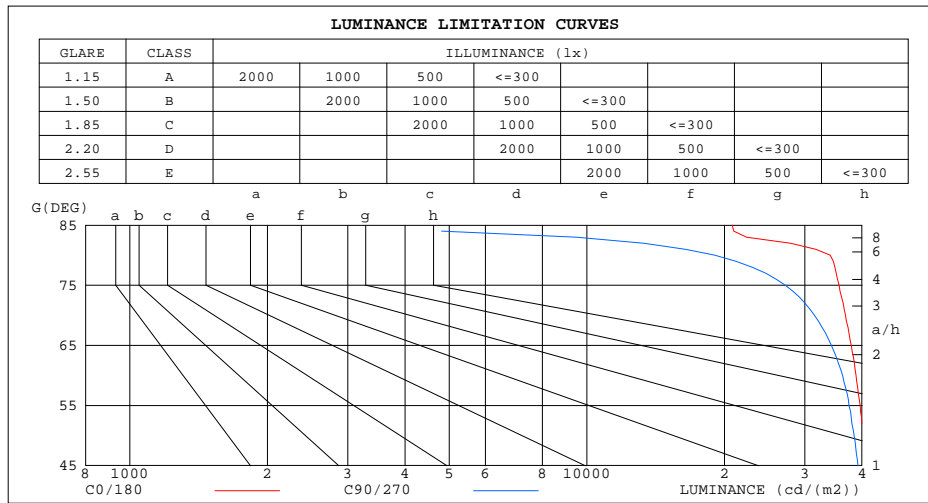

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	20792	495
80	34052	19042
75	35652	27170
70	36784	31502
65	37884	34263
60	38833	36269
55	39639	37498
50	40276	38476
45	40871	39228


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-4

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1279]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.17V I:0.1007A P:11.870W PF:0.9810 Freq:59.98Hz Lamp Flux:780x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: ϕ 0.09	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.00	.96	1.02	.98	.94	.97	.94	.91	.93	.91	.88	.90	.87	.85	.83
2.0	.90	.83	.78	.88	.82	.77	.85	.79	.75	.81	.77	.73	.78	.75	.71	.69
3.0	.79	.71	.64	.78	.70	.64	.75	.68	.63	.72	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.54	.69	.60	.54	.66	.59	.53	.64	.57	.52	.62	.56	.52	.49
5.0	.63	.53	.47	.61	.53	.46	.59	.52	.46	.57	.51	.45	.55	.49	.45	.43
6.0	.56	.47	.41	.55	.47	.41	.53	.46	.40	.52	.45	.40	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.42	.36	.49	.41	.35	.47	.40	.35	.46	.40	.35	.33
8.0	.46	.38	.32	.46	.38	.32	.44	.37	.32	.43	.36	.31	.42	.36	.31	.29
9.0	.43	.34	.29	.42	.34	.29	.41	.34	.29	.40	.33	.28	.39	.33	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.26	.24

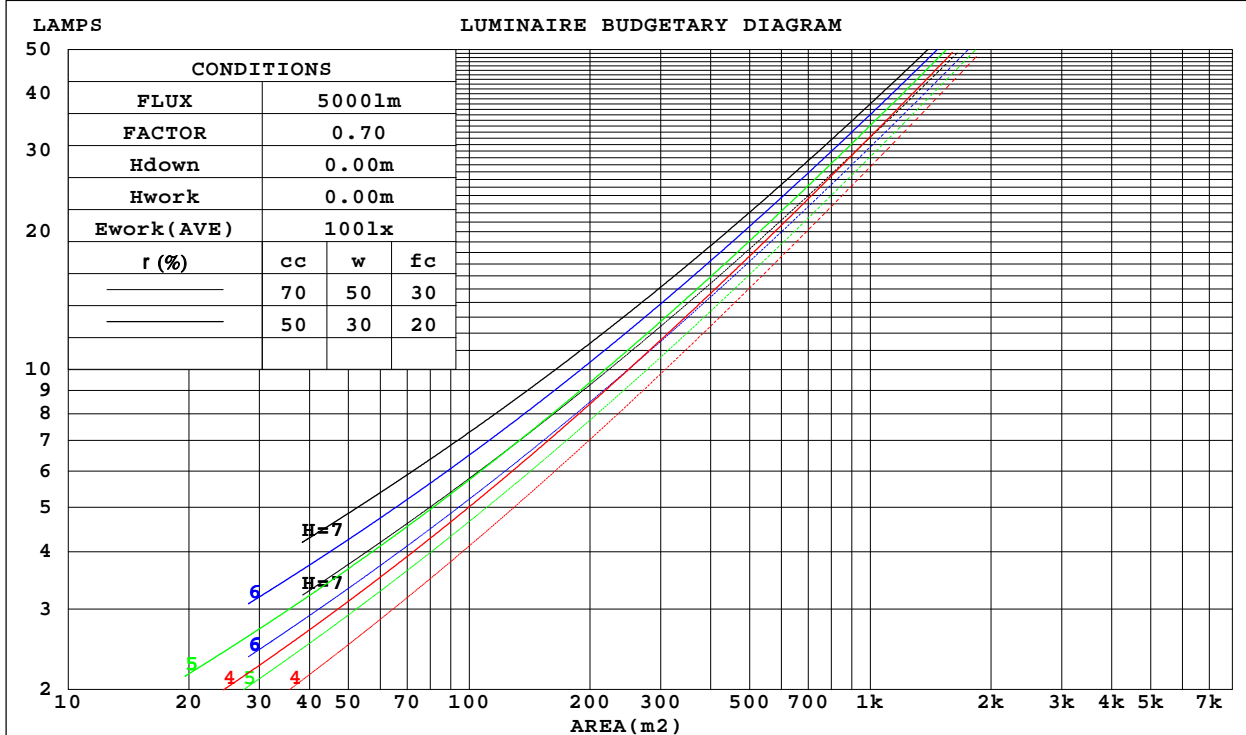

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-4

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1279]
 Remarks:

WEC AND CCEC

Test:U:120.17V I:0.1007A P:11.870W PF:0.9810 Freq:59.98Hz Lamp Flux:780x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: φ0.09	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.309	.175	.056	.301	.172	.055	.288	.165	.053	.275	.159	.051	.264	.153	.049	
2.0	.292	.160	.049	.286	.157	.048	.274	.152	.047	.263	.147	.046	.252	.143	.045	
3.0	.270	.144	.043	.265	.142	.043	.254	.138	.042	.245	.134	.041	.235	.130	.040	
4.0	.250	.130	.038	.245	.128	.038	.235	.125	.037	.227	.122	.037	.219	.119	.036	
5.0	.231	.118	.034	.226	.116	.034	.218	.114	.033	.210	.111	.033	.203	.109	.033	
6.0	.214	.107	.031	.210	.106	.031	.203	.104	.030	.196	.102	.030	.189	.100	.030	
7.0	.199	.098	.028	.196	.097	.028	.189	.096	.028	.183	.094	.027	.177	.092	.027	
8.0	.186	.091	.026	.183	.090	.025	.177	.088	.025	.171	.087	.025	.166	.085	.025	
9.0	.174	.084	.024	.171	.084	.023	.166	.082	.023	.161	.081	.023	.156	.079	.023	
10.0	.164	.079	.022	.161	.078	.022	.157	.077	.022	.152	.075	.021	.148	.074	.021	

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.193	.193	.193	.165	.165	.165	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.183	.159	.137	.157	.137	.118	.107	.094	.082	.062	.054	.048	.020	.018	.015	
2.0	.175	.135	.101	.150	.116	.087	.103	.080	.061	.059	.047	.036	.019	.015	.012	
3.0	.168	.117	.077	.144	.101	.067	.099	.070	.047	.057	.041	.028	.018	.013	.009	
4.0	.160	.104	.061	.137	.090	.053	.094	.063	.037	.055	.037	.022	.018	.012	.007	
5.0	.153	.094	.050	.131	.081	.044	.090	.057	.031	.052	.033	.018	.017	.011	.006	
6.0	.145	.085	.042	.125	.074	.037	.086	.052	.026	.050	.030	.015	.016	.010	.005	
7.0	.139	.078	.036	.119	.068	.032	.082	.048	.022	.048	.028	.013	.015	.009	.004	
8.0	.132	.073	.032	.114	.063	.028	.079	.044	.020	.046	.026	.012	.015	.009	.004	
9.0	.126	.068	.028	.109	.059	.025	.075	.041	.017	.044	.024	.010	.014	.008	.003	
10.0	.120	.063	.025	.104	.055	.022	.072	.039	.016	.042	.023	.009	.014	.008	.003	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-4

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1279]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.17V I:0.1007A P:11.870W PF:0.9810 Freq:59.98Hz Lamp Flux:780x1 lm										
NAME:					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: ASD LIGHTNG CORP					SUR.: φ0.09			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	24.9	26.6	25.3	26.9	27.2	24.6	26.2	24.9	26.5	26.9
3H	26.9	28.3	27.2	28.7	29.0	26.3	27.8	26.7	28.1	28.5
4H	27.6	29.0	28.0	29.4	29.8	26.9	28.3	27.3	28.6	29.0
6H	28.2	29.5	28.6	29.9	30.3	27.2	28.5	27.6	28.8	29.2
8H	28.4	29.6	28.8	30.0	30.4	27.2	28.4	27.6	28.8	29.2
12H	28.4	29.6	28.9	30.0	30.5	27.2	28.4	27.6	28.8	29.2
4H 2H	25.5	26.9	25.9	27.3	27.7	25.2	26.6	25.6	27.0	27.4
3H	27.7	28.9	28.1	29.3	29.7	27.1	28.3	27.5	28.7	29.1
4H	28.6	29.6	29.0	30.0	30.5	27.8	28.9	28.2	29.3	29.7
6H	29.3	30.2	29.8	30.7	31.1	28.2	29.1	28.7	29.6	30.0
8H	29.5	30.4	30.0	30.8	31.3	28.3	29.1	28.7	29.6	30.0
12H	29.6	30.4	30.1	30.9	31.3	28.2	29.0	28.7	29.5	30.0
8H 4H	28.8	29.7	29.3	30.1	30.6	28.1	29.0	28.6	29.4	29.9
6H	29.7	30.4	30.2	30.9	31.4	28.6	29.3	29.1	29.8	30.3
8H	29.9	30.6	30.4	31.1	31.6	28.6	29.3	29.2	29.8	30.3
12H	30.1	30.7	30.6	31.2	31.7	28.6	29.2	29.1	29.7	30.3
12H 4H	28.8	29.6	29.3	30.1	30.6	28.1	28.9	28.6	29.4	29.9
6H	29.7	30.3	30.2	30.8	31.4	28.6	29.3	29.2	29.7	30.3
8H	30.0	30.6	30.5	31.1	31.6	28.7	29.3	29.2	29.8	30.4
CIE190: 2010										

CIE190: 2010
Area: 0.0064 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-6-4

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.600m [K=1.1279]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.17V I:0.1007A P:11.870W PF:0.9810 Freq:59.98Hz Lamp Flux:780x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.09$	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	46	39	56	45	38	55	45	38	32
0.80	67	56	48	66	55	48	64	54	48	41
1.00	76	65	57	74	64	57	72	65	56	49
1.25	83	72	65	81	72	65	79	70	64	56
1.50	88	78	71	86	77	70	83	75	69	62
2.00	95	86	80	93	85	79	89	83	77	69
2.50	99	91	85	97	90	84	93	87	82	74
3.00	102	95	90	100	94	89	96	91	86	78
4.00	106	100	96	104	99	94	99	95	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-4

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=1.1279]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.17V I:0.1007A P:11.870W PF:0.9810 Freq:59.98Hz Lamp Flux:780x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: ϕ 0.09	Shielding Angle:

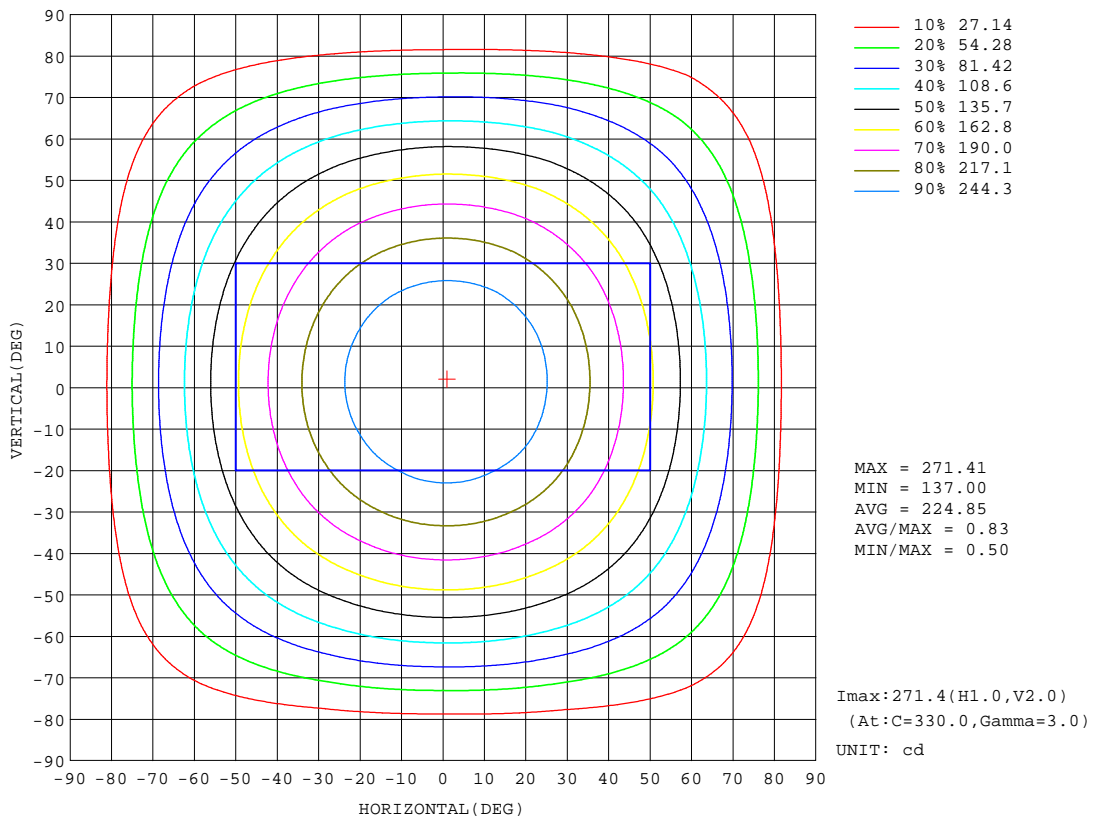


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-4

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1279]
 Remarks:

AAI Figure

Test:U:120.17V I:0.1007A P:11.870W PF:0.9810 Freq:59.98Hz Lamp Flux:780x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: ϕ 0.09	Shielding Angle:

Flux out:578.9 lm

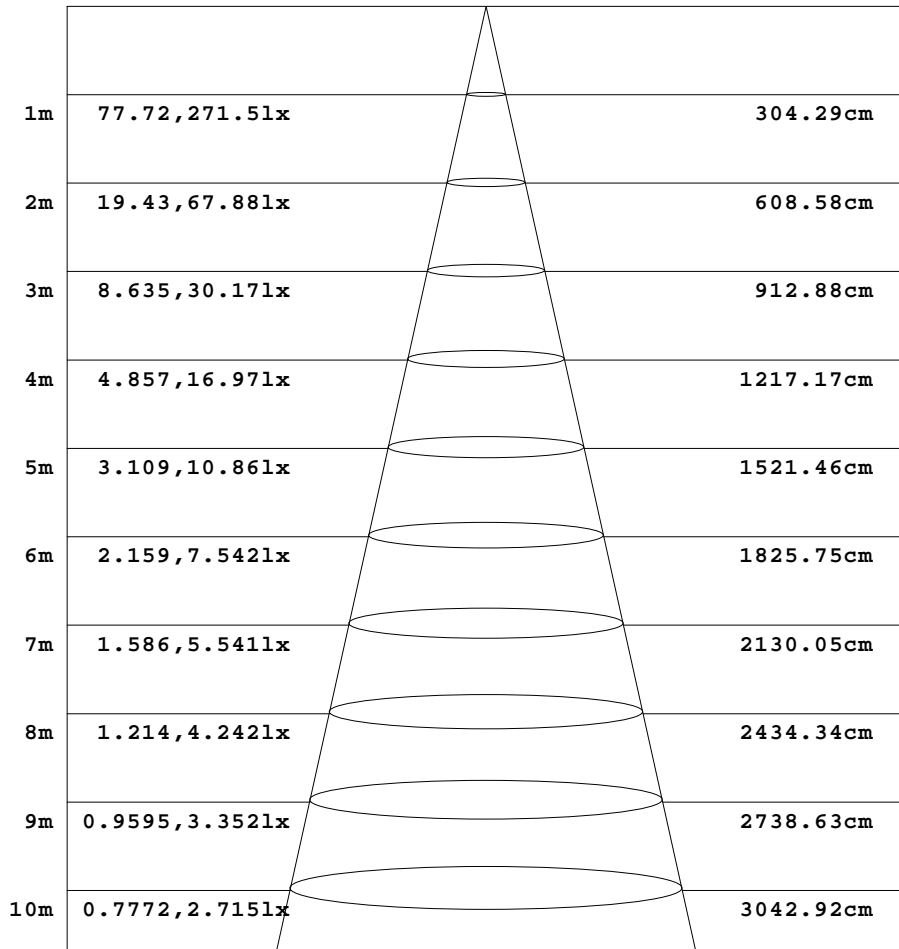

Height Eavg, Emax Angle:113.37deg Diameter


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-4

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1279]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.17V I:0.1007A P:11.870W PF:0.9810 Freq:59.98Hz Lamp Flux:780x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: ϕ 0.09	Shielding Angle:

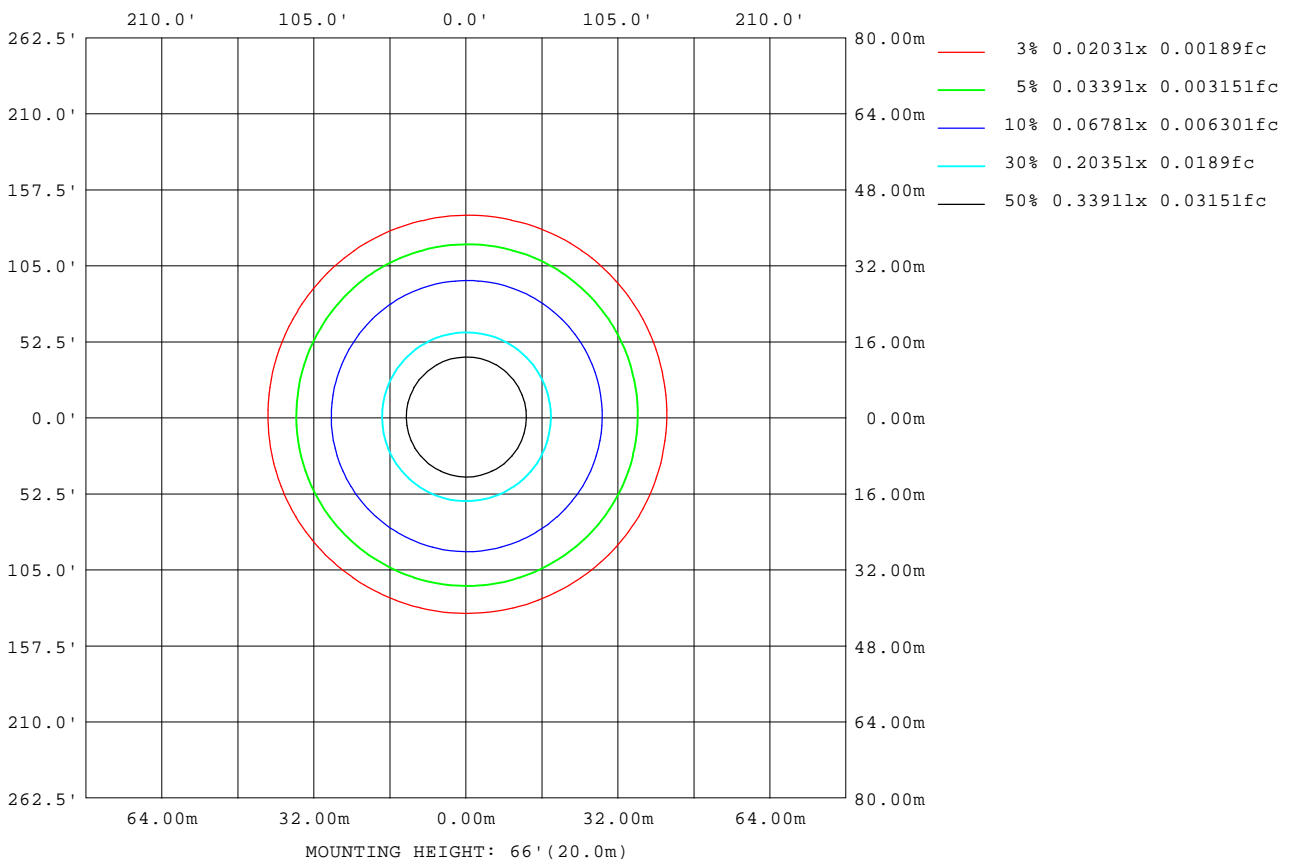

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-4

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=1.1279]
 Remarks:

LED Avg.L Report

Test:U:120.17V I:0.1007A P:11.870W PF:0.9810 Freq:59.98Hz Lamp Flux:780x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: ϕ 0.09	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	36927
L_0~180(75)av	34228
L_0~180(85)av	17953
L_90~270(65)av	36577
L_90~270(75)av	31116
L_90~270(85)av	9254
L_45(65)av	36950
L_45(75)av	32728
L_45(85)av	16458

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-6-4

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.600m [K=1.1279]
Remarks:

Planar Illuminance Curve

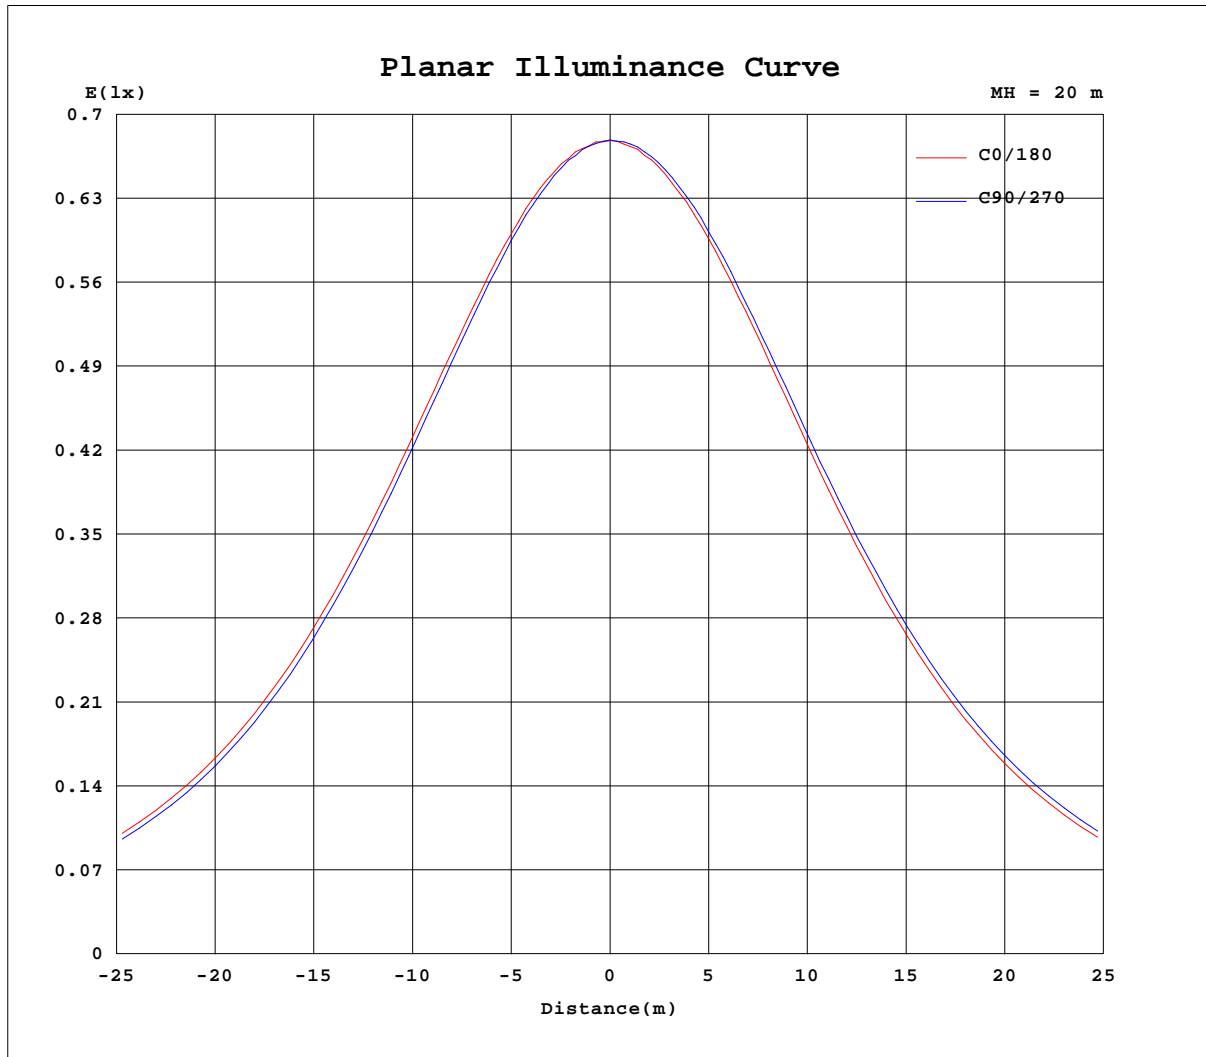

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-4

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=1.1279]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.17V I:0.1007A P:11.870W PF:0.9810 Freq:59.98Hz Lamp Flux:780x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: φ0.09	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	271	271	271	271	271	271	271	271	271	271	271	271						
5	271	270	270	269	270	270	269	270	271	270	271	271						
10	268	267	266	265	265	266	266	266	268	268	268	268						
15	262	261	260	259	259	259	260	261	262	262	264	263						
20	254	253	251	250	250	250	252	253	255	255	256	256						
25	244	243	241	240	239	240	241	243	245	246	247	246						
30	232	231	228	227	226	227	228	230	233	234	235	234						
35	218	216	214	212	211	212	214	216	219	220	221	221						
40	202	200	197	195	195	196	198	200	203	204	206	205						
45	185	182	179	177	176	178	180	182	186	187	189	187						
50	166	163	160	158	157	158	160	163	167	169	170	169						
55	145	142	139	138	137	138	140	142	146	149	150	149						
60	124	121	118	116	115	117	119	121	126	128	129	128						
65	102	99.3	94.9	92.6	93.0	95.3	97.3	99.5	104	105	107	106						
70	80.5	76.7	71.4	68.9	69.5	73.3	75.5	77.6	80.5	81.8	84.5	84.1						
75	59.0	54.0	47.7	45.0	46.1	51.1	54.4	55.2	57.3	58.1	60.9	61.4						
80	37.8	31.6	24.0	21.1	22.7	29.0	33.9	33.4	34.0	34.3	36.9	38.6						
85	11.6	10.2	1.72	0.28	0.82	7.80	8.43	12.3	10.8	10.0	12.6	15.7						
90	0.14	0.03	0.03	0.02	0.03	0.04	0.09	0.13	0.07	0.12	0.06	0.12						
95	0.05	0.07	0.03	0.08	0.03	0.07	0.16	0.09	0.11	0.07	0.14	0.07						
100	0.11	0.19	0.08	0.15	0.12	0.16	0.27	0.15	0.19	0.12	0.19	0.13						
105	0.22	0.25	0.17	0.24	0.18	0.24	0.34	0.24	0.27	0.22	0.28	0.23						
110	0.30	0.36	0.27	0.33	0.26	0.31	0.44	0.34	0.38	0.29	0.36	0.30						
115	0.41	0.44	0.36	0.42	0.35	0.40	0.51	0.46	0.46	0.41	0.44	0.43						
120	0.45	0.52	0.46	0.50	0.44	0.48	0.60	0.53	0.53	0.48	0.52	0.48						
125	0.54	0.62	0.50	0.57	0.50	0.54	0.68	0.58	0.62	0.56	0.61	0.55						
130	0.60	0.63	0.56	0.64	0.54	0.60	0.74	0.65	0.68	0.63	0.67	0.62						
135	0.65	0.64	0.63	0.67	0.60	0.68	0.79	0.76	0.75	0.68	0.72	0.67						
140	0.68	0.68	0.67	0.71	0.65	0.70	0.84	0.78	0.80	0.74	0.77	0.71						
145	0.69	0.74	0.68	0.77	0.68	0.75	0.88	0.79	0.84	0.80	0.81	0.79						
150	0.77	0.76	0.74	0.82	0.73	0.80	0.91	0.83	0.89	0.82	0.86	0.82						
155	0.79	0.81	0.79	0.86	0.79	0.85	0.95	0.97	0.93	0.87	0.90	0.85						
160	0.81	0.87	0.85	0.91	0.84	0.90	0.98	1.02	1.02	0.91	0.94	0.88						
165	0.91	0.93	0.90	0.95	0.89	0.95	1.03	1.00	1.03	0.95	1.02	0.90						
170	0.94	0.99	0.95	1.01	0.94	1.01	1.05	1.01	1.03	0.98	1.02	0.95						
175	0.99	1.04	0.99	1.04	0.99	1.05	1.07	1.03	1.05	1.00	1.05	0.98						
180	1.04	1.07	1.05	1.05	1.03	1.05	1.07	1.08	1.07	1.07	1.05	1.03						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-4

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1279]
 Remarks: