
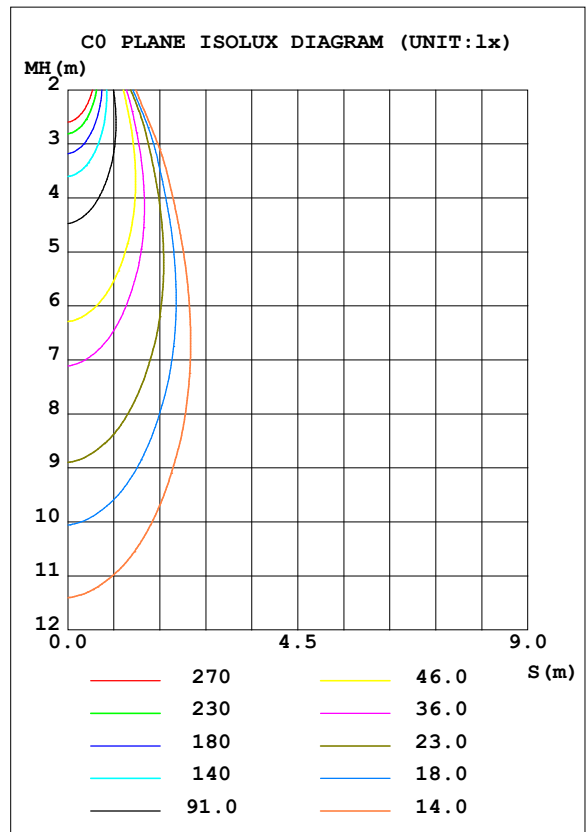


**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:120.02V I:0.1105A P:13.056W PF:0.9466 Freq:59.98Hz Lamp Flux:861.455x1 lm		
NAME: ASD-CD-TS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 65.98 lm/W			
MODEL		I <sub>max</sub> (cd)	1865	S/MH (C0/180)	0.67
NOMINAL POWER (W)	15	LOR (%)	100.0	S/MH (C90/270)	0.66
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	861.45	<input type="checkbox"/> UP, DN (C0-180)	0.0, 47.6
NOMINAL FLUX (lm)	861.455	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 52.4
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	0.65

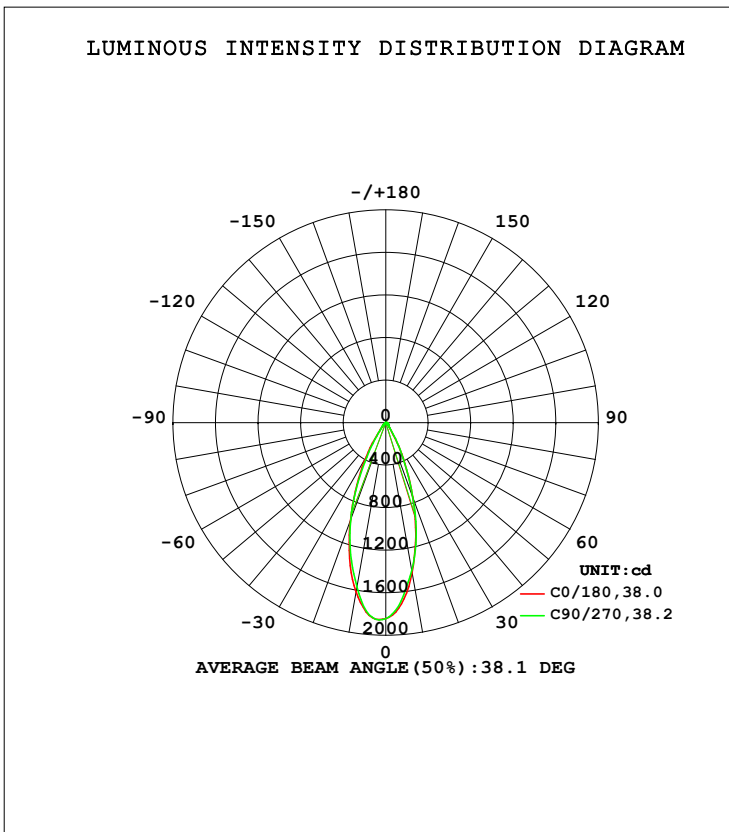

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2021-09-28

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity: 65.0%  
 Test Distance: 3.080m [K=1.0000]  
 Remarks:

**ZONAL FLUX DIAGRAM**

ZONAL FLUX DIAGRAM:


mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	□ zone	□ total	%lum, lamp
10	1433	1438	1411	1521	1614	1628	1570	1439	0- 10	159.5	159.5	18.5,18.5
20	744.5	722.3	747.3	871.4	974.1	915.0	963.7	668.3	10- 20	323.1	482.6	56,56
30	216.2	212.1	220.6	327.1	372.4	328.5	320.9	197.5	20- 30	234.7	717.3	83.3,83.3
40	49.96	48.90	51.26	61.02	65.16	59.10	62.09	48.64	30- 40	76.43	793.7	92.1,92.1
50	29.18	29.07	28.46	29.73	32.03	31.60	30.76	27.94	40- 50	30.96	824.7	95.7,95.7
60	15.39	15.40	15.17	15.80	16.84	16.45	16.03	14.93	50- 60	19.63	844.3	98,98
70	8.119	8.058	7.823	8.094	8.518	7.757	7.204	7.753	60- 70	11.45	855.7	99.3,99.3
80	2.744	2.125	1.598	2.312	2.908	2.006	1.524	1.954	70- 80	5.074	860.8	99.9,99.9
90	0.0250	0.0211	0.0230	0.0218	0.0317	0.0258	0.0263	0.0274	80- 90	0.6314	861.5	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-09-28

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**LUMINANCE LIMITATION CURVES**

Test:U:120.02V I:0.1105A P:13.056W PF:0.9466 Freq:59.98Hz Lamp Flux:861.455x1 lm		
NAME: ASD-CD-TS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

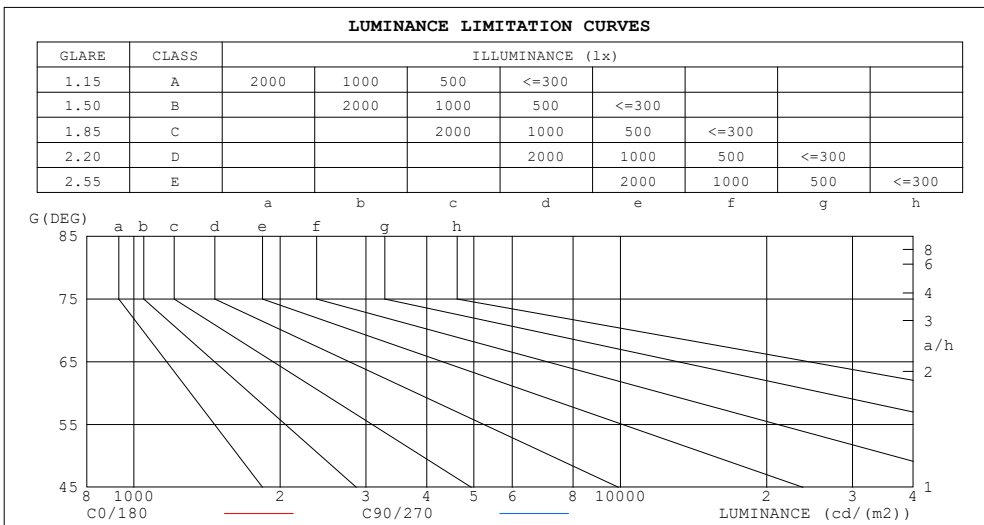

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	23	7
80	141	83
75	178	153
70	211	206
65	242	242
60	274	273
55	319	320
50	404	399
45	473	476


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-09-28

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM**

Test:U:120.02V I:0.1105A P:13.056W PF:0.9466 Freq:59.98Hz Lamp Flux:861.455x1 lm		
NAME: ASD-CD-TS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.05	1.03	1.02	1.01	1.00	.99	.98	.97	.96	.94
2.0	1.04	1.01	.97	1.03	.99	.96	.99	.97	.94	.96	.94	.92	.94	.92	.90	.89
3.0	.98	.94	.90	.97	.93	.89	.94	.91	.88	.92	.89	.86	.90	.87	.85	.84
4.0	.93	.88	.84	.92	.87	.83	.89	.85	.82	.87	.84	.81	.86	.83	.80	.79
5.0	.88	.83	.79	.87	.82	.78	.85	.81	.78	.84	.80	.77	.82	.79	.76	.75
6.0	.83	.78	.74	.83	.78	.74	.81	.77	.73	.80	.76	.73	.79	.75	.72	.71
7.0	.79	.74	.70	.79	.74	.70	.78	.73	.70	.76	.72	.69	.75	.72	.69	.68
8.0	.76	.70	.67	.75	.70	.67	.74	.70	.66	.73	.69	.66	.72	.69	.66	.65
9.0	.73	.67	.64	.72	.67	.64	.71	.67	.63	.70	.66	.63	.70	.66	.63	.62
10.0	.69	.64	.61	.69	.64	.61	.68	.64	.61	.68	.63	.61	.67	.63	.60	.59

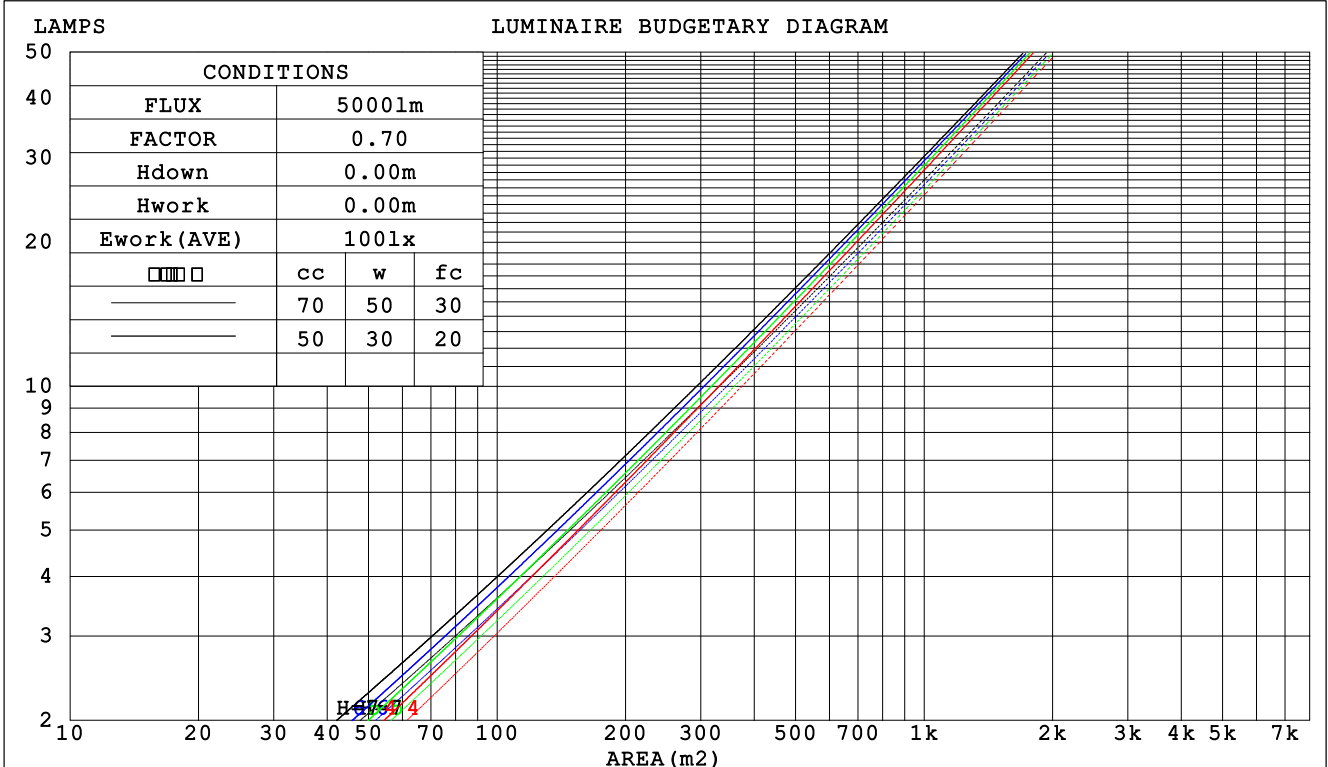

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-09-28

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

WEC AND CCEC

Test:U:120.02V I:0.1105A P:13.056W PF:0.9466 Freq:59.98Hz Lamp Flux:861.455x1 lm		
NAME: ASD-CD-TS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients (WEC)			
0.0						
1.0	.168 .096 .030	.161 .092 .029	.149 .085 .027	.137 .079 .025	.127 .073 .024	
2.0	.159 .087 .027	.153 .085 .026	.143 .079 .025	.133 .075 .023	.124 .070 .022	
3.0	.150 .080 .024	.145 .078 .023	.136 .074 .022	.128 .070 .022	.120 .067 .021	
4.0	.141 .074 .022	.137 .072 .021	.130 .069 .021	.123 .066 .020	.116 .063 .019	
5.0	.134 .068 .020	.130 .067 .019	.124 .064 .019	.118 .062 .018	.112 .060 .018	
6.0	.127 .064 .018	.124 .063 .018	.118 .061 .018	.113 .059 .017	.108 .057 .017	
7.0	.121 .060 .017	.118 .059 .017	.113 .057 .016	.108 .056 .016	.104 .054 .016	
8.0	.115 .056 .016	.113 .056 .016	.108 .054 .015	.104 .053 .015	.100 .051 .015	
9.0	.110 .053 .015	.108 .053 .015	.104 .051 .015	.100 .050 .014	.097 .049 .014	
10.0	.105 .051 .014	.104 .050 .014	.100 .049 .014	.097 .048 .014	.093 .047 .013	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients (CCEC)			
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.171 .157 .146	.146 .135 .125	.100 .093 .087	.057 .054 .050	.018 .017 .016	
2.0	.155 .133 .114	.132 .114 .099	.091 .079 .069	.052 .046 .040	.017 .015 .013	
3.0	.141 .113 .091	.121 .098 .079	.083 .068 .056	.048 .040 .033	.015 .013 .011	
4.0	.130 .099 .074	.112 .085 .065	.077 .059 .045	.044 .035 .027	.014 .011 .009	
5.0	.121 .087 .062	.104 .075 .054	.072 .052 .038	.041 .031 .022	.013 .010 .007	
6.0	.113 .077 .052	.097 .067 .045	.067 .047 .032	.039 .028 .019	.013 .009 .006	
7.0	.106 .069 .044	.091 .060 .038	.063 .042 .027	.037 .025 .016	.012 .008 .005	
8.0	.100 .063 .038	.086 .055 .033	.059 .038 .023	.035 .023 .014	.011 .007 .005	
9.0	.095 .058 .033	.081 .050 .029	.056 .035 .020	.033 .021 .012	.011 .007 .004	
10.0	.090 .053 .029	.077 .046 .025	.054 .032 .018	.031 .019 .011	.010 .006 .004	

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-09-28

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**UGR(Unified Glare Rating) Table**

Test:U:120.02V I:0.1105A P:13.056W PF:0.9466 Freq:59.98Hz Lamp Flux:861.455x1 lm										
NAME: ASD-CD-TS-2D15AC-WH					TYPE:			WEIGHT:		
SPEC.:2700K 90					DIM.:			SERIAL No.:		
MFR.: ASD Lighting Corp					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	3.7	4.5	3.9	4.7	4.9	4.2	5.1	4.5	5.3	5.4
3H	4.4	5.1	4.6	5.3	5.5	4.8	5.6	5.1	5.8	6.0
4H	4.6	5.3	4.9	5.6	5.8	5.0	5.7	5.3	6.0	6.2
6H	4.7	5.4	5.0	5.7	5.9	5.0	5.7	5.3	6.0	6.2
8H	4.7	5.4	5.0	5.7	5.9	5.0	5.7	5.3	5.9	6.2
12H	4.7	5.3	5.0	5.6	5.9	4.9	5.6	5.3	5.9	6.1
4H 2H	4.0	4.7	4.2	4.9	5.1	4.4	5.2	4.7	5.4	5.6
3H	4.8	5.4	5.1	5.7	6.0	5.2	5.8	5.5	6.1	6.4
4H	5.1	5.7	5.4	6.0	6.3	5.4	6.0	5.8	6.3	6.6
6H	5.3	5.8	5.7	6.2	6.5	5.5	6.0	5.9	6.4	6.7
8H	5.3	5.8	5.7	6.2	6.5	5.5	6.0	5.9	6.3	6.7
12H	5.3	5.7	5.7	6.1	6.5	5.4	5.9	5.8	6.2	6.6
8H 4H	5.2	5.7	5.6	6.0	6.4	5.5	6.0	5.9	6.3	6.7
6H	5.4	5.8	5.9	6.2	6.6	5.6	6.0	6.0	6.4	6.8
8H	5.5	5.8	5.9	6.2	6.7	5.5	5.9	6.0	6.3	6.8
12H	5.4	5.7	5.9	6.2	6.6	5.5	5.8	6.0	6.2	6.7
12H 4H	5.1	5.6	5.5	5.9	6.3	5.4	5.9	5.8	6.3	6.6
6H	5.4	5.8	5.8	6.2	6.6	5.5	5.9	6.0	6.3	6.8
8H	5.4	5.7	5.9	6.2	6.6	5.5	5.8	6.0	6.3	6.7
Variations with the observer position at spacings:										
S = 1.0H	+ 0.5 / - 0.7					+ 0.7 / - 0.9				
1.5H	+ 0.6 / - 0.4					+ 0.7 / - 0.6				
2.0H	+ 1.1 / - 0.8					+ 1.2 / - 1.1				

CIE Pub.117, 861.5 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.5)  
 Area: 0.111111 m2

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-09-28

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**UTILIZATION FACTORS TABLE**

Test:U:120.02V I:0.1105A P:13.056W PF:0.9466 Freq:59.98Hz Lamp Flux:861.455x1 lm		
NAME: ASD-CD-TS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	87	80	76	86	80	76	85	80	76	72
0.80	94	88	84	93	88	84	92	87	84	80
1.00	99	93	89	98	92	89	96	92	88	84
1.25	103	97	94	102	97	93	100	96	93	88
1.50	105	100	97	104	100	97	102	98	95	91
2.00	108	104	101	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	111	108	105	110	107	104	106	104	102	95
4.00	114	111	109	112	109	107	108	106	104	97
5.00	115	113	111	113	111	109	109	107	106	98
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-09-28

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**ISOCANDELA DIAGRAM**

Test:U:120.02V I:0.1105A P:13.056W PF:0.9466 Freq:59.98Hz Lamp Flux:861.455x1 lm		
NAME: ASD-CD-TS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

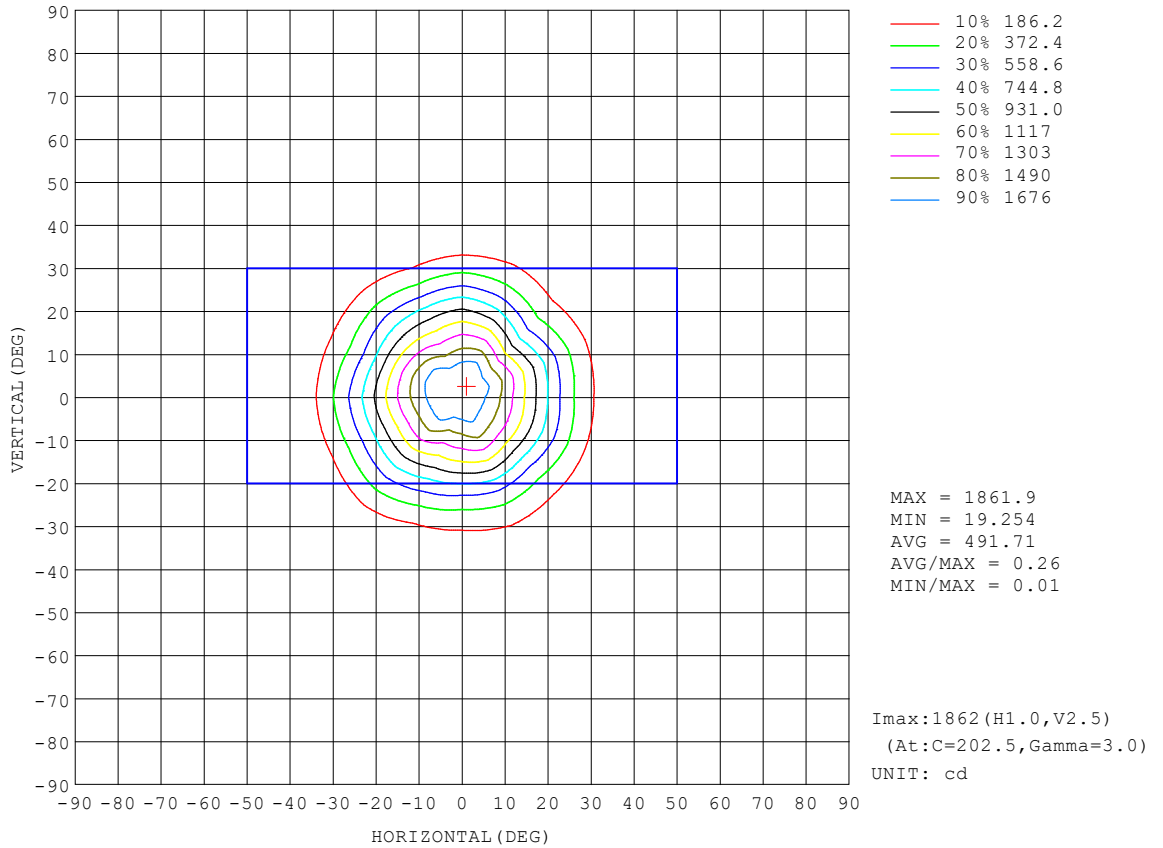


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-09-28

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:



**AAI Figure**

Test:U:120.02V I:0.1105A P:13.056W PF:0.9466 Freq:59.98Hz Lamp Flux:861.455x1 lm		
NAME: ASD-CD-TS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

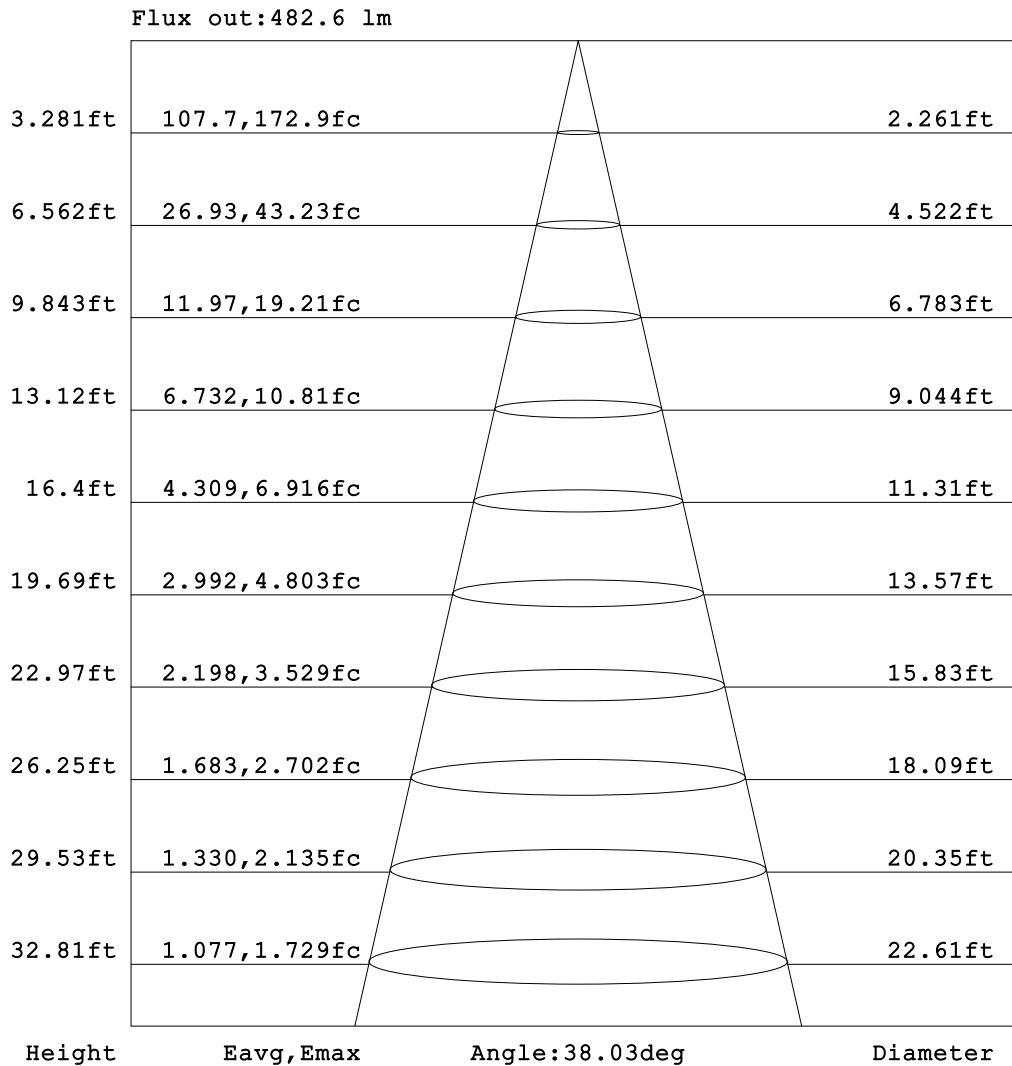


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-09-28

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**ISOLUX DIAGRAM**

Test:U:120.02V I:0.1105A P:13.056W PF:0.9466 Freq:59.98Hz Lamp Flux:861.455x1 lm		
NAME: ASD-CD-TS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

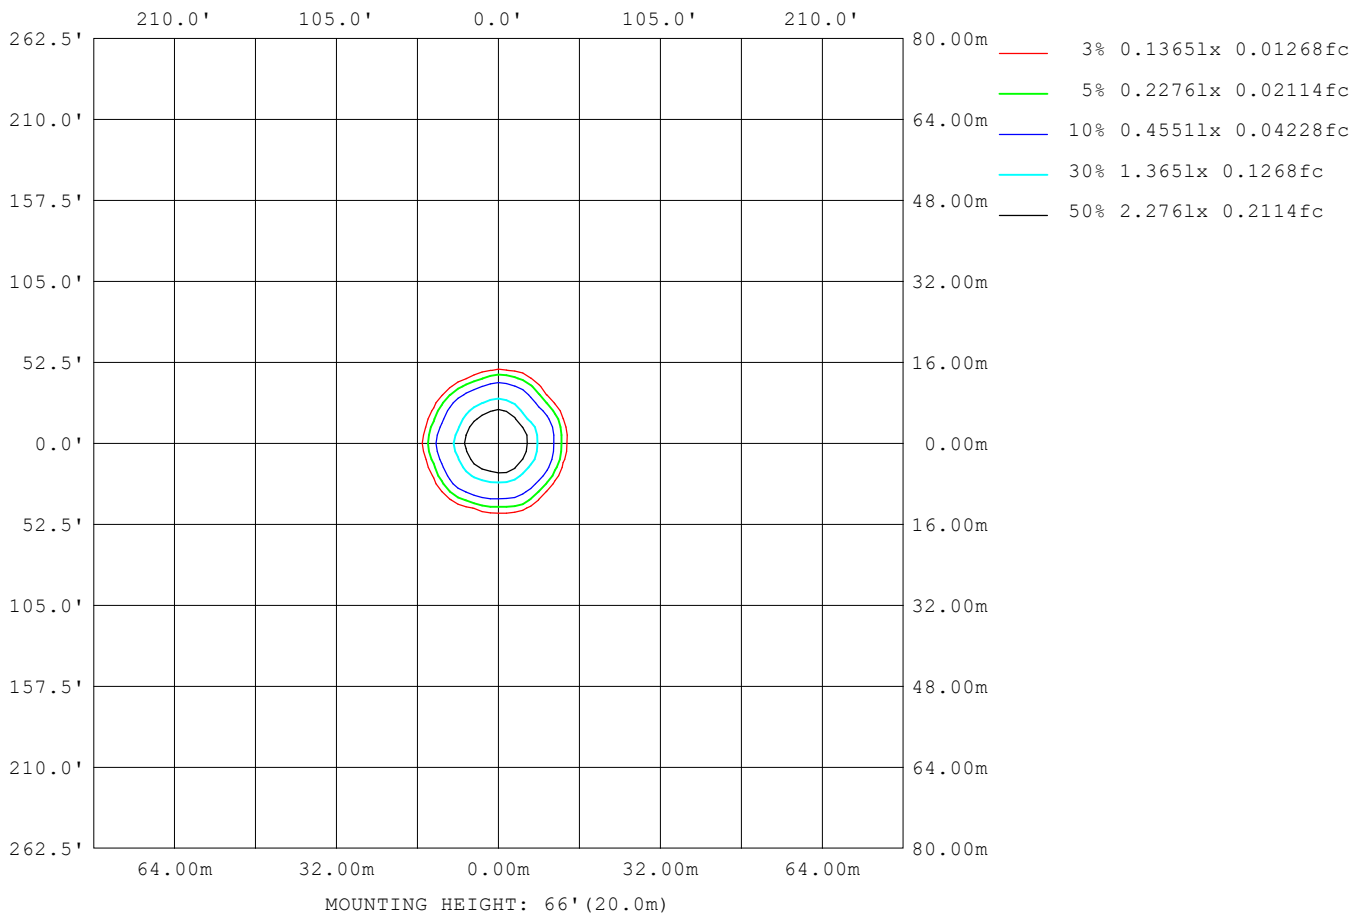

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-09-28

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**LED Avg.L Report**

Test:U:120.02V I:0.1105A P:13.056W PF:0.9466 Freq:59.98Hz Lamp Flux:861.455x1 lm		
NAME: ASD-CD-TS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	254
L_0~180 (75) av	184
L_0~180 (85) av	35
L_90~270 (65) av	240
L_90~270 (75) av	146
L_90~270 (85) av	7
L_45 (65) av	245
L_45 (75) av	165
L_45 (85) av	23

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-09-28

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**Planar Illuminance Curve**

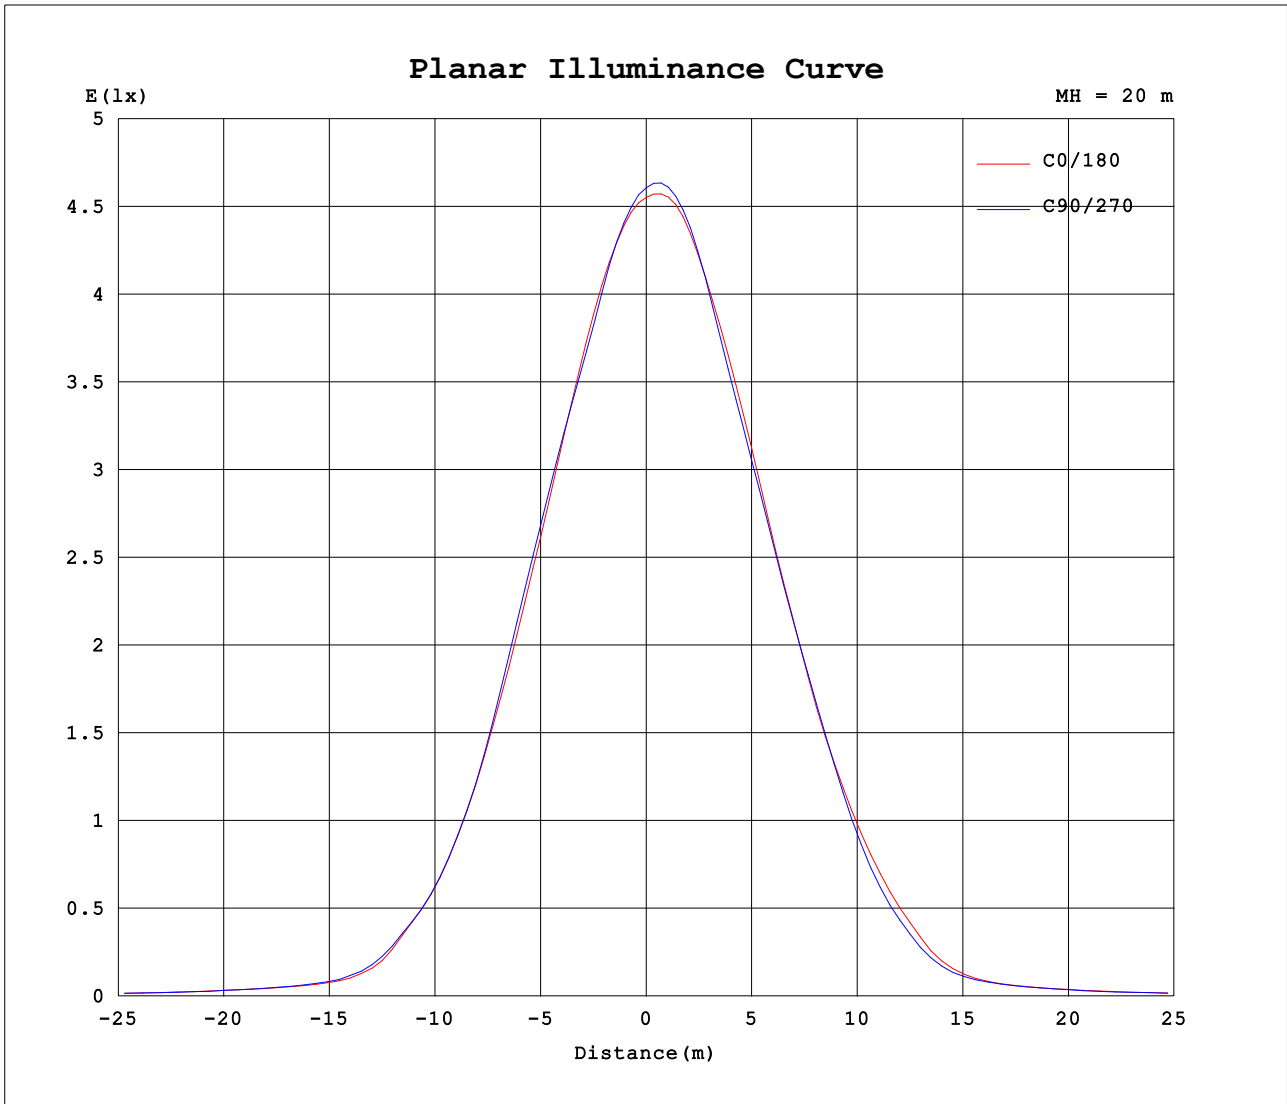

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2021-09-28

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity: 65.0%  
 Test Distance: 3.080m [K=1.0000]  
 Remarks:

**LUMINOUS DISTRIBUTION INTENSITY DATA**

Test:U:120.02V I:0.1105A P:13.056W PF:0.9466 Freq:59.98Hz Lamp Flux:861.455x1 lm		
NAME: ASD-CD-TS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1841	1841	1841	1841	1841	1841	1841	1841	1841	1841	1841	1841	1841	1841	1841	1841			
5	1711	1692	1691	1724	1683	1668	1765	1766	1818	1839	1839	1773	1812	1831	1732	1745			
10	1433	1425	1438	1487	1411	1382	1521	1530	1614	1653	1628	1499	1570	1602	1439	1481			
15	1094	1108	1098	1166	1113	1086	1206	1214	1320	1320	1268	1204	1282	1252	1046	1131			
20	745	766	722	780	747	769	871	875	974	914	915	901	964	881	668	778			
25	430	465	409	451	427	475	577	565	646	558	600	563	623	543	382	469			
30	216	226	212	244	221	238	327	310	372	305	329	278	321	288	197	238			
35	76.6	76.6	76.9	98.4	86.8	88.8	132	118	148	127	130	103	126	123	78.2	89.3			
40	50.0	49.5	48.9	53.8	51.3	51.4	61.0	57.1	65.2	57.7	59.1	55.7	62.1	60.5	48.6	51.0			
45	37.6	37.0	37.4	39.7	37.4	35.1	41.0	39.6	44.5	42.2	42.8	37.8	42.5	42.5	36.0	37.7			
50	29.2	28.8	29.1	30.4	28.5	27.1	29.7	29.1	32.0	32.1	31.6	28.9	30.8	31.4	27.9	28.9			
55	20.5	20.6	20.7	22.4	20.4	19.3	21.9	21.2	23.7	23.7	23.3	20.5	22.5	23.3	20.2	20.7			
60	15.4	15.2	15.4	16.3	15.2	14.5	15.8	15.4	16.8	16.7	16.5	14.9	16.0	16.6	14.9	15.3			
65	11.5	11.4	11.5	12.1	11.4	10.8	11.6	11.4	12.3	12.2	11.7	10.5	11.2	11.8	11.2	11.5			
70	8.12	7.97	8.06	8.37	7.82	7.45	8.09	7.88	8.52	8.29	7.76	6.82	7.20	7.68	7.75	8.07			
75	5.18	5.03	4.94	4.87	4.39	4.30	4.95	5.02	5.40	5.08	4.54	3.82	4.01	4.35	4.59	5.14			
80	2.74	2.62	2.12	1.92	1.60	1.68	2.31	2.64	2.91	2.53	2.01	1.49	1.52	1.72	1.95	2.59			
85	0.23	0.50	0.16	0.08	0.07	0.08	0.34	0.73	0.45	0.61	0.23	0.09	0.07	0.07	0.17	0.49			
90	0.02	0.02	0.02	0.01	0.02	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-09-28

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks: