
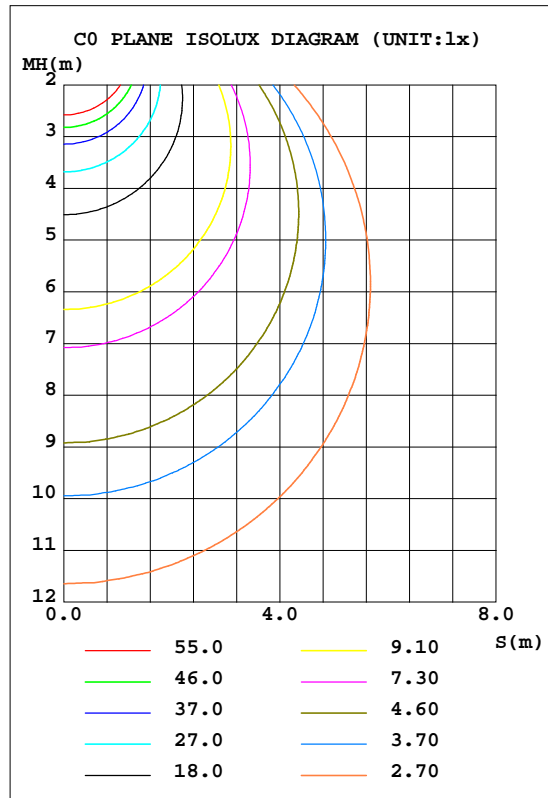


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.00V I:0.1519A P:15.375W PF:0.8161 Freq:60.00Hz Lamp Flux:1121.32x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: ϕ 0.14	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 72.93 lm/W			
MODEL	ASD-LDS-6N15AC-MaxFlux(3000K)	366.2	S/MH(C0/180)	1.25	
NOMINAL POWER(W)	15	LOR(%)	100.0	S/MH(C90/270)	1.25
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	1121.3	h UP, DN(C0-180)	1.2,49.1
NOMINAL FLUX(lm)	1121.32	CIE CLASS	DIRECT	h UP, DN(C180-360)	1.1,48.6
LAMPS INSIDE	1	h up(%)	2.3	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	h down(%)	97.7	CIBSE SHR MAX	1.35

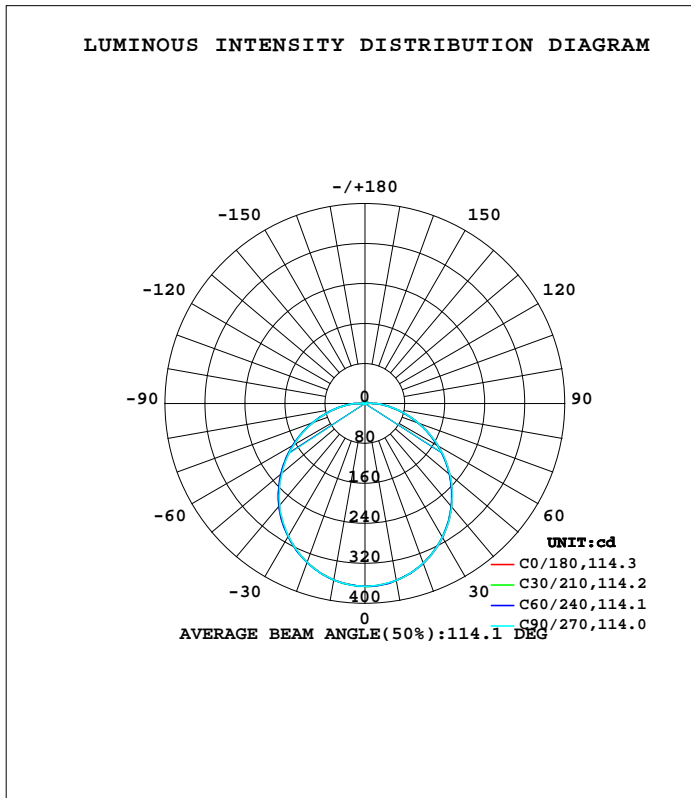

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-06-16

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=0.9540]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	359.6	359.6	359.4	358.6	358.9	358.6	358.3	359.5	0- 10	34.59	34.59	3.08,3.08
20	339.9	340.7	340.4	339.5	338.8	338.2	338.4	339.9	10- 20	99.00	133.6	11.9,11.9
30	309.2	309.9	309.5	308.8	307.7	306.8	306.7	308.4	20- 30	149.9	283.5	25.3,25.3
40	268.7	269.4	270.0	268.0	268.7	267.1	265.1	268.0	30- 40	181.1	464.6	41.4,41.4
50	220.9	221.4	222.3	220.1	220.1	218.9	217.0	221.2	40- 50	189.0	653.6	58.3,58.3
60	167.6	168.4	169.2	166.7	166.7	165.6	164.0	167.3	50- 60	173.5	827.0	73.8,73.8
70	112.3	113.0	113.6	111.2	110.5	110.1	109.1	111.7	60- 70	137.9	964.9	86.1,86.1
80	59.68	60.42	60.96	58.72	57.91	57.56	57.20	59.19	70- 80	89.30	1054	94,94
90	19.46	21.00	21.22	19.91	19.21	17.55	19.02	19.84	80- 90	41.18	1095	97.7,97.7
100	1.188	1.268	0.9494	1.116	3.261	0.9044	0.4068	0.7885	90-100	8.687	1104	98.5,98.5
110	2.962	2.315	1.246	2.072	3.144	2.300	1.501	1.962	100-110	1.427	1106	98.6,98.6
120	5.646	4.591	2.840	4.497	6.358	4.379	2.867	4.004	110-120	3.332	1109	98.9,98.9
130	6.681	5.540	4.607	6.069	7.039	5.233	4.518	5.860	120-130	4.667	1114	99.3,99.3
140	5.674	4.178	4.426	4.723	5.658	3.517	4.128	4.723	130-140	4.039	1118	99.7,99.7
150	2.639	1.269	2.021	1.393	3.014	1.318	2.384	1.469	140-150	2.057	1120	99.8,99.8
160	1.346	2.790	2.190	2.785	1.906	2.094	2.034	2.755	150-160	0.8087	1120	99.9,99.9
170	2.762	1.468	1.415	1.671	2.932	1.921	1.758	1.689	160-170	0.7454	1121	100,100
180	1.458	1.469	1.473	1.509	1.444	1.462	1.453	1.475	170-180	0.1482	1121	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm			

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-06-16

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.700m [K=0.9540]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.00V I:0.1519A P:15.375W PF:0.8161 Freq:60.00Hz Lamp Flux:1121.32x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: $\phi 0.14$	Shielding Angle:

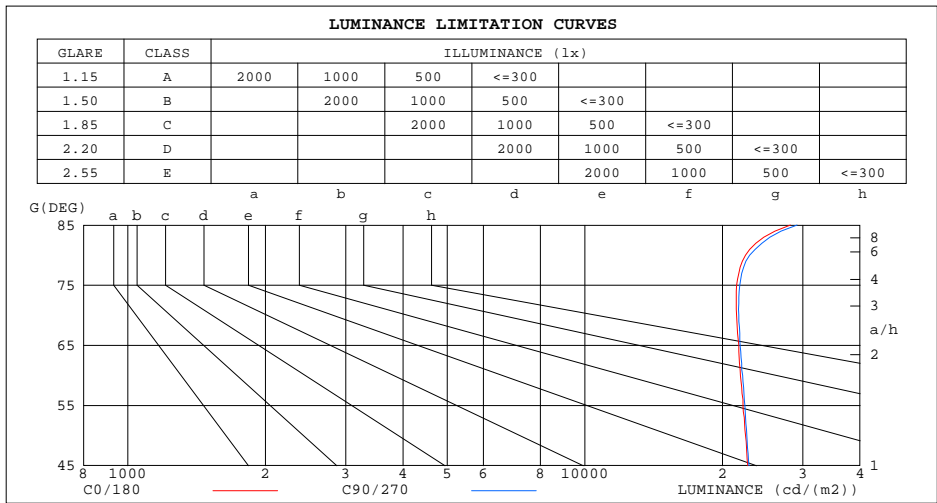

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	28167	29147
80	22477	22965
75	21498	21817
70	21466	21718
65	21712	21874
60	21918	22138
55	22190	22386
50	22473	22621
45	22714	22861


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-06-16

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=0.9540]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.00V I:0.1519A P:15.375W PF:0.8161 Freq:60.00Hz Lamp Flux:1121.32x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: $\phi 0.14$	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.10	1.10	1.10	1.05	1.05	1.05	.00	.00	.00	.98
1.0	1.02	.97	.93	.00	.95	.91	.95	.91	.88	.90	.88	.85	.86	.84	.82	.80
2.0	.88	.81	.75	.86	.80	.74	.82	.77	.72	.79	.74	.70	.75	.71	.68	.66
3.0	.77	.69	.62	.76	.68	.61	.72	.66	.60	.69	.63	.59	.66	.61	.57	.55
4.0	.68	.59	.52	.67	.58	.52	.64	.57	.51	.61	.55	.50	.59	.54	.49	.47
5.0	.61	.52	.45	.60	.51	.45	.57	.50	.44	.55	.48	.43	.53	.47	.42	.40
6.0	.55	.46	.39	.54	.45	.39	.52	.44	.38	.50	.43	.38	.48	.42	.37	.35
7.0	.50	.41	.34	.49	.40	.34	.47	.39	.34	.45	.39	.33	.44	.38	.33	.31
8.0	.45	.37	.31	.44	.36	.31	.43	.36	.30	.42	.35	.30	.40	.34	.30	.28
9.0	.42	.33	.28	.41	.33	.27	.40	.32	.27	.38	.32	.27	.37	.31	.27	.25
10.0	.38	.30	.25	.38	.30	.25	.37	.29	.25	.35	.29	.24	.34	.28	.24	.22

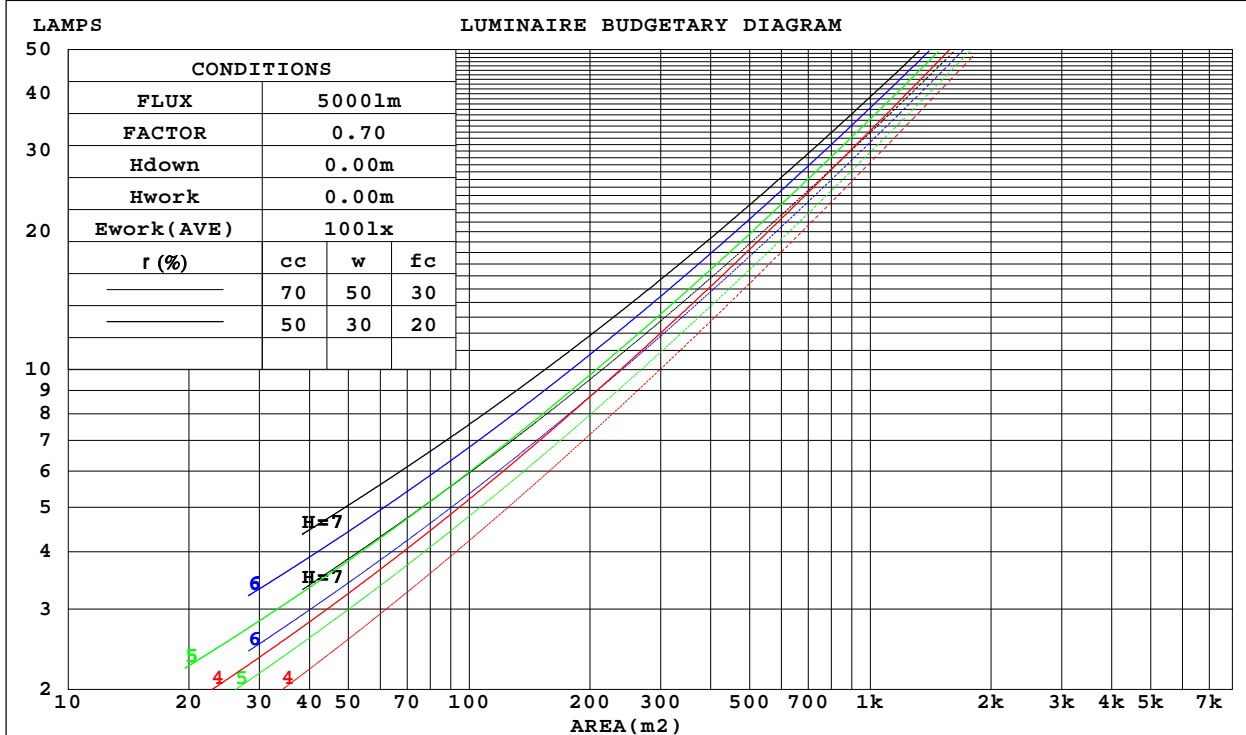

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-06-16

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=0.9540]
 Remarks:

WEC AND CCEC

Test:U:120.00V I:0.1519A P:15.375W PF:0.8161 Freq:60.00Hz Lamp Flux:1121.32x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: φ0.14	Shielding Angle:

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.334	.190	.060	.326	.186	.059	.311	.179	.057	.298	.172	.055	.286	.166	.053	
2.0	.306	.167	.051	.299	.165	.051	.286	.159	.049	.274	.153	.048	.262	.148	.047	
3.0	.279	.149	.044	.273	.146	.044	.261	.142	.043	.251	.137	.042	.241	.133	.041	
4.0	.255	.133	.039	.250	.131	.039	.240	.127	.038	.230	.124	.037	.221	.120	.037	
5.0	.235	.120	.035	.230	.118	.034	.221	.115	.034	.212	.112	.033	.204	.109	.033	
6.0	.217	.109	.031	.213	.107	.031	.204	.105	.030	.197	.102	.030	.190	.100	.030	
7.0	.201	.100	.028	.198	.098	.028	.190	.096	.028	.183	.094	.027	.177	.092	.027	
8.0	.188	.092	.026	.184	.091	.026	.178	.089	.025	.171	.087	.025	.165	.085	.025	
9.0	.176	.085	.024	.172	.084	.024	.166	.082	.023	.161	.081	.023	.155	.079	.023	
10.0	.165	.079	.022	.162	.078	.022	.157	.077	.022	.151	.075	.021	.147	.074	.021	

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.208	.208	.208	.178	.178	.178	.121	.121	.121	.070	.070	.070	.022	.022	.022	
1.0	.200	.174	.150	.171	.149	.129	.117	.103	.089	.067	.059	.052	.022	.019	.017	
2.0	.192	.150	.114	.164	.129	.099	.113	.089	.069	.065	.052	.040	.021	.017	.013	
3.0	.184	.132	.091	.158	.114	.079	.108	.079	.055	.063	.046	.033	.020	.015	.011	
4.0	.176	.119	.075	.151	.103	.066	.104	.072	.046	.060	.042	.027	.019	.014	.009	
5.0	.169	.109	.065	.145	.094	.056	.100	.066	.040	.058	.039	.024	.019	.013	.008	
6.0	.162	.101	.057	.139	.087	.049	.096	.061	.035	.056	.036	.021	.018	.012	.007	
7.0	.155	.094	.051	.133	.081	.044	.092	.057	.032	.053	.034	.019	.017	.011	.006	
8.0	.148	.088	.047	.127	.076	.041	.088	.054	.029	.051	.032	.017	.017	.010	.006	
9.0	.142	.083	.043	.122	.072	.038	.085	.051	.027	.049	.030	.016	.016	.010	.005	
10.0	.136	.079	.041	.117	.068	.035	.081	.048	.025	.047	.028	.015	.015	.009	.005	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-06-16

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=0.9540]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.00V I:0.1519A P:15.375W PF:0.8161 Freq:60.00Hz Lamp Flux:1121.32x1 lm										
NAME:					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: ASD LIGHTING CORP					SUR.: φ0.14			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.8	24.4	23.2	24.7	25.1	22.7	24.3	23.1	24.7	25.1
3H	24.8	26.2	25.2	26.6	27.0	24.7	26.2	25.2	26.6	27.0
4H	25.6	27.0	26.0	27.4	27.8	25.6	27.0	26.0	27.4	27.8
6H	26.3	27.6	26.8	28.0	28.5	26.3	27.6	26.8	28.1	28.5
8H	26.7	27.9	27.1	28.3	28.8	26.7	27.9	27.1	28.4	28.8
12H	27.0	28.2	27.4	28.6	29.1	27.0	28.2	27.5	28.6	29.1
4H 2H	23.4	24.8	23.9	25.2	25.7	23.4	24.8	23.8	25.2	25.6
3H	25.7	26.9	26.1	27.3	27.8	25.6	26.8	26.1	27.3	27.7
4H	26.7	27.7	27.1	28.2	28.7	26.6	27.7	27.1	28.2	28.7
6H	27.6	28.5	28.1	29.0	29.5	27.6	28.5	28.0	29.0	29.5
8H	28.0	28.9	28.5	29.3	29.9	28.0	28.9	28.5	29.3	29.9
12H	28.4	29.2	28.9	29.7	30.2	28.4	29.2	28.9	29.7	30.2
8H 4H	27.1	28.0	27.6	28.5	29.0	27.0	27.9	27.5	28.4	28.9
6H	28.2	28.9	28.7	29.4	30.0	28.1	28.9	28.6	29.4	29.9
8H	28.7	29.4	29.2	29.9	30.4	28.7	29.3	29.2	29.9	30.4
12H	29.2	29.8	29.8	30.4	31.0	29.2	29.8	29.8	30.3	31.0
12H 4H	27.2	28.0	27.7	28.5	29.0	27.1	27.9	27.6	28.4	28.9
6H	28.3	29.0	28.8	29.5	30.1	28.2	28.9	28.8	29.4	30.0
8H	28.9	29.5	29.4	30.0	30.6	28.9	29.5	29.4	30.0	30.6
CIE190: 2010										

CIE190: 2010
Area: 0.0153 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-06-16

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.700m [K=0.9540]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.00V I:0.1519A P:15.375W PF:0.8161 Freq:60.00Hz Lamp Flux:1121.32x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: $\phi 0.14$	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	56	44	37	55	44	37	54	43	36	30
0.80	66	54	46	64	53	46	62	52	45	38
1.00	74	62	55	72	62	54	70	63	54	46
1.25	81	70	62	79	69	62	76	67	61	53
1.50	86	75	68	84	74	67	81	72	66	58
2.00	93	84	77	91	82	76	87	80	74	66
2.50	97	88	82	95	87	81	90	84	79	70
3.00	100	93	87	98	91	86	93	88	83	74
4.00	104	98	93	102	96	92	97	93	89	79
5.00	107	102	97	104	100	95	99	95	92	82
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-06-16

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=0.9540]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.00V I:0.1519A P:15.375W PF:0.8161 Freq:60.00Hz Lamp Flux:1121.32x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: $\phi 0.14$	Shielding Angle:

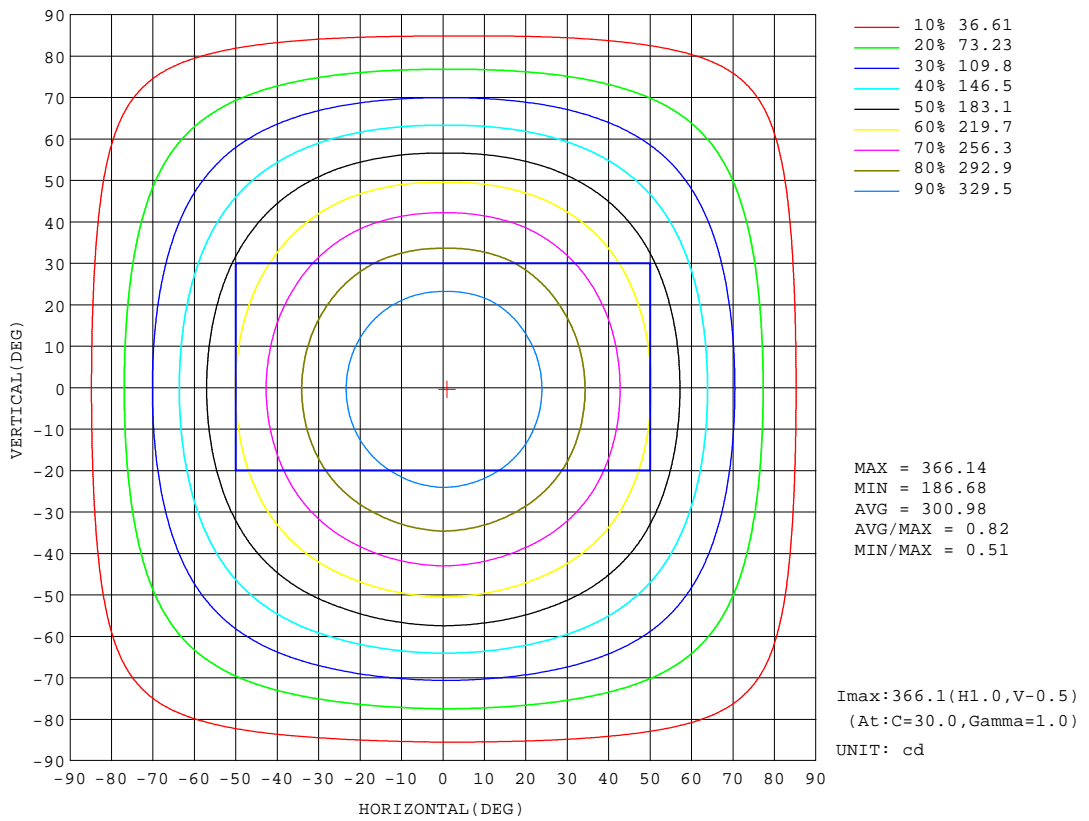


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-06-16

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=0.9540]
 Remarks:

AAI Figure

Test:U:120.00V I:0.1519A P:15.375W PF:0.8161 Freq:60.00Hz Lamp Flux:1121.32x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: $\phi 0.14$	Shielding Angle:

Flux out:794.6 lm

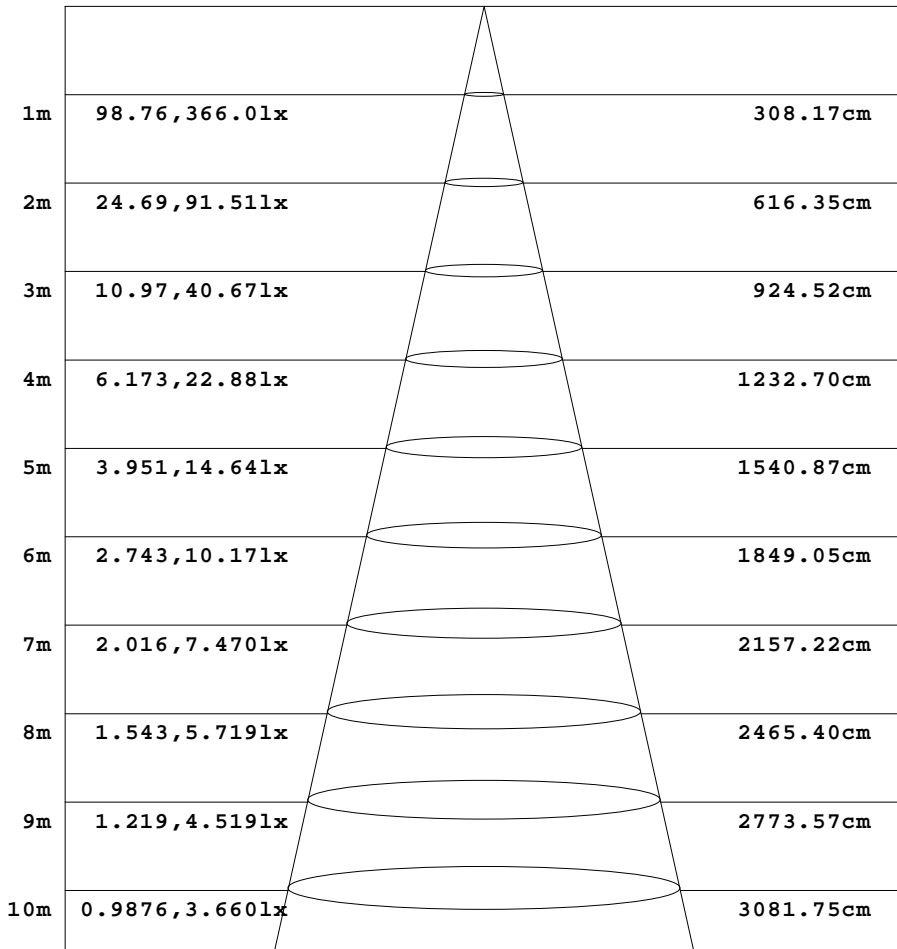

Height Eavg, Emax Angle:114.03deg Diameter


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-06-16

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=0.9540]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.00V I:0.1519A P:15.375W PF:0.8161 Freq:60.00Hz Lamp Flux:1121.32x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: $\phi 0.14$	Shielding Angle:

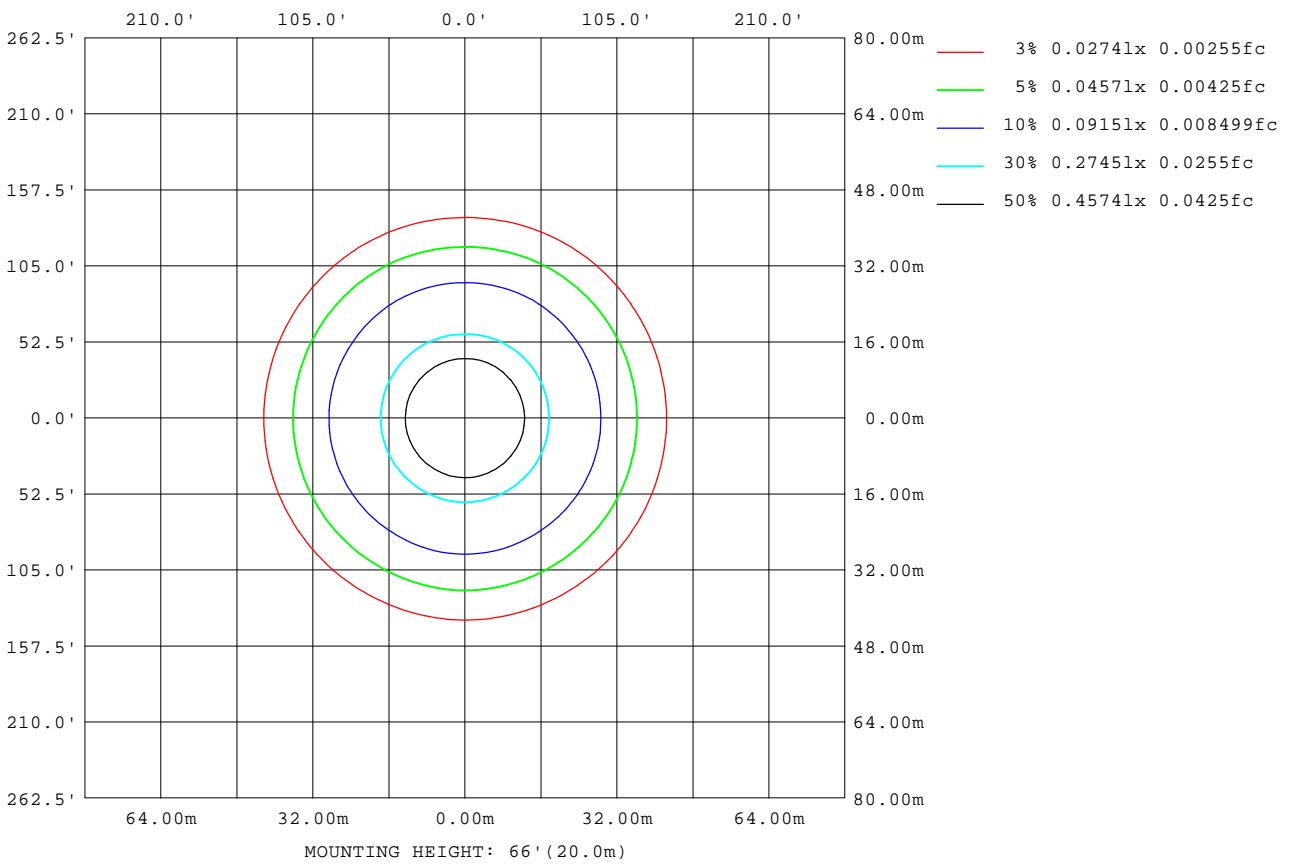

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-06-16

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=0.9540]
 Remarks:

LED Avg.L Report

Test:U:120.00V I:0.1519A P:15.375W PF:0.8161 Freq:60.00Hz Lamp Flux:1121.32x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: $\phi 0.14$	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	21574
L_0~180(75)av	21254
L_0~180(85)av	27539
L_90~270(65)av	21511
L_90~270(75)av	21275
L_90~270(85)av	27947
L_45(65)av	21578
L_45(75)av	21307
L_45(85)av	27864

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-06-16

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.700m [K=0.9540]
Remarks:

Planar Illuminance Curve

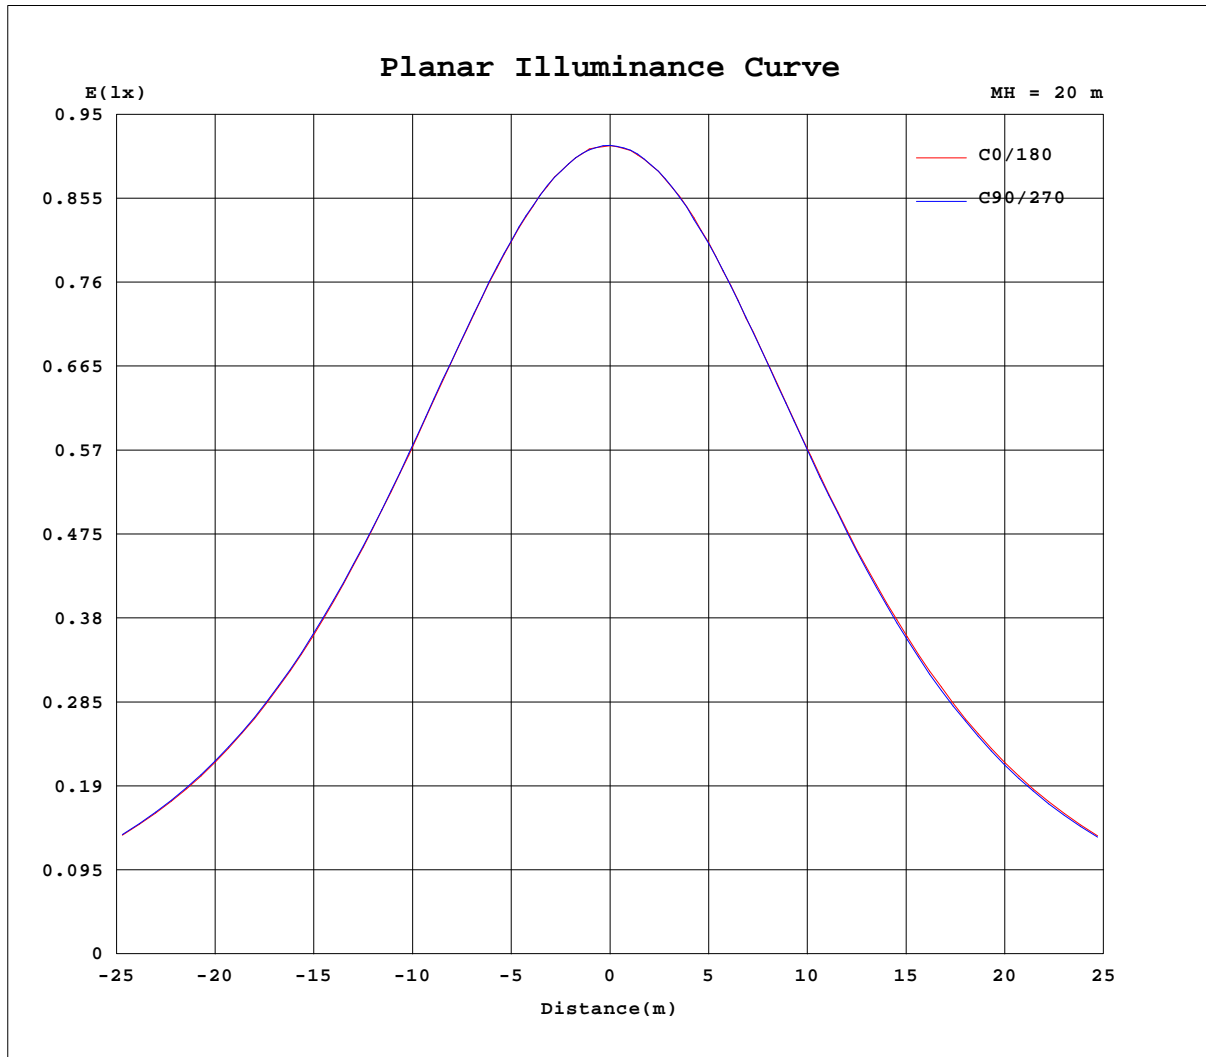

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-06-16

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.700m [K=0.9540]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.00V I:0.1519A P:15.375W PF:0.8161 Freq:60.00Hz Lamp Flux:1121.32x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTING CORP	SUR.: φ0.14	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	366	366	366	366	366	366	366	366	366	366	366	366						
5	364	365	364	364	364	364	364	363	364	364	364	364						
10	360	360	360	359	359	358	359	359	359	358	359	360						
15	351	351	352	352	351	350	350	350	350	350	351	352						
20	340	340	341	340	339	340	339	338	338	338	340	340						
25	326	326	327	326	325	326	324	324	324	324	325	326						
30	309	310	310	309	309	309	308	307	307	307	308	308						
35	290	291	291	291	289	290	289	288	289	287	290	289						
40	269	270	269	270	268	268	269	267	267	265	268	268						
45	246	247	246	247	244	245	245	243	244	242	245	245						
50	221	222	221	222	220	221	220	219	219	217	220	222						
55	195	196	195	196	193	194	194	192	193	191	194	194						
60	168	169	168	169	166	167	167	165	166	164	167	168						
65	140	141	141	141	139	139	139	138	138	137	139	140						
70	112	113	113	114	111	111	111	110	110	109	111	112						
75	85.1	85.9	86.0	86.3	84.3	83.9	83.3	82.8	83.1	82.2	84.2	84.9						
80	59.7	60.4	60.5	61.0	59.0	58.4	57.9	57.4	57.8	57.2	58.9	59.5						
85	37.5	38.3	38.9	38.8	37.5	36.6	35.9	35.5	35.9	35.7	37.1	37.4						
90	19.5	21.0	21.0	21.2	20.0	19.8	19.2	16.0	19.1	19.0	20.2	19.5						
95	9.24	6.65	5.26	8.33	5.79	7.84	8.60	6.80	5.39	6.80	6.02	6.51						
100	1.19	0.72	1.81	0.95	1.52	0.71	3.26	0.81	1.00	0.41	0.87	0.71						
105	1.93	1.63	0.95	0.77	0.92	1.19	2.05	1.56	1.03	0.81	0.98	1.53						
110	2.96	2.88	1.75	1.25	1.74	2.40	3.14	3.19	1.41	1.50	1.79	2.13						
115	4.73	4.96	2.65	2.15	2.49	4.20	5.20	4.70	2.50	2.06	2.22	3.43						
120	5.65	5.57	3.62	2.84	3.40	5.60	6.36	5.55	3.20	2.87	3.03	4.98						
125	6.56	6.35	4.48	4.12	5.29	6.44	6.96	6.15	3.81	3.68	4.32	5.81						
130	6.68	6.39	4.69	4.61	6.01	6.12	7.04	6.27	4.19	4.52	5.70	6.02						
135	6.38	5.69	4.27	5.13	5.67	5.60	6.71	5.02	3.89	5.44	4.46	5.34						
140	5.67	5.27	3.08	4.43	4.44	5.01	5.66	4.89	2.14	4.13	4.30	5.15						
145	5.04	3.57	1.99	4.09	3.43	2.50	5.25	3.67	1.72	2.46	2.56	2.14						
150	2.64	1.27	1.27	2.02	1.20	1.58	3.01	1.41	1.23	2.38	1.58	1.36						
155	1.59	1.66	2.02	1.42	2.00	1.44	1.70	1.58	2.30	1.86	1.95	1.35						
160	1.35	2.44	3.14	2.19	4.05	1.52	1.91	1.69	2.50	2.03	4.06	1.45						
165	3.70	1.78	2.90	2.47	2.37	3.05	3.96	2.05	3.50	2.67	1.93	3.14						
170	2.76	1.47	1.46	1.41	1.49	1.85	2.93	1.73	2.11	1.76	1.48	1.90						
175	1.43	1.43	1.43	1.46	1.47	1.55	1.44	1.47	1.45	1.46	1.45	1.48						
180	1.46	1.45	1.48	1.47	1.49	1.53	1.44	1.46	1.46	1.45	1.43	1.52						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-06-16

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.700m [K=0.9540]
 Remarks: