
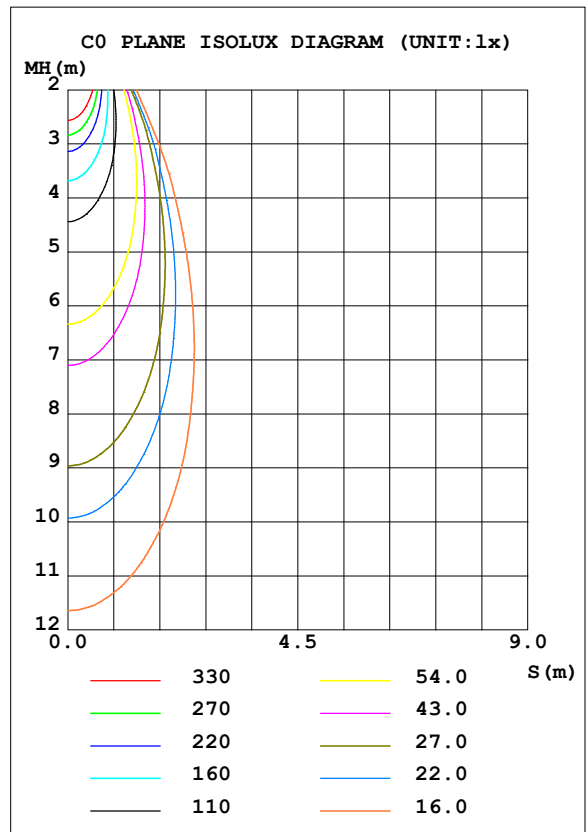


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.02V I:0.1066A P:12.596W PF:0.9466 Freq:59.98Hz Lamp Flux:1026.37x1 lm		
NAME: ASD-CD-TS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:4000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 81.49 lm/W			
MODEL		I _{max} (cd)	2159	S/MH (C0/180)	0.65
NOMINAL POWER (W)	15	LOR (%)	100.0	S/MH (C90/270)	0.61
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	1026.4	<input type="checkbox"/> UP, DN (C0-180)	0.0, 50.9
NOMINAL FLUX (lm)	1026.37	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 49.1
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	0.65

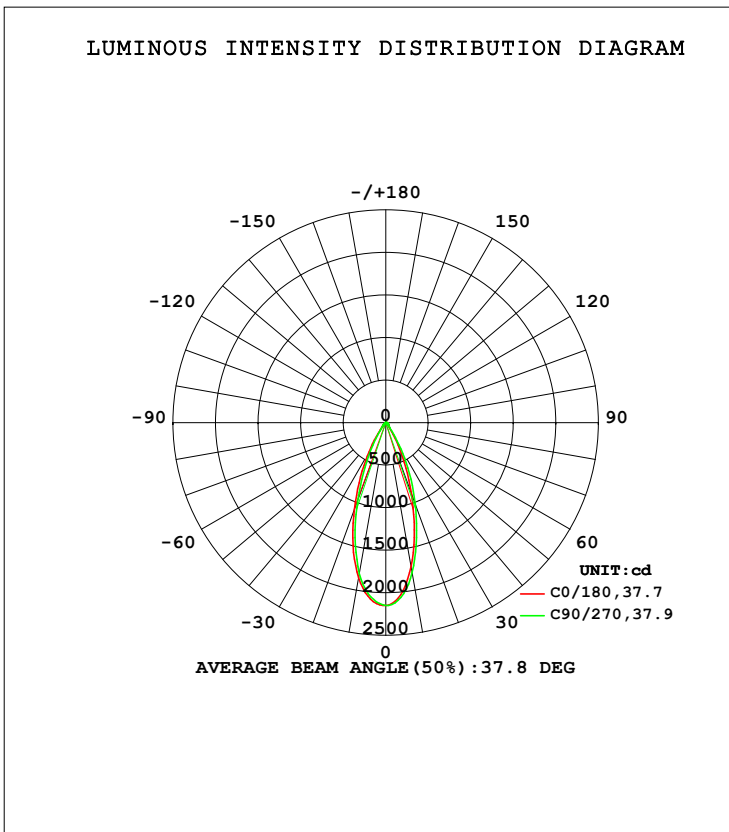

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-09-28

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	□ zone	□ total	%lum, lamp
10	1715	1867	1787	1878	1850	1710	1799	1693	0- 10	187.8	187.8	18.3,18.3
20	883.3	1078	1015	1108	1080	902.7	962.1	868.3	10- 20	382.5	570.3	55.6,55.6
30	258.2	380.3	363.1	408.7	396.9	277.3	307.7	252.8	20- 30	281.3	851.6	83,83
40	58.70	69.37	71.51	75.38	72.47	58.75	67.40	60.25	30- 40	93.24	944.8	92.1,92.1
50	34.07	37.38	34.75	36.82	36.86	34.29	36.82	34.50	40- 50	37.26	982.1	95.7,95.7
60	17.92	19.80	18.42	19.63	19.49	17.92	19.37	18.50	50- 60	23.61	1006	98,98
70	9.445	10.07	9.364	9.977	9.857	8.658	8.887	9.652	60- 70	13.79	1019	99.3,99.3
80	3.189	2.727	1.918	2.847	3.384	2.205	1.897	2.440	70- 80	6.122	1026	99.9,99.9
90	0.0344	0.0263	0.0308	0.0279	0.0367	0.0372	0.0355	0.0400	80- 90	0.7665	1026	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-09-28

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.02V I:0.1066A P:12.596W PF:0.9466 Freq:59.98Hz Lamp Flux:1026.37x1 lm		
NAME: ASD-CD-TS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:4000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

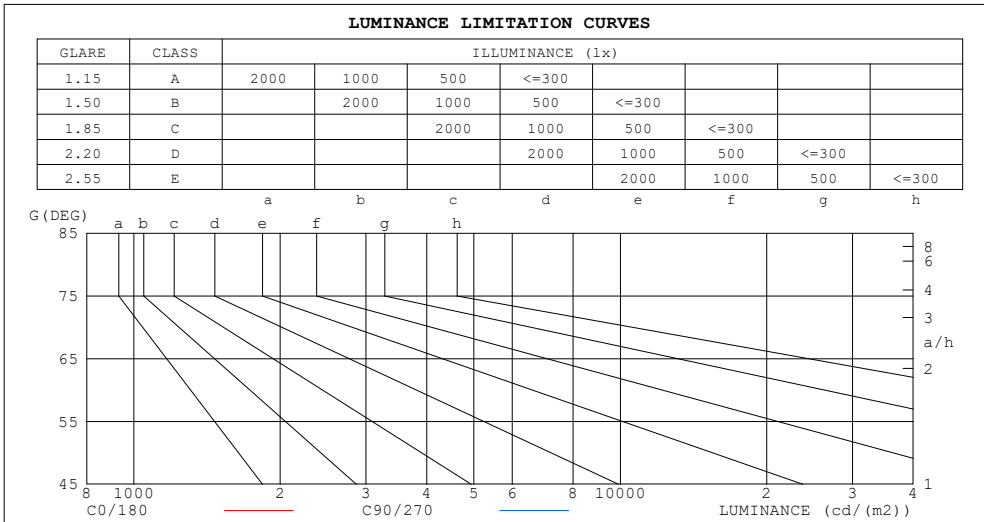

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	28	10
80	167	99
75	211	182
70	251	246
65	288	291
60	326	331
55	380	391
50	481	485
45	561	593


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-09-28

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.02V I:0.1066A P:12.596W PF:0.9466 Freq:59.98Hz Lamp Flux:1026.37x1 lm		
NAME: ASD-CD-TS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:4000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.05	1.03	1.02	1.01	1.00	.99	.98	.97	.96	.94
2.0	1.04	1.00	.97	1.03	.99	.96	.99	.97	.94	.96	.94	.92	.94	.92	.90	.89
3.0	.98	.93	.90	.97	.92	.89	.94	.91	.88	.92	.89	.86	.89	.87	.85	.83
4.0	.93	.87	.84	.91	.87	.83	.89	.85	.82	.87	.84	.81	.86	.83	.80	.79
5.0	.88	.82	.78	.87	.82	.78	.85	.81	.77	.83	.80	.77	.82	.79	.76	.75
6.0	.83	.78	.74	.82	.77	.74	.81	.77	.73	.80	.76	.73	.78	.75	.72	.71
7.0	.79	.74	.70	.79	.74	.70	.77	.73	.70	.76	.72	.69	.75	.72	.69	.68
8.0	.76	.70	.67	.75	.70	.67	.74	.69	.66	.73	.69	.66	.72	.68	.66	.64
9.0	.72	.67	.64	.72	.67	.63	.71	.66	.63	.70	.66	.63	.69	.66	.63	.62
10.0	.69	.64	.61	.69	.64	.61	.68	.64	.60	.67	.63	.60	.67	.63	.60	.59

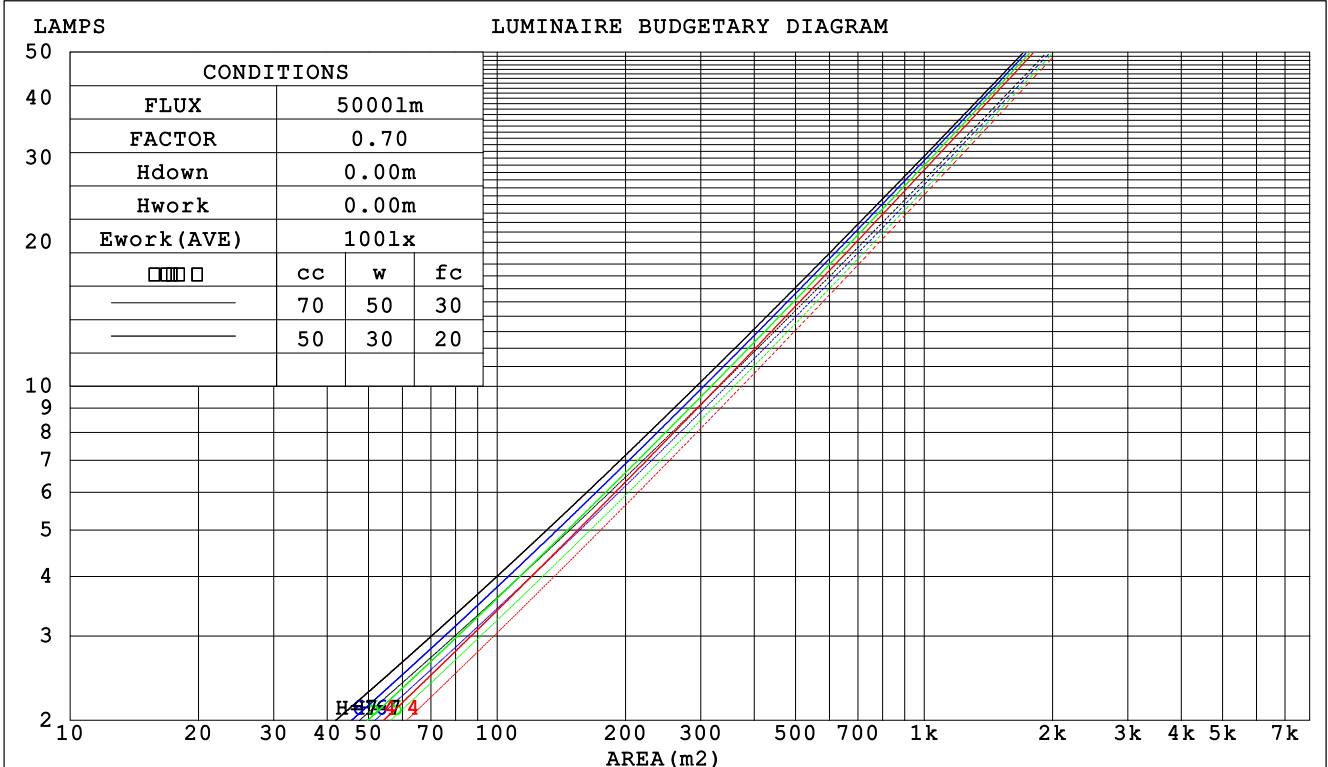

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-09-28

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:120.02V I:0.1066A P:12.596W PF:0.9466 Freq:59.98Hz Lamp Flux:1026.37x1 lm		
NAME: ASD-CD-TS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:4000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients (WEC)			
0.0						
1.0	.169 .096 .030	.162 .092 .029	.149 .086 .027	.138 .080 .026	.127 .074 .024	
2.0	.160 .087 .027	.154 .085 .026	.143 .080 .025	.134 .075 .023	.125 .071 .022	
3.0	.150 .080 .024	.146 .078 .023	.137 .074 .023	.129 .070 .022	.121 .067 .021	
4.0	.142 .074 .022	.138 .072 .021	.130 .069 .021	.123 .066 .020	.117 .063 .019	
5.0	.134 .068 .020	.131 .067 .020	.124 .065 .019	.118 .062 .019	.112 .060 .018	
6.0	.127 .064 .018	.124 .063 .018	.119 .061 .018	.113 .059 .017	.108 .057 .017	
7.0	.121 .060 .017	.119 .059 .017	.113 .057 .017	.109 .056 .016	.104 .054 .016	
8.0	.116 .056 .016	.113 .056 .016	.109 .054 .016	.105 .053 .015	.101 .052 .015	
9.0	.111 .053 .015	.108 .053 .015	.104 .052 .015	.101 .050 .014	.097 .049 .014	
10.0	.106 .051 .014	.104 .050 .014	.100 .049 .014	.097 .048 .014	.094 .047 .014	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients (CCEC)			
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.171 .157 .146	.146 .135 .125	.100 .093 .087	.057 .054 .050	.018 .017 .016	
2.0	.155 .133 .114	.132 .114 .099	.091 .079 .069	.052 .046 .040	.017 .015 .013	
3.0	.141 .113 .091	.121 .098 .079	.083 .068 .055	.048 .040 .033	.015 .013 .011	
4.0	.130 .099 .074	.112 .085 .065	.077 .059 .045	.045 .035 .027	.014 .011 .009	
5.0	.121 .087 .061	.104 .075 .053	.072 .052 .038	.041 .031 .022	.013 .010 .007	
6.0	.113 .077 .052	.097 .067 .045	.067 .047 .032	.039 .028 .019	.013 .009 .006	
7.0	.106 .069 .044	.091 .060 .038	.063 .042 .027	.037 .025 .016	.012 .008 .005	
8.0	.100 .063 .038	.086 .055 .033	.060 .038 .023	.035 .023 .014	.011 .007 .005	
9.0	.095 .058 .033	.082 .050 .029	.057 .035 .020	.033 .021 .012	.011 .007 .004	
10.0	.090 .053 .029	.078 .046 .025	.054 .032 .018	.031 .019 .011	.010 .006 .004	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-09-28

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.02V I:0.1066A P:12.596W PF:0.9466 Freq:59.98Hz Lamp Flux:1026.37x1 lm										
NAME: ASD-CD-TS-2D15AC-WH					TYPE:			WEIGHT:		
SPEC.:4000K 90					DIM.:			SERIAL No.:		
MFR.: ASD Lighting Corp					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	3.9	4.8	4.2	5.0	5.1	5.4	6.3	5.7	6.5	6.6
3H	4.6	5.3	4.8	5.5	5.7	5.8	6.6	6.1	6.8	7.0
4H	4.8	5.5	5.0	5.7	6.0	5.9	6.7	6.2	6.9	7.1
6H	4.9	5.6	5.2	5.8	6.1	5.9	6.6	6.2	6.9	7.1
8H	4.9	5.6	5.2	5.8	6.1	5.9	6.6	6.2	6.8	7.1
12H	4.9	5.5	5.2	5.8	6.0	5.8	6.5	6.2	6.8	7.0
4H 2H	4.2	5.0	4.5	5.2	5.4	5.5	6.3	5.8	6.5	6.7
3H	5.0	5.7	5.3	5.9	6.2	6.1	6.7	6.4	7.0	7.3
4H	5.3	5.9	5.6	6.2	6.5	6.2	6.8	6.6	7.1	7.4
6H	5.5	6.0	5.9	6.3	6.7	6.3	6.8	6.7	7.1	7.5
8H	5.5	6.0	5.9	6.3	6.7	6.2	6.7	6.6	7.1	7.4
12H	5.5	5.9	5.9	6.3	6.7	6.2	6.6	6.6	7.0	7.4
8H 4H	5.4	5.8	5.8	6.2	6.6	6.3	6.7	6.6	7.1	7.5
6H	5.6	6.0	6.0	6.4	6.8	6.3	6.7	6.7	7.1	7.5
8H	5.6	6.0	6.1	6.4	6.8	6.3	6.6	6.7	7.1	7.5
12H	5.6	5.9	6.1	6.3	6.8	6.2	6.5	6.7	7.0	7.4
12H 4H	5.3	5.8	5.7	6.1	6.5	6.2	6.7	6.6	7.0	7.4
6H	5.6	5.9	6.0	6.3	6.8	6.3	6.6	6.7	7.1	7.5
8H	5.6	5.9	6.1	6.4	6.8	6.3	6.6	6.7	7.0	7.5
Variations with the observer position at spacings:										
S = 1.0H	+ 0.6 / - 0.8					+ 0.9 / - 1.2				
1.5H	+ 0.5 / - 0.4					+ 1.4 / - 0.9				
2.0H	+ 1.0 / - 0.8					+ 1.2 / - 1.2				

CIE Pub.117, 1026 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 0.1)
 Area: 0.111111 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-09-28

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.02V I:0.1066A P:12.596W PF:0.9466 Freq:59.98Hz Lamp Flux:1026.37x1 lm		
NAME: ASD-CD-TS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:4000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	87	80	76	86	80	76	85	80	76	72
0.80	94	88	84	93	88	84	92	87	84	80
1.00	99	93	89	98	92	89	96	92	88	84
1.25	103	97	94	102	97	93	100	95	92	88
1.50	105	100	97	104	100	97	102	98	95	91
2.00	108	104	101	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	111	108	105	110	107	104	106	104	102	95
4.00	114	111	108	112	109	107	108	106	104	97
5.00	115	113	111	113	111	109	109	107	106	98
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-09-28

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.02V I:0.1066A P:12.596W PF:0.9466 Freq:59.98Hz Lamp Flux:1026.37x1 lm		
NAME: ASD-CD-TS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:4000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

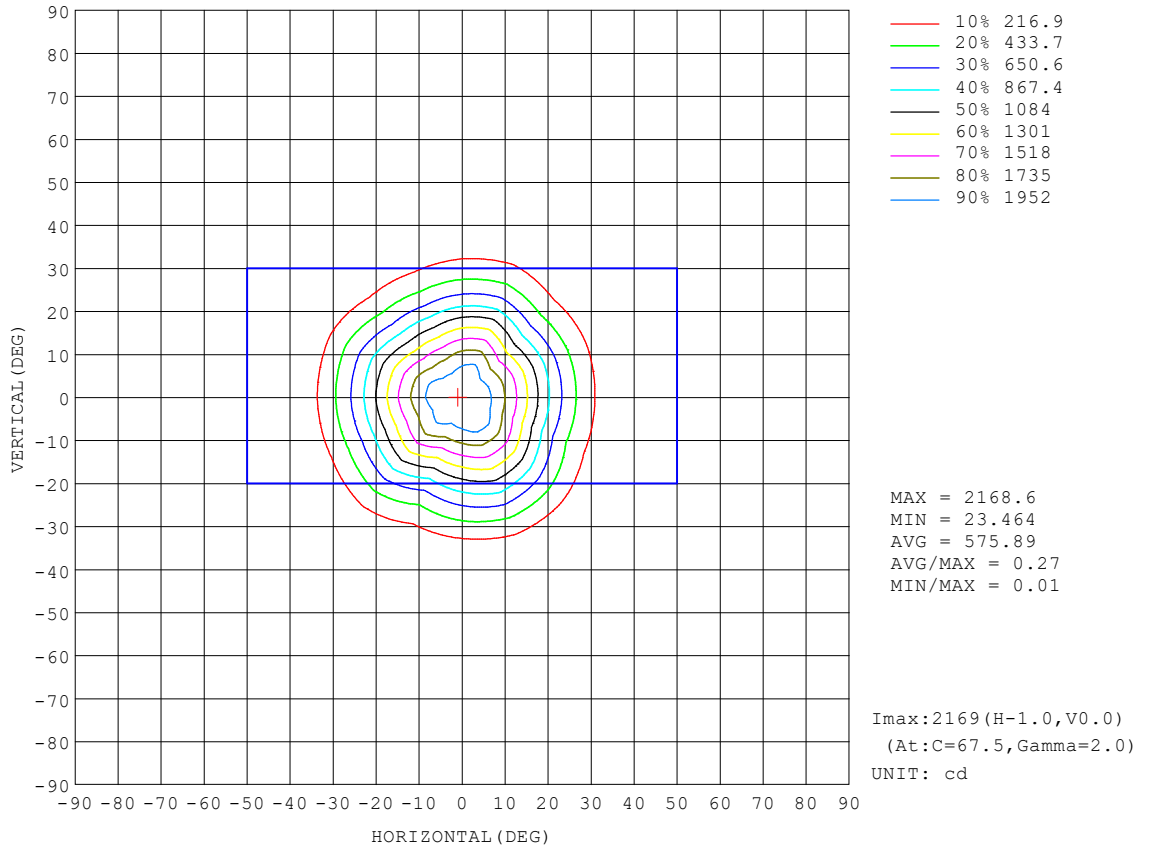


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-09-28

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

AAI Figure

Test:U:120.02V I:0.1066A P:12.596W PF:0.9466 Freq:59.98Hz Lamp Flux:1026.37x1 lm		
NAME: ASD-CD-TS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:4000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

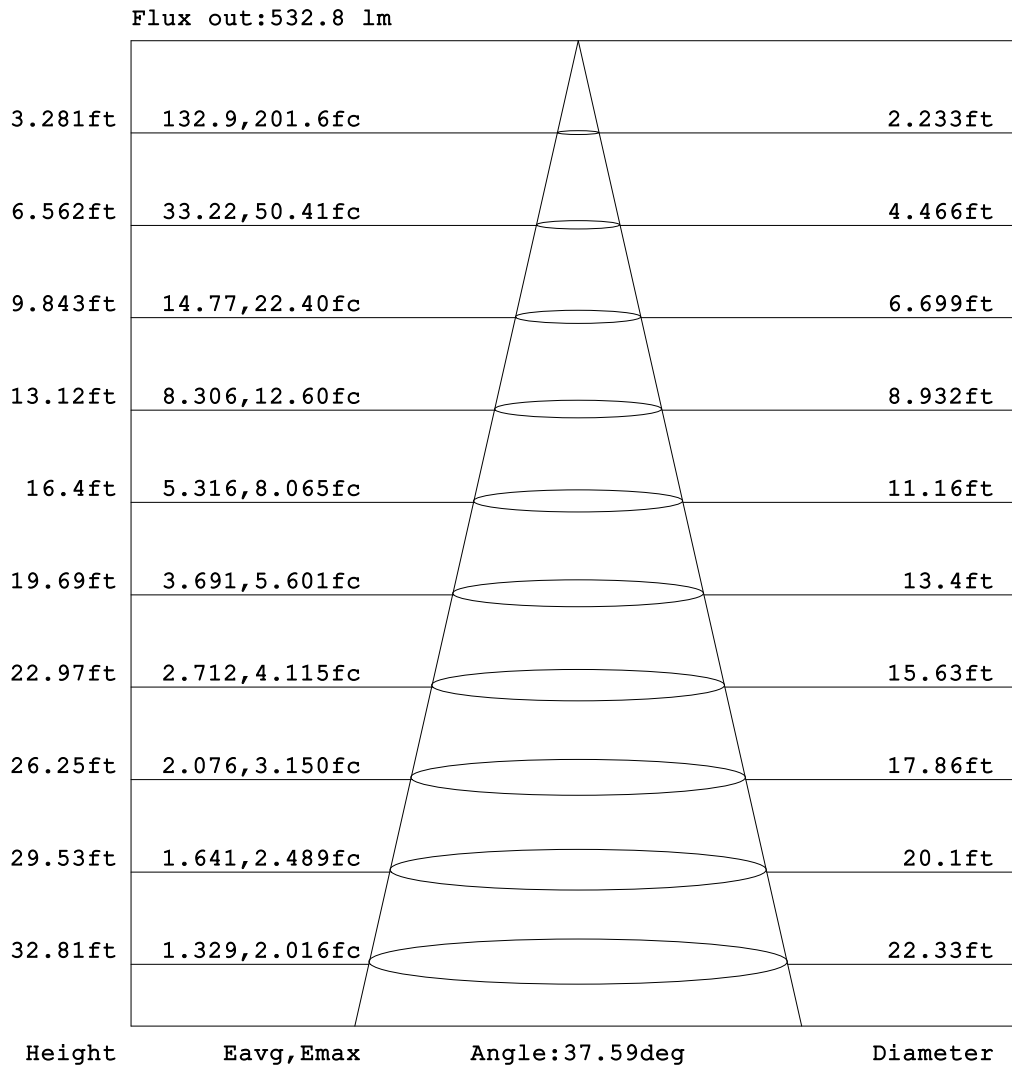


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-09-28

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.02V I:0.1066A P:12.596W PF:0.9466 Freq:59.98Hz Lamp Flux:1026.37x1 lm		
NAME: ASD-CD-TS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:4000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

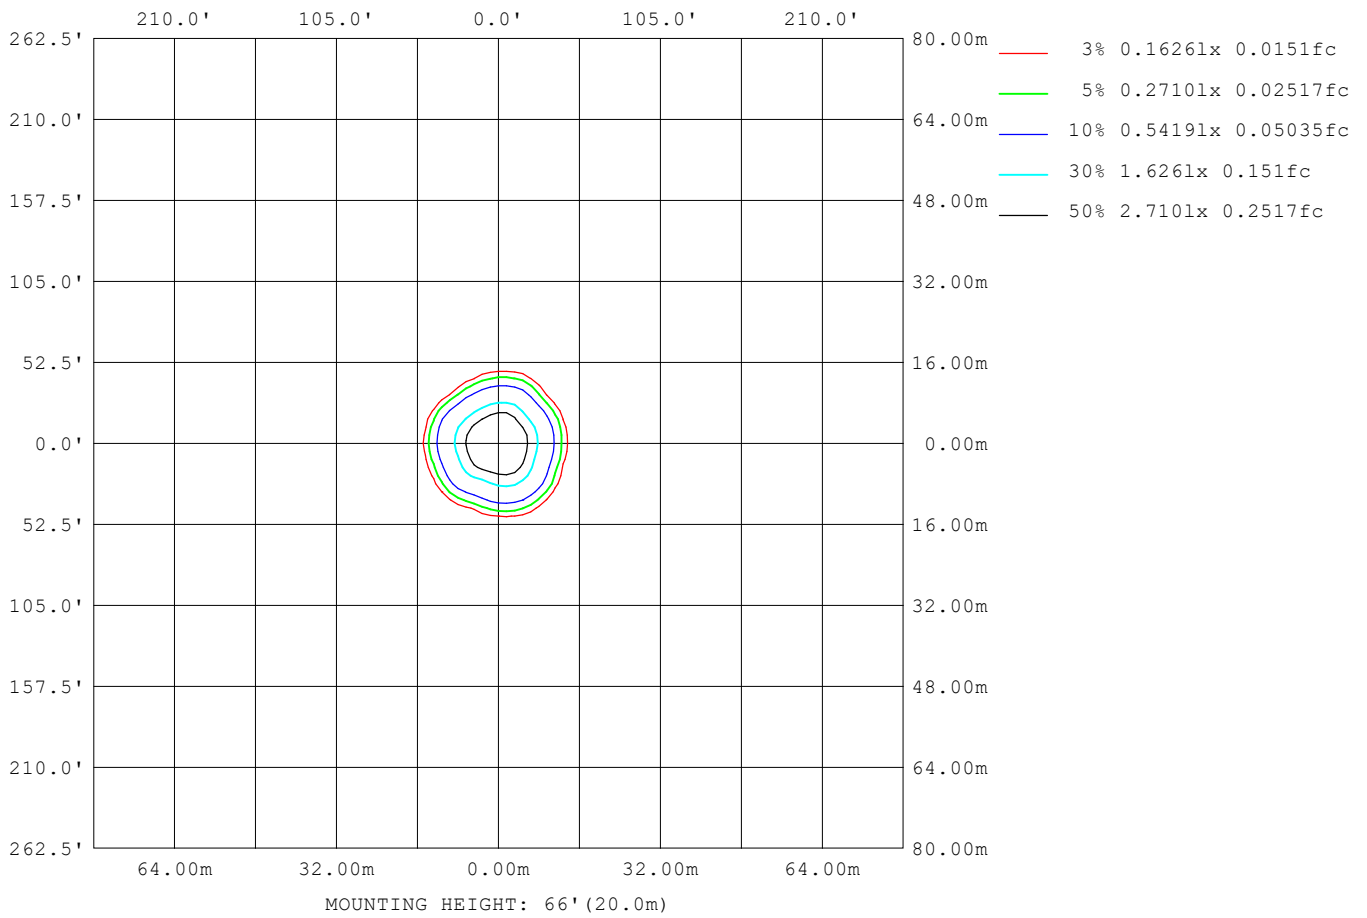

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-09-28

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:120.02V I:0.1066A P:12.596W PF:0.9466 Freq:59.98Hz Lamp Flux:1026.37x1 lm		
NAME: ASD-CD-TS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:4000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	294
L_0~180 (75) av	213
L_0~180 (85) av	40
L_90~270 (65) av	292
L_90~270 (75) av	177
L_90~270 (85) av	9
L_45 (65) av	297
L_45 (75) av	200
L_45 (85) av	27

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-09-28

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

Planar Illuminance Curve

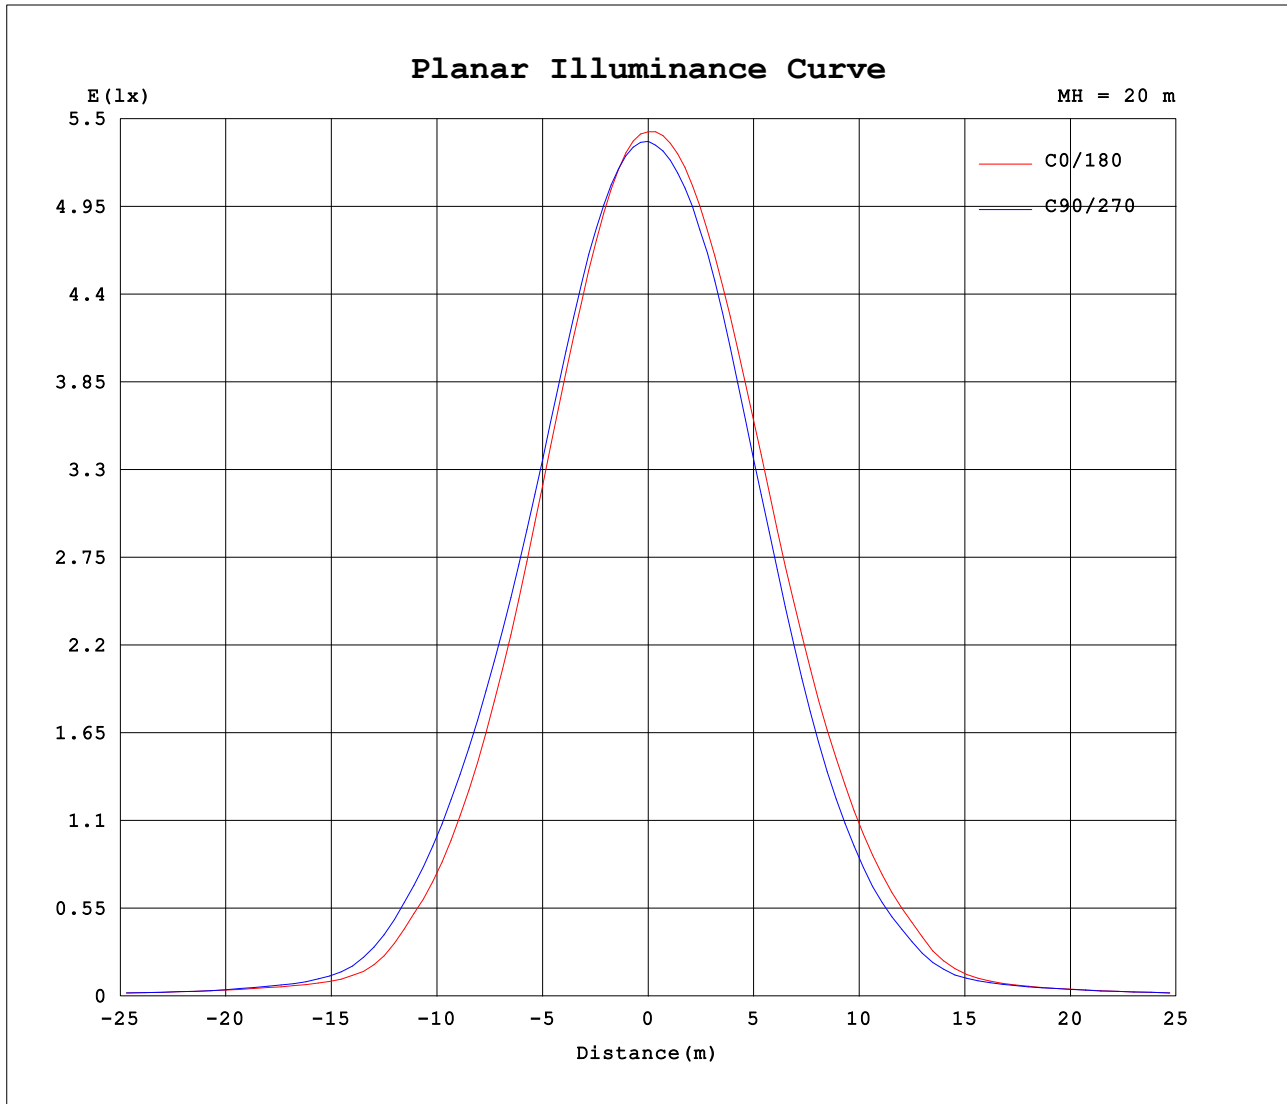

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-09-28

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.02V I:0.1066A P:12.596W PF:0.9466 Freq:59.98Hz Lamp Flux:1026.37x1 lm		
NAME: ASD-CD-TS-2D15AC-WH	TYPE:	WEIGHT:
SPEC.:4000K 90	DIM.:	SERIAL No.:
MFR.: ASD Lighting Corp	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	2148	2148	2148	2148	2148	2148	2148	2148	2148	2148	2148	2148	2148	2148	2148	2148			
5	2027	2040	2112	2113	2062	2030	2107	2072	2082	2075	2010	2006	2054	2089	2020	2045			
10	1715	1724	1867	1882	1787	1732	1878	1819	1850	1827	1710	1709	1799	1849	1693	1744			
15	1307	1302	1491	1523	1400	1313	1521	1451	1493	1460	1318	1303	1398	1465	1279	1343			
20	883	863	1078	1145	1015	891	1108	1043	1080	1063	903	873	962	1040	868	917			
25	520	501	696	776	664	534	722	675	705	699	537	514	583	635	511	542			
30	258	256	380	430	363	276	409	376	397	399	277	262	308	341	253	278			
35	94.1	91.5	147	175	139	108	171	147	159	153	98.5	98.1	124	141	96.0	103			
40	58.7	57.7	69.4	78.8	71.5	62.0	75.4	70.1	72.5	67.9	58.8	60.7	67.4	71.7	60.2	62.5			
45	43.7	43.6	50.2	52.1	46.7	42.2	50.6	48.7	50.1	50.1	44.4	44.6	49.0	51.5	44.4	46.5			
50	34.1	34.1	37.4	37.4	34.8	32.8	36.8	35.9	36.9	37.1	34.3	34.5	36.8	38.3	34.5	35.8			
55	24.0	24.2	27.7	27.7	25.0	23.3	27.3	26.1	27.2	27.4	24.3	24.4	26.9	28.6	24.7	25.7			
60	17.9	18.0	19.8	20.0	18.4	17.4	19.6	19.0	19.5	19.5	17.9	18.1	19.4	20.3	18.5	19.0			
65	13.4	13.4	14.5	14.7	13.7	12.9	14.4	14.0	14.2	14.2	13.0	12.9	13.7	14.5	13.9	14.3			
70	9.45	9.34	10.1	10.1	9.36	8.92	9.98	9.71	9.86	9.73	8.66	8.44	8.89	9.53	9.65	10.02			
75	6.01	5.90	6.15	5.86	5.24	5.14	6.10	6.17	6.26	5.99	5.07	4.75	4.97	5.43	5.72	6.40			
80	3.19	3.06	2.73	2.33	1.92	2.01	2.85	3.25	3.38	2.99	2.21	1.86	1.90	2.17	2.44	3.22			
85	0.27	0.59	0.18	0.10	0.09	0.11	0.42	0.89	0.51	0.73	0.23	0.11	0.08	0.08	0.21	0.62			
90	0.03	0.03	0.03	0.02	0.03	0.03	0.03	0.03	0.04	0.04	0.04	0.04	0.04	0.03	0.04	0.04			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-09-28

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks: