
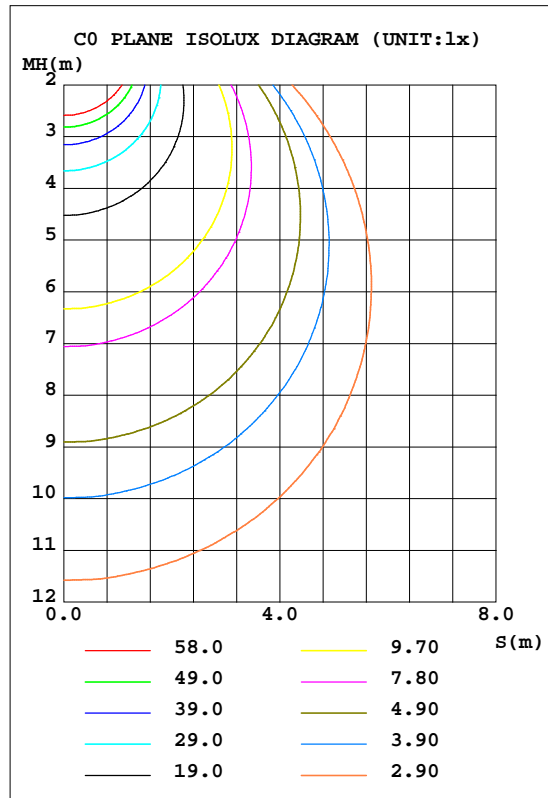


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.17V I:0.1232A P:14.570W PF:0.9837 Freq:59.98Hz Lamp Flux:1144.6lx1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.14*0.14	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 78.56 lm/W			
MODELASD	JBS-6D15AC(4000K)	I _{max} (cd)	390.5	S/MH(C0/180)	1.26
NOMINAL POWER(W)	15	LOR(%)	100.0	S/MH(C90/270)	1.28
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	1144.6	h UP, DN(C0-180)	0.2,49.6
NOMINAL FLUX(lm)	1144.61	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.2,50.0
LAMPS INSIDE	1	h up(%)	0.4	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	h down(%)	99.6	CIBSE SHR MAX	1.35

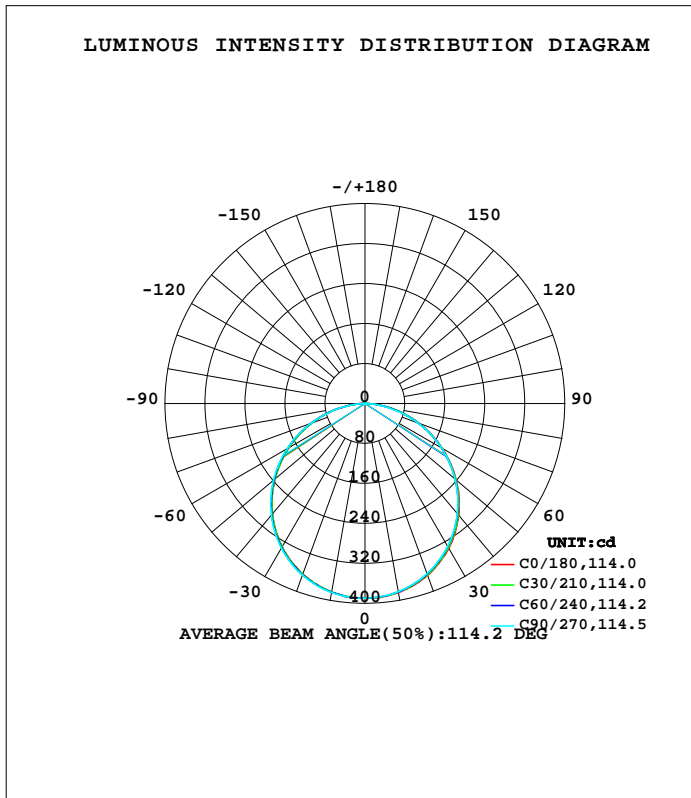

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-7

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1512]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	384.0	383.1	382.5	382.6	383.1	383.4	383.7	384.8	0- 10	36.90	36.90	3.22,3.22
20	366.1	364.1	362.7	362.5	363.5	364.2	365.7	366.7	10- 20	106.0	142.9	12.5,12.5
30	335.4	332.4	330.5	330.0	331.4	332.4	334.6	335.6	20- 30	161.4	304.3	26.6,26.6
40	291.9	289.0	287.6	286.6	288.3	289.5	291.6	293.1	30- 40	195.5	499.8	43.7,43.7
50	238.4	236.5	235.0	233.8	234.9	236.5	239.3	240.0	40- 50	203.8	703.6	61.5,61.5
60	178.0	176.7	176.4	174.4	175.0	176.9	179.4	180.0	50- 60	185.5	889.1	77.7,77.7
70	113.9	113.1	112.0	111.3	111.8	113.2	114.2	115.6	60- 70	143.8	1033	90.2,90.2
80	49.65	49.19	45.65	47.76	48.64	48.77	47.53	50.03	70- 80	85.42	1118	97.7,97.7
90	0.1288	0.0865	0.0620	0.1000	0.1247	0.1765	0.1859	0.1660	80- 90	21.29	1140	99.6,99.6
100	0.2416	0.2245	0.2478	0.2548	0.3667	0.3248	0.4156	0.3134	90-100	0.2227	1140	99.6,99.6
110	0.5114	0.4766	0.4954	0.4751	0.6367	0.5769	0.5569	0.5682	100-110	0.4239	1140	99.6,99.6
120	0.9534	0.7393	0.7429	0.7231	0.9477	0.8359	0.7909	0.8092	110-120	0.6600	1141	99.7,99.7
130	1.529	0.9740	0.9562	0.9365	1.190	1.030	1.072	1.082	120-130	0.8449	1142	99.8,99.8
140	1.075	1.023	1.080	1.047	1.273	1.185	1.334	1.178	130-140	0.8522	1143	99.8,99.8
150	1.180	1.220	1.270	1.236	1.376	1.323	1.561	1.291	140-150	0.7589	1143	99.9,99.9
160	1.348	1.347	1.417	1.395	1.508	1.447	1.432	1.426	150-160	0.6324	1144	99.9,99.9
170	1.523	1.510	1.541	1.536	1.627	1.642	1.823	1.629	160-170	0.4257	1144	100,100
180	1.632	1.648	1.637	1.639	1.639	1.651	1.658	1.636	170-180	0.1542	1145	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm			

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-6-7

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.600m [K=1.1512]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.17V I:0.1232A P:14.570W PF:0.9837 Freq:59.98Hz Lamp Flux:1144.61x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.14*0.14	Shielding Angle:

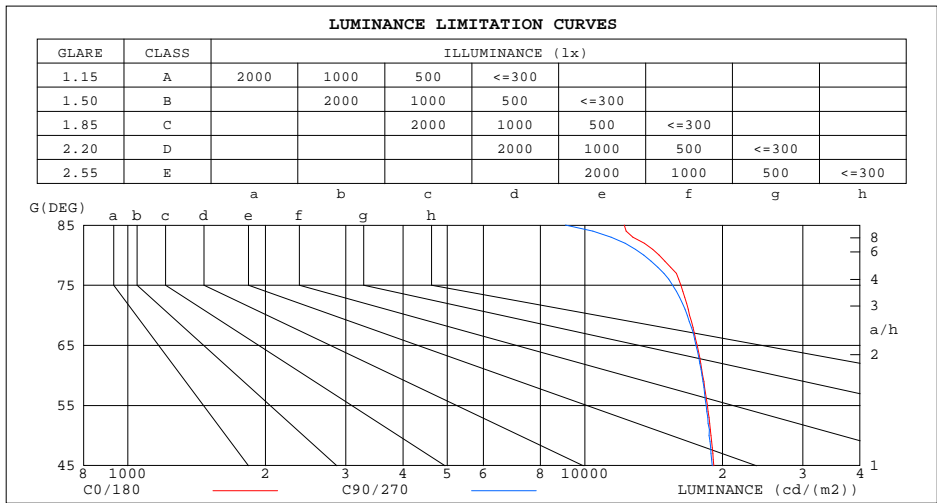

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	12201	9065
80	14549	13449
75	16214	15570
70	16949	16761
65	17608	17512
60	18120	18054
55	18545	18439
50	18876	18707
45	19172	18997


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-7

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1512]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.17V I:0.1232A P:14.570W PF:0.9837 Freq:59.98Hz Lamp Flux:1144.61x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.14*0.14	Shielding Angle:

r _{cc}	80%			70%			50%			30%			10%			0
r _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.99	.95	1.01	.97	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.90	.83	.77	.88	.82	.76	.84	.79	.74	.81	.77	.73	.78	.74	.71	.69
3.0	.79	.71	.64	.77	.70	.63	.74	.68	.62	.71	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.54	.68	.60	.54	.66	.59	.53	.63	.57	.52	.61	.56	.51	.49
5.0	.62	.53	.46	.61	.53	.46	.59	.51	.46	.57	.50	.45	.55	.49	.45	.42
6.0	.56	.47	.40	.55	.46	.40	.53	.46	.40	.51	.45	.39	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.41	.35	.48	.41	.35	.47	.40	.35	.45	.39	.35	.33
8.0	.46	.38	.32	.46	.37	.32	.44	.37	.31	.43	.36	.31	.42	.36	.31	.29
9.0	.42	.34	.29	.42	.34	.28	.41	.33	.28	.39	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.30	.26	.37	.30	.25	.36	.30	.25	.24

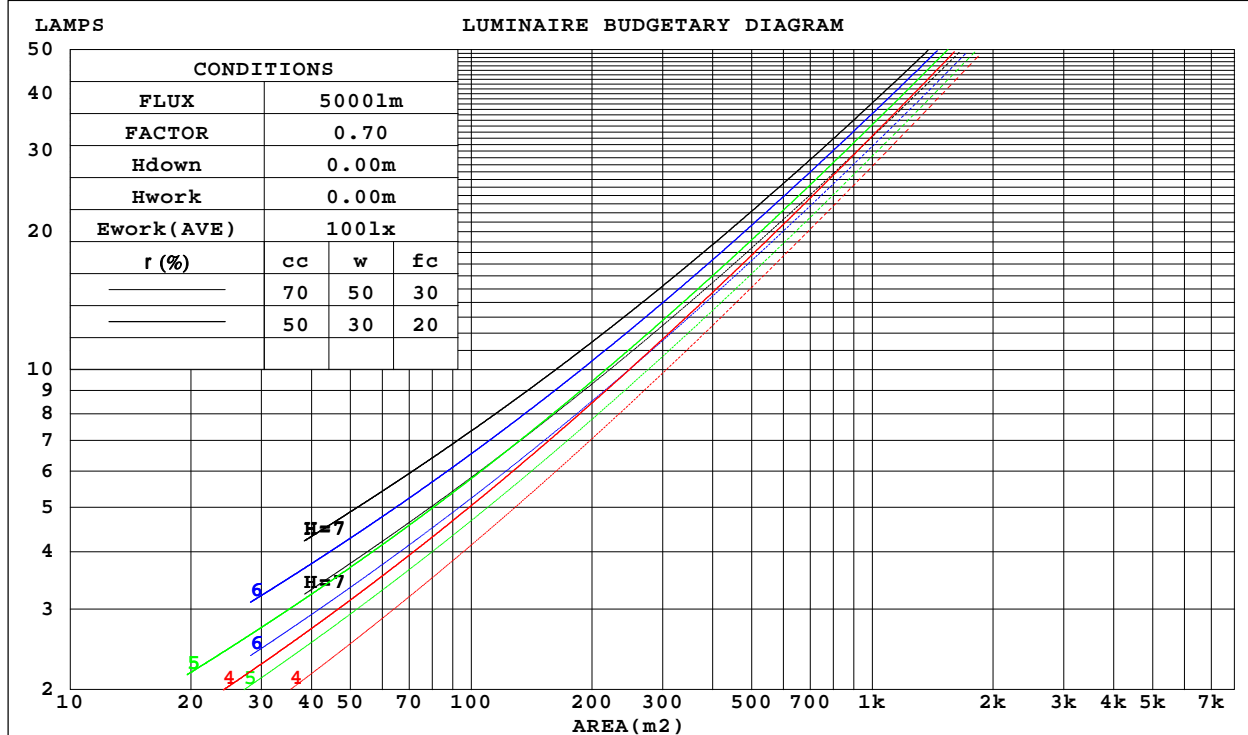

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-7

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1512]
 Remarks:

WEC AND CCEC

Test:U:120.17V I:0.1232A P:14.570W PF:0.9837 Freq:59.98Hz Lamp Flux:1144.61x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.14*0.14	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.313	.178	.056	.306	.174	.055	.292	.168	.054	.280	.161	.052	.268	.156	.050	
2.0	.294	.161	.050	.288	.159	.049	.276	.154	.048	.265	.149	.047	.255	.144	.045	
3.0	.272	.145	.043	.267	.143	.043	.256	.139	.042	.246	.135	.041	.237	.131	.041	
4.0	.251	.130	.038	.246	.129	.038	.237	.125	.037	.228	.122	.037	.220	.119	.036	
5.0	.232	.118	.034	.227	.117	.034	.219	.114	.034	.211	.111	.033	.204	.109	.033	
6.0	.215	.108	.031	.211	.107	.031	.203	.104	.030	.196	.102	.030	.190	.100	.030	
7.0	.200	.099	.028	.196	.098	.028	.190	.096	.028	.183	.094	.027	.178	.092	.027	
8.0	.187	.091	.026	.183	.090	.026	.177	.089	.025	.172	.087	.025	.167	.085	.025	
9.0	.175	.085	.024	.172	.084	.024	.167	.082	.023	.161	.081	.023	.157	.080	.023	
10.0	.164	.079	.022	.162	.078	.022	.157	.077	.022	.152	.076	.021	.148	.074	.021	

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.194	.194	.194	.166	.166	.166	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.184	.159	.137	.157	.137	.118	.108	.094	.082	.062	.054	.048	.020	.018	.015	
2.0	.176	.135	.101	.151	.116	.087	.103	.081	.061	.060	.047	.036	.019	.015	.012	
3.0	.168	.118	.077	.144	.102	.067	.099	.071	.047	.057	.041	.028	.018	.013	.009	
4.0	.161	.104	.061	.138	.090	.053	.095	.063	.038	.055	.037	.022	.018	.012	.007	
5.0	.153	.094	.050	.132	.081	.044	.091	.057	.031	.053	.033	.018	.017	.011	.006	
6.0	.146	.086	.042	.126	.074	.037	.087	.052	.026	.050	.031	.016	.016	.010	.005	
7.0	.139	.079	.036	.120	.068	.032	.083	.048	.023	.048	.028	.013	.016	.009	.004	
8.0	.133	.073	.032	.114	.063	.028	.079	.044	.020	.046	.026	.012	.015	.009	.004	
9.0	.127	.068	.029	.109	.059	.025	.076	.042	.018	.044	.025	.011	.014	.008	.003	
10.0	.121	.064	.026	.104	.055	.023	.072	.039	.016	.042	.023	.010	.014	.008	.003	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-7

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1512]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.17V I:0.1232A P:14.570W PF:0.9837 Freq:59.98Hz Lamp Flux:1144.61x1 lm										
NAME:					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: ASD LIGHTNG CORP					SUR.: 0.14*0.14			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	22.3	23.9	22.7	24.3	24.6	22.2	23.9	22.6	24.2	24.5
3H	24.2	25.7	24.6	26.0	26.4	24.1	25.6	24.5	25.9	26.3
4H	24.9	26.4	25.4	26.7	27.1	24.8	26.2	25.2	26.6	27.0
6H	25.5	26.8	25.9	27.2	27.6	25.3	26.6	25.7	27.0	27.4
8H	25.7	26.9	26.1	27.3	27.7	25.5	26.7	25.9	27.1	27.5
12H	25.8	27.0	26.2	27.4	27.8	25.5	26.7	26.0	27.1	27.6
4H 2H	23.0	24.4	23.4	24.7	25.1	22.9	24.3	23.3	24.6	25.0
3H	25.1	26.3	25.5	26.7	27.1	25.0	26.2	25.4	26.6	27.0
4H	26.0	27.0	26.4	27.5	27.9	25.8	26.9	26.3	27.3	27.8
6H	26.7	27.6	27.1	28.1	28.5	26.4	27.4	26.9	27.8	28.3
8H	26.9	27.8	27.4	28.2	28.7	26.6	27.5	27.1	27.9	28.4
12H	27.1	27.8	27.5	28.3	28.8	26.7	27.5	27.2	28.0	28.5
8H 4H	26.3	27.2	26.8	27.6	28.1	26.2	27.0	26.6	27.5	28.0
6H	27.1	27.9	27.6	28.4	28.9	26.9	27.6	27.4	28.1	28.6
8H	27.5	28.1	28.0	28.6	29.1	27.1	27.8	27.6	28.3	28.8
12H	27.7	28.3	28.2	28.8	29.3	27.3	27.9	27.8	28.4	28.9
12H 4H	26.3	27.1	26.8	27.6	28.1	26.2	27.0	26.7	27.5	27.9
6H	27.2	27.9	27.7	28.3	28.9	27.0	27.6	27.5	28.1	28.6
8H	27.6	28.1	28.1	28.6	29.2	27.2	27.8	27.8	28.3	28.9
CIE190: 2010										

CIE190: 2010
Area: 0.0196 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-6-7

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.600m [K=1.1512]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.17V I:0.1232A P:14.570W PF:0.9837 Freq:59.98Hz Lamp Flux:1144.61x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.14*0.14	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	45	38	56	45	38	55	45	38	31
0.80	67	55	48	66	55	48	64	54	47	40
1.00	75	64	57	74	64	57	72	65	56	49
1.25	83	72	65	81	71	64	78	70	63	56
1.50	88	78	70	86	77	70	83	75	69	61
2.00	95	86	79	93	85	78	89	82	77	69
2.50	98	91	84	96	89	84	92	86	82	73
3.00	102	95	89	100	93	88	96	90	86	77
4.00	106	100	95	104	98	94	99	95	91	82
5.00	108	104	99	106	102	98	101	98	95	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-6-7

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity: 65.0%
Test Distance: 8.600m [K=1.1512]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.17V I:0.1232A P:14.570W PF:0.9837 Freq:59.98Hz Lamp Flux:1144.61x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.14*0.14	Shielding Angle:

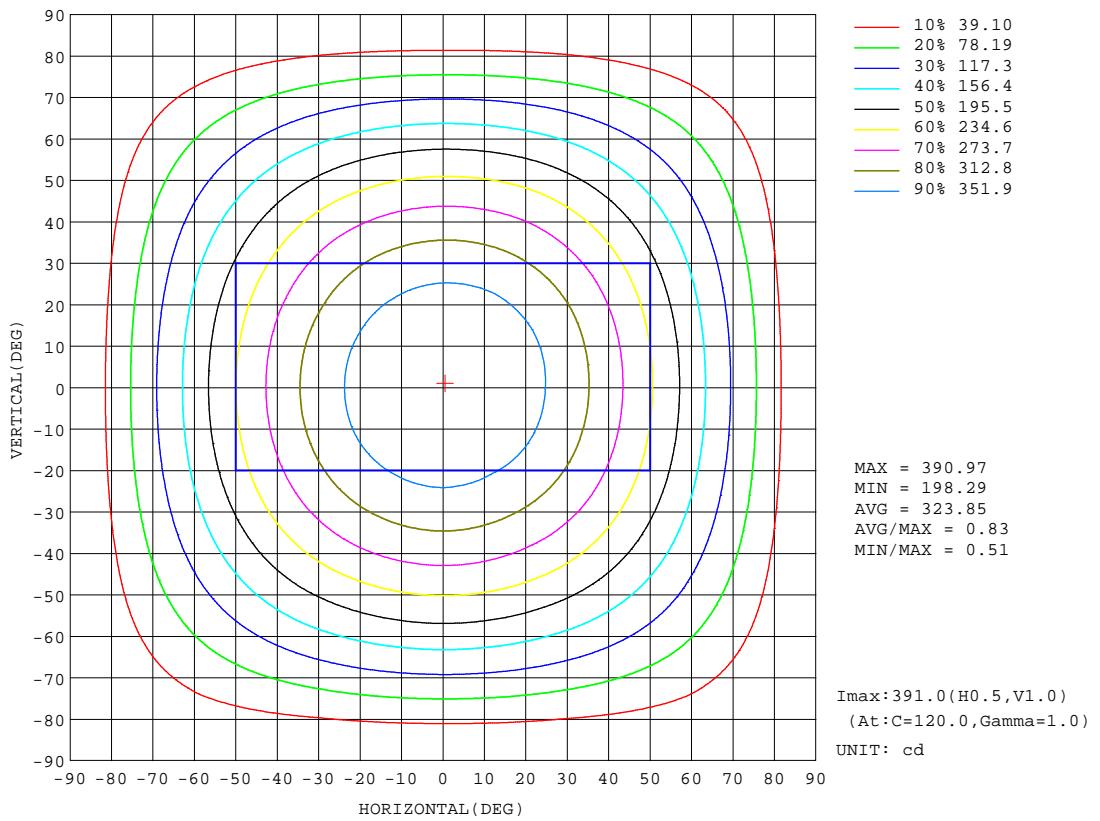


C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-7

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1512]
 Remarks:

AAI Figure

Test:U:120.17V I:0.1232A P:14.570W PF:0.9837 Freq:59.98Hz Lamp Flux:1144.61x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.14*0.14	Shielding Angle:

Flux out:854.7 lm

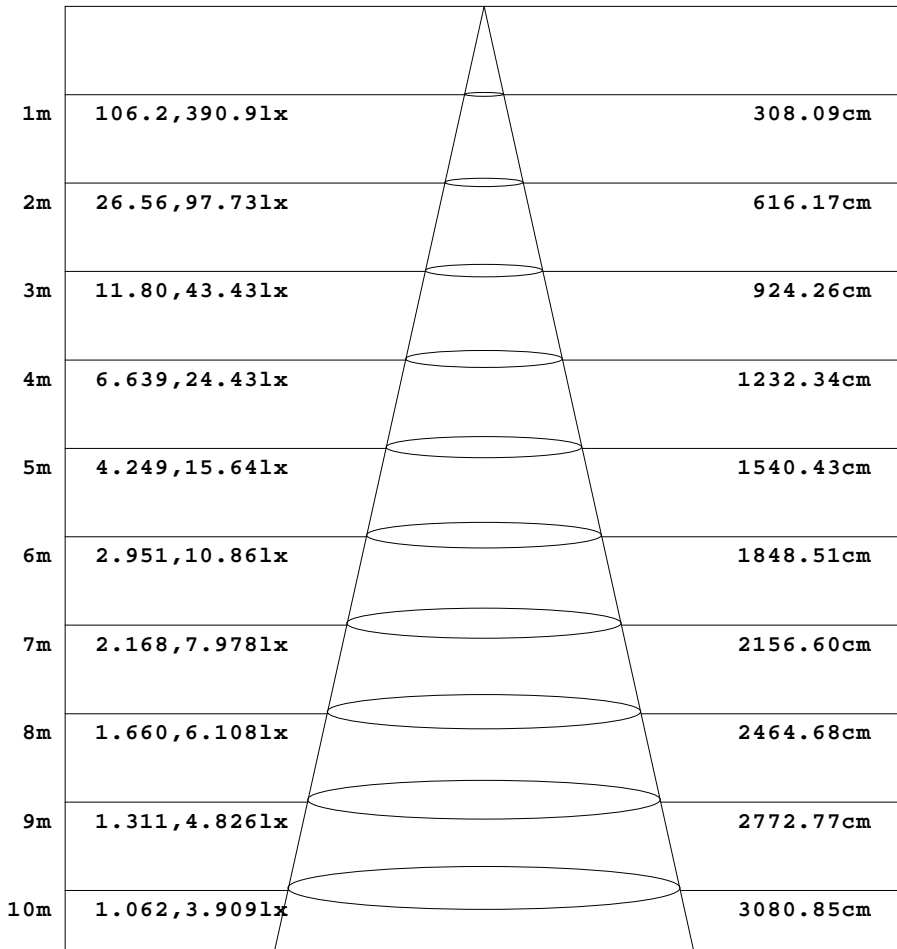

Height Eavg, Emax Angle:114.02deg Diameter


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-7

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1512]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.17V I:0.1232A P:14.570W PF:0.9837 Freq:59.98Hz Lamp Flux:1144.61x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.14*0.14	Shielding Angle:

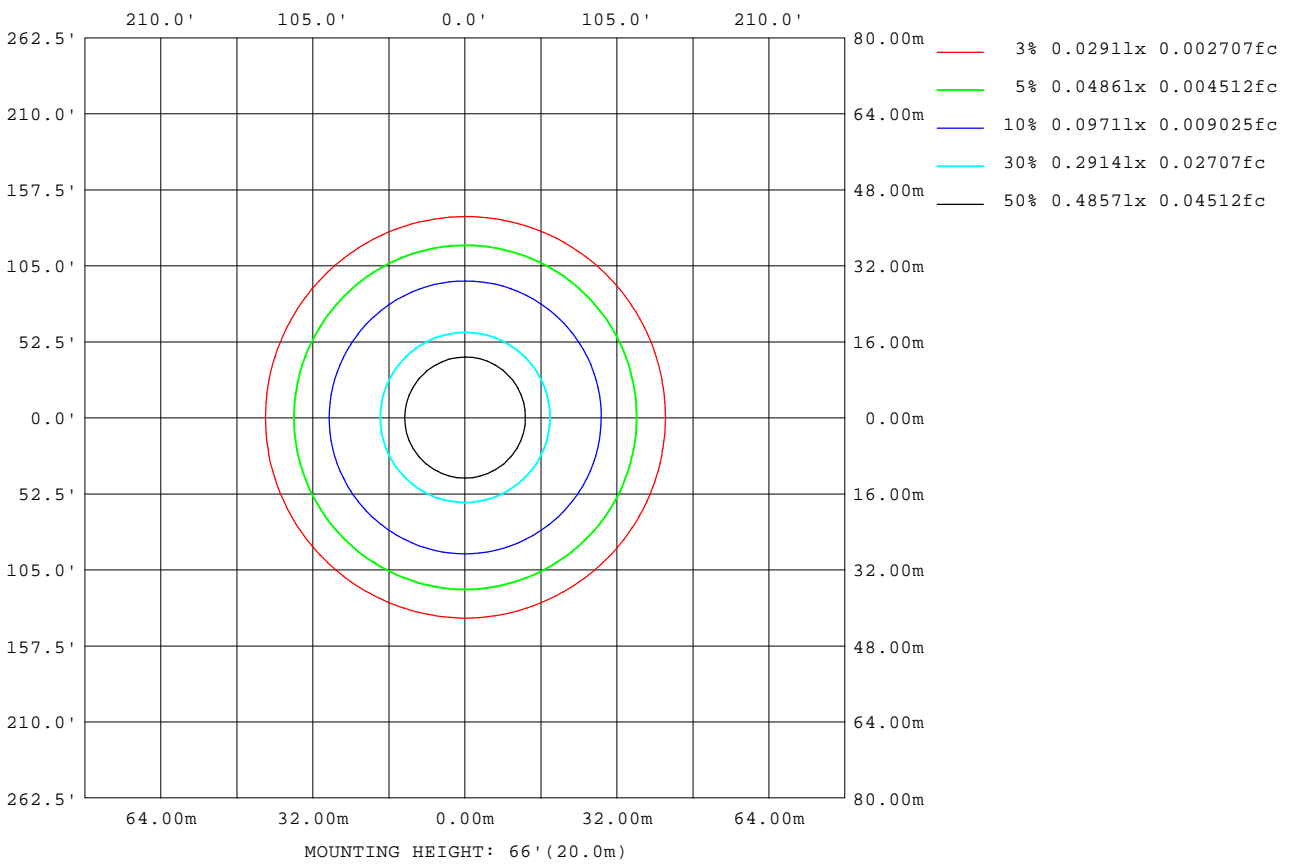

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-7

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=1.1512]
 Remarks:

LED Avg.L Report

Test:U:120.17V I:0.1232A P:14.570W PF:0.9837 Freq:59.98Hz Lamp Flux:1144.61x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.14*0.14	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	17491
L_0~180(75)av	16096
L_0~180(85)av	11721
L_90~270(65)av	17615
L_90~270(75)av	15722
L_90~270(85)av	9267
L_45(65)av	17552
L_45(75)av	16004
L_45(85)av	10412

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-6-7

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.600m [K=1.1512]
Remarks:

Planar Illuminance Curve

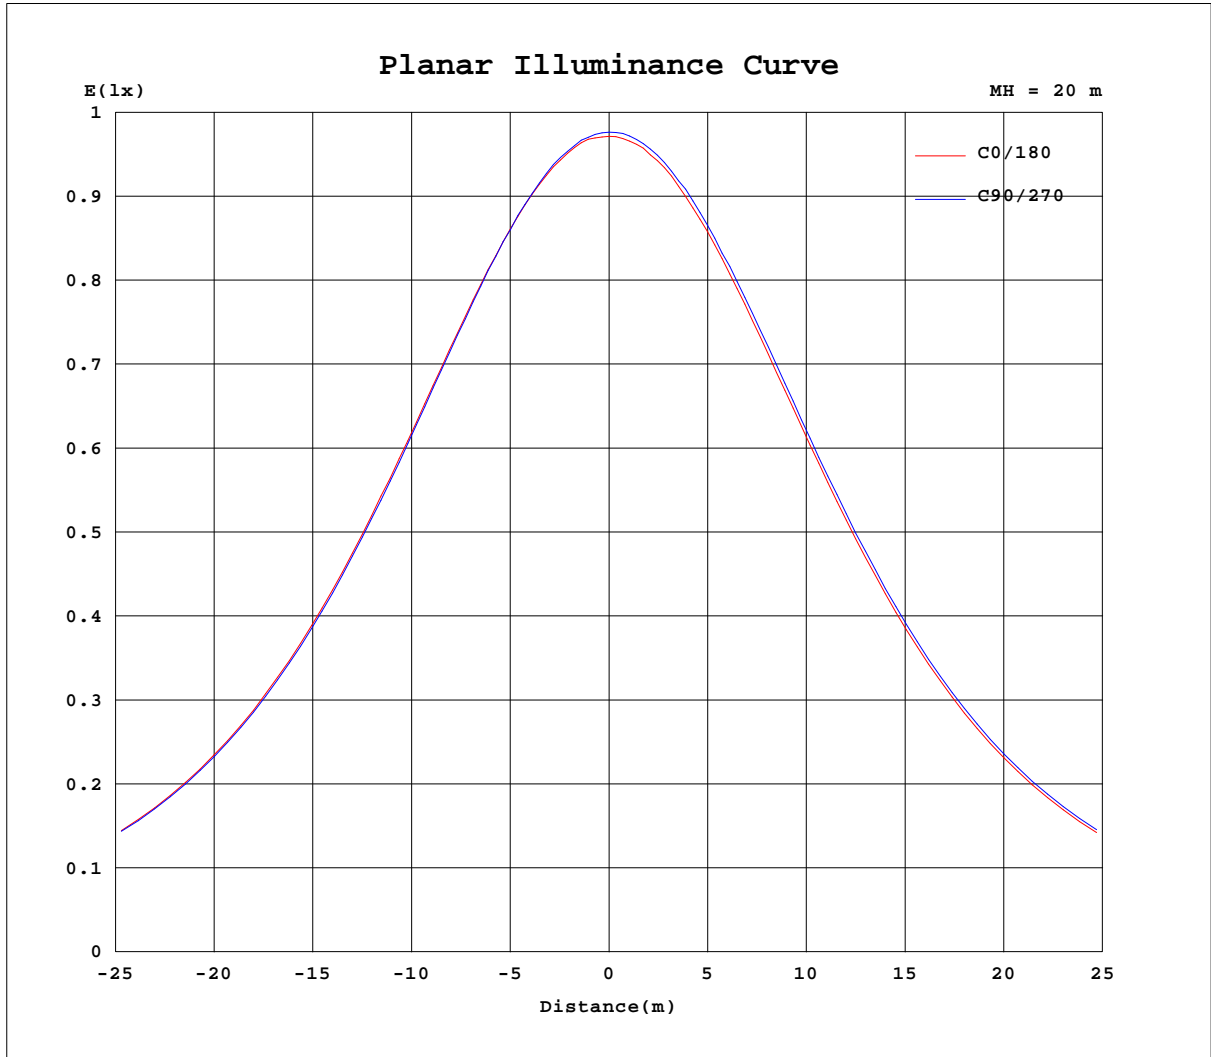

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-7

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=1.1512]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.17V I:0.1232A P:14.570W PF:0.9837 Freq:59.98Hz Lamp Flux:1144.61x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: 0.14*0.14	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	390	390	390	390	390	390	390	390	390	390	390	390						
5	389	388	387	387	388	387	388	388	388	388	389	389						
10	384	383	383	382	383	382	383	383	384	384	385	384						
15	377	376	375	375	374	374	375	375	376	376	377	377						
20	366	365	363	363	362	363	363	364	365	366	367	366						
25	352	351	349	348	348	348	349	350	351	352	353	353						
30	335	333	331	330	330	330	331	332	333	335	336	335						
35	315	313	311	310	310	310	312	311	314	314	316	316						
40	292	290	288	288	287	287	288	289	291	292	294	292						
45	266	265	263	263	262	261	263	263	265	266	268	267						
50	238	237	236	235	234	234	235	235	238	239	240	240						
55	209	208	206	207	205	205	206	206	209	210	212	210						
60	178	177	176	176	175	174	175	175	178	179	181	179						
65	146	146	145	145	143	143	144	144	147	147	149	147						
70	114	114	112	112	111	112	112	112	114	114	116	116						
75	82.5	82.5	79.8	78.8	78.4	80.5	80.8	80.9	81.2	80.7	82.5	83.3						
80	49.6	51.5	46.9	45.6	45.7	49.8	48.6	49.1	48.4	47.5	49.5	50.6						
85	20.9	21.0	16.5	15.4	15.4	19.8	19.1	16.4	17.3	16.2	18.0	18.0						
90	0.13	0.09	0.08	0.06	0.09	0.11	0.12	0.20	0.15	0.19	0.15	0.18						
95	0.10	0.14	0.08	0.14	0.30	0.16	0.23	0.22	0.32	0.22	0.33	0.22						
100	0.24	0.26	0.19	0.25	0.23	0.28	0.37	0.30	0.35	0.42	0.32	0.30						
105	0.35	0.38	0.30	0.36	0.32	0.38	0.50	0.41	0.45	0.40	0.48	0.39						
110	0.51	0.52	0.43	0.50	0.44	0.51	0.64	0.54	0.62	0.56	0.61	0.53						
115	0.69	0.66	0.55	0.61	0.56	0.63	0.80	0.68	0.74	0.69	0.72	0.67						
120	0.95	0.79	0.68	0.74	0.69	0.76	0.95	0.82	0.85	0.79	0.83	0.79						
125	1.43	0.93	0.78	0.84	0.79	0.88	1.07	0.94	0.94	0.89	0.96	0.88						
130	1.53	1.08	0.87	0.96	0.88	0.99	1.19	1.02	1.04	1.07	1.09	1.07						
135	1.23	0.97	0.93	0.99	0.93	1.01	1.25	1.13	1.17	1.24	1.30	1.09						
140	1.07	1.05	0.99	1.08	1.01	1.08	1.27	1.17	1.20	1.33	1.20	1.16						
145	1.20	1.11	1.10	1.22	1.12	1.18	1.33	1.25	1.27	1.44	1.27	1.22						
150	1.18	1.23	1.21	1.27	1.22	1.25	1.38	1.30	1.35	1.56	1.32	1.26						
155	1.24	1.31	1.31	1.32	1.33	1.42	1.44	1.37	1.40	1.68	1.38	1.34						
160	1.35	1.37	1.33	1.42	1.36	1.43	1.51	1.44	1.45	1.43	1.47	1.38						
165	1.45	1.43	1.44	1.49	1.43	1.47	1.58	1.60	1.54	1.79	1.56	1.56						
170	1.52	1.51	1.51	1.54	1.51	1.56	1.63	1.62	1.66	1.82	1.70	1.56						
175	1.58	1.60	1.60	1.60	1.59	1.62	1.64	1.65	1.63	1.71	1.65	1.57						
180	1.63	1.65	1.64	1.64	1.65	1.63	1.64	1.67	1.64	1.66	1.65	1.62						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-7

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=1.1512]
 Remarks: