


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.08V I:0.2073A P:24.483W PF:0.9834 Freq:59.98Hz Lamp Flux:1900x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.46$	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 77.61 lm/W			
MODEL	JBR-12D24AC-WH(2700K)	I _{max} (cd)	661.9	S/MH(C0/180)	1.26
NOMINAL POWER(W)	24	LOR(%)	100.0	S/MH(C90/270)	1.27
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	1900	h UP, DN(C0-180)	0.2, 49.6
NOMINAL FLUX(lm)	1900	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.2, 50.0
LAMPS INSIDE	1	h up(%)	0.4	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.0	h down(%)	99.6	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

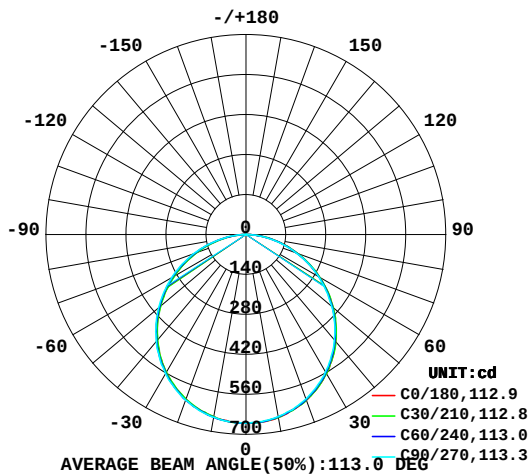

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

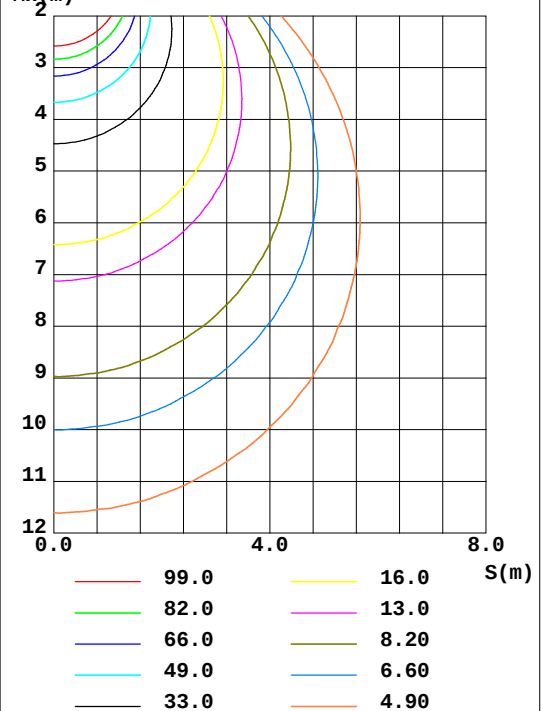

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-6-10

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.00.426
Humidity: 65.0%
Test Distance: 8.600m [K=0.9767]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum, lamp
10	650.2	649.6	647.9	647.9	648.0	648.8	650.2	651.0	0- 10	62.52	62.52	3.25, 3.25
20	617.8	617.3	612.9	610.0	613.6	615.2	617.6	620.0	10- 20	179.3	241.8	12.6, 12.6
30	563.4	561.2	557.1	553.9	558.4	559.8	562.7	565.7	20- 30	272.1	513.9	26.7, 26.7
40	489.1	487.3	482.2	478.5	483.1	484.6	489.2	493.1	30- 40	328.5	842.4	43.8, 43.8
50	398.5	397.8	392.7	388.2	392.2	392.8	399.6	404.4	40- 50	341.2	1184	61.6, 61.6
60	296.5	296.1	292.6	287.5	290.3	291.3	299.0	304.5	50- 60	309.4	1493	77.7, 77.7
70	190.1	189.7	186.7	181.9	184.2	184.1	192.0	197.9	60- 70	239.3	1732	90.1, 90.1
80	86.19	85.73	80.68	78.38	79.82	76.97	84.25	88.83	70- 80	142.6	1875	97.6, 97.6
90	1.829	1.002	0.2578	0.3001	0.2438	0.2755	0.2482	1.301	80- 90	38.83	1914	99.6, 99.6
100	0.5217	0.5299	0.5651	0.5600	0.5572	0.6197	0.6534	0.6169	90-100	0.4580	1914	99.6, 99.6
110	0.8944	0.9057	0.9417	0.9418	0.9301	0.9009	0.8718	0.8551	100-110	0.7885	1915	99.6, 99.6
120	1.287	1.272	1.289	1.311	1.293	1.252	1.238	1.222	110-120	1.080	1916	99.7, 99.7
130	1.590	1.603	1.591	1.621	1.616	1.568	1.521	1.509	120-130	1.279	1917	99.8, 99.8
140	1.859	1.852	1.824	1.854	1.850	1.792	1.764	1.750	130-140	1.312	1919	99.8, 99.8
150	2.103	2.078	2.061	2.094	2.073	2.051	1.972	1.978	140-150	1.212	1920	99.9, 99.9
160	2.242	2.294	2.304	2.322	2.342	2.309	2.259	2.258	150-160	1.002	1921	100, 100
170	2.485	2.531	2.522	2.533	2.585	2.571	2.552	2.498	160-170	0.6825	1921	100, 100
180	2.699	2.710	2.636	2.650	2.670	2.705	2.671	2.655	170-180	0.2475	1922	100, 100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-10

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=0.9767]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.08V I:0.2073A P:24.483W PF:0.9834 Freq:59.98Hz Lamp Flux:1900x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.46$	Shielding Angle:

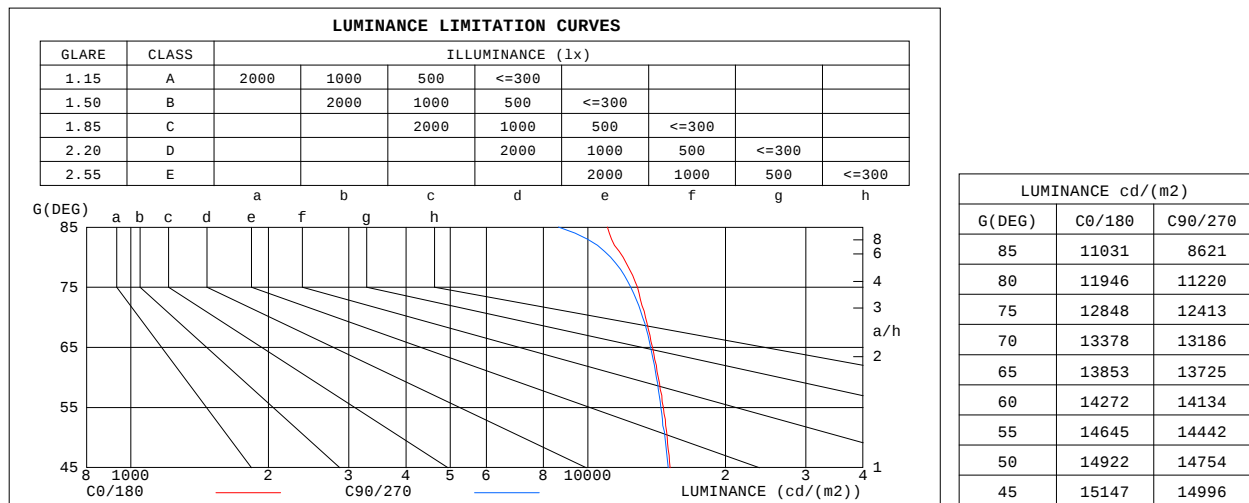


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-6-10

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.00.426
Humidity: 65.0%
Test Distance: 8.600m [K=0.9767]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.08V I:0.2073A P:24.483W PF:0.9834 Freq:59.98Hz Lamp Flux:1900x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.46$	Shielding Angle:

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.99	.95	1.01	.97	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.90	.83	.77	.88	.82	.76	.84	.79	.74	.81	.77	.73	.78	.74	.71	.69
3.0	.79	.71	.64	.77	.70	.63	.74	.68	.62	.71	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.54	.68	.60	.54	.66	.59	.53	.63	.57	.52	.61	.56	.51	.49
5.0	.62	.53	.46	.61	.53	.46	.59	.51	.46	.57	.50	.45	.55	.49	.45	.42
6.0	.56	.47	.41	.55	.47	.40	.53	.46	.40	.51	.45	.40	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.42	.36	.48	.41	.35	.47	.40	.35	.45	.39	.35	.33
8.0	.46	.38	.32	.46	.37	.32	.44	.37	.31	.43	.36	.31	.42	.36	.31	.29
9.0	.42	.34	.29	.42	.34	.29	.41	.33	.28	.40	.33	.28	.39	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.25	.24

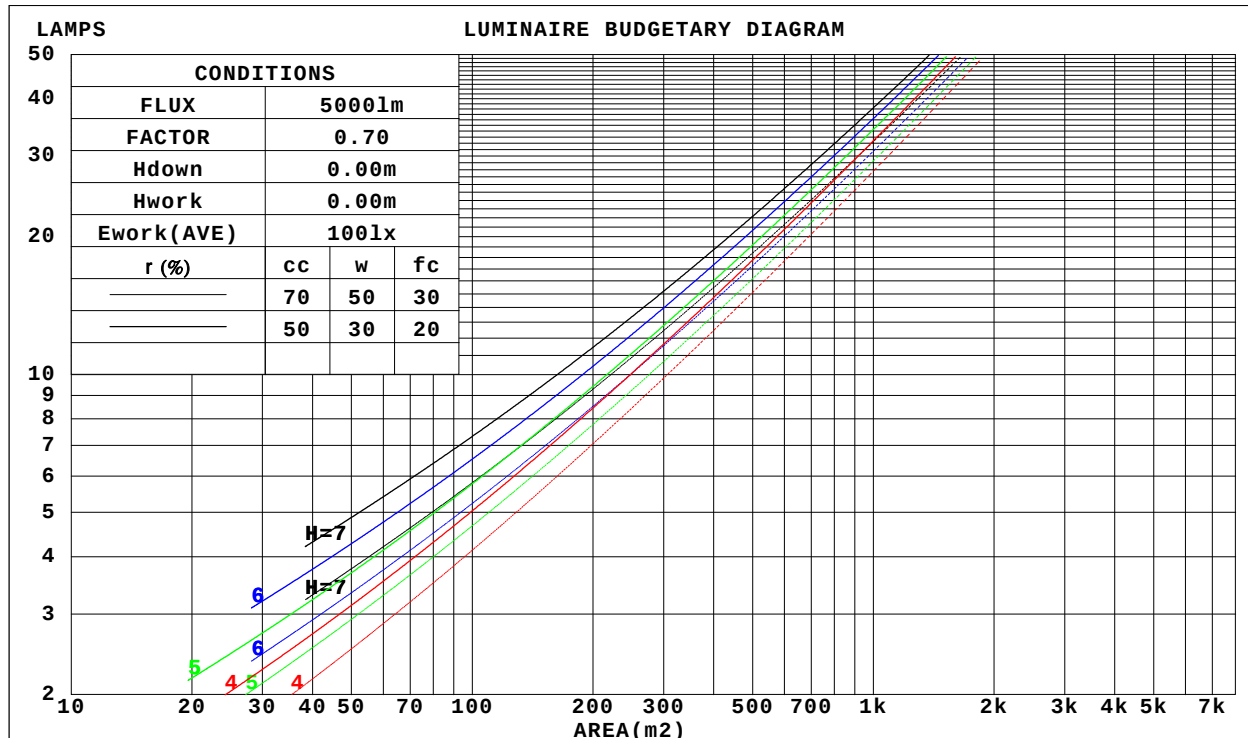

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-10

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=0.9767]
 Remarks:

WEC AND CCEC

Test:U:120.08V I:0.2073A P:24.483W PF:0.9834 Freq:59.98Hz Lamp Flux:1900x1 lm					
NAME:			TYPE:		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.: ASD LIGHTNG CORP			SUR.: φ0.46		Shielding Angle:

r c c	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r f c	20%			20%			20%			20%			20%			0
R C R	R C R:Room Cavity Ratio						Wall Exitance Coefficients(W E C)									
0.0																
1.0	.314	.178	.057	.307	.175	.056	.293	.168	.054	.281	.162	.052	.269	.156	.050	
2.0	.295	.161	.050	.288	.159	.049	.276	.154	.048	.265	.149	.047	.255	.144	.045	
3.0	.272	.145	.043	.267	.143	.043	.256	.139	.042	.246	.135	.041	.237	.131	.041	
4.0	.251	.130	.038	.246	.129	.038	.236	.125	.037	.228	.122	.037	.220	.119	.036	
5.0	.232	.118	.034	.227	.117	.034	.219	.114	.034	.211	.111	.033	.204	.109	.033	
6.0	.215	.108	.031	.211	.106	.031	.203	.104	.030	.196	.102	.030	.190	.100	.030	
7.0	.200	.099	.028	.196	.098	.028	.189	.096	.028	.183	.094	.027	.177	.092	.027	
8.0	.186	.091	.026	.183	.090	.025	.177	.089	.025	.172	.087	.025	.166	.085	.025	
9.0	.175	.084	.024	.172	.084	.023	.166	.082	.023	.161	.081	.023	.157	.080	.023	
10.0	.164	.079	.022	.162	.078	.022	.157	.077	.022	.152	.076	.021	.148	.074	.021	

r cc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.194	.194	.194	.166	.166	.166	.113	.113	.113	.065	.065	.065	.021	.021	.021	
1.0	.184	.159	.137	.157	.137	.118	.108	.094	.082	.062	.054	.048	.020	.018	.015	
2.0	.176	.135	.101	.151	.116	.087	.103	.080	.061	.060	.047	.036	.019	.015	.012	
3.0	.168	.118	.077	.144	.101	.067	.099	.070	.047	.057	.041	.028	.018	.013	.009	
4.0	.161	.104	.061	.138	.090	.053	.095	.063	.038	.055	.037	.022	.018	.012	.007	
5.0	.153	.094	.050	.131	.081	.044	.091	.057	.031	.052	.033	.018	.017	.011	.006	
6.0	.146	.086	.042	.125	.074	.037	.087	.052	.026	.050	.031	.015	.016	.010	.005	
7.0	.139	.079	.036	.120	.068	.032	.083	.048	.022	.048	.028	.013	.016	.009	.004	
8.0	.133	.073	.032	.114	.063	.028	.079	.044	.020	.046	.026	.012	.015	.009	.004	
9.0	.126	.068	.028	.109	.059	.025	.075	.041	.018	.044	.024	.011	.014	.008	.003	
10.0	.121	.064	.026	.104	.055	.022	.072	.039	.016	.042	.023	.010	.014	.008	.003	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-10

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.426
 Humidity:65.0%
 Test Distance:8.600m [K=0.9767]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.08V I:0.2073A P:24.483W PF:0.9834 Freq:59.98Hz Lamp Flux:1900x1 lm											
NAME:					TYPE:			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:			
MFR.: ASD LIGHTNG CORP					SUR.: φ0.46			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	2H	21.5	23.1	21.9	23.5	23.8	21.3	23.0	21.7	23.3	23.6
	3H	23.4	24.9	23.8	25.2	25.6	23.2	24.7	23.6	25.0	25.4
	4H	24.1	25.5	24.5	25.9	26.3	23.9	25.3	24.3	25.7	26.1
	6H	24.7	26.0	25.1	26.4	26.8	24.5	25.8	24.9	26.1	26.6
	8H	24.9	26.1	25.3	26.5	26.9	24.6	25.9	25.1	26.3	26.7
	12H	25.0	26.2	25.5	26.6	27.1	24.7	25.9	25.2	26.3	26.8
4H	2H	22.1	23.5	22.5	23.9	24.3	22.0	23.4	22.4	23.7	24.1
	3H	24.3	25.4	24.7	25.8	26.3	24.1	25.2	24.5	25.7	26.1
	4H	25.1	26.2	25.6	26.6	27.1	24.9	26.0	25.4	26.4	26.9
	6H	25.9	26.8	26.3	27.3	27.7	25.6	26.5	26.1	27.0	27.4
	8H	26.1	27.0	26.6	27.4	27.9	25.8	26.7	26.3	27.1	27.6
	12H	26.3	27.1	26.8	27.6	28.1	25.9	26.7	26.4	27.2	27.7
8H	4H	25.5	26.4	26.0	26.8	27.3	25.2	26.1	25.7	26.6	27.0
	6H	26.4	27.1	26.9	27.6	28.1	26.0	26.8	26.5	27.3	27.7
	8H	26.7	27.3	27.2	27.9	28.4	26.3	27.0	26.8	27.5	28.0
	12H	27.0	27.6	27.5	28.1	28.6	26.5	27.1	27.0	27.6	28.2
12H	4H	25.5	26.3	26.0	26.8	27.3	25.3	26.1	25.8	26.6	27.0
	6H	26.4	27.1	27.0	27.6	28.1	26.1	26.8	26.6	27.2	27.8
	8H	26.8	27.4	27.3	27.9	28.5	26.4	27.0	26.9	27.5	28.1
CIE190: 2010											

CIE190: 2010
Area: 0.0415 m²

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-6-10

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.00.426
Humidity: 65.0%
Test Distance: 8.600m [K=0.9767]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.08V I:0.2073A P:24.483W PF:0.9834 Freq:59.98Hz Lamp Flux:1900x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.46$	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	45	38	56	45	38	55	45	38	32
0.80	67	55	48	66	55	48	64	54	47	40
1.00	75	64	57	74	64	57	72	65	56	49
1.25	83	72	65	81	71	64	78	70	63	56
1.50	88	78	71	86	77	70	83	75	69	61
2.00	95	86	79	93	85	79	89	82	77	69
2.50	98	91	84	96	89	84	92	86	82	73
3.00	102	95	89	100	93	88	96	90	86	77
4.00	106	100	95	103	98	94	99	95	91	82
5.00	108	103	99	106	101	98	101	98	95	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-10

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=0.9767]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.08V I:0.2073A P:24.483W PF:0.9834 Freq:59.98Hz Lamp Flux:1900x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.46$	Shielding Angle:

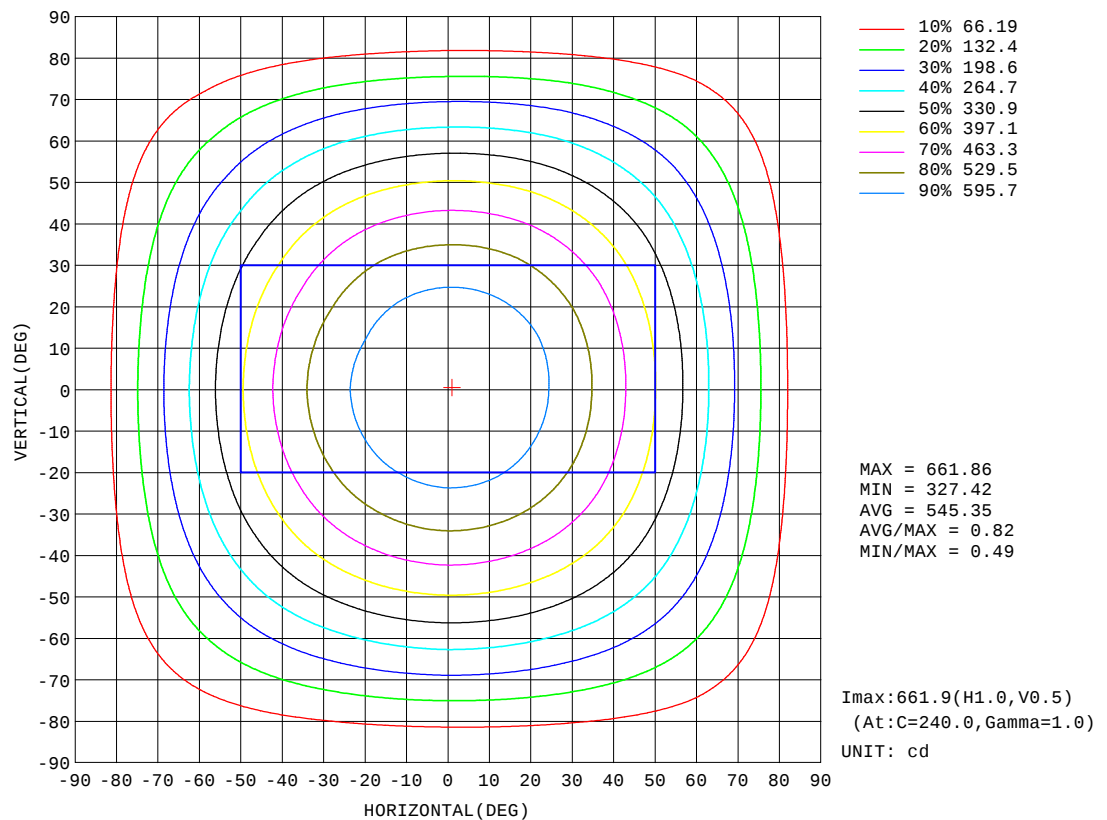


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-6-10

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.600m [K=0.9767]
Remarks:

AAI Figure

Test:U:120.08V I:0.2073A P:24.483W PF:0.9834 Freq:59.98Hz Lamp Flux:1900x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.46$	Shielding Angle:

Flux out:1406 lm

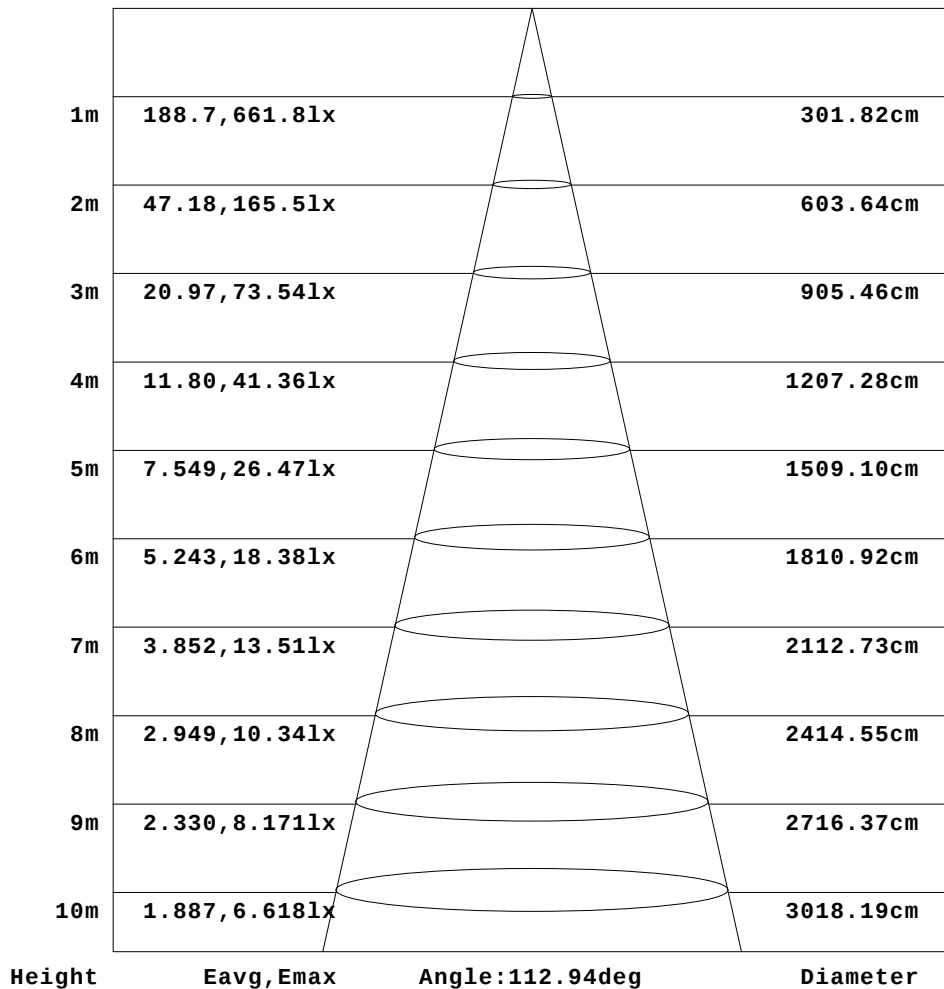


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-10

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE G0-2000B_V1 SYSTEM V2.00.426
 Humidity: 65.0%
 Test Distance: 8.600m [K=0.9767]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.08V I:0.2073A P:24.483W PF:0.9834 Freq:59.98Hz Lamp Flux:1900x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.46$	Shielding Angle:

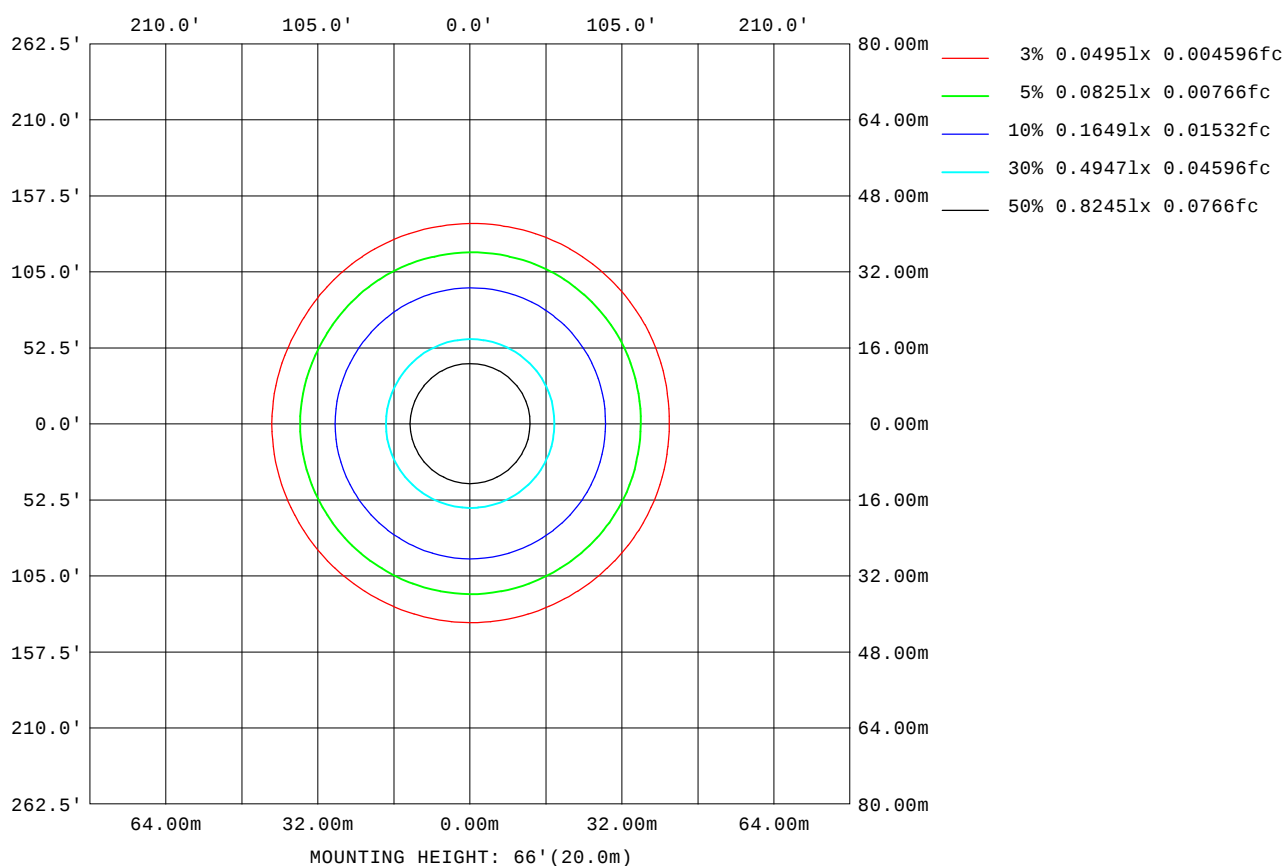

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-6-10

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.00.426
Humidity: 65.0%
Test Distance: 8.600m [K=0.9767]
Remarks:

LED Avg.L Report

Test:U:120.08V I:0.2073A P:24.483W PF:0.9834 Freq:59.98Hz Lamp Flux:1900x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ASD LIGHTNG CORP	SUR.: $\phi 0.46$	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	13707
L_0~180(75)av	12543
L_0~180(85)av	10047
L_90~270(65)av	13866
L_90~270(75)av	12588
L_90~270(85)av	8953
L_45(65)av	13793
L_45(75)av	12592
L_45(85)av	9137

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-6-10

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.600m [K=0.9767]
Remarks:

Planar Illuminance Curve

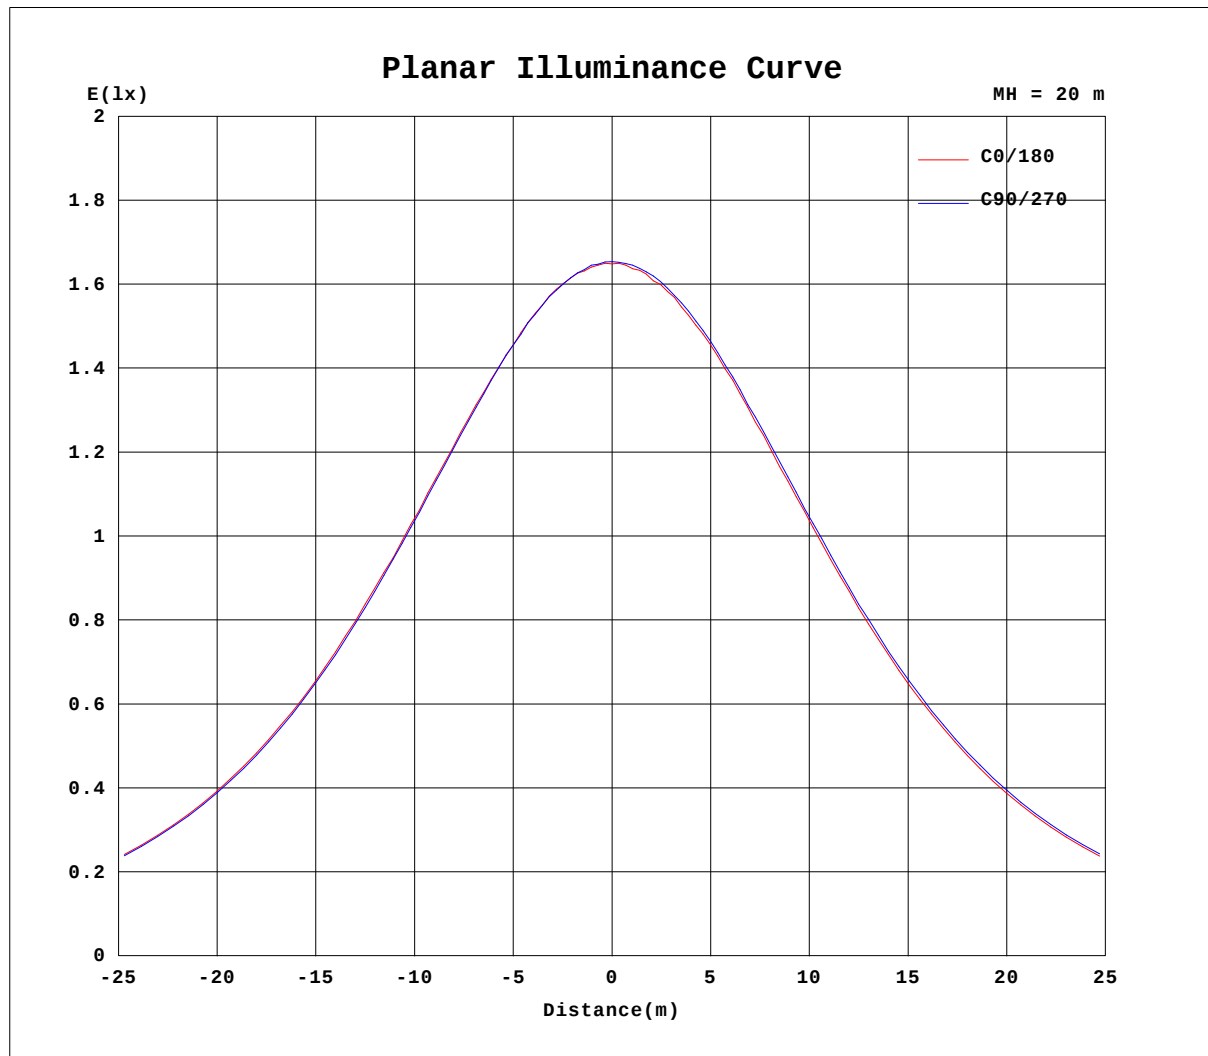

C Range: 0 - 360DEG
C Interval: 30.00DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2022-6-10

g Range: 0 - 180DEG
g Interval: 1.00DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.00.426
Humidity: 65.0%
Test Distance: 8.600m [K=0.9767]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.08V I:0.2073A P:24.483W PF:0.9834 Freq:59.98Hz Lamp Flux:1900x1 lm											
NAME:						TYPE:				WEIGHT:	
SPEC.:						DIM.:				SERIAL No.:	
MFR.: ASD LIGHTNG CORP						SUR.: $\phi 0.46$				Shielding Angle:	

Table--1

UNIT: cd

C(DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	660	660	660	660	660	660	660	660	660	660	660	660						
5	659	658	658	657	656	656	658	658	659	658	659	659						
10	650	651	649	648	648	648	648	648	650	650	651	651						
15	636	637	635	634	632	632	635	633	636	637	637	637						
20	618	619	616	613	610	610	614	614	616	618	621	619						
25	593	593	591	588	585	585	589	588	592	593	595	596						
30	563	563	560	557	554	553	558	558	562	563	567	565						
35	528	529	524	521	519	519	524	522	527	527	532	532						
40	489	489	485	482	479	478	483	482	487	489	493	493						
45	445	446	442	439	435	435	440	437	444	446	451	450						
50	399	400	395	393	389	387	392	390	396	400	405	404						
55	349	351	345	343	339	338	343	341	346	350	355	354						
60	296	299	294	293	288	287	290	287	295	299	305	304						
65	243	245	241	240	235	234	238	234	242	246	252	251						
70	190	191	188	187	183	181	184	180	188	192	198	198						
75	138	139	135	133	130	129	131	127	134	137	144	143						
80	86.2	88.0	83.5	80.7	78.2	78.6	79.8	73.9	80.0	84.2	88.2	89.4						
85	39.9	40.7	34.3	31.1	28.8	31.0	32.7	26.0	29.7	33.6	36.4	38.5						
90	1.83	1.71	0.30	0.26	0.29	0.31	0.24	0.29	0.26	0.25	0.24	2.36						
95	0.36	0.37	0.34	0.39	0.36	0.41	0.37	0.38	0.38	0.33	0.39	0.37						
100	0.52	0.54	0.52	0.57	0.55	0.57	0.56	0.54	0.70	0.65	0.73	0.51						
105	0.71	0.71	0.72	0.76	0.73	0.76	0.74	0.69	0.73	1.00	0.71	0.65						
110	0.89	0.90	0.91	0.94	0.92	0.96	0.93	0.89	0.91	0.87	0.88	0.83						
115	1.09	1.08	1.11	1.14	1.13	1.16	1.10	1.07	1.09	1.06	1.06	1.03						
120	1.29	1.27	1.27	1.29	1.29	1.33	1.29	1.25	1.26	1.24	1.24	1.20						
125	1.44	1.43	1.46	1.45	1.44	1.51	1.46	1.41	1.43	1.39	1.40	1.36						
130	1.59	1.58	1.62	1.59	1.58	1.66	1.62	1.56	1.58	1.52	1.52	1.50						
135	1.71	1.71	1.76	1.72	1.70	1.76	1.73	1.67	1.70	1.64	1.65	1.63						
140	1.86	1.83	1.87	1.82	1.81	1.89	1.85	1.79	1.79	1.76	1.75	1.75						
145	1.98	1.97	1.98	1.96	1.92	1.99	1.97	1.94	1.89	1.87	1.88	1.84						
150	2.10	2.06	2.10	2.06	2.08	2.11	2.07	2.07	2.03	1.97	1.99	1.96						
155	2.20	2.15	2.19	2.18	2.20	2.24	2.20	2.20	2.17	2.11	2.11	2.12						
160	2.24	2.29	2.30	2.30	2.29	2.35	2.34	2.32	2.30	2.26	2.26	2.26						
165	2.37	2.37	2.45	2.43	2.41	2.44	2.51	2.48	2.43	2.40	2.39	2.39						
170	2.49	2.52	2.54	2.52	2.51	2.56	2.59	2.60	2.54	2.55	2.54	2.45						
175	2.61	2.61	2.66	2.63	2.59	2.63	2.61	2.70	2.64	2.64	2.58	2.59						
180	2.70	2.71	2.71	2.64	2.67	2.63	2.67	2.71	2.70	2.67	2.63	2.68						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2022-6-10

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.00.426
Humidity:65.0%
Test Distance:8.600m [K=0.9767]
Remarks: